

GAN-Generate-synthetic-data

February 26, 2024

```
[1]: import numpy as np
import pandas as pd
from sklearn import datasets
from sklearn.preprocessing import MinMaxScaler, OneHotEncoder
import tensorflow as tf
from tensorflow.keras.layers import Input, Dense, Concatenate
from tensorflow.keras.models import Model
from tensorflow.keras.optimizers import Adam

# Load iris dataset
iris = datasets.load_iris()
X = iris.data # we only take the first four features.
y = iris.target

# Normalize the data
scaler = MinMaxScaler()
X = scaler.fit_transform(X)

# Convert data to pandas DataFrame
real_data = pd.DataFrame(X, columns=['a', 'b', 'c', 'd'])
real_labels = y

# One hot encode labels
one_hot_encoder = OneHotEncoder(sparse=False)
one_hot_labels = one_hot_encoder.fit_transform(np.array(real_labels).
    ↪reshape(-1, 1))

# Constants
NOISE_DIM = 100
NUM_CLASSES = 3
NUM_FEATURES = 4
BATCH_SIZE = 64
TRAINING_STEPS = 5000

# Generator
def create_generator():
    noise_input = Input(shape=(NOISE_DIM,))
```

```

class_input = Input(shape=(NUM_CLASSES,))
merged_input = Concatenate()([noise_input, class_input])
hidden = Dense(128, activation='relu')(merged_input)
output = Dense(NUM_FEATURES, activation='linear')(hidden)
model = Model(inputs=[noise_input, class_input], outputs=output)
return model

# Discriminator
def create_discriminator():
    data_input = Input(shape=(NUM_FEATURES,))
    class_input = Input(shape=(NUM_CLASSES,))
    merged_input = Concatenate()([data_input, class_input])
    hidden = Dense(128, activation='relu')(merged_input)
    output = Dense(1, activation='sigmoid')(hidden)
    model = Model(inputs=[data_input, class_input], outputs=output)
    return model

# cGAN
def create_cgan(generator, discriminator):
    noise_input = Input(shape=(NOISE_DIM,))
    class_input = Input(shape=(NUM_CLASSES,))
    generated_data = generator([noise_input, class_input])
    validity = discriminator([generated_data, class_input])
    model = Model(inputs=[noise_input, class_input], outputs=validity)
    return model

# Create and compile the Discriminator
discriminator = create_discriminator()
discriminator.compile(loss='binary_crossentropy', optimizer=Adam())

# Create the Generator
generator = create_generator()

# Create the GAN
gan = create_cgan(generator, discriminator)

# Ensure that only the generator is trained
discriminator.trainable = False

gan.compile(loss='binary_crossentropy', optimizer=Adam())

# Train GAN
for step in range(TRAINING_STEPS):
    # Select a random batch of real data with labels
    idx = np.random.randint(0, real_data.shape[0], BATCH_SIZE)
    real_batch = real_data.iloc[idx].values
    labels_batch = one_hot_labels[idx]

```

```

# Generate a batch of new data
noise = np.random.normal(0, 1, (BATCH_SIZE, NOISE_DIM))
generated_batch = generator.predict([noise, labels_batch])

# Train the discriminator
real_loss = discriminator.train_on_batch([real_batch, labels_batch], np.
↳ ones((BATCH_SIZE, 1)))
fake_loss = discriminator.train_on_batch([generated_batch, labels_batch],
↳ np.zeros((BATCH_SIZE, 1)))
discriminator_loss = 0.5 * np.add(real_loss, fake_loss)

# Train the generator
generator_loss = gan.train_on_batch([noise, labels_batch], np.
↳ ones((BATCH_SIZE, 1)))

if step % 500 == 0:
    print(f"Step: {step}, Discriminator Loss: {discriminator_loss},
↳ Generator Loss: {generator_loss}")

# Generate instances for a given class
def generate_data(generator, data_class, num_instances):
    one_hot_class = one_hot_encoder.transform(np.array([[data_class]]))
    noise = np.random.normal(0, 1, (num_instances, NOISE_DIM))
    generated_data = generator.predict([noise, np.repeat(one_hot_class,
↳ num_instances, axis=0)])
    return pd.DataFrame(generated_data, columns=['a', 'b', 'c', 'd'])

# Generate 40 instances of class 1
generated_data = generate_data(generator, 1, 40)
print(generated_data)

```

2024-02-26 13:44:33.431809: I tensorflow/core/platform/cpu_feature_guard.cc:182] This TensorFlow binary is optimized to use available CPU instructions in performance-critical operations.

To enable the following instructions: SSE4.1 SSE4.2 AVX AVX2 AVX_VNNI FMA, in other operations, rebuild TensorFlow with the appropriate compiler flags.

2/2 [=====] - 0s 24ms/step

/home/nmit/anaconda3/lib/python3.11/site-

packages/sklearn/preprocessing/_encoders.py:868: FutureWarning: `sparse` was renamed to `sparse_output` in version 1.2 and will be removed in 1.4.

`sparse_output` is ignored unless you leave `sparse` to its default value.

warnings.warn(

2024-02-26 13:44:34.182326: I

tensorflow/core/common_runtime/process_util.cc:146] Creating new thread pool with default inter op setting: 2. Tune using inter_op_parallelism_threads for

best performance.

```
2024-02-26 13:44:34.358446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:44:34.658670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:44:34.670477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
Step: 0, Discriminator Loss: 0.6627020835876465, Generator Loss:
0.6535869836807251
```

```
2/2 [=====] - 0s 2ms/step
```

```
2/2 [=====] - 0s 3ms/step
```

```
2024-02-26 13:44:34.973149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:44:34.989787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:44:34.997666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:44:35.075906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:44:35.097344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:44:35.116713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:44:35.184534: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.203792: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.225592: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.301905: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.324455: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.344582: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:35.452187: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.468964: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.483016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.556147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.583636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.608308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:35.697671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.715199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.733992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.807984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.829067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:35.850787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:44:35.948184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.961952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:35.977186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:36.052985: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:36.073788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:36.084639: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:36.162737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:36.187176: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.202026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.275469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.296580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.309590: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:36.400847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.425218: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.440035: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.516561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.536112: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.551334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:44:36.633862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.661044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.688028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.768497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.790546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.811073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:36.891794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.911395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:36.924393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.017549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.038287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.057677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:44:37.155637: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.174060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.194217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.284332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.311462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.330334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:37.427563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.448757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.461870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.555363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.570289: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.587138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step

```

```

2024-02-26 13:44:37.705861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.731631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.747248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.840369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.890478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:37.907053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:37.988707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.003959: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.031180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:44:38.133825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.157266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.182261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:44:38.274212: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.298596: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.311200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.388375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.426385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:38.443440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:38.546018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.566157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.593361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.665289: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.685074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.700731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:38.749537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.753715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.765467: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.834332: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.851796: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.869181: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.943125: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:44:38.970477: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:38.997715: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.098248: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.117447: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.135053: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:39.213529: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.240555: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.264445: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.333751: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.360801: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.381630: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:39.450045: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:39.477331: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.485862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.572312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.600941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.628757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:39.713453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.734633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.762213: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.860563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.882135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:39.898444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:39.990830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.015887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.037149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.136504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.158196: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.173592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:40.274983: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.295617: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.322764: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.401472: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.424111: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.443269: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:40.536871: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.564647: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.591689: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.663537: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.684790: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.697729: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:40.778735: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.810751: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.837843: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.910464: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.928465: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:40.949966: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:44:41.021960: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.039239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.063424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.143850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.156745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.174167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:41.265292: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.280182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.300902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.382333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.400567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.427418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:41.504856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.521710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.541944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.617130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.644632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:41.671904: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 25ms/step

```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:41.724726: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:41.728880: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:41.732681: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:41.795541: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:41.812313: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:41.823223: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:41.909088: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:41.935953: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:41.954536: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.043384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.070981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.092853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:42.187221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.208144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.219340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.281444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.308230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.322644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:42.391424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.418912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.445538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.525058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.545886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.560482: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:42.644824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.672330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.693880: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.772744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.800367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.827756: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:42.910051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.927337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:42.944528: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.032594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.059623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.074238: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:43.159929: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:43.178887: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:43.196278: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:43.283682: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:43.323363: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:43.351409: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 899us/step

2024-02-26 13:44:43.432013: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:43.458931: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.479618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.552245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.579078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.605636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:44:43.682134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.707011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.719881: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.841204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:43.863535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:43.891011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:43.987389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:44.010814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:44.037857: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:44.120391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:44.147566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:44.168989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:44.250673: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:44.277436: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.303972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:44.385986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.414184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.436119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.551951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.582681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:44.604258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.702105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.718463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.746153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:44:44.833797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.855096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.874419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.938895: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.960195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:44.975259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:44:45.049207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.070849: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.098194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.167891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.204617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.222118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:45.328078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.349538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.376729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:44:45.445297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.464787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.479245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 980us/step

2024-02-26 13:44:45.570132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.594614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.621565: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.681822: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.700654: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.719269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:45.806107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.849697: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.869103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.960298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.975190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:45.992285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:46.066742: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.087412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.106902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.179034: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.194446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.221577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:46.297078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.324172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.350915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.439981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.467467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.494597: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:46.562475: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:46.584492: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:46.597259: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:46.671394: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:46.698293: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:46.710488: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:46.797973: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:46.819235: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.838086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.920911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.942140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:46.969062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:47.044532: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:47.062907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:47.089763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:47.171789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:47.193192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:47.220343: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:47.321727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.348646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.375391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.471840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.512438: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:47.539819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.597369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.641627: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.653560: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.726108: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:47.746963: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.767486: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.852218: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.867047: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:47.893662: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:47.976897: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.003015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.011013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.101774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.123212: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.137566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:48.214453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.235382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.255922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.334845: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.349670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.365272: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:44:48.430493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.451649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.478338: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.584737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.611786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 985us/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:48.638159: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:48.706975: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:48.728101: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:48.748838: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:48.832515: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:48.853408: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:48.875049: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:48.943464: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:48.970426: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:48.991806: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:49.060738: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.081708: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.098809: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.170583: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.191796: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.212651: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:49.293842: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.320636: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.341328: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.422982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.443798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.470691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:49.533594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.554550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.581063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.658278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.679208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:49.706050: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 965us/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:49.773114: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.799922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.826371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.896219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.917361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:49.938191: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:50.016077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:50.043733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.070491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.142490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.150572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.154248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.196051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.212210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2024-02-26 13:44:50.224429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.311997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.333005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:44:50.351524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:50.443753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:50.464604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:50.491357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:50.576369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:50.603541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:50.627250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:50.711021: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:50.745937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.767473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.851580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.872388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.893203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:50.966968: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:50.993961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.012852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.082854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.111219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.131236: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 966us/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:51.213044: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.232495: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.259217: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.349381: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.368296: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.383107: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:51.449575: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.468524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.489248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.556275: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.577247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.597841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:51.664539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.691450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.710897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.826737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:44:51.850677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:51.870228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.963038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:51.981967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.000503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.062091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:52.083256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.100264: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.175377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.196732: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.216287: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:52.313124: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.340096: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.363767: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.453105: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.469320: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.492741: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

```

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:52.578558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.605559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.620598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.696600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.715877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.743413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:52.822312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.841429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:52.862429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:52.950899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:52.977934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:53.005267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:53.095961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:53.110902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:53.137598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:53.213202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:53.240213: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:53.267668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:53.347774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.375066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.414071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.512080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.527385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:53.546940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.649173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.670146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.682692: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:53.784553: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.816251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.840475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.936864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.954116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:53.982562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:44:54.079903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:44:54.104226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.125560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.206358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.225621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.252858: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:44:54.355542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.373666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.402645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.499447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.517195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.535358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:44:54.621905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.649096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.667914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.747049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.774266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.795114: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:44:54.874112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:44:54.895627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.902585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:54.999812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.027342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.048877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:55.129658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.145110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.162481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.238805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:44:55.265897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.289468: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:44:55.376477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.396106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.423431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.530667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.552683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:55.570346: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:55.668977: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:55.706458: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:55.729509: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:55.840075: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:55.862215: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:44:55.884841: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:55.978959: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:56.007074: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:56.026975: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 3ms/step

```

2024-02-26 13:44:56.128451: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.148340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.175880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.259808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.299217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.314472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:44:56.407502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.435516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.454874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:44:56.564479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.592350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.601177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:44:56.690633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.718031: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.743999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.808253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.827680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.834549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:44:56.909516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.934471: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:56.941112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.073468: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.099782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:44:57.116362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.186911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.206862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.234764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.318015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:44:57.337368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.371013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.443974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.467171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.482260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 939us/step

2024-02-26 13:44:57.562517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.585295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:44:57.612869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.679541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.698959: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.711359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:57.801821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.844669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.870537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.967259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:44:57.986434: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:58.011096: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.086576: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.114574: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.141989: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:44:58.233765: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.255914: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.283443: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.366203: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.385854: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:58.407229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:44:58.504555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.524518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.532020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:44:58.811553: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.835265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.859208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.937388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.960123: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:58.980913: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:44:59.063593: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:59.086188: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:59.107314: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:59.202182: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:59.222110: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:44:59.241057: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:44:59.333685: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.349699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.365458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.466373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.488636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.507554: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:44:59.630639: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.651600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.680545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.777123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.796503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.815601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:44:59.894951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.914008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:44:59.935755: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.033067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.054526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.075757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

```

```

2024-02-26 13:45:00.183022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.210952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.228524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.373545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:00.395609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.424797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.510548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.531820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.552772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```
2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step
```

```
2024-02-26 13:45:00.650924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.679258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.707595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.771461: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.782850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.787227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.830909: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.843818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:00.850741: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:00.900903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.921834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:00.938791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.030594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.045588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.063758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:01.134147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.161757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.185473: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.263681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.278696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.286219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:01.357702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.393709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.403105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.477476: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.491711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.518726: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:01.599696: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:01.637277: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:01.658559: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:01.768398: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:01.789803: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:01.822550: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:01.916464: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:01.936431: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:01.957998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:02.051933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.071791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.092743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.192063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.214541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.239227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:02.322036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.334875: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.352022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.430935: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.458635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.473930: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 996us/step

2024-02-26 13:45:02.563906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.583096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.606456: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.672393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:02.691463: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.708592: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:02.795324: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.822534: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.837354: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.915991: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.944023: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:02.965414: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:03.053372: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.071552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.098533: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.195009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.216855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.234794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:03.354986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.374584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.394190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.469355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.496550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.523455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 949us/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:03.600365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.607401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.647434: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.720323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.732193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.759556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:45:03.848064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.862313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.883233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.968653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:03.996108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.016601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:04.129991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.145476: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.166223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.234592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.254079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.269197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.326757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.331344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:04.360143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.450893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.465718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.483303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 934us/step

2024-02-26 13:45:04.604243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.627115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.648247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.729233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.748785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.766209: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:45:04.848578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.876277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.895721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.979941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:04.995568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.012861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:05.093050: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.114608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.132211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.221211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.240449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.257627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:05.340599: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:05.367772: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:05.388774: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:05.462758: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:05.491136: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:05.515245: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:05.602218: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:05.623981: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.642543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.710432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.729253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.743908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:05.810663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.838106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.851676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.927691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.942461: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:05.961942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:06.046599: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.066949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.093997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.179997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.197541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.220753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:45:06.316382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.335615: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.352948: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.422763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.448331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.475122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:06.547108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.568314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.585777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.665962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:06.693874: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:06.715056: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:06.822161: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:06.841921: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:06.859240: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:06.930924: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:06.958081: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:06.978974: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:07.072806: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.097107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.123246: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.213212: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.226200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.253571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:07.351154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.377969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.404726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.482716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.510588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.540777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:07.626952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.648166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.669416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.743861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.771227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.798686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

```

```

2024-02-26 13:45:07.881545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.902735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:07.920381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.020958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.043303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.064788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:08.178524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.210583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.229146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:08.293217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.311055: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.329306: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:08.423070: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.451239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.488460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.567362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.596172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:08.617308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:08.695089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:08.722291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:08.730882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:08.800008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:08.827955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:08.848696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:08.923109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:08.978926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:08.997989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.065546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.084667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.101569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1000us/step

2024-02-26 13:45:09.185519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.211393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.238379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.303669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.330857: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.341874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 27ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:45:09.432156: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:09.459679: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:09.477270: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:09.551087: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:09.586543: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:09.601362: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:09.682229: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:09.705353: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.740481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.812740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.831495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.858313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:09.912196: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.916508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:09.944308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.023377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.038933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.074655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:45:10.174154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.189707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.223832: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.307588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.326753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.343831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:45:10.414194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:10.441352: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.462157: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.533460: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.548726: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.569823: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:10.654333: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.673481: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.679480: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.757119: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.792488: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.819576: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:10.911383: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.930596: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:10.951484: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:11.035607: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:11.070929: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:11.101330: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 898us/step

2024-02-26 13:45:11.182448: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.209572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.228226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.296576: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.315443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.336274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 934us/step

2024-02-26 13:45:11.421958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.443248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.470308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.542525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.561750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.588506: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:45:11.667491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.694747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.721584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.794175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.821081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.835735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

```

```

2024-02-26 13:45:11.910463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.937620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:11.964424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.038306: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.057482: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.081481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:12.154768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.176094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.196921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:45:12.289577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.317062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.338065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:12.431818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.459015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.479787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.560077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.577652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.594898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:12.679001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.698160: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.715438: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.782545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.801786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.816622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:45:12.914642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.944086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:12.963842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.051946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.079652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.098910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:13.174328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.179337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.183223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.257492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.272422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.293087: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:13.377644: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:13.405388: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:13.448590: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:13.526056: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:13.553233: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:13.570417: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 6ms/step

2024-02-26 13:45:13.670001: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:13.685290: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.690131: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.776174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.797396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.814714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:13.902295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.923784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:13.945218: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:14.033185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:14.060344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:14.081386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:45:14.169969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.191227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.210112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.298014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.315669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.337632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 999us/step

2024-02-26 13:45:14.431834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.451286: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.479068: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.541435: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.562714: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.583488: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:14.669921: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.691297: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.701923: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.780212: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.799115: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.819906: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:14.895327: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.916650: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:14.937608: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.030522: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.049219: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.070165: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:15.163026: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.185141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.206022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.292885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.313406: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.330568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:15.418428: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.439723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.454187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.511460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.544189: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.549676: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.617497: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:15.638844: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.649391: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.747223: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.763597: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:15.790100: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 10ms/step

```

2024-02-26 13:45:15.897001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.922279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:15.946964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.017828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.042318: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.066265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:16.159060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.178393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.190212: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:16.241250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.260609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.275452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:16.380022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.407729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.427029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.527163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:16.555103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:16.583118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.650374: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.666823: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.677670: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.732305: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.751439: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.764802: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:16.803298: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.826050: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.831060: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.909785: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.931549: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:16.958426: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:17.037692: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.056863: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.078016: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.166464: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.185579: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.212537: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:17.320666: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.342483: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.369353: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.473547: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.496301: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:17.523779: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.602270: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.630639: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:45:17.658691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:17.772602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.800354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.821710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.900522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.927712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:17.945082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:18.036205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.055597: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.082514: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.180802: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.209110: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.234063: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:18.329686: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.356946: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.383948: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.459357: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.486384: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.498715: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:18.580988: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.608491: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.636279: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.716746: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.744406: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:18.762158: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:18.853909: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:18.881453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:18.908331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:18.976254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.004198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.017201: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:19.073001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.116942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.138539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.221714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.241567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.268839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:45:19.343757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.371467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.393592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.480989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.500223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:19.521429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:19.599023: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:19.626538: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:19.644000: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:19.727161: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:19.754431: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:19.781977: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:19.885946: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:19.901931: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:19.923858: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:20.001596: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:20.006166: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:20.014741: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:20.111213: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:20.139146: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:20.166461: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:20.277096: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:20.285108: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:20.313363: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.389074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.396408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.417481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.485153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.512335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:45:20.520739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.625174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.647006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.668413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:20.751404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.779070: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.806768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.918436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:20.947008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:20.967068: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.040765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.063803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.083028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:21.183848: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.206328: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.233869: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.322832: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.351120: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.378893: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:21.479392: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.502126: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.519406: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.622978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.650444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.677939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 984us/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:21.766877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.795025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.815739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.862735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:21.867243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.871208: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.913572: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.917878: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:21.921646: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:21.977928: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.009623: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.036340: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.119307: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.147021: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.171052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:22.247998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.285891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.307455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.415562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:22.447145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.465253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.567562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.585253: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.612229: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:22.714529: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.734751: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.760471: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.849590: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.871544: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:22.884397: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:22.969943: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:22.998096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.011908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.089669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.117168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.134255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:23.215239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.243581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.260700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.336511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.359673: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.382154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:23.475347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.496555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.514932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.592772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.620139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.647559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 10ms/step

```

```

2024-02-26 13:45:23.733512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.761302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.782883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.859074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.882282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.899473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:23.968892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:23.996300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.023748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:45:24.107157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.142929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.161370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:24.238184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.251089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.273095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.350056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.400116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:24.417076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:24.498157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.527488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.554624: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.642037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.661136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.688074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:45:24.770748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.795623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.818941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.915521: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.932611: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:24.949096: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:45:25.019858: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.040364: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.067324: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.133338: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.147535: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.165542: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:25.249258: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.276852: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.294611: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.371512: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.397902: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.420491: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:25.532867: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:25.553975: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.581345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.689531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.714014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.729579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:25.839401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.853371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.868868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.970592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:25.995916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:26.012011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:26.109430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.131709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.153391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.248137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.258984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.269324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:26.366979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.390127: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.408176: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.472249: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.492078: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.517138: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:26.634976: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.657105: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.681377: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.795461: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.819530: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:26.844714: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.956098: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:26.980130: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.002135: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:27.096412: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.124143: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.141616: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.218171: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:27.237375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:27.254089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:27.343883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:27.371838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:27.394095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:27.498335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:27.525972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:27.554446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:27.641166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.668970: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.690474: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:27.785659: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.810100: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.837874: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.936253: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.953919: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:27.975163: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:28.044347: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:28.049857: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:28.060811: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:28.229446: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:28.245586: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:28.265277: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:28.348789: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:28.375965: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:28.402573: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:28.502199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.527042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.537936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.615606: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.633397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.658163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:28.766080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.781986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.803493: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.899919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.922139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:28.943810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:29.037641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.059261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.081484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.144210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.212887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.225431: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:29.300606: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:29.319824: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:29.338700: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:29.422935: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:29.452250: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:29.476543: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:29.576111: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:29.592644: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.619474: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.710371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.725838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.736680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:29.832908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.852181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.871555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.936175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.961814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:29.989368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:30.088410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.116602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.138075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.223876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.251426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.272241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:30.371501: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:45:30.407271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.426754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.473252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.508793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.529059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:30.616180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.636052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.655026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.765240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:30.789917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.811913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:30.894613: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.922337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:30.938011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.029833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.047647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.082486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:31.165038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.186949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.191137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.275530: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.294686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.316770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 984us/step

2024-02-26 13:45:31.382274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.401582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.421266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.489414: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:31.505878: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:31.509909: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:31.544984: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:31.556786: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:31.561221: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:31.599928: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:31.604346: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:31.615354: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:45:31.682690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.710013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.725973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 19ms/step
2024-02-26 13:45:31.802814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.830001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.857101: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.946768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.970078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:31.991166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:32.097336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:32.113222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:32.130539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:32.195784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:32.223091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:32.241952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:32.332799: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:32.354420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:32.377539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.461259: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.488987: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.525889: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:32.606597: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.633829: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.654587: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.724325: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.743392: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.770301: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:32.821338: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.836747: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.857815: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.935775: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.963240: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:32.978496: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:33.063735: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:33.083284: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.110617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.213206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.240967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.255876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:33.343915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.363085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.379124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.472245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.491625: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.509104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:33.598471: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:33.617840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:33.644612: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:33.725793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:33.744951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:33.772350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:33.860303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:33.864476: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.867849: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:33.991617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.012025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.032982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:45:34.128097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.155898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.175389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.274828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.303129: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:34.323975: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:34.394374: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:34.409852: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:34.413912: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:34.463073: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:34.490349: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:34.509774: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:34.599027: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.627064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.648614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.737017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.752228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.773275: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 975us/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:34.886609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.906195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:34.939216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.028665: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.073661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:35.095622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.178913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.206135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.222842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:35.316600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.332430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.340445: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.439059: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.466388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.487755: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:35.596091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.618207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.631957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.728416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.749855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.776627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:35.885408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.901472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:35.918121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.009810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.037040: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.058351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:36.140779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.162012: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.183113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.253575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.282666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.310145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:36.387881: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.414258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.430306: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.501353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.520239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.539222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:36.637016: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:36.652273: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:36.679088: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:36.768919: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:36.790182: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:36.816977: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 888us/step

2024-02-26 13:45:36.912266: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:36.927397: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:36.944559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.015029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.042300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.069298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:37.136679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.154575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.181586: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.276211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.298579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:37.316245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:37.406450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.425223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.455257: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.541797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.561453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.588486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:37.710221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.738007: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.765087: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.856031: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.881175: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:37.894377: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:37.982514: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.003853: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.024954: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.111574: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.139264: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.159181: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:38.284697: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.312363: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.327433: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.415854: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.443147: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:38.462269: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:38.563413: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.584768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.597522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.663060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.690365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.714454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 965us/step

2024-02-26 13:45:38.789183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.810830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.831906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.903454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.928455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:38.945893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
Step: 500, Discriminator Loss: 0.6617830991744995, Generator Loss:
0.7392672300338745
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:39.004925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.023747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.042177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.151079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.173340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.189913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:39.253616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:39.257892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:39.262072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:39.397814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:39.412605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:39.433498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:39.548569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:39.570886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:39.594500: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.693794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.718267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.739292: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:39.845392: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.866732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.889880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:39.984234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.003041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.020220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:40.095997: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.117380: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.140329: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.234314: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.261611: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.282553: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:40.370980: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.402513: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.418939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.501470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.520750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.536744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:40.637566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.659276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.689674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.773615: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.791285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:40.808797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:40.926548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.954035: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:40.975151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.047001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.068385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.089534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:41.170714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.188501: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.206179: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.317935: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.339226: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.354139: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 981us/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:41.436069: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.459976: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.481864: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.607085: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:41.629233: I tensorflow/core/common_runtime/executor.cc:1197]

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 9ms/step
```

```
2024-02-26 13:45:41.646981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:41.730924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:41.752747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:41.773965: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 7ms/step
```

```
2/2 [=====] - 0s 9ms/step
```

```
2024-02-26 13:45:41.865914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:41.888333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:41.906681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:45:42.019297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.044350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.063574: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:42.180251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.198604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.218204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.309924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.327464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.347139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:42.459130: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.487570: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.515286: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.594893: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.616224: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.633677: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:42.720106: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.739599: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.756805: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:42.830171: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.858855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.880349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:42.966725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:42.994163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.005202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.112216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.135703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.159669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:43.265032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.289268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.317071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.415837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.430887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.453064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:43.538364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.559656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:43.586664: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.680097: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.707427: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.734632: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 6ms/step

2024-02-26 13:45:43.819076: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.846557: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.864452: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.951176: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.978425: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:43.996200: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:44.077134: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.104439: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.123320: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.199303: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.226383: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.241160: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:44.334115: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.361367: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.380029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.458333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.477288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.498184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:44.583746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.598945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.616220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.710371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.726528: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:44.748154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:44.812950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.840171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.863996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.964867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:44.984489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.006216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:45:45.151929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.167461: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.195487: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.289554: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.310887: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.326393: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:45.413787: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.441073: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.465207: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.540568: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.567744: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.582605: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:45.665059: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.686262: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.713122: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.802520: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.829530: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:45.853347: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:45:45.940049: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:45.957393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:45.971689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.061605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.076817: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.103666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:46.192808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.214133: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.240870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.323918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.343059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.363839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:46.446584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.467126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.493976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.582477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.606709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.622005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:45:46.712425: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.731960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.746283: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.846997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.868911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.890084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:45:46.979177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:46.999174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.014362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:47.095694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.114848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.141759: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:47.217974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.240769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.267886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.363777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.382258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.399689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:47.495193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.516407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.537766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.617659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.634038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.654898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:47.742480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.761719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.787914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.883316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.905124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:47.926267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:48.032024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.051703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.069508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.150303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.171718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.199137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:48.294184: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:48.313391: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:48.331905: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:48.416777: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:48.434508: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:48.451851: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:48.522736: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:48.549896: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.567661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.652672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.673941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.691209: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:48.771427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.790736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.817563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.914364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.927115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:48.948323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 992us/step

2024-02-26 13:45:49.043397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.062796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.085053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.164194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.186661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.213538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:45:49.302744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.323961: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.350923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.450628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.478629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.499717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 998us/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:49.577948: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.597318: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.624125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.695881: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.713012: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.730236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:45:49.804410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.828010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.838367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.939926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.958660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:49.985405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:50.082636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.104719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.125591: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.218099: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.233556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.246845: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:45:50.339936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.351360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.388059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.490016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.511266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.533402: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 31ms/step

2024-02-26 13:45:50.609279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.630426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.651171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.746085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.754982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.772617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

```

```

2024-02-26 13:45:50.853932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.862183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.879563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:50.967633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.004138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.025148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:51.131177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.152320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.173179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:51.260638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.279759: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.297090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:51.383491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.401360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.428769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.558831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:51.586499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.601664: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.697491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.717922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.736776: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:51.837780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.865108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.893152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:51.988603: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.006195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.023509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:45:52.108472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:52.126291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:52.143894: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:52.248959: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:52.265937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:52.290680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:45:52.411080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:45:52.437198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:52.454634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.545044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.572355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.593325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:52.691507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.706805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.724667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.832434: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:52.860772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:52.888549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 997us/step

2024-02-26 13:45:52.981371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.003530: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.030931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.123779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.135287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.155497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:53.234933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.262075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.284993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.382005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.402715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.419945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:45:53.524188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.554744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.575577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.659757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:53.686912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.695179: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:53.794876: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.820151: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.841582: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.940981: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.960749: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:53.978458: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:54.022797: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.027691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.031844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.109767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.137003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.163972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:54.275709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.291078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.311904: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.394343: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.421803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.443505: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:45:54.547056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.568711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.595905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.684505: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.711753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:54.730848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:54.820573: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:54.839921: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:54.867087: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:54.974629: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:54.996000: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:55.023393: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.114975: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.142723: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.164574: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:55.281513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.294966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.299709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.438107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.460900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.476128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:45:55.530869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.563578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:45:55.583036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:55.666950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:55.695981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:55.720666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 35ms/step

2024-02-26 13:45:55.814898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:55.833662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:55.851332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.005405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:56.027105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.043580: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.141540: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.160734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.181542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:56.288299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.304277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.325571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.415008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.442223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.463798: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:56.574443: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:56.589842: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:56.616752: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:56.705978: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:56.728030: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:56.752391: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:56.856770: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:45:56.878251: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.890906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:56.998988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.021464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.048619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:57.156467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.174429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.201632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.302794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.324105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.346837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:57.453337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.466546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.483930: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.569462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.590960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.606415: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:45:57.694251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:57.711868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.728998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.801439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.820688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.841690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:45:57.947541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:57.969441: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.006305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.097259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:45:58.121006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.147033: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:58.255373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.283056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.312834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.423484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.443203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:58.460794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.561813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.577414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.598739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:45:58.684976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.706647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.724262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.811198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.838517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.855840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

```

```

2024-02-26 13:45:58.950444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.971675: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:58.982570: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.070864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.092664: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.113534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:45:59.215351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.236769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.249690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:45:59.333058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.352367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.379346: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:45:59.472301: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.485310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.502906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.581872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.609173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.630185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:45:59.736386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.749596: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.769601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.839954: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.860604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:45:59.879667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:45:59.998806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.014240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.029529: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.123130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.152692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.174255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:46:00.265552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.280822: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.298210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.392657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.410297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.428529: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:46:00.504652: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:00.532225: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:00.549693: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:00.619107: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:00.627461: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:00.650608: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:00.761223: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:00.780515: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.803515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.912831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.934310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:00.961403: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:46:01.055624: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.083448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.110455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.201416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.232245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.250891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:01.351629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.379768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.407348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.529291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:01.555143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.580241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.707797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.735389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.758407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:01.862951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.887837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.915062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:01.998460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.018448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.046254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:02.154052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.173480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.192161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.288385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.316490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.338335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:02.391771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.396228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.422734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.528112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.552161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.579854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:46:02.664307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.691705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.713663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.780384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.796152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.813757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:02.916832: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.945113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:02.960312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.068004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.096251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.111652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:03.223582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.239361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.257609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.334209: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.354151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.375991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:03.478626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.497685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.524685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.617653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.637767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.658732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:03.750850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.779075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.794488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.867304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.894785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:03.912356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:04.005522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.030734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.056989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.153433: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.168686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.183824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:04.305976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.328067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.342991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.450284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.470090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.482687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:46:04.568846: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:04.588271: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:04.598013: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:04.676563: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:04.717770: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:04.742315: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:04.842218: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:04.864672: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.886781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:04.978660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:05.006280: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:05.018979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:05.104901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:05.129741: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:05.156835: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:05.250111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:05.274925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:05.299398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:05.389666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.409043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.426363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.500377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.520837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.542041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:05.616381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.637901: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.656059: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.717596: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.752505: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.779309: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 6ms/step

2024-02-26 13:46:05.853548: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.878990: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.905776: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:05.992755: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:06.020167: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:06.041908: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:06.137646: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:06.153052: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:06.173976: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:06.237832: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:06.253110: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:06.266984: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:06.371444: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.393219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.420540: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.516822: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.537151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.556377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:06.671240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.692632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.714184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.821484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.841194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.868059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:06.955605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.973544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:06.994588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.071330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.099984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.127029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

```

```

2024-02-26 13:46:07.227956: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.247130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.267957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.356111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.383600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.398596: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:07.494718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.509470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.518698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:46:07.598039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.622039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.643288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:46:07.719923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.741657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.759311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.825995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.830821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.834809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:07.928669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.945151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:07.958537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.032830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.051922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.070952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:08.153579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.163327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.180754: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.261796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.283088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.299744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 993us/step

2024-02-26 13:46:08.398230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.414710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.432381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.515295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.542828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.560154: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:08.650739: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:08.672391: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:08.699545: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:08.786286: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:08.807801: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:08.835012: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:08.945142: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:08.964493: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:08.988267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.091948: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.119180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:09.147568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.232936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.248167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.275337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 988us/step

2024-02-26 13:46:09.367953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.395819: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.414960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.496621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.514527: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.532069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 959us/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:09.615459: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.636569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.654005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:09.725228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:46:09.741787: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:09.749772: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:09.808565: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:09.829617: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:09.856824: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:09.957063: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:09.978414: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:09.999590: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:46:10.081779: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:10.109165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:10.136240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:10.253452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:10.288344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:10.311273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:10.422798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:10.444485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:10.484692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:10.599993: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:10.619158: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:10.646189: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:10.719130: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:10.738974: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:10.760798: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:10.867572: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:10.885574: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:10.912703: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.029328: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.044120: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:11.072309: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.179502: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.195599: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.216918: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 984us/step

2024-02-26 13:46:11.310813: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.338852: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.360156: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:11.436379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:11.468154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:11.486374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:11.582341: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:11.614937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:11.623192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:11.751465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:11.780516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:46:11.815885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.927496: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.955308: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:11.991760: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:12.100017: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.115047: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.142090: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.233260: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.254813: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.275781: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:12.371176: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.392940: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.414501: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.504296: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.531998: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.553167: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:12.620553: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:12.654220: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:12.671770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:12.748474: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:12.775908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:12.792790: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:12.887118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:12.906786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:12.927752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.012153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.030658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.047933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:46:13.134123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.148754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.170038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.262316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.277892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.305224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:13.421081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.439225: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:13.461879: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:13.570753: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:13.598338: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:13.623054: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:13.730946: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:13.752559: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:13.770706: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:13.867983: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.885950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:13.907131: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.002476: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.015464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.032931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:14.114595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.142428: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.169697: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.246791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.268305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.281871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 996us/step

2024-02-26 13:46:14.385577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.407651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.428914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.503006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.522633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.549562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:46:14.636505: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.664327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.688076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.765159: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.780896: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.809994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:14.912893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.932361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:14.954379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.035072: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.064076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.085332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:46:15.176116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.193440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.211084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.309264: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.328001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.346314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:15.436748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.449771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.471308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.582775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.610195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.631210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:15.721939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.751421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.778655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.876799: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.902030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:15.915252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:16.024975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.052574: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.072319: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.165322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.189571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.205009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:16.306973: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:16.335118: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:16.357319: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:16.462490: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:16.484191: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:16.501841: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:46:16.594634: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:16.621991: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.649629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.749577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.771335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:16.800762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.874901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.902542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.917707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:16.978381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:17.013340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.028710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.104728: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.124152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.141699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:17.236199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.279768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.299262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.392926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.420448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:17.448455: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:17.534802: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:17.562176: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:17.589229: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:17.669261: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:17.694502: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:17.716401: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:17.808265: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:46:17.824389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.851977: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:46:17.948841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.968232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:17.985780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.049733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.065247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.081045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:18.165545: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:18.193323: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:18.212496: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:18.296326: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:18.316227: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:18.343438: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:46:18.394688: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:18.399407: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:18.403712: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:46:18.465023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.476761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.504824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 9ms/step
2024-02-26 13:46:18.601582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.629209: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.656639: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.742794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.764328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.788507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:46:18.902129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.930662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:18.953872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.045015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.062369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.083657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:19.173351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.200803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.227784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.330921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.350274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.367267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:46:19.459473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.464806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.483913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.598219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.618036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:19.639248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 992us/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:19.726368: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:19.753936: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:19.770646: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:19.846715: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:19.866368: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:19.883796: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:46:19.954169: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:19.973482: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.000663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.064061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.068439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.074464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.152514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:20.179878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.199117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.309246: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.326990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:20.338117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:20.420171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.440244: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.464768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.544108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.571591: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.591315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:20.707243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.736246: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.757957: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.884566: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:20.906181: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:20.929026: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:21.034134: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:21.049638: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:21.070109: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:21.176439: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.199260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.221041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.331750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.351148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.372732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:21.477080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.499485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.520640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.611020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.631363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.657952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:21.764301: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.783640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.802653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.878016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.896072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:21.935879: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:22.049868: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.077362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.098288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.183616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.210843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.231915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:22.332999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.361707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.382762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.475059: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.500549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.522578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:22.618450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.638082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.653201: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.762982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.785283: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:22.812342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:22.914335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:22.934174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:22.951597: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.031345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.066694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.090870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:23.184499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.209364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.230395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.333338: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.354903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.382892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:23.481034: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.501500: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.519102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.615977: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.635023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:23.656119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:46:23.745460: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.767782: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.794505: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.895242: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:23.922730: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:23.954536: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:24.023137: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:24.035851: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.039961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.095194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.106788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.124155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 34ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:24.217814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.233255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.254594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.321962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.349361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.365524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:24.441905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.469563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.488372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.587535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.602324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.619689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:24.713771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.741264: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.756782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.839973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.863101: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:24.891214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:46:24.996810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.005907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.021643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.113731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.134985: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.161856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:25.269748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.289137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.316317: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.401889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.430836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.452169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 12ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:46:25.531818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.543193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.556185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.621840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.643128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.659129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:46:25.748566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.776302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.803359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:25.878027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:25.899861: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:25.921198: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:26.022986: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.052770: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.068111: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.151117: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.176758: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.203853: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step


```

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:26.279418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.308192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.335430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.429420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.448850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.469949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:26.586027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.613552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:26.640662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:26.726766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:26.748499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:26.765990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:26.847174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:26.867709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:26.888258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:26.979745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:26.998992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.016535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:27.102721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.130384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.146925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.225009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.264621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.291749: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:27.391487: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.418842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:27.436207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.523298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.541217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.560052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:27.651681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.666944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.688016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.768193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:27.787986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:27.818121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:46:27.905017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.926894: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:27.948089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:28.043747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:28.063177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:28.090093: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:46:28.195143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:28.216542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.237607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.330507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.354176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.371489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:28.466237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.487868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.514980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.612764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.640308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.664017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:28.759149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.786610: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.813746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.917890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:28.948609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:28.976163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.066752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:29.097812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.124958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 31ms/step

2024-02-26 13:46:29.218841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.246539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.267469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.376449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.402016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:29.431056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.522647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:29.537796: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:29.544855: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:29.626612: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:29.648708: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:29.658550: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:29.744304: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:29.772062: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:29.791358: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 1ms/step

```

2024-02-26 13:46:29.876117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.891791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:29.915263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.000853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.028673: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.047307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:30.148263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.165100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.192569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:30.284323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.300740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.330918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:30.430736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.457854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.479000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.548286: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.568865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.588256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:30.663072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.690546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.717765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.804125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.835870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.863176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:46:30.962960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.978135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:30.999226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.078127: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.105730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.126836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:31.226831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.248533: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.275813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.362342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.389836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.410984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:31.504114: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:31.523785: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:31.546261: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:31.643081: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:31.660003: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:31.677554: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:31.751946: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:31.781244: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.800413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.877726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.898610: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:31.922052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:32.030217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.049884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.071010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.181424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.208994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 11ms/step
2024-02-26 13:46:32.233312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.340798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.368335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.395379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 11ms/step
2024-02-26 13:46:32.496085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.517747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.545038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.625696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.652985: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.668081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:32.758440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.774112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.801369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.884732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.912206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:32.931381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:33.041669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.057798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.075843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.172398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.199964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.218928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:33.313676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.332358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.359443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.454975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.482681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.504215: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:33.606605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.634782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.652468: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.739766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.767511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:33.794773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:33.914759: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:33.927263: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:33.948307: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:34.042526: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:34.060777: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:34.078640: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:34.170384: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:34.190865: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:34.204686: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:34.286874: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.314513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.341955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:34.439850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.467663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.485333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.559057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.580984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.608249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:46:34.691177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.711348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.739980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.835380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.862771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:34.881674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:35.028820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.056392: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.083306: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:35.179266: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:35.207035: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:46:35.231513: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:35.299084: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:35.320756: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:35.338639: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:35.455355: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:35.477708: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.496917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.592919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.606327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.623926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:35.699504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.721016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.742234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.832233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.850288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:35.872064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:46:35.962368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:35.981199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.008402: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.110336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.125873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.143293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:36.247132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.270328: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.297022: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.401412: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.423920: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.445837: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:36.554375: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.578622: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.605806: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.698733: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:36.726559: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:36.744102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:36.840433: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:36.868708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:36.890165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:36.974530: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.002580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.030484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:37.155491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.183159: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.199304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.307519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.335315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:37.356877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.466803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.488987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:37.516494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:37.621931: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:37.649533: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:37.667483: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:37.754104: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:37.784386: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:37.806409: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:37.909754: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:37.931101: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:37.958205: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:38.049751: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.071220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.088728: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:46:38.176623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.198552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.216243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.313006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.328416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.342801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 46ms/step

2024-02-26 13:46:38.421168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.442561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.460147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.566790: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.582726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.597690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:38.707523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.723854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.750812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.841017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.856091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:38.883262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:38.982231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:39.009670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:39.036897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:39.122989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:39.140475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:39.161531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:39.254870: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.282419: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.303463: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.417093: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.435787: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:39.473298: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.558561: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.586290: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:46:39.603892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:39.700793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.728670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.746384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.837881: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.860091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.887120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:39.968220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:39.990670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.012244: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.082803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.105377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.132511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:40.234929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.253084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.267607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.363281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.385106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:40.412240: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:46:40.522230: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:40.540459: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:40.561429: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:40.656108: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:40.680106: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:40.697720: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:40.786471: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.802898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.821872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.939380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:40.967186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:40.988603: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:41.099585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:41.124566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:41.141977: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:41.243139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.274667: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.301466: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.393015: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.415368: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.439580: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:41.537508: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.559282: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.583765: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.688553: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.710206: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.721035: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:41.815946: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.831599: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.849227: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.927935: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.946913: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:41.968610: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:42.087503: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.114948: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.142057: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.229717: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.254838: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.282124: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:42.384086: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.408708: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.430510: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.529917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.549980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.577840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:42.655878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.665896: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.677102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.812703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.834395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:42.847867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:42.944695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.964370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:42.983490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.075655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.105008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:43.150208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.238711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.259819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:46:43.281414: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.352384: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:43.371991: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.390864: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.474533: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.502844: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.524346: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:43.636765: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:43.664843: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:43.682824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:43.763345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:43.791144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:43.808883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:46:43.911758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:43.932025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:43.959328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.051190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.073043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.097411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:44.202990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.230439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.244496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.352917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.368876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.390234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:44.493726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:44.518924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.540685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.626875: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.654142: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.681806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:44.826652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.841726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.845806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.881999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.886623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.891621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.977519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:44.995391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.012713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:45.105422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.123958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.142064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.250842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.278389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.299558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:45.392978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.408425: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.439293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.505086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.539911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.567151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:45.666097: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.684100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.701862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.800383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.828662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.853793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:45.946747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.962026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:45.979468: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.064649: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.083944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.101355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:46:46.183021: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.218134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.227473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.318305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.345723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.372886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:46:46.478975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.506375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.525507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.620349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.641401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.662736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:46.760796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.788802: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.811216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.908911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.931515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:46.959068: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:47.085910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.113706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.134928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.237240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.262473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.283625: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

Step: 1000, Discriminator Loss: 0.6965508759021759, Generator Loss:
0.693069338798523

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:47.362309: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:47.379594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:47.397818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:47.503026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:47.524853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:47.534975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:47.613522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:47.641146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.662839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.763050: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.788650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.810390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:47.899378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.919455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:47.935159: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.012197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.050458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:48.076112: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:48.228875: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:48.245830: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:48.250723: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:48.339135: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:48.367239: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:48.388498: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:48.500807: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.516563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.534358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.614655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.642803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.662293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:48.751438: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.764909: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.778220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.863805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.883421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:48.900242: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:48.992109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.011947: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.023941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.106928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.128412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.143548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:49.225347: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.253996: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.281564: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.370751: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.389177: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.416539: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:49.511250: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.528104: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.555302: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:49.640892: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.662190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.677960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:49.749382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.765182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.787064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.884184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.901802: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:49.924387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:50.005501: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.024747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.052638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.157577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.180337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:50.207380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.335349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.357020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.373831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:50.462832: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.490993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.512544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.587722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.616002: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.643469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:50.720993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.725815: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.737090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.773291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.781277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.786695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.917768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:50.942929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:50.970381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.078452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.094176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:51.116739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:51.225062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:51.243297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:51.262300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:51.369890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:51.381611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:51.394351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:46:51.560910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:51.580738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.608236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.702142: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.720333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.744650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:51.839573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.855906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.874093: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:51.981076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.009208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.034040: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:52.160017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.183920: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.202230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.300146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.322022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.343238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:52.442662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.470595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.492817: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.596074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.623978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.642168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:46:52.770043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.800235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.815472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.924956: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:46:52.952625: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:52.976987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.087279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.134534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.162892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:53.230495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.243495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.260867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.330834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.358468: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.374549: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:53.452657: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.479321: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.500515: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.576694: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.598516: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.616668: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:46:53.715594: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.735197: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.762556: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.872067: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.891943: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:53.906615: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:46:54.035233: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.055265: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.086659: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.184506: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.200268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.213901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:46:54.312150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.333598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.353510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.438188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.460587: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:54.479988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:46:54.595015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.626107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.647121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.728534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.748022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.765749: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:46:54.865291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:54.886548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:54.904378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.016194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.032013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.053617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:46:55.185621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.200529: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.218577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.320923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.348666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:46:55.362892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:46:55.452929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:55.468720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:55.481048: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:55.572496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:55.594072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:55.612761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 26ms/step

2024-02-26 13:46:55.702016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:55.723800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.745489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.841150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.863805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.882918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:55.976494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:55.991788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.019017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.119635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.140427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.161663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:56.251580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.290947: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.317206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.413417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.434873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:56.454025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.550853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:46:56.568953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.596183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:56.692605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.717123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.739004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.841268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.856725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.874908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:56.981676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:56.997139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:57.025950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:57.125260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:57.148145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:57.163793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:57.268503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:57.292711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:57.320001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:57.462609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:46:57.489082: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.516574: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.618639: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.641256: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.668362: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 25ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:46:57.794231: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.822468: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.849818: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.950797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:57.979810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:57.997349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.117587: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.130634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.152348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:58.233947: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.261671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.274363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.353122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.380911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.395926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:58.474936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.498148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.516371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.594374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.611149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:46:58.638393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:46:58.711621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.731504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.758988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.865663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:58.893690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:46:58.918235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.036175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.064238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.085592: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:59.200508: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.218685: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.231654: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.316799: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.338510: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.359782: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:46:59.447714: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:46:59.467751: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.492094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.619250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.641916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:46:59.661905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.737698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.745564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.753322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.827271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.839749: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.860833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:46:59.945892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.959511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:46:59.980806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.082041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.094126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.108417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:47:00.174644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:00.210269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.229127: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.305331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.327922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.346322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:47:00.445496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.465791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.493584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.581964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:00.595922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.617407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:00.716509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.744726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.762841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.850227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.876595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:00.898280: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:01.004166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.019886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.044543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.142485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.163965: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.170375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 27ms/step

2024-02-26 13:47:01.279957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.301826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.329237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:01.448679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.474436: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.479950: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:01.599121: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.621099: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.642917: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.728977: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.736582: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.751931: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step


```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:01.868455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.890502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:01.917996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:02.016118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:02.042070: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:02.063186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:47:02.137045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:02.165692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:02.198878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.291780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.313262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:47:02.349536: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.428179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.448399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.475710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:02.568786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.587870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:02.609182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.706934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.734752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.752686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:02.854102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.876294: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:02.894237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.031249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.053574: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 4ms/step

2024-02-26 13:47:03.070958: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.152511: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.173751: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.195129: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:03.292432: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.320438: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.334689: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.432531: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.454127: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.475266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 36ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:03.593265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.621055: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.636255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.749298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.776907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:03.801944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.902855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:03.925566: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:03.946792: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:04.034089: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.061865: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.079426: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.200305: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.222147: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:04.247062: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.360257: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:04.384251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:04.401611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:04.500022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:04.521986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:04.538782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:04.679666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:04.696026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:04.715237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:04.822734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.838650: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.854986: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:04.967480: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:04.990665: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.012532: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.085847: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.105861: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.118966: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:05.201654: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.237600: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.259815: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.347237: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.372019: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.394607: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:05.502159: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.516702: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:05.529615: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.605851: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.625189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.646478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:05.732983: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.758465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.786045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.885678: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.898865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:05.919013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:06.025995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.054255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.081994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.209081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:47:06.231777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.259736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.351853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.372146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.394693: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:06.519776: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.542146: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.560307: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.662627: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.682487: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.709920: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:06.856732: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:06.874757: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:06.901818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:06.988645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.006857: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.029369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:07.142591: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.171953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.193422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.289995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.311560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.335801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:07.468609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.488898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.504084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.581205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.603017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.624109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:07.734146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:07.752183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.765819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.845016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.860762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:07.878265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:08.001901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.019284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.082864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.177055: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:08.195719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:08.215966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:08.320028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:08.343239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:08.359225: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:08.411356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:08.418758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:08.438163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:08.562576: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.579792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.606897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:08.721874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.753787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.781588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.885255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:08.912866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:47:08.940689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:09.032009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.050295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.068094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:09.154036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.182367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.190187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.281253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.301339: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.306421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:09.433570: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.453821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.475196: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.565494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.587711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.614963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:09.715413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.735363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:09.762430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:09.863376: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:09.884793: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:09.905898: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:10.009858: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.017669: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.045063: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.115926: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.128471: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.133019: I tensorflow/core/common_runtime/executor.cc:1197

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.186213: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.206142: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:10.228783: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.327969: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.346128: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.360564: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:10.453444: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.470718: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.488270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.584964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.612707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.625384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:10.705196: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.724683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.746032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.830887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.835943: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:10.873489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:10.959110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:10.974234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.001782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.084402: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.106110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.123806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:11.215196: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.252262: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.273525: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.375339: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.397032: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:11.418273: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.521989: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.538246: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:11.559929: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:47:11.646585: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:11.666857: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:11.688357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:11.795326: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:11.813176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:11.830508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:11.901642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:11.906248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:11.942514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.018583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.038237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.056928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:12.136193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.155455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.183264: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.272531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.291039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.318105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:12.405027: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.423473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.446165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.531081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.556325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.583431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:12.669469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.697726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.725781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:12.822394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.827507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.832166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:12.884884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.892625: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.897431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.950761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.968863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:12.988536: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:47:13.067380: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:13.096451: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.116185: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.248149: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.267623: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.288999: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 56ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:13.404671: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.422203: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.450580: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.547769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.563540: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.578634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:13.677388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.692377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.707015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.783409: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.802807: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:13.817414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:13.884052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.895830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:13.931989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:14.034189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:14.057475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:14.075248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:14.174918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:14.196597: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:14.218041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.341850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.364180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 13ms/step
2024-02-26 13:47:14.385852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.526952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.551422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.578595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step
2024-02-26 13:47:14.718925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.740149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.767906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.875118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:14.897018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:14.925943: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:15.070450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:15.094299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:15.119439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:15.251970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:15.267491: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.288331: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.384294: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.402819: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.428960: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:15.545782: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.570166: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.591208: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.683221: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.709615: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.736806: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:15.835421: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.858346: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.876203: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.962819: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:15.982344: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:16.000415: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:16.102506: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.124307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.142043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.232081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.252179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.274236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:16.340325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.368151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.395521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.510708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.524500: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:47:16.547380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.646682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.668192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.704739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:16.780973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.802538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.823719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:16.935443: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:16.955733: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:16.983478: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.100556: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.123192: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.145144: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:17.248547: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.276304: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.294101: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:17.391793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:17.410081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:17.427919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:47:17.549978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:17.569820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:17.595576: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:17.708406: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:17.732620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:17.762848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.879960: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.902302: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:17.929761: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:18.031511: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.059201: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.077769: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.175647: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.200120: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.223400: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:18.387150: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.417970: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.433023: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.513454: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.541608: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.559446: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:47:18.673835: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:18.693966: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:18.721431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:18.799079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:18.820548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:18.838486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:18.938513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:18.961698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:18.983147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.082706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.110281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.137355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:19.238934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.260796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.282095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.378116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.400029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.418016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:19.518735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:19.555995: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.582956: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.665225: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.684843: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.706049: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:19.813518: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.835239: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.870583: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.947529: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.963026: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:19.969284: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:20.063373: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:20.084861: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:20.102400: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:20.195970: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:20.215432: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:20.242583: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:20.318077: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.337475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.372831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.453973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.482430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.501632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:20.597466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.625272: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.649985: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.739147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.767062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.790490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:20.907119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.932592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:20.959725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.054856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.082595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.102041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 13ms/step

```

```

2024-02-26 13:47:21.213331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.242265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.255400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.375302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.392884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:21.420152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.510282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.545804: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.572754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:21.667032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.694562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.715635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.802722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.830274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.846917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:21.932490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.954118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:21.989358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.086867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.112167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.129841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:22.230397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.258156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.279366: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.370825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.396040: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.423069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:22.515917: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:22.543769: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:22.574316: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:22.651779: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:22.671484: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:22.683210: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:22.767753: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:22.788941: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.810266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.892862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.913372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:22.934656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:23.013880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:23.035694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:23.063185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:23.162851: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:23.190495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:23.205644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 988us/step

2024-02-26 13:47:23.281819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.300997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.328279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.402817: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.430413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.451813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:23.504638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.513956: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.518365: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.584824: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.605953: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.611189: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:23.919391: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.939390: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:23.958834: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:24.065219: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:24.093912: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.118189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:24.225940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.247167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.282685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.393393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.419144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:24.446762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.565311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.588761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.601747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:24.715478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.735874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.749277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.850863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.876690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:24.899922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:25.005687: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.021909: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.035808: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.141175: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.164879: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.176893: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:25.271635: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.288757: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.302044: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.396598: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:25.413058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:25.428725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:25.546661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:25.582920: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:25.606406: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:25.698288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:25.718391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:25.742071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:25.851980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.880391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:25.905989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.001237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.029999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:26.054057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.159124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.183892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.207876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:47:26.318117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.338950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.360645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.468238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.488961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.507206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:26.648826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:26.677372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:26.693203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:26.793442: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:26.823243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:26.837597: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:26.947766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:26.970745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:26.998897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.131455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:27.160301: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.174999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.277916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.295735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.311333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:27.389868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.418369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.440147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.546508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.570116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.588241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:27.692359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.715497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.737312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.831037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.854232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:27.882377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:27.970642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:27.982642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.002669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.106993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.126117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.155169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:28.276115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.295181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.319291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.417609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:47:28.445632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.463640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:28.582942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.602336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.630548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.756241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:28.790620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.812818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.918113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.930662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:28.936299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:47:29.037544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.059814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.081497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.190229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.212522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.234674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

```

```

2024-02-26 13:47:29.352339: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.372665: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.394405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.486357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.506506: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.528440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:29.639585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.653627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.671624: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:29.771250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.797345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.821739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:29.967330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.984155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:29.998602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.139241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:30.184151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.212551: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.325017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.353258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.378246: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:47:30.498846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.521409: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.543026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.667210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.684333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:30.692862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:47:30.777005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:30.799243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:30.817516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:30.903485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:30.929558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:30.954988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:47:31.071356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:31.100502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:47:31.126356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:31.253889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:31.286000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:31.311962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:31.418613: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:31.442042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:31.464720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:31.595525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:31.619511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:31.647709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:31.762036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:31.782569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:31.804691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:31.928962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:31.947961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:31.976170: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 25ms/step

2024-02-26 13:47:32.095581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:32.116290: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.121705: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.221142: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.233703: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.247024: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:32.351273: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.366972: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.381407: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.466557: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.479823: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.538922: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:32.651159: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.667006: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.688629: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.803539: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.824514: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:32.844256: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:47:32.954886: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:32.975186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:32.993225: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.078693: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.102008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.115405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:33.241657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.269521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.286655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.389973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.408351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.436539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:33.572281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.600351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.622188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.738895: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.766111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:33.796612: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:33.916934: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:33.933205: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:33.951472: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:34.067646: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:34.087880: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:34.109960: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:34.220145: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:34.248525: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:47:34.276549: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.403642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.432344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.460362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:34.575282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.597424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.617143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.702581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.730711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.750160: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:34.816511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.846430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.868168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.952144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.980663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:34.998763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:47:35.108965: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.137320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.152934: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.243591: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.261224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.282827: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:47:35.359252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.377957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.391251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.494537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.526400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:35.554284: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:35.668302: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:35.696740: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:35.715006: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:35.818825: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:35.847114: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:35.865492: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:35.979884: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:35.996612: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.015358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.110350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.140249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.168503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:36.272982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.294960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.316457: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.415226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.443110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.465929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:36.566764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.588680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.609996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.705509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.725558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.747331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:36.841020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:36.859452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.879175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:36.989967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.010467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.038276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 999us/step

2024-02-26 13:47:37.137504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.151517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.178450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.255072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:37.278274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.305758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:37.432193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.459890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.481217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.571315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.599049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:37.626647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:37.726188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:37.741830: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:37.747016: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:37.810545: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:37.815396: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:37.850340: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:37.951938: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:37.963590: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:37.986180: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.075151: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.095278: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.118190: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:47:38.237260: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.265821: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.279262: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.348987: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.376973: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.404977: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:38.516346: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.542273: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.570476: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.658419: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.689424: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.715189: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:38.829845: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.848398: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:38.875903: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:38.979162: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.001426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.022723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:39.126787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.146349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.165128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.294092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.319230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:39.364689: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.471378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.492968: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.520189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:47:39.622117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.643778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.671094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.763934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.781972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:39.799682: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:39.929225: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:39.950553: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:39.978260: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.072835: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.095302: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.122571: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:47:40.212836: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.240700: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:40.262324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:40.369181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:40.393567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:40.415499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:40.559299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:40.587059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:40.615561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:47:40.703330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:40.723164: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.743679: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.845918: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.861338: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.872749: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:40.966835: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:40.987990: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.009416: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.128456: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.148231: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:41.176900: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.255721: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.275488: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.284245: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.376791: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:41.398053: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.418863: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:41.521931: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:41.543800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:41.561611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:41.681744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:41.703627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:41.731007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:41.828811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:41.856583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:41.884315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:41.981282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.003168: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.027007: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:42.149481: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.177277: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.202070: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.286144: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.309443: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.336738: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:42.443998: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.471903: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.489541: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.592984: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.612618: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.639913: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:42.735849: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.763787: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:42.776596: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:42.849130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:42.877428: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:42.913565: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:43.012321: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.033821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.061291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.140489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.162555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.184169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:43.279166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:43.301024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:43.322477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:43.416699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:43.439173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:43.470761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:43.548356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:43.565227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:43.582784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.692582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.715412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.736577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:43.871285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.894873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:43.922204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:44.015485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:44.033345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:44.051153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:47:44.160333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.178765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.200783: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.299200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.319094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.340284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:44.466754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.499758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.526842: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.622136: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.649655: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.658967: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:47:44.763597: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.787896: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.810569: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.912664: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:44.936756: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:44.974354: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.077853: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.106222: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.134160: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:47:45.261358: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.280914: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.311840: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.417904: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:47:45.439265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:45.476360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.569834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.589902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.617729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:45.711139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.739080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.758727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:45.827543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:45.852356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:45.872034: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:45.994865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.022805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.049858: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.132074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.155103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.167990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 15ms/step

```

```

2024-02-26 13:47:46.275800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.291880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.319167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.437391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.465370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:46.490221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.577806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.613720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.633222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:46.746425: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.766389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.782454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.906556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.922469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:46.945453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:47.082404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:47.104271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:47.115655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.210017: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.230151: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.251241: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:47.358444: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.377975: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.398956: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.480771: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.500215: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.515501: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:47:47.622064: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.642318: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.661893: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.766105: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.793817: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.821519: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:47.927609: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:47.947811: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:47.963561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.083588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.101696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.119879: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:47:48.227025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.248751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.270658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.374928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.412152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 985us/step
2024-02-26 13:47:48.438660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.534676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.557823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.574437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 14ms/step
2024-02-26 13:47:48.668332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.689444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.711182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.820605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:48.840762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:48.858604: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:48.943893: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:48.976201: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:48.993040: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:49.072105: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:49.094555: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:49.115649: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:49.223843: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.245888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.273556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.360380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.388299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.406460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:49.516986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.539430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.554922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.688691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:49.710418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:49.732806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:49.847961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:49.863871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:49.882092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:47:49.983698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.010635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.030265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.121578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.144356: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.166653: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:50.270349: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.298906: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.322242: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.448696: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:50.471387: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:47:50.491834: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:47:50.615202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:50.643551: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:50.658663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:47:50.757288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:50.785614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:50.813000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:50.894566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:50.915300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:50.933699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 25ms/step

2024-02-26 13:47:51.026120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.047913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.065728: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.179426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.201793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.223551: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 48ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:51.353455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.376383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.394797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:51.481230: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:51.509267: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:51.528565: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:47:51.627500: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:51.647091: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:51.674321: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:51.787933: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:51.815229: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

```

2024-02-26 13:47:51.838092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.963152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:51.985446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.003239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:47:52.089213: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.110207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.131548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.220887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.237711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:47:52.265725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:52.383980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:52.400084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:52.416117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:52.455877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:52.469827: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:52.482868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:52.611941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:47:52.633949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.646626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.737386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.765189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.783157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:47:52.885862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.901899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.918515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:52.987539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.012979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:53.030860: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:47:53.136894: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:53.164482: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:53.191750: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:53.294351: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:53.316023: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:53.337139: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:53.453232: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.467433: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.494573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.609463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.631262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.649030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:53.728475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.744047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.761683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.818995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.824022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.828932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.877926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.885349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:53.907818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:54.003185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.031197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.052615: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.146729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.168341: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.195601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:54.329265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.350835: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.368701: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.488957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.510912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:54.531404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.627332: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.649561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.676813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:54.781857: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.799961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.817754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.924788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.946635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:54.964088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:55.056684: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.076424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.094163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.182239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.209923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.222655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:47:55.281322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.286897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.325917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.420663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.438048: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.457346: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:55.569153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.590771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.612957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.705582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.721106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:55.748300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:55.854732: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:55.882737: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:55.900728: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.005547: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.022396: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.035209: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:47:56.146860: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.171944: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:56.189655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:56.295523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:56.323344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:56.351946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:56.449462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:56.479400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:56.492208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 35ms/step

2024-02-26 13:47:56.573676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:56.601608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.624523: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2024-02-26 13:47:56.774625: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.802768: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.827864: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.928712: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:56.956979: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:47:56.989839: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:57.087280: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:57.109175: I tensorflow/core/common_runtime/executor.cc:1197

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.130535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:57.216772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.244805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.272071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.378657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.407828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:47:57.432821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.546193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.568284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.578751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:47:57.673798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.703113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.724970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.811978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.840128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:47:57.867559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:47:57.968599: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:57.996405: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.027613: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.124268: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.152202: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:58.179763: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.277731: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.298246: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.319474: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:47:58.405177: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.433110: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.438614: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.548428: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.567857: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.587063: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:58.678089: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.705748: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:47:58.733378: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:58.832134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:58.853182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:58.875316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:58.968740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:58.993971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.002624: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.114674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.137499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.164842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:47:59.276124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:59.295632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:59.313315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:59.413643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:59.433807: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:59.455259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

Step: 1500, Discriminator Loss: 0.690954327583313, Generator Loss:
0.7105411887168884
2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:47:59.562292: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:47:59.590466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.609677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.713117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.743237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2024-02-26 13:47:59.769467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.858552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.880552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:47:59.897310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:00.008956: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.042552: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.070603: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.157268: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.179194: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:00.215897: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.309570: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.337334: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.345919: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:00.465060: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.493098: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.517820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.609291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.637100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 1ms/step
2024-02-26 13:48:00.664394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.766250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.781946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:00.815969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2024-02-26 13:48:00.913112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.936052: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:00.963668: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:01.056657: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:01.080160: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:01.114698: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:01.227016: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:01.249267: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:01.266681: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 9ms/step

```

2024-02-26 13:48:01.373299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.396530: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.414833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.500177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.526899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.542314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:48:01.636736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.658523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.685951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:01.757349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.798185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.810825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:01.911298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.929441: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:01.950925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.042165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.069618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.090871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:02.207510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.226823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.232337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.336085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.369696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.385030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:48:02.483606: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.510538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:02.532030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:02.658038: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:02.686524: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:02.712780: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:02.820542: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:02.837952: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:02.855774: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:02.953907: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:02.970281: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:48:02.988305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:03.098013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:03.115693: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:03.131274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:03.242648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:03.262134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:03.279711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:03.374303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:03.396107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:03.412636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 67ms/step

2024-02-26 13:48:03.496143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:03.513277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:03.531181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:03.700187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:03.730041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:03.754163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:03.864283: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:03.884609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:03.904523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.016918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.037983: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.063334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:04.145498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.166229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.194385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.262292: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.266888: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.294943: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:04.404356: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.432889: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.449922: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.545595: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.566646: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:04.593834: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:04.672301: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:04.707529: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:04.729104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:04.809788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:04.838025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:04.859704: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:48:04.979422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:04.995206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.016462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.119978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.136759: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.154720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:05.266535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.283164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.311298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.403379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.431425: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.460207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 20ms/step

```

```

2024-02-26 13:48:05.582498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.610573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.632468: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.753751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:05.781757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.797203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.905014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.928312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:05.946221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:06.054440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.086945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.100309: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.200794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.228754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.246922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:06.362921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.390518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.415487: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:06.523622: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:06.552919: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:48:06.575045: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:06.678184: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:06.692194: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:06.714134: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:48:06.804976: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:06.824886: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:48:06.842516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.935623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.959434: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:06.986661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:07.091386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:07.113604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:07.135154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:07.250843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:07.280558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:07.310772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:07.428872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:07.457018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:07.478958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:07.581607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:07.604293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:07.626007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:07.714768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:07.738054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:07.753238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:07.862112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:07.883883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:07.905608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.027401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.045655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:08.063541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.188724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.217198: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.232235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:48:08.349927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.369642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.396927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.509332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.537740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:08.552700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.692141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.715611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.742954: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:48:08.849895: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.869791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:08.897197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.024310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:09.052398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.079991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.151847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:09.170895: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:09.189140: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:48:09.299836: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:09.313419: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:09.340852: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:09.451464: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:09.479282: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:09.507229: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]


```

2024-02-26 13:48:09.609645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.631355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.658613: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 51ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:09.793023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.811297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.834012: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.949475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.965707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:09.983517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:10.103634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:10.128331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:10.145017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:10.239923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:10.263243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:10.290792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:48:10.420782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:10.450523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:10.472383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.568303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.600008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.619202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:10.726481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.749207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.776568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.864931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.880819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:10.905409: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:11.013833: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:11.048355: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:11.066267: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:11.147697: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:11.175705: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:11.191325: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:11.289880: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:11.317723: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.339496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.449480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.474157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:11.501609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.620822: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.645938: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.667237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:11.765793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.787480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.815811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.912642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.935007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:11.962931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:12.104920: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.123248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.141290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.238239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.258394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:12.276539: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:12.401536: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:12.417547: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:12.435369: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:12.518238: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:12.539466: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:12.566624: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:12.652457: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.667870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.692112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.770758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.783868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.796130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:12.890992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.916383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:12.938623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.035891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.055944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.075347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:13.172235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.199991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.217619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.288739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.312291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:13.325966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:13.419696: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.447498: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.474876: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.558889: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.579030: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.606891: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:13.717472: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.739866: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.761811: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.897361: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:13.918421: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:13.947574: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:14.017664: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:14.045553: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:14.063336: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:14.146491: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:14.172347: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:14.193738: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.281141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.300816: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.328084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:14.426793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.444315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.461933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.560478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.588224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.609619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:48:14.717493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.735675: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.753296: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.848315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.870123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:14.898591: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:14.994369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.022041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.046745: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.123047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.153467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.168615: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:15.275135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.306571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.324256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.426699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.446720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.474348: I tensorflow/core/common_runtime/executor.cc:1197]

```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 1ms/step
```

```
2/2 [=====] - 0s 10ms/step
```

```
2024-02-26 13:48:15.550744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:48:15.578890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:48:15.600348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:48:15.690375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:48:15.707955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:48:15.733259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 1ms/step
```

```
2/2 [=====] - 0s 17ms/step
```

```
2024-02-26 13:48:15.825923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:48:15.853946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.875168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:15.987557: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.005801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:48:16.033620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.151711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.183848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.220217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:16.352510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.374917: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.396700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.487565: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.507596: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.529238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:16.654282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.682546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.700657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.800359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:16.828684: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:16.852299: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:16.964990: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:16.983138: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.010926: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.129454: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.154762: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:17.186206: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.291426: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:17.311363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:17.348260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:17.463882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:17.491686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:17.509896: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:17.603377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:17.624913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:17.634874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:48:17.715085: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.741889: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.758662: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.859001: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.887444: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:17.903022: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:17.990061: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.018194: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.039971: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.143504: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:18.161452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:18.183168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:18.301869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:18.324577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:18.351797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:18.443560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:18.471447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:18.492643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:18.595161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.620632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.638625: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:48:18.801785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.830828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.863293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:18.980468: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:19.009557: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:19.023271: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.149330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.172075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.188477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:48:19.288280: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.316809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.329274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.414878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.445809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.473659: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:19.557909: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:19.585766: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:19.607470: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:19.696210: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:19.718606: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:19.746293: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:19.876157: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:19.897958: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:19.920373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.023240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.047184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.068868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:48:20.181336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.209039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.236163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.345414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.373383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:48:20.401291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.531804: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.559897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.577852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:20.683705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.703667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.721349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:20.772340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:48:20.777572: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:20.784376: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:20.839097: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:20.874314: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:20.895948: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:20.986344: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:21.017897: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:21.045013: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:21.130202: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.148601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.170280: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.270090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.291830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.300215: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:48:21.384396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.412465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.439338: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.541407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.559689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:48:21.587846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.693330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.721464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.749245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 27ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:48:21.884710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.916073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:21.937865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.038095: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:22.066209: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:22.094718: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:22.187345: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:22.215583: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:22.242975: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:22.350474: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:22.378463: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:22.406038: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.498176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.515005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.537458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:22.631261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.652780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.675200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.748731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.776274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.797826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:22.896145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.918057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:22.935648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.028824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.056453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.077558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:23.169211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.188878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.209978: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.291712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.307182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.320598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:23.422282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.444396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.457292: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.560092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.579717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:23.601085: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:48:23.709174: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:23.736977: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:23.759182: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:23.849716: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:23.865524: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:23.892754: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:23.990408: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:24.010158: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.031507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.118869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.137942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.155892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:48:24.243019: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.261290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.282651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.381615: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.400239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.427481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:24.519679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.544685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.565817: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.651187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.672940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.701040: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:24.840885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:24.859223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.889882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.972671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:24.997777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.015314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:25.139090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.170628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.194913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.299846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:25.341250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:25.369405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:25.473039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:25.494636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:25.513799: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:25.611147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:25.633498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:25.654890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:25.743603: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.763069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.784427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:48:25.861273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.883154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.900700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:25.998511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.026828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.048390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 13ms/step

```

```

2024-02-26 13:48:26.161398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.184260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.202049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.296975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.318699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.339941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:48:26.417608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.439671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.457447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:48:26.533783: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.553971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.575350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:26.667350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.683316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.703743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.775758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.792748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.810359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:48:26.893431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.915216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:26.927876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.011682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.039602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.057181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:27.146149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.173870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.191509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.287119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.309974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.332088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:27.426112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.450399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.472051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.545622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.561132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.567416: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:27.625198: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:27.645475: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:27.658781: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:27.746727: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:27.774927: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:27.789924: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:27.875479: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:27.897218: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:27.924420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.015215: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.037729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.060020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:28.172519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.194335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.222115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.327029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.355013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 14ms/step
2024-02-26 13:48:28.385261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.499089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.519460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.536378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 14ms/step
2024-02-26 13:48:28.630214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.651854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.673225: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.771702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:28.790313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:28.804583: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:28.881117: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:28.900408: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:28.927650: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:29.019683: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:29.048308: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:29.070042: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:29.171844: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.200242: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.228088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.335591: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.355447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 11ms/step
2024-02-26 13:48:29.383096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.476526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.504360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.532102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 2ms/step
2024-02-26 13:48:29.636566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.658452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.685786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.769649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.797575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.812940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:29.886390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.894327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.899522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:29.997277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.032972: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.048300: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:30.142128: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.159185: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.183833: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.281106: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.316661: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.335471: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:30.440814: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.462179: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.483779: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.583824: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.596532: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.618137: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:30.744669: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.761033: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:30.782532: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:30.882867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:30.898605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:30.925241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:31.016976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.035094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.051979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.143200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.182813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.204342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:31.277430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:31.292806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:31.302243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:31.392085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:31.404385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:31.431786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:31.518152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:31.533908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:31.555147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.637991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.650998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.664782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:31.769558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.798310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.822743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.917066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:31.932600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:31.961054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:32.057653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.079404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.095950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.190408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.217947: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.245128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:32.340541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.368284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.395328: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.505949: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.533977: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:48:32.561849: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.677703: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.705510: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:32.726917: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:32.832933: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]


```

2024-02-26 13:48:32.848122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:32.864870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:32.960112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:32.979821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:32.997568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:33.119580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.142704: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.163093: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.276838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:33.292641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.320047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:33.419056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.440730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.462095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.538440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.570386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.599708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:33.687088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.715489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.733737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.824287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.839840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.866992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:33.960991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:33.988593: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:34.007924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:34.102995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.117271: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.134831: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:34.255699: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.287007: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.295671: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.375173: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.403374: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.416572: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:34.506616: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.534461: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.561820: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.648797: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.676634: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:34.718798: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.801298: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.834005: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:34.853114: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:34.946490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:34.968284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:34.995586: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:35.068177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:35.079605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:35.083865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:35.134946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:35.142855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:35.147113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:35.203304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.262020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.284682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.368600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.385966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:35.402487: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.486413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.509604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.530112: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:48:35.646337: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.666205: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.681495: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.788218: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.812604: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.827767: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:35.909847: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:35.932962: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:35.953211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.049650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.077449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.096917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 997us/step

2024-02-26 13:48:36.200846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.221483: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.257001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.338328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.356526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.361399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:36.446307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.466174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.493566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.584724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.600213: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.617768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:36.718602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:36.742603: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.761155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.860195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.879687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:36.906517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:48:37.016680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.036400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.063674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.165030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:37.185411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.199946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:37.326952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.354604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.381863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.457252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.478798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:37.499541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:48:37.596674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:37.624627: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:37.649462: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:37.767974: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:37.795870: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:48:37.809066: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:37.912319: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:37.932398: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:37.953476: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 14ms/step

```

2024-02-26 13:48:38.049383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:38.072833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:38.116310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:38.211030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:38.239087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:38.270636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:38.365904: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:38.379157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:38.396858: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:48:38.481255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.502645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.509746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.557001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.564335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.578945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.637638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.656724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.672316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:38.759384: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.779726: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.785157: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.843321: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.861276: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.872360: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.928649: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.942314: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:38.948757: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:48:39.030678: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.051788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.076181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.166770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.186525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.213812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:39.287630: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.316258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.336645: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.426109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.454041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.473908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:39.566924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.588107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.612745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.697452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.725188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:39.752558: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:48:39.868284: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:39.888540: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:39.906220: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:40.009268: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:40.027565: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:40.041557: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:40.125316: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:40.150022: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.167837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.259819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.277037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.294786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:40.343605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.348582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.379240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.500181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.513972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.532161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:40.627489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.648812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.670729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.781420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.801398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.823030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:40.938973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:40.955566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:40.982956: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.064439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.093581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.111380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:41.223699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.239589: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.255465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.361356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:41.384084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.405595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:41.515261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.544005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.571561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.679161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.704467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:41.730326: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.825489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.847123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.860145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:41.960349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:41.976148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.004085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.098841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.126150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.144309: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 18ms/step

```



```

2024-02-26 13:48:42.265456: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.278202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.293894: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.390926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.419179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.440934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 24ms/step
2024-02-26 13:48:42.562726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.579626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.606798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:42.692756: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.709616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.728621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:42.818427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.840076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.861904: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.950811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.966565: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:42.984284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:43.083705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.104415: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.126452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.229184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.251324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.269702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:43.375515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.395456: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.417360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.515466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.538126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.574219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:43.669124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.692085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.713888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.781719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.801636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:43.823823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:48:43.914980: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:43.943088: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:43.964596: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.093935: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:44.114119: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.133199: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.223479: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.249604: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:48:44.278310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 1ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:48:44.369118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.396828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.423790: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.478660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.492815: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.504488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:44.588416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:44.608311: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.636197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.725181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.738014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.759244: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:44.834188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.848319: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.872038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.960386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:44.979252: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:45.006987: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:45.104721: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:45.124023: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:45.143147: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:45.242744: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:45.271074: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:45.298452: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:48:45.404035: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.419739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.437064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.528502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.548729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.576100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:45.667220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.686461: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.713778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.799112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.818798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.846327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:48:45.958445: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:45.980145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.001521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.119545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.141405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:48:46.163627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:46.263739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.279673: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.301448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 27ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:46.399486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.416900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.435156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.534908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.547964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.575297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:48:46.665743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.670969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.677444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.792470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.812232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.837234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:46.943360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.962418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:46.987494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.085647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.114446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.139095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:47.253241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.280963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.305389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.400251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.426176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.439151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:47.541578: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:47.555431: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:47.576406: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:47.681367: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:47.702125: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:47.730755: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:47.831413: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:47.846382: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.873450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:47.994774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.022319: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 14ms/step
2024-02-26 13:48:48.035164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.157245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.176460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.194234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step
2024-02-26 13:48:48.314894: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.340481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:48.361879: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:48.466383: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:48.495006: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:48:48.517946: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:48.638909: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:48.666804: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:48.682253: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:48.809492: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]


```

2024-02-26 13:48:48.831340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.849290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.940837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.962622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:48.989924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:49.080172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.095886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.117238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.250395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:49.276927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:49.310271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:49.416315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:49.431407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:49.453008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:49.537640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:49.559563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:49.578884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:49.678761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.704973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.726335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:49.834784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.859734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.875134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.970517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:49.989943: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.002363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

```

```

2024-02-26 13:48:50.086250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.104045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.125269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.210853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.235922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.253516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:50.342292: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.370075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.390377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:50.485876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.505834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.533079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 997us/step
2024-02-26 13:48:50.631549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.656500: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.674135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.746784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.775282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.799500: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:50.914329: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.939844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:50.958935: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:51.067588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:51.083115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:51.109999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:51.213598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:51.229087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:51.246772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.326517: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.345925: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.367291: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:51.422881: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.427471: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.439245: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.583094: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.596429: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.615641: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 28ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:48:51.743170: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.759044: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.786060: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.899337: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:51.923464: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:51.951670: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.034524: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.057988: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]


```

2024-02-26 13:48:52.079359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:52.187058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.210004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.233727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.358072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.383693: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:52.411779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.526967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:48:52.557208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:52.578744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:52.688985: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:52.711953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:52.727438: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:52.805621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:52.833405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:52.853923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:52.979716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:53.002209: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.015479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.092419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.112245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.128457: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:53.215561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.235706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.257084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.342357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:48:53.369834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.395802: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:48:53.484558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.512492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.534059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.636366: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.664095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.673517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:48:53.784577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.800775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.828180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.932830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.952383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:53.966531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:54.096447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.118393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.139992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.244739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:54.272794: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:48:54.305768: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:54.400893: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:54.423333: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:54.444915: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:54.522502: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:54.551042: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:54.573633: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:48:54.685097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.695175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.722292: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:54.823180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.851199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.867542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.962184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:54.987316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.008546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:48:55.119485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.147550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.171542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.266844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.295057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.319599: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:55.429572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.453422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:55.474560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.559511: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.582979: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.592074: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:55.709667: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.727998: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.749802: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.852292: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.865681: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:55.880887: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:55.974625: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.002678: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.030294: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.142998: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.169107: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2024-02-26 13:48:56.194173: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.297065: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.325053: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:48:56.339403: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:48:56.426400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.447583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.465360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.574937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.602572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.621914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:56.723314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.751565: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.770981: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.857487: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.876853: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:56.904091: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:48:56.987846: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.003745: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.031242: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.125160: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.166363: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:57.194942: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.285392: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.313940: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.341878: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:48:57.433109: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.454899: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.472635: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:48:57.564577: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:48:57.587346: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:57.615408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:57.718814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:57.742572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:57.759320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:57.828767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:57.844242: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:57.872135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:57.966368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:57.994421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:58.022322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:58.114940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:58.132280: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:58.160269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:48:58.281951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:58.303807: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:58.308285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:48:58.447531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.462857: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.484392: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:58.600346: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.626126: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.643616: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.749266: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.771696: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.793770: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:48:58.889492: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.917177: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:58.938897: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.046136: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.074514: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:48:59.098306: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.179082: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.210260: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.232465: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:48:59.330944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:59.359496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:59.387195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:59.470890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:59.492522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:59.520887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:48:59.623271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:59.645112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:48:59.667094: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.794266: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.809517: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:48:59.834968: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.932157: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.948079: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:48:59.954768: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:00.049103: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:00.071081: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.093405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.199088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.219017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.240924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:00.360039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.388729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.416443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.523450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.551235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:00.582372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.663317: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.691090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.696706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.765779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:49:00.793547: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.821804: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.925972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:00.949223: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:00.976662: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:01.036619: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.051233: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.056890: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.108441: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.158183: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.181852: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:01.298363: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:01.320847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:01.340144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:01.493449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:49:01.509124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:01.519691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:01.608706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:01.635721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:01.651293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:01.768877: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.790938: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.819516: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.932158: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:01.947828: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:01.973820: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.073014: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.097027: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.124429: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step


```

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:02.211459: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.233100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.252327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.340435: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.362032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.389448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:02.482261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.501387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:02.522963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.606826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.634573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.656001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:02.730866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.753084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.771288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.842143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.861052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:02.871985: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:02.980493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.008232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.032515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.129397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.150979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.170236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:03.242900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.270547: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:03.298446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:03.382229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:03.414380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:03.429752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:03.530864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:03.550558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:03.568602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:03.666077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:03.684324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:03.707106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:03.819645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.847729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.859078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.952051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.974169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:03.995426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:04.123827: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.142939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.165446: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.259708: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.287428: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.305490: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:04.425952: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.448693: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.475590: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.580146: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.603289: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.622125: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:04.739311: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.754809: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.778570: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.885438: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.904935: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:04.922527: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:49:05.041599: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:05.068255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:05.086565: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:05.207982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:05.232630: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 7ms/step
2024-02-26 13:49:05.250632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:05.384758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:05.415149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:05.441138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 7ms/step
1/2 [=====>...] - ETA: 0s
2024-02-26 13:49:05.557685: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.571121: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.588347: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.672582: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.695495: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.713172: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:05.787241: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.817056: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.844723: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:05.980244: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:06.003188: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.028746: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.128072: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.146184: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.170039: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:06.253391: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.271030: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.280996: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:06.366462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:06.397379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:06.414879: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:06.515409: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:06.536660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:06.549167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:06.702031: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:06.718080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:06.745962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.852706: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.876912: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:06.898903: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:07.018719: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.050647: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.078688: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.185158: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.213033: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

```

2024-02-26 13:49:07.240668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:07.324008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:07.346581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:07.371523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:07.499592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:07.514036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:07.533600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:07.620013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:07.631942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:07.653789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:07.762879: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.800137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.815340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.917418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.937772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:07.965143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:08.069766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:08.089747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.111490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.197567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.217130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.235152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:08.352912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.372002: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.390768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.474008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.493658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:08.502839: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:08.614146: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:08.640872: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:08.668079: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:08.772755: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:08.794558: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:08.812485: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:49:08.913051: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.936782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:08.958360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.049449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.071732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.098992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:09.215922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.237651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.260137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.350623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.373917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.393545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:09.498996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.522855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.538399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.661622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.689949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:09.711850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:09.819089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:09.842340: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:09.852696: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:09.939237: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:09.961651: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:09.984038: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:10.097332: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:10.120639: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:10.143423: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:49:10.250335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.288143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.322772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:10.422063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.444623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.471937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.549308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.573353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.582501: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:10.682515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.704146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.731861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.829123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.851392: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:10.871016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:10.980563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:11.002055: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:11.029880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.121452: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.149178: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.170437: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

Step: 2000, Discriminator Loss: 0.6980981230735779, Generator Loss: 0.696304440498352

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:49:11.297428: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.325388: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.352822: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.421845: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.435500: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:49:11.446923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:11.556905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.575250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.593281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.689954: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.710589: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.730174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:11.815228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:11.842942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:11.864695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:11.958331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:11.980060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.002091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:12.088518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.101645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.109192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.196779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.219150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.241741: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:12.361440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.389221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.407203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.535075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.559248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2024-02-26 13:49:12.581343: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.663918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:12.686564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.708178: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:12.807641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.828572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.856192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.953268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:12.982147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.000007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:13.119189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.141758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.169441: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.284452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.293646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.321394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 55ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:49:13.460975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.479540: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.502077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:13.629375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:13.658066: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:49:13.686659: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:13.791104: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:13.823246: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:13.844578: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:13.957358: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:13.985937: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:14.013848: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:49:14.103218: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.130969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.152179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:14.259172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.286389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.309810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.435419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:14.467999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.488068: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.600781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.624446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.631533: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:14.738179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.766312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.793555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.889009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.911133: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:14.932587: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:15.055616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:15.075786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:15.100556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:15.206914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:15.234874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:15.254076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:15.363541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:15.385284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:15.394359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:15.509902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:15.529423: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:15.548470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:15.662609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:15.679685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:15.684129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:15.830934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:15.860400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```


2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:15.887037: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:15.984881: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:16.009567: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:16.026164: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:16.134367: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:16.154384: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:16.170735: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:16.272738: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:16.301328: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.322862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:16.426121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.455007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.467987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.565893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.594492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.622672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:16.737370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:16.758905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.780598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.850852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.870754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:16.898072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:17.031986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.057558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.073101: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.174675: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:17.196926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.224711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:17.328354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.351107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.375851: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.447811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.467293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:17.489311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:49:17.575053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:17.586790: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:17.595644: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:17.751655: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:17.767667: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:17.786533: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:17.883391: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:17.909815: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:17.925146: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 16ms/step

```

2024-02-26 13:49:18.046614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.069006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.090585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.244611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:18.265496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.282769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.343783: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.371715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.381348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:49:18.465792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:18.486363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:18.500157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:18.608688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:18.630415: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:18.648108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:49:18.731384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:18.753797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:18.769752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.870409: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.898674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:18.916510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:19.011004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.040054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.068623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.186357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:19.212225: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.234132: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.361547: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.389401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.406335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:19.544049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.572203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.593627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.704497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:19.732568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:19.757550: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:19.880439: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:19.909059: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:19.924812: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:20.021377: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.038138: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.065849: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.163384: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.184074: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:20.211569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:20.307618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:20.335186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:20.354850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:20.467589: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:20.486679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:20.517436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:20.624126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:20.652224: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.670067: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:20.794231: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.813191: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.832017: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.922078: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.940809: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:20.960653: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:21.090106: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.107413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.127759: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.214813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.239674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.259397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:49:21.364829: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.385315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.412865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.518755: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.541034: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.552467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 36ms/step

2024-02-26 13:49:21.665022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.686786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.698057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.840344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.862654: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:49:21.880974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.967333: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:21.983439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.011282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:22.102786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.131348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.150023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.268721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.284244: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.289452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:22.348267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.366643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.394705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.495495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.515513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.533980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:22.631665: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.659470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.677357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.774573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.790621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.820090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:22.939413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.955736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:22.973471: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.074919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.100529: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.122024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:23.211043: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:23.229366: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:23.251507: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:23.352868: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:23.380842: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:23.401719: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:23.491591: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:23.517117: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.526429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.596360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.608271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.616268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:23.727403: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.745736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.767063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.859039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.887083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:23.914512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:24.027048: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.046862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.074628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.186205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.212749: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:24.236347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.357737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.381577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:24.409361: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:24.510914: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:24.530855: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:24.546143: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:24.670436: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:24.694922: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:24.712710: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:24.806910: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:49:24.834733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.859382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:24.947061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.969555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:24.979108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:25.069485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:25.085627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:25.095496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:25.188600: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.218870: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.223760: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.273039: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.295747: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.301350: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.383558: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:25.405844: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.440385: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.545300: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.566702: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.589476: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:25.673377: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.691998: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.713695: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.780948: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.800465: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.828727: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step


```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:25.919154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.944740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:25.962933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:26.023022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:26.055387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:26.087875: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:26.197657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:26.225544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:26.253483: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.359284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.386939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:49:26.416463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.497140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.513090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.535936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:26.624123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.639816: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.661773: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.775933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.799393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.821019: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:26.899590: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.912052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.916747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:26.977417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.005365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.026911: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:27.128591: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.151220: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.186784: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.275013: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.303664: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.321596: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:27.404271: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.416030: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.427922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.587655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:27.607614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.630126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.734793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.746374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.766305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:27.862502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:27.880752: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.908196: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:27.995259: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.024624: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.046302: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:28.104034: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.108728: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.114666: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.243320: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.261363: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.279116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 990us/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:28.396924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.412320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.430127: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.474765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.479271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.513531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.589784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:49:28.606043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.624001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.706764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.728575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.750123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:28.815623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.835198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.841809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:28.905764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.922465: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:28.949763: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:29.055404: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.077273: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.098897: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.196692: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.212237: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.248524: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

```

2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:29.337401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.365256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.387538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.475601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.492700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.509337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:29.601966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.617690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:29.630622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:29.718345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:29.739851: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:29.755039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:29.825271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:29.853042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:29.880507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:29.985046: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:29.998310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.015925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:30.121484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:30.142888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:30.164134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:30.273951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:30.290820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:30.317728: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:30.439930: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:30.460517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:30.480890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.563697: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.583422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.610608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:49:30.707269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.727091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.744679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.832720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:30.857399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:30.884811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:30.969072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:30.989162: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:31.009484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:31.113152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:31.158364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:31.181150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:31.270029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:31.291888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.310042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:31.409113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.424263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.446544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.537124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.553817: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.575077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:31.670448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:31.693756: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.721514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.834125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.847679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.865558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:31.967165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:31.993812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.021394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.126537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:49:32.146666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:32.183057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:32.291098: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:32.308320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:32.325846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:32.432995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:32.455360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:32.486199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:32.583982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.606980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.628221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:32.727285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.748960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.768679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.867379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.887372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:32.914577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 16ms/step

```

```

2024-02-26 13:49:33.008919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.029265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.050833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.142484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.158973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.189760: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:33.278766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.307229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.329012: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:33.422612: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.438073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.463064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:49:33.594825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.619948: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.637794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.759156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:33.779589: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:33.806113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:33.877856: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:33.900181: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:33.921733: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:34.014749: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.038390: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.063783: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.150931: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.168459: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.187476: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:34.242391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.248377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.252861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.302808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.314647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.319494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.384632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.406648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.441753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:34.552578: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.563111: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.614631: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.725748: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.747793: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:49:34.775653: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.878952: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:34.899914: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:34.917469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:34.988166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.010153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.038287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.135062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.162647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:35.190829: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.287891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.313278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.328898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:35.438469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.460436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.485227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.603038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.618465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.635067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:35.750429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:35.782185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.802183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.892799: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.914683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:35.937871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:36.053457: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.082006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.109582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.202855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:36.233308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.248745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:36.367163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.385265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.412803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.520672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.544216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.564178: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:49:36.675155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.697092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.714829: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.799736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.840789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:36.869380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:37.000410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:37.016397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:37.041305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:37.142234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.167951: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.189441: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:37.283400: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.305188: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.332662: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.403117: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.417515: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.422151: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:49:37.512039: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.536279: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.541943: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.638280: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.657855: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.663493: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:37.771028: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.799157: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:37.819897: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:37.923782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:37.943320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:37.964865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:38.055095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.082306: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.109901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.204221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.226032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.253847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:38.338357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:38.360906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:38.370407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:38.482823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:38.511033: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:38.535024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:49:38.636609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:38.664261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:49:38.683417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.795934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.807299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.828452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:38.920860: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.942651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:38.970064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.054493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.076330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:39.097636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:39.205350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:39.230124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:39.263877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:39.384997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:39.402304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:49:39.428160: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:39.532280: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:39.548179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.575747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:39.687842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.708050: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.735505: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.826386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.846056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.864219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:39.955764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:39.968882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:39.986833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.080664: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.100506: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.120460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:40.215230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.243145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.273903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.354268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:40.375992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.397929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:40.507764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.536233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.557905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.667760: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.691125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 27ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:49:40.715007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:40.797522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:40.830176: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:40.835155: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:49:40.930042: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:40.943408: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:40.952347: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.044993: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.063035: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.084350: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:41.171207: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.193119: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.217476: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.336140: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.364222: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:49:41.385882: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.501259: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.514692: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:41.536777: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:41.644214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:41.673090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:41.686066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:41.736155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:41.766780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:41.783746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:49:41.867913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:41.889872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:41.915148: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.013113: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.026465: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.054211: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:42.158091: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.186228: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.208074: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:42.387968: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.415762: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:42.440502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:42.547302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:42.575126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:42.599808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:42.702102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:42.723834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:42.751603: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:42.857153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:42.875698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.893666: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:42.990943: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:43.018915: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:43.046275: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:43.175703: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:43.203506: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:43.230984: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:43.355763: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

```

2024-02-26 13:49:43.377890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.405989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.502886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.522342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.543876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:49:43.640920: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.668736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.689768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.792584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:43.810690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:43.838056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:43.993333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.009275: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.036621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.159775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.177975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:44.202823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.343150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.368122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.379420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:49:44.511054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.539129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.558965: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.641457: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:44.723537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.745189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.868296: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.895828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:44.923224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:45.030939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.054291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.078906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.186807: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.209080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.222377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:45.331356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.347204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.374874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.464734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.492641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.517427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:45.628145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.651896: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:45.673792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:45.794371: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:45.811716: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:45.827643: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2/2 [=====] - 0s 34ms/step

2024-02-26 13:49:45.918997: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:45.932802: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:45.939272: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.059260: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.086811: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.111436: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:46.212532: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.241196: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.263777: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.364922: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.381178: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.409315: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:46.550105: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:46.572550: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.594466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.694647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.723484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:49:46.751141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.824686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.829934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.844347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.908854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.928405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:46.943234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:49:47.038634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:47.066496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:47.086465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:47.220174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:47.247992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:47.270219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:47.387484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:47.409266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:47.430542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:47.536427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:47.564785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:47.592229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:47.691277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:47.723210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:47.751175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:47.863431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:47.879635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:47.897991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:47.998682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.018521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.039125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.147139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.165495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.170566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:48.238018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.251360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.265021: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.331155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.350385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.375542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:48.498656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.527429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.551378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:48.677837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:49:48.701265: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:48.723199: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:48.816672: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:48.844420: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:48.869027: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:48.965530: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:48.987711: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:49.009133: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]


```

2024-02-26 13:49:49.111871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.127637: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.145255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:49.230378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.253717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.281148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.357000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.379060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.408347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:49.520112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.540600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.562005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.660334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.682150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.703543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:49.782479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.804314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.809171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.902666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.915838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:49.937423: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:49:50.031061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.054305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.076033: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.154744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.172142: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.186968: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:50.265263: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:50.284459: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:50.311892: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:50.408640: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:50.425593: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:50.449112: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:50.548996: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:50.575172: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.591044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.701469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.726009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.746951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:50.853127: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.874922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.893814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:50.984602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:51.006350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:51.028089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:51.149986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.175459: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.200243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.327852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:51.352510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.381766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.482987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.507782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.525679: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:51.618148: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.646364: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.667897: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.755860: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.777607: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:51.805494: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:51.919073: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:51.942335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:51.969644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:52.048913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:52.076881: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:52.096189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:52.195721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:52.220714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:52.247919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:52.331480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:49:52.381647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:52.405171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.520191: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.538353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.555888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:52.648818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.669081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.696490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.796925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.812539: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.840242: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:52.932820: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.948391: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:52.962388: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.070066: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.101400: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.122732: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:53.244084: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.266014: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.296882: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.385329: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.407442: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.427310: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:53.537698: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.551885: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:53.569760: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:53.671270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:53.698730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:53.719907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:49:53.832794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:53.846058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:53.867362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:53.976064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:53.998113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.015846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:49:54.109904: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:54.136097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:54.163554: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:54.253999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:54.278769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:54.296170: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:54.455564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:49:54.478392: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:54.505835: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.598864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.624331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.646920: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:54.738793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.766414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.793708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.898635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:54.926468: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 7ms/step

2024-02-26 13:49:54.948583: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.048409: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.070668: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.097940: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:49:55.181736: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.203541: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.221454: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.296625: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.308098: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:55.325284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:55.409395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:55.433898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:55.451873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:55.544031: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:55.560453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:55.581905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:55.686008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```


2024-02-26 13:49:55.709012: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.726786: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.851386: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:55.873775: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:55.901708: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:56.011719: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:56.034236: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:56.057442: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:56.148002: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.176387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.201452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.291466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.320175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.345002: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:49:56.450878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.468413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.496235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.608340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.630250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:49:56.651840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.770826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.798716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.823116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:56.952463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.974113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:56.996229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.083200: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.110988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.138299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:57.230461: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.250439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.277162: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.322723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.354701: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.385507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:49:57.512323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.525503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.552994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.654657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.676902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.698601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:57.795194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.817276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:57.839567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:57.919413: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:57.942762: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:57.973411: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:49:58.106466: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:58.131305: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:58.156455: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:58.256675: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:49:58.279597: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 27ms/step

```

2024-02-26 13:49:58.310846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:58.461187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:58.485957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:58.510000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:49:58.600174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:58.623623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:58.632450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:58.721324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:58.746514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:58.767900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:49:58.878844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:58.901691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:58.926335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:59.051760: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:59.079859: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:49:59.099656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:59.215832: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:49:59.237786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.265455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:49:59.382042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.397870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.425258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.533537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.553344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.574806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:49:59.674564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:49:59.696295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.723688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.827024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.848686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.875967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:49:59.971480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:49:59.991430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:00.018761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:00.123836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:00.171973: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.246453: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.353152: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.369823: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 6ms/step

2024-02-26 13:50:00.382613: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.462260: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.484654: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.506614: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.582938: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:00.610647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.633834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.729466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.757850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.779226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:00.879989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.898121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:00.925443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.029281: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.051788: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.075529: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:01.133202: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.167060: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.191906: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.302878: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.321989: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:01.338193: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:01.430907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:01.452978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:01.473058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:50:01.548017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:01.570622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:01.588061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:01.757413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:01.777187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:01.804580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.925098: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:01.946982: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:01.964989: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.069126: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.087153: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.103934: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:02.218609: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.242753: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.270727: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.387275: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.412774: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:02.431533: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.533196: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.549644: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.571462: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:02.672651: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:02.700737: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:02.716509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:03.078870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.089853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.141916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.252016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.274608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:50:03.296850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.410188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.438892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:03.457799: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:50:03.607262: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:03.627565: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:03.650164: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:03.761230: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:03.784076: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:03.806496: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:03.914762: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.935331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:03.942764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:04.107405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:04.167220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:04.175628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:04.272217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:04.288080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:04.316258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:04.439161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.454738: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.483133: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.586189: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.611996: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:04.639860: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.733873: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.749937: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.772307: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 29ms/step

2024-02-26 13:50:04.868568: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.891007: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:04.927386: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:05.077383: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:05.097504: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:05.120167: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:05.232881: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:05.253784: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:05.283087: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:05.392030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:05.408638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:05.431191: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:05.549278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:05.575651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:05.594172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:05.707112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:05.728510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:50:05.757122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:05.861393: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:05.883829: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:05.910082: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:06.049434: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:06.074862: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:06.096851: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:06.221372: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:06.237436: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

```

2024-02-26 13:50:06.255966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:06.365969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:06.394492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:06.426503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:06.564277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:06.584643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:06.613068: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:06.727538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:06.756642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```


2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:06.780580: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:06.891674: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:06.912104: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:06.930565: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:07.048886: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.065065: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.103426: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.208122: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.230667: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:07.252868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.356695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.376910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.401993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 28ms/step

2024-02-26 13:50:07.518552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.543205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.562106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.674748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:07.695834: I tensorflow/core/common_runtime/executor.cc:1197]

```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 9ms/step
```

```
2024-02-26 13:50:07.718499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:50:07.810709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:50:07.838996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:50:07.848550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 2ms/step
```

```
2/2 [=====] - 0s 3ms/step
```

```
2024-02-26 13:50:07.935024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:50:07.948324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:50:07.961653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:50:08.065066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:08.131486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:08.150052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.268271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.298409: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.318285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:08.457514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.485891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.508418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.617472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.638823: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.657341: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:08.759164: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.774752: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.796919: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.915728: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.939313: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:08.961226: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:09.087428: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:09.104581: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:09.132881: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:09.230671: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:09.247057: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:09.265765: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:09.393073: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:09.416738: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:09.444640: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:09.559047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:09.579331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:09.612939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:09.727003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:09.755543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:09.783878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:09.887532: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:09.914146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:09.936464: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.033327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.053405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.081687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:10.193668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.213738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.232182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.342519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.371099: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:10.399970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:10.519270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:10.535795: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:10.551271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:50:10.655785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:10.677873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:10.700697: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:10.820941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:10.850645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:10.872681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:10.978643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.001160: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.029416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:11.135531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.151998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.174077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.275202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.295202: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:11.315304: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:11.437449: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:11.465860: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:11.487393: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:11.568417: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:11.587272: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:11.614966: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:50:11.716884: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.746739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.768763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.911226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:50:11.939994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:11.964677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:12.080818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:12.103142: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:12.128413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:50:12.239288: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:12.268069: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:12.293268: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:12.431847: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:50:12.450105: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:12.470461: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:12.619142: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:12.645260: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:50:12.664489: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:50:12.781968: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:12.805221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:12.828005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:50:12.929074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:12.952107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:12.971437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.095848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.118754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:50:13.138272: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.274934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.297601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.304031: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:50:13.429822: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.454882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.475953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.595121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.617903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:13.631808: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.768571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.797277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.826859: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:13.927454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.950000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:13.972428: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:14.095718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:14.111768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```


2/2 [=====] - 0s 6ms/step

2024-02-26 13:50:14.130405: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:14.233505: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:14.243881: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:14.264283: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 38ms/step

2024-02-26 13:50:14.420477: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:14.443326: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:14.459872: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:14.575910: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:14.597292: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:14.625825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:14.743475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:14.769723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:14.786062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:14.917554: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:14.931282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:50:14.959717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:15.037191: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:15.056276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:15.078376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:15.175984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:15.200840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:15.210027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:15.330216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:15.356100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:15.372487: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:15.506588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.527607: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.548119: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.634033: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.654162: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.671124: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:15.752652: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.804349: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.831607: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.916982: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:15.944857: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:15.978865: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.074810: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.091464: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.119702: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:16.213505: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.241671: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.262934: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.372216: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.396381: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:16.420034: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.519223: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.539964: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.558235: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:16.650290: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.670829: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:16.686856: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:16.754764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:16.783143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:16.802724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:16.906416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:16.926100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:16.941820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:17.019085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:17.041217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:17.060748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:17.153138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.174493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.202504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.313999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.338808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:17.367694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.460496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.487376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.505404: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:17.607087: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.623911: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.643248: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.742042: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.770269: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.798175: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:17.919547: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:17.942484: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:17.960683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.047377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.062474: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.080950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:18.165682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.182354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.204385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.319770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.341998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.362234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:18.450969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.478724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.502192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.615994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.629454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.646214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:50:18.753122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:18.781233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.803008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.897348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.913009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:18.950069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:19.068482: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.089360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.110864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.216185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:19.238906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.259801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:19.357074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.385732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.413998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.531771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.550836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:19.567270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.697432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.713666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.736385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:50:19.884241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.906452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:19.928526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.043508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.065047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:20.093918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.178777: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.200312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.219711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:20.326283: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.346793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.374499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.483575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.502151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.523705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 994us/step

2024-02-26 13:50:20.629773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.652827: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.674670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.756875: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.776327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.781576: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:20.858000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.886184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:20.910611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.029024: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.034628: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.039308: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:21.140604: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.165219: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.187916: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.306013: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.332156: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

```

2024-02-26 13:50:21.354448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:21.489774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:21.505908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:21.524326: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:21.617876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:21.644320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:21.672780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:21.748655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:21.777146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:21.795733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:21.909093: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.931821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:21.952934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.081405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:22.109634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.135478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.243024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.260508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:22.281890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:22.394073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:22.407459: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:22.425593: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:22.521925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:22.542556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:22.570385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:22.671975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:50:22.700750: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.723219: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.856158: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:22.876552: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.895325: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:22.991843: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:23.014717: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:23.037182: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:50:23.127094: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.157126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.181883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.274955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.285940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.302654: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:23.401248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.429407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.451091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.536043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.552781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.571020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:50:23.626559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.631621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.639410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.709706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.724071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.743141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

```

```

2024-02-26 13:50:23.846971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.863019: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.890687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:23.982081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.003634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.021467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:24.119706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.148090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.170074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```


2024-02-26 13:50:24.290288: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:24.312556: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:24.334812: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:24.439916: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:24.458269: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:24.485706: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 25ms/step

2024-02-26 13:50:24.577983: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:24.599747: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:24.618101: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.748094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.764458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:24.782551: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.864236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.894963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:24.922764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:25.012652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.037478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.059474: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.153490: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.176221: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.204476: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

Step: 2500, Discriminator Loss: 0.6943393051624298, Generator Loss: 0.6794989109039307

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:25.288618: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.316439: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.345454: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.471843: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.484031: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:25.494390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.545486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.564621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.580186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.668010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.690267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:25.712121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.805822: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:25.833877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.853796: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:25.940378: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.968275: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:25.990887: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.094261: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.109672: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.127743: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:26.227006: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:26.255058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:26.276825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:26.388239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:26.416150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:26.437962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:26.570435: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:26.602446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:26.633668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:26.737387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.762055: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.775880: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.871351: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.893079: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:26.915382: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:26.988067: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.007549: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.029326: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.137455: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.159821: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.182000: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:27.302564: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.319333: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.324930: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.443677: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.459923: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.487864: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:27.583677: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.606771: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.635306: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.708224: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.730065: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.751692: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:27.872566: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.894600: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:27.910524: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.011607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.040169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.068400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:28.189401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.203169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.221543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.326049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.354100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.381738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:28.487219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:28.505140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:28.526834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:28.632004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:28.654422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:28.682578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:28.799199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:28.815521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:28.843875: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.956526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.971364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:28.998753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:29.095695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:29.123592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:29.151966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:29.252988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:29.276937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:29.288717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 9ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:50:29.369507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.383705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.388372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.440222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.469538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.484828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 29ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:29.602568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.628731: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.644298: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.736852: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.767581: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.790070: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:29.900729: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.929498: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:29.951662: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.025883: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.046304: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.066436: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:30.168496: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.187888: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.235898: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.310770: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.352587: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.359587: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:30.446548: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:30.458124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:30.487152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:30.604133: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:30.627172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:50:30.649146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:30.754708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:30.776774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:30.804610: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:30.912783: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.935151: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:30.963532: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.063441: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.083825: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.105800: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:50:31.242152: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.264735: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.293210: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.414500: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.440763: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:50:31.459498: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.556563: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.579332: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.597991: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:31.673092: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.682198: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.691157: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.751527: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.769477: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.785868: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.869982: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:31.898014: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.913587: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:31.993956: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.015548: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.037170: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.099096: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:32.110897: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.122844: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.188717: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.194672: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.212556: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.298023: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:32.319260: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:50:32.347161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:32.433697: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:32.453809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:32.469485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:32.558165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:32.578060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:32.592051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:32.692646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:32.715577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:32.728888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:32.813316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.831365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.856719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.900043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.928182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:32.943994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:33.040889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:33.077136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:33.097341: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:33.207776: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:33.228234: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:33.246261: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:33.326372: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:33.340587: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:33.354110: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:33.452740: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:50:33.472967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.492846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.585030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.601915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.623513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:33.730151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.750835: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.768104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.862191: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:50:33.880661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:33.902952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:34.003064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.016411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.039661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.166996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.187119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:50:34.214713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.321773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.343350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.360571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:34.452747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.481251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.517664: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.620578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.642743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:34.670495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:34.786467: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:34.814508: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:34.843397: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:34.934978: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:34.962795: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:34.992154: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:35.115508: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:35.128887: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:35.153970: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.281870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.297713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.314207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:35.434252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.451630: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.479267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.570812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.590460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.595601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:50:35.695222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.711494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.729492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.823595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.840265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.867900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:50:35.958692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:35.981890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.003525: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:36.104562: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:36.132360: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:36.159805: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:36.245730: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:36.265824: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:36.293543: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:36.335245: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:50:36.377517: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.402289: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.505241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.525848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.549377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:50:36.648727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.668687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.682774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.770278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.783944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.800198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:36.921413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.944705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:36.964771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:37.052437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:37.074218: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:37.089955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:37.227893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:37.244042: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.258238: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.355183: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.377248: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.394065: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:37.487677: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.510406: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.528899: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.607106: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.635395: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.657937: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:50:37.718977: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.769301: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.792444: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.906118: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:50:37.935696: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:37.963435: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.047753: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:38.085074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:38.107520: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:38.193369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:38.212881: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:38.247329: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:38.337396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:38.359411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:38.387349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:38.479598: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.502079: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.529856: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.628390: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.668418: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:38.684550: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.790844: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.814167: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.833351: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:38.948253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:38.975204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:39.002730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:39.079045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:39.123172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:39.146087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:39.285436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:39.301889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:39.329531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.422694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.446754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.465089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:39.546353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.574238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.602311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.720571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.743198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:39.774532: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.907251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.929376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:39.957086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:40.095087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.119871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.153848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.262870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.291077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:40.320307: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:40.421049: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:40.445812: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:40.467868: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 24ms/step

2024-02-26 13:50:40.564144: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:40.592403: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:40.620140: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:40.695907: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:40.715184: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.736598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:50:40.828667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.848110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.870929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.969071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.982155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:40.999735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:41.100542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:41.128149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.149787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.238140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.254794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.282447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:41.389778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.403056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.425866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.522880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:41.546334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.574134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:41.679697: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.695869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.717575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.809425: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.829256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.840739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:50:41.916405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.932595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:41.955739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.083757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.097259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.113632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:42.225971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.247768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.277776: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.402836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.424686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:42.449987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.570990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.594805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.614075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:50:42.716998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.738856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.763690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:42.861022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.879145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.897457: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:42.970632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:42.992396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.003627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.117382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.147037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.167646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:50:43.276671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.305020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.332692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.429484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.457460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:43.485220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.586763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.607925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:43.628116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:43.718891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:43.746678: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:43.774566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:43.876775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:43.902844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:43.922063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.015618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.043536: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.065874: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 33ms/step

2024-02-26 13:50:44.170167: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.192299: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.211889: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.329205: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.345515: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.362768: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:44.468549: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:44.499061: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.516833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.614907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.635453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.653462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:44.738929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.766627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.790011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.890917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.912678: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:44.930792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:45.075376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.091097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.119952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.217810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.237866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.260950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:45.358984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:45.391272: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.406744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.512633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.535186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.557093: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:45.669763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.692418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.739338: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:45.832975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:45.848534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:50:45.876268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:45.989978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.019045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.036079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:46.089333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.133676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.154983: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.254360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:50:46.291575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.306331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.399596: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.436203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.458526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:46.527222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.555763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.569642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:50:46.681539: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:46.704139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:46.719976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:46.821812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:46.847985: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:46.862271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:46.970145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:46.988012: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.016064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:47.142015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.160378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.178867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.306613: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.335131: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:50:47.355169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.472703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.489058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:47.502240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:50:47.596679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:47.614955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:47.636703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:47.737087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:47.750205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:47.760954: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:47.848894: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:50:47.865105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:47.893066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.015003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.039126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 9ms/step
2024-02-26 13:50:48.064769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.165753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.189535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.208233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 10ms/step
2024-02-26 13:50:48.314472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.336550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.355132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.464626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.493279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.511907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:48.611566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.631618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.653792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.756519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.781625: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.804355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:48.909383: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.932134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:48.960095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.059074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.088251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.109631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:49.228419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:49.256936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.285155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.378619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.403335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:49.428760: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.535825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.553818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.572096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:49.635335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.646876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.682404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.805321: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.828046: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:49.850106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:49.996726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:50.023090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:50.041650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:50:50.145447: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.168759: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.191106: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.307934: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.333438: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:50.357489: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.476902: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.500337: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.518569: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:50.605127: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.621075: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.637834: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.732884: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.760789: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.778906: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:50.882943: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.905026: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:50.920846: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.049260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.077882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:51.101011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.198109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.221200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.243623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:51.369293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.387957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.400421: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.493761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.516706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.538474: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:51.648485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.663535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.681817: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.800047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.813474: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:51.837443: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:51.939691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:51.963418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:51.981652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:52.081401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:52.099695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:52.121266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:52.232996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:52.261517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.289388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.389210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.411166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.429216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:50:52.551290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.569581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.592880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.683868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.705893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.723677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:52.829648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.845336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.873065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:52.983800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.018918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:53.034961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.082492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:53.094853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.101569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.157905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.164786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.181479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:53.246132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.261919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.283746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.390301: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:53.418356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.440145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:50:53.537106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.553262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.574947: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.674778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.702926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.725616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:53.844655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.869029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.891079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:53.984131: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:54.009107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:54.024265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:54.132793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:54.155743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:54.171060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:54.261818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.284233: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.315056: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:54.422888: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.452960: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.477228: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.570446: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.592484: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.610756: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:54.702144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.730298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.742633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.840710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.860329: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.888991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:54.970226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:54.993053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:50:55.021270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.137672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.165754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:50:55.194224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.287376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.309398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.336986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:50:55.430282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.458587: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.486800: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:55.590582: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:55.613533: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:55.636925: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:55.735456: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:55.763932: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:55.791895: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:50:55.885866: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:55.914508: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:55.942998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.046572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.064512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.084846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:56.185195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.208419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.236511: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.326808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.348960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.364316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 18ms/step
2024-02-26 13:50:56.498742: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.520667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.538725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.647575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.670110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.698273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 19ms/step
2024-02-26 13:50:56.795522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:56.817337: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:56.836513: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:56.917979: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:56.966755: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:56.983341: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:50:57.087026: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.101283: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.123049: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.204912: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.227044: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.248659: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:50:57.333927: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.356140: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.376732: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.482293: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.502159: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:57.517903: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:50:57.621437: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:57.637502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:57.659600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:57.765066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:57.789947: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:57.810260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:50:57.899801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:57.918116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:57.945752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.034472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.052729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.074265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:58.127607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.132727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.167689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.284073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.304453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.324133: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:50:58.414795: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.434719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.454416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.561970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.579767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.600128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:50:58.678494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.706801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.734644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:50:58.815709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.838866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.861057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 1ms/step
2024-02-26 13:50:58.957584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:58.979338: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.006603: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.092416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.110638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.138467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:59.233982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.253704: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.275674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.368236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.379764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.398664: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:50:59.479652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.504570: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:50:59.523849: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.616492: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.645750: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.663723: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:50:59.763358: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.791305: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.819005: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.906965: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.932299: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:50:59.954655: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:00.058971: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.086741: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.108168: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.182536: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.203163: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.227530: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 29ms/step

2024-02-26 13:51:00.315424: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.331851: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.347168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.464687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.491631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.507917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:00.652377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.674941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.679897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.762978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.790805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:00.806065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:00.908604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.936819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:00.964560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:01.042775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:01.061335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:01.083277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:01.145481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:01.151208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.155314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.201622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.206650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.211449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.266837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.278912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.284720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:51:01.386295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:01.412054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.430551: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.556791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.584620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:01.612790: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.721296: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.744481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.770120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:01.867179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.887015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:01.908192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.051901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:02.079693: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.097563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.206463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.226198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.244577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:02.350888: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.379071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.407234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.505910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.525198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.544348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:51:02.641342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.656070: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.673837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:02.759422: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.784983: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.796939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:02.858305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.911157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:02.927803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.015340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.044916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:03.059152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.146009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.169901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.182185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:03.298244: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.310995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.333207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.425276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.449053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:03.480132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 27ms/step

2024-02-26 13:51:03.601362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:03.626000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:03.644737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:03.761713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:03.781669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:03.801662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:03.920815: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:03.940164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:03.963162: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:04.062445: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.082548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.108044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.210614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.232268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.251877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:04.390316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.403600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.416653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.511990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.533789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.556004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:04.674587: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.702069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.721235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:04.855102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:04.877223: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:04.890660: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:04.976690: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.005472: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.029860: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:05.145049: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.175968: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.198777: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.296393: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.325321: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.343488: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:51:05.454214: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.470343: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.490662: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.616702: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.633734: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:05.650714: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:05.748585: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:05.770641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:05.791370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:05.887136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:05.908578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:05.926638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:06.053724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.081845: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.110848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.225840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.247289: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:51:06.269440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.333287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.358376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.364323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.466337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:51:06.482582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.504236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:06.611980: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.631568: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.650295: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 1ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:51:06.749828: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.772505: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.786263: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.851626: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.872203: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.885693: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:06.967077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:06.997599: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.026421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:07.171229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.187287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.220387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.302111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.327878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.346158: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:07.432420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.457659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.475483: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.569831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.593285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.615069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:07.728773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:07.744513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:07.766156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:07.857741: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:07.873560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:07.894946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:07.984801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:08.020876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:08.043937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:08.148874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:08.165504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:08.181439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:08.308097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.336208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.363873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.474865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.493836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.498520: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:08.540974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.545643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.549957: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.653991: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.681982: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.709579: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:08.825131: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.850181: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.872530: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.967246: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:08.995047: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:09.016525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:09.145027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:09.168307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:09.190089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:09.303232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:09.322716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:51:09.346972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:09.456408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:51:09.474470: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.499263: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:09.604718: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.627670: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.660030: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.728286: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.743244: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.763577: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:09.862987: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.900396: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:09.919833: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.023335: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.039223: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:10.061714: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.184960: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.208721: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.230875: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 18ms/step

```

2024-02-26 13:51:10.308195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:10.329113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:10.354598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:10.478750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:10.503967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:10.522944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:10.635461: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:10.651496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:10.670692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:10.789415: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.817218: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.834519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.931175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.959210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:10.974758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 27ms/step

2024-02-26 13:51:11.078213: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.106533: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.134521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.253284: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.275689: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:11.303719: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.397790: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.423438: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.447679: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:51:11.572176: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:11.593138: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:51:11.616670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:11.751356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:11.769361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:51:11.784556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:11.865153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:11.885515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:11.901293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:12.004382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.026949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.040311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.137162: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.165116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.183950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:12.249059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.261016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.268970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.407294: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.424649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:12.441412: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:12.528047: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:12.543406: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:12.572723: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:12.659548: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:12.694187: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:12.721766: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:12.832833: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.852317: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.868253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.915498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.966922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:12.993198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:13.099923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.119488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.146614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.254622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.275928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:13.304071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.404044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.432072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.451558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:13.544891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.567118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.591696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:13.702949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:13.726825: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:13.744089: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:13.804068: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:13.809111: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:13.813629: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:13.880038: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:13.900105: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:13.913930: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step


```

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:14.006952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:14.020830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:14.036142: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:14.132232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:14.152188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:14.178674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:14.270483: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:14.298601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:14.324115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.430118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.456394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:14.480391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.600304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.616375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.634266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:14.747952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.770749: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.791719: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.900894: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.920769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:14.938621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:15.049301: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:15.077448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:15.104707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:15.200278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:15.228278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:15.249621: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:15.399653: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:15.421784: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:15.449691: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:15.546784: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:15.572019: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:15.589852: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:15.707983: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:15.731356: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:15.750739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:15.854987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:15.878455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:15.896472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:15.995279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.013890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.029955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.170946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.190933: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:16.209113: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:16.311878: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:16.333976: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:16.359483: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:16.464878: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:16.488454: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:16.506841: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:16.606722: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.635037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.659619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:16.757435: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.770700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.801707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.912424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:16.940365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:16.962553: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.070662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.092581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.120057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:17.206577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.234640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.256900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.377414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:51:17.407631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.425585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:51:17.567139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.582739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.608072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 30ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:51:17.734832: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.756926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.779421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.877940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.894175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:17.922023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:18.004308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.015950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.040278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.171766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.190606: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:51:18.206087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.261291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.292499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.313017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 34ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:18.415439: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:18.443660: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:18.468256: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:18.565716: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:18.575932: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:18.603404: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:18.716404: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:18.738318: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.759882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.846763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.875471: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:18.902907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:18.986836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.008690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.026707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.139456: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.160485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 14ms/step
2024-02-26 13:51:19.189589: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.309586: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.325522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.354130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 18ms/step
2024-02-26 13:51:19.445766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.465402: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.484963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.590467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:19.605897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:19.623582: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:19.730513: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:19.746615: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:19.764542: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:19.864292: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:19.886511: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:19.915594: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:20.017635: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.042006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.064290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.183020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.210679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:20.230447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.298271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.312395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.324928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.422906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 18ms/step
2024-02-26 13:51:20.444751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.466279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.589129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.617019: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.641838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 16ms/step
2024-02-26 13:51:20.747744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.763348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.786615: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:20.896310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:20.909278: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:20.921369: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:21.022696: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.050555: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.071933: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.178554: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.201009: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:21.226280: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:51:21.339479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:21.361526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:21.379712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:21.478054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:21.506155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:21.524247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:21.626631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:21.647426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:21.669411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:51:21.774974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.803187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.835054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.951698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:21.970839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:51:21.999255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.101481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.125853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.141187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:22.227272: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.255122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.273249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.396344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.418223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:22.446362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.530919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.556413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:51:22.572113: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:22.654864: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.674376: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.696040: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.774393: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.807073: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.836583: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:51:22.960721: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:22.983170: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.011698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.150215: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:51:23.181973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.193794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.310031: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.329767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.352277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:51:23.473644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.499210: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:23.517549: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:23.646579: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:23.669291: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2024-02-26 13:51:23.687698: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:23.802828: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:23.821883: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:23.840244: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:23.923602: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.944924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:23.967219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:24.071646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:24.087740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:24.106407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:24.219222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:24.241398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:24.268952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:24.377295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:24.417132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:24.432023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.542410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.565977: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.583884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:24.699645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.715813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.743334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.834741: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.866391: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:24.887854: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:24.998635: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:25.026498: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:25.054144: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:25.210891: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:25.232766: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:25.260794: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:51:25.355978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.384376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.406083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 2ms/step
2024-02-26 13:51:25.521863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.544053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.562001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.687577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.703000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.716660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:51:25.835110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.852775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.880385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.961053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:25.986181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.013797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 38ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:26.098439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.115087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.132688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:26.241500: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:26.259827: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:26.287288: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:26.336182: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:26.358282: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:26.395167: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:26.506255: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:26.533857: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

```

2024-02-26 13:51:26.545946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.642721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.667793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.695074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:26.782310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.810136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.837803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.943784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:26.965956: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:51:26.987549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.089357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.100779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.122486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.188937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start abort

2/2 [=====] - 0s 21ms/step

ing (this does not indicate an error and you can ignore this message):
INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2'
with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.221149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.239069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.355482: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.381946: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:51:27.409580: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:27.519775: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:27.541872: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:27.569581: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 56ms/step

2024-02-26 13:51:27.649755: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:27.669563: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:27.687647: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:27.850908: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.880086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:27.905072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:28.054926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:28.075666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:28.098362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:28.206223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:28.231937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:28.259678: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:28.383623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.398965: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.421209: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:28.534816: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.555264: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.579959: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.682880: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.696231: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.711794: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:28.813266: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.835269: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.863649: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.945522: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.965021: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:28.985396: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:29.082884: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:29.105533: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:29.123349: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.214887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.237528: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.259195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:51:29.395672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.412722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.430176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.554305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.570454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:29.586113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:29.727349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:29.746772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:29.762880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:29.871344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:29.888211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:29.904427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:30.030951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.046691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:30.065423: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:30.175700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:30.197067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:30.217157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:51:30.327150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:30.349222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:30.371856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:30.476525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:30.499287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:30.515032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:30.657017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.679480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.706899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.799710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.824907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.830010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:51:30.950433: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.973898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:30.992295: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:31.074378: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:31.096507: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:31.118516: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:31.226103: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:31.247977: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:31.266197: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:31.369262: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:31.391351: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an


```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:31.413308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:51:31.555845: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:31.578923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:31.597616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:31.717281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:31.745608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:31.773643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:31.873138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:31.888710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:31.903958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:31.986671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:32.006180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:32.022346: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:32.106680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:32.126188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:32.142887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:32.246012: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.261625: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.274934: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.370084: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.385757: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.402804: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:51:32.490321: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.503750: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.525344: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.633859: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.661708: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.677005: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:32.797927: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.834253: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.853796: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.955768: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.976264: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:32.992111: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:33.095386: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:33.120340: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:33.136124: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:33.267756: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:33.290832: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:33.304619: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:33.412390: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:33.428100: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:33.460114: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:33.574046: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:33.593766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:33.613983: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:33.721964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:33.746456: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:33.769508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:33.883114: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:33.911346: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:33.932124: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.012773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.032599: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.056988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:34.175402: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.195079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.222941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.325347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.346518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.370220: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 30ms/step

2024-02-26 13:51:34.513019: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:34.532896: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:34.554486: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:34.686815: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:34.705716: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:34.711139: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:34.851110: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:34.867353: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:34.896382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:35.007308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:35.027398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:35.051622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:35.150182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:35.175676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:35.200512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:35.315369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:35.343833: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.371938: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.458812: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.478864: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.503420: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:35.618928: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.641539: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.663635: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.768563: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.792613: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.814865: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:35.928589: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.944438: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:35.965952: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:36.047989: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:36.072880: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:36.112937: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:36.234718: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:36.257298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:36.275879: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:36.402107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:36.422119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:36.450467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:36.547516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:36.569652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:36.595299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:51:36.750871: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:36.776763: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:36.804521: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:36.915394: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:36.943399: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:36.962311: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.070900: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.093141: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.111276: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 34ms/step

2/2 [=====] - 0s 35ms/step

2024-02-26 13:51:37.238656: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.259093: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.283787: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.407344: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.432274: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:37.449591: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.555792: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.578171: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:37.596451: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:37.707678: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:37.734908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:37.757097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:37.862846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:37.890745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:37.912416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:38.019108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:38.046890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:38.069271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

Step: 3000, Discriminator Loss: 0.6915870308876038, Generator Loss:
0.7310910224914551

2/2 [=====] - 0s 6ms/step

2024-02-26 13:51:38.149345: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.175723: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.192200: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.288184: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.313158: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.341368: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:38.463783: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.480234: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.508671: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.632697: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.659858: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:38.673576: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.798493: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.822496: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:38.850714: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:38.953817: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:51:38.979306: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.000079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.109515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.133483: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.155680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:39.257654: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.279485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.300016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.404357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:39.433283: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:39.461199: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:39.568469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:39.590568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:39.607369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:51:39.719550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:39.739432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:39.755215: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:39.869132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.890209: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:39.912617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:40.032293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.049237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.067541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.150831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.178816: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.206831: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:51:40.299867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.320882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.336508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.418806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.444188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.467154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:40.553375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.576595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.599560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:40.691528: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.720243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.748178: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:40.877254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.894750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:40.912497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.040354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.062192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.070868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:51:41.152083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.172979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.186053: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.255072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.267345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.283481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:41.358385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.378231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:41.399568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.477643: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.495717: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.508812: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:41.616919: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.639398: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.654986: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.768348: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.791362: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.809834: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:41.913102: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.942122: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:41.960868: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.044454: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.073377: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.089668: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:42.194260: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.218129: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.241698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.341058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.356778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.379530: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:51:42.504175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.522713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.546149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.633217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.661343: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:42.683166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:51:42.775850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.798074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.809438: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.898227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.926108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:42.951224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:51:43.050314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.072516: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.094201: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.156418: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.161411: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.166118: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:43.274363: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.294766: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.316387: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.433138: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.454846: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 26ms/step

2024-02-26 13:51:43.476667: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.548504: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.572168: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.599913: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:43.683235: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.695604: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.718809: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:43.810975: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:43.829112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:43.846972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:43.952553: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:43.968184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:43.985973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:44.082405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:44.104272: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:44.125632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:44.253869: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.273795: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.301483: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.402822: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.422211: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.443984: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:44.543243: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.571011: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.593005: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.668978: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.691099: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.720422: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:44.838796: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.862503: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.890036: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:44.992403: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:45.017849: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:51:45.046199: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.157886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.179557: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.202117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:45.313803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.341688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.363932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.458839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.482078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.511023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:45.617245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.645038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.673004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.767736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.796408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:45.818009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.939349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.964666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:45.987446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:46.086567: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:46.112062: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:46.134657: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:46.235525: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:46.260154: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:46.282131: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:46.421191: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:46.449796: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.471611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.569367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.589155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.616801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:46.731652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.757997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.780222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.866839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.895032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:46.910952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:47.031304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.052850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.074706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.167736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.192043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.213497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:47.336925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.365183: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:47.389160: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:47.487376: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:47.516861: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:47.540445: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:47.666898: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:47.698662: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:47.720282: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:47.860878: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.882213: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.910264: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:47.987007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.014948: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.037570: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:48.134897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.147373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.156785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.232346: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.254892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.284571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:48.386727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.414685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.434986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.538715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.554683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:48.576287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:48.702692: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:48.730634: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:48.744423: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:48.869763: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:48.897911: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:48.919404: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.041632: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.070184: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.097656: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:49.187265: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.214943: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.236455: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.357054: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.379687: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:49.407864: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.526599: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.552445: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:49.580245: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:51:49.676322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:49.690056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:49.707964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:49.818604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:49.846712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:49.874479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:49.980054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.002489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.024664: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.141421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.158206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.180032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:51:50.288360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.311533: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.339830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.450029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.466098: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.482596: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:50.614666: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:50.641033: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:50.668865: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:50.774790: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:50.788066: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:50.809721: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:50.925786: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:50.945921: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:50.963702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.086775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.103177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:51.132498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.225891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.247864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.275278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:51.370719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.398773: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:51.426918: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:51.526292: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:51.554301: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:51.581294: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:51.662373: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:51.679509: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:51.701425: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:51:51.800551: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.815963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.837420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.957136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.973635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:51.992165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:52.101194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.117621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.145643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.220659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.228359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.253478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:52.364273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.392507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.420117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.519295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.550106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2024-02-26 13:51:52.571932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:52.673380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:52.694350: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:52.716031: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:51:52.846591: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:52.864246: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:52.879711: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:52.954912: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:52.972699: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:52.993225: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:53.111463: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:53.139759: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:53.165516: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:53.261882: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:53.286912: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:53.309270: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:51:53.408807: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:53.437726: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:53.462149: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:53.575207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:53.590379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:53.609895: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:53.740266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:53.768011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:53.789518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:51:53.904253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:53.932823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:51:53.939451: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.045839: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.065868: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.087789: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:54.210647: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.233902: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.261728: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.347525: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.366971: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.396200: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:54.495125: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.528335: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.552430: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.660875: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.684412: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:54.702967: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.816741: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.837518: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:54.865432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:54.953290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:54.978923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.001140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.104370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.123943: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.133364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:55.211795: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.234383: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.262640: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.367446: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.388716: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.410684: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:55.500941: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.529309: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:55.573746: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:55.714219: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:55.742269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:55.768962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:55.859015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:55.888419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:55.910017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:56.026970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.056892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.075241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.168938: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.191313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.219116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:56.319211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.341440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.362949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.453360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.475636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.494209: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:56.545140: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.567404: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.582550: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.667577: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.684718: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.702568: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:51:56.792581: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.821977: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.841473: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:56.934974: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.957061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:56.978592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:51:57.071634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.091249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.106620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.207371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.229307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.257081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:57.368771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.393193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.420751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.513538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.554297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:51:57.582387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.705769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.726086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:57.739727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:57.828754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:57.856618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:57.884070: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:57.971579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:57.985594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.003706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:51:58.141994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.165381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:58.185118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:58.286429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:58.314286: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:58.332297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:58.456679: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:58.478585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:58.496359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:58.595496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:58.617288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:51:58.634367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:51:58.695859: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.707545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.715452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.777184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.819781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.839395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:51:58.927667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.947490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:58.960563: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.070294: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.090215: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.112143: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:51:59.215533: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.234879: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.244052: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.326893: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.348450: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.370197: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:51:59.460335: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.479663: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.497724: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.597187: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.615245: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:51:59.634892: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:51:59.716138: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:51:59.731730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:59.756453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:59.861599: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:59.886494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:51:59.914125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:00.008099: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:00.039838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:00.057821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:00.132848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:00.197793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:00.217097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.310905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.330310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.349617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:00.451764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.471416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.492192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.602880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.622900: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.644768: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:52:00.734653: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.749849: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.758850: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.865946: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.884292: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:00.907065: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:01.026198: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.049092: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.070394: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.167726: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.193275: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.221002: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:01.322051: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.352376: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.371152: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.456149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.491939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.519834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:52:01.593746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.598544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.602637: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.668193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.690590: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:01.710042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:01.795073: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.833815: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:01.857143: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:02.001174: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.024024: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.051810: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.171646: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.199845: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]


```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:02.226984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:02.303092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:02.328733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:02.347706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:02.431058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:02.456563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:02.482438: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:02.599047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:02.621682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:02.649847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.754976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.786439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.814262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:02.928989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.950062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:02.974790: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.085691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.107926: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.126439: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:52:03.199488: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.227698: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.249912: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.342028: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.361324: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.382715: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:03.484502: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.506414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.524598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.631396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.651278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.675282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:03.760898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.789234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.817224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:03.939988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:03.968163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:52:03.992776: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:52:04.108032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:52:04.131724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:52:04.161898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:04.298582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:52:04.313123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:52:04.332650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:52:04.430505: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.454951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.471193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:04.584728: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.620691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.647955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.726699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.752153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.773838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:04.864452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.892390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.912202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.970235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:04.975355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:05.003327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:05.131257: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:05.147527: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:05.167299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.266438: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.294332: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.316018: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:52:05.418413: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.441731: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.459978: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.606485: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:05.635988: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.658335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.809740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.836007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2024-02-26 13:52:05.853984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.969168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:05.998062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.016240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:06.123065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.145275: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:06.167206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:06.297178: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:06.310367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step

2024-02-26 13:52:06.333054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:06.466629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:06.480683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:06.502813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:06.616501: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:06.629905: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.651883: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.760439: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.778838: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.795741: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:06.898699: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.914154: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:06.927686: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.023411: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.044961: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.063050: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:07.166312: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.196081: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.219073: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.304595: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.327036: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.350921: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:07.455994: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:07.479919: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:07.507331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:07.607096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:07.635675: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:07.663676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:07.768263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:07.796227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:07.824340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:07.920105: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.944625: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:07.966520: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.054819: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.082662: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.104532: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:08.157744: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.169469: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.174737: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.297795: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.313292: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.332487: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 47ms/step

2024-02-26 13:52:08.426518: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.454799: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.482420: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.626166: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:08.654689: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:08.673316: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:08.804100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:08.819709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:08.847432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:52:09.021154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.037203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.056237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.153646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.172799: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.194912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:09.279657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.311772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.331288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.435037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.454313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.476234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:52:09.588963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.605294: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.627097: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.729648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.759344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.778883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:52:09.885266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.909039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:09.929546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.045233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.060990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.080295: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:52:10.211407: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:10.229861: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:10.250373: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:10.339369: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:10.358124: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:10.379989: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:10.514926: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:10.531320: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.550787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.669710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.694024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.716405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:10.843715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.861027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.889137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:10.987709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.008458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.033266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:11.131768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.152809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.175794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.251450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.259573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.271158: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.322868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

```

2024-02-26 13:52:11.358764: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:11.390152: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:11.520985: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:11.540789: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:11.559494: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:11.690956: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:11.711853: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:11.731505: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:11.857832: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.874111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:11.896591: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:12.026825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:12.064484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:12.092495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:12.216076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:12.242385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:12.264811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:12.353492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.375672: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.404273: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:12.531240: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.547620: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.565005: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.657809: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.682227: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.704063: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:52:12.823291: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.851472: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.879099: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:12.987205: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.015404: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.021510: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:13.115418: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.139436: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.157691: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.255214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.276425: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.291980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:13.384259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.415132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.431656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.549060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.566249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:13.581659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:13.655373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.671238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.698785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.808216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.829746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.845924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:13.914903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:13.937190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:13.949424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:14.040266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:14.055927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:14.075129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:14.162909: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:14.190682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:14.206327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:14.294892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:14.322765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:14.350903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:14.417597: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.476296: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.489413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.585493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.603764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.612384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:14.698850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.720767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.742084: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.836855: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.856377: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.874293: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:52:14.962867: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:14.982705: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.004586: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.103505: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.125362: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.146851: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:15.257955: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.286174: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.314224: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.417691: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.440165: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:15.455553: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:52:15.547957: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.575594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.603338: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.685931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.706791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.718110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:52:15.802348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.822497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.846037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.967598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.980087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:15.995840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:52:16.099107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:16.117449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:16.145176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:16.257009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:16.272835: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:16.294522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:16.420620: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.443021: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.470623: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.597164: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:16.625247: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.663288: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.761437: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.783388: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.804830: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:16.915216: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.943404: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:16.960492: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.054151: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.079123: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.106723: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:17.213614: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.243430: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.265191: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.340184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.359685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.379285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:52:17.473514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.494222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.522132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.624988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.640712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:17.663524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:17.752913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.780801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.808276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.934546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:17.957758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:17.985972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.126498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.148617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 20ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:52:18.184992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.304279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.325087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.343277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:52:18.403372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.424009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.441079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.514159: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.532205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.544469: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:18.635070: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.654581: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.675836: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.769279: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.796930: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:18.817544: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 32ms/step

2024-02-26 13:52:18.908435: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.927617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:18.943024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.069437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.084956: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.098058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:19.176568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.196447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.212254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.290840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.310336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.331898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:52:19.386868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.399049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.410904: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.475549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.497455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.508399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 10ms/step

```

```

2024-02-26 13:52:19.596903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.616397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.636391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.728799: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.764765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.784705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:19.890632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.910984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:19.929707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:20.034598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.059899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.080156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:20.179178: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.208870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.224869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.318797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.338736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.366181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:20.491435: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.507783: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.525874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.631557: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.659841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.681929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:20.804493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.827021: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:20.848722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:20.953326: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:20.978075: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:20.997447: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:21.085356: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.113346: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.135470: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.230695: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.262196: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.283834: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:52:21.365843: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.393891: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.414639: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.564407: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:21.591118: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.609402: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.699384: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.718525: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:52:21.746740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:21.847049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.873906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.891537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:21.991115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.013132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.026811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:22.149037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.165024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.187079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.282937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.302848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.325649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:22.425451: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.453109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.476342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.589819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:22.611609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:22.633427: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.725626: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.747710: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.775976: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:22.872662: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.892183: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:22.919900: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:23.019333: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:52:23.048297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:23.076054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:23.197047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:23.220823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:23.248843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:23.355082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:23.383418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:23.402504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:23.502953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.530770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.545420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:52:23.651312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.687340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.709010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.803379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.831607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.846473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

```

```

2024-02-26 13:52:23.943811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:23.971512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.000238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.102078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.121423: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.130234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:24.223596: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.252344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.288538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:24.342667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.369106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:24.433892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.501733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.526690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.535013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.590945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.606695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.618086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:24.723156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.746833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.762341: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.847118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.865010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:24.879732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:25.001400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:25.021653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:25.045526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.155400: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.172157: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.181490: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:25.255106: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.277630: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.305449: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.411016: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.430056: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.452454: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:25.563374: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.584684: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.606948: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.715446: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.738904: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:25.769139: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.878850: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:25.894522: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]


```

2024-02-26 13:52:25.912687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 37ms/step

2024-02-26 13:52:26.004460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.028583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.051404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.190952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:26.212820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.228488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.299779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.327535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:26.347390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:26.445303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:26.474014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:26.502256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:26.594996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:26.620706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step

2024-02-26 13:52:26.646016: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:26.728237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:26.751327: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.779366: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:52:26.884172: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.905901: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:26.911450: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.035341: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.057155: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.078818: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:52:27.166950: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.188490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.210882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.313762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.329387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.347212: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:27.490890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.519542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.541374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.634843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:27.667062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:27.691489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.783043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.804562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.832266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:27.944611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.954044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:27.981758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:28.089258: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.119890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.145191: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 25ms/step

2024-02-26 13:52:28.277210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.299914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.327420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.429535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.445034: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.465037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:28.598971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.636163: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.650440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.772725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.797975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:28.819367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.922938: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.950688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:28.978141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:29.092911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.121609: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.149109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.233902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.261648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.281140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:29.383225: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.421273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```


2024-02-26 13:52:29.435778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.558826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:29.586958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.614757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.718669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.746888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.766267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:29.861081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:29.883477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:29.901912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.019915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.038800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:52:30.066993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.148067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.176594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.192172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:30.277608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:30.297564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.306986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.400257: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.419304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.441061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:30.551735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.571780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.584885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:30.683299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:52:30.709192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:30.731078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:30.855158: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:30.880950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:30.909076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.004962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.030200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.051923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:52:31.169171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.191717: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.208036: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.334132: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.360096: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:31.381902: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.517357: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.545189: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:31.567002: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 3ms/step

```

2024-02-26 13:52:31.654761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:31.677044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:31.698852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:31.789184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:31.812825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:31.834102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:31.982525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.008204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.030006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:32.135211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.155809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:32.183964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.268074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.295908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.313772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:52:32.404375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.422718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.443522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.550194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.570314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.593210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:32.673399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.701347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.720601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.799028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.806513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:32.835479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:32.931464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:32.959523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:32.987750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.080187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.098757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.124034: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:33.218717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.246825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:33.274505: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:33.372345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:33.392056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:33.413796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:33.507038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:33.535186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:33.570926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:33.654657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:33.676311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:33.694186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:33.805659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.831952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.854856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.955923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:33.984270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:34.023876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.134141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.161916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:34.191180: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:34.305490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:34.319096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:34.349263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:34.433224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:34.455314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:34.480998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:34.584531: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:52:34.618355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.647228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:34.792290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.810936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.828931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.910250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.932585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:34.954003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:35.057843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.087382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.108079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.211711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.234003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.259835: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:35.374888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.410198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.424572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.547865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:35.564291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:35.586574: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:35.711147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:35.739113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:35.775889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:35.884118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:35.918300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:35.942282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:36.035416: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.064621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.077742: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:52:36.142979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.176319: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.189418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.281041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.300990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.319703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:52:36.401666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.421732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.441322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.532999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.549523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.571496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:52:36.654693: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.675444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.703116: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.794699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.806136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.817727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:52:36.863666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.871377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.879797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.932825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:36.994052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.008974: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 15ms/step

2024-02-26 13:52:37.128369: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:37.151503: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:37.166101: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:37.277856: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:37.293682: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:37.316975: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2/2 [=====] - 0s 25ms/step

2024-02-26 13:52:37.438903: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:37.468808: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.484544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.619039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:52:37.646549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.674436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.798910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.828140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:37.850820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.944079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:37.966405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:37.988238: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:52:38.070984: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:38.099029: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:38.120779: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:38.241185: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:38.263886: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:52:38.292278: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:38.386332: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:52:38.414996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:38.439085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:52:38.563303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:38.580806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:38.608368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:38.706917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:38.722689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:38.754864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:38.843410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:38.870934: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:38.898904: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.007457: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.029350: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 41ms/step

2024-02-26 13:52:39.051518: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.177440: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.204637: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.225701: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

```

2024-02-26 13:52:39.296157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:39.308123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:39.317702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:39.436314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:39.459110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:39.481307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:52:39.591780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:39.618848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:39.646870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```


2024-02-26 13:52:39.785771: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:39.822986: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.843268: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.920876: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.941148: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:39.968918: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:52:40.059963: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.075891: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.091528: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.169560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.182987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.204056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:40.301518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.318478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.342884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.443541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.469469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:40.497893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:40.601584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.624316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.640825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.746314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.766702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.788737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:40.896207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:52:40.918262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:40.939211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:41.038660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:41.070673: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:41.090491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:41.190179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:41.210045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:41.232486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:41.343683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:41.363766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:41.392296: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:41.511532: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:41.533897: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:41.555733: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 24ms/step

2024-02-26 13:52:41.689290: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:41.711329: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:41.742868: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:41.847128: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:41.875246: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:52:41.906581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.019937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.033579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.046917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:42.140862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.163077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.191106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.287026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.319252: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:42.347328: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:42.455090: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:42.479019: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:42.507100: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:42.612384: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:42.638201: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:42.666558: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:42.769800: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.797885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:42.820123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:43.080166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:43.124893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:43.154648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:43.255975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:43.280741: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:43.298446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:43.419386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.447993: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.476300: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:43.605172: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.633588: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.651983: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.760506: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.778270: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.790138: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:43.931101: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.953507: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:43.969749: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:44.080505: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:44.101164: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:44.123463: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:44.225546: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:44.254475: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:44.282794: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.401954: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.417194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:52:44.435957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.512877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.533495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.554145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:44.670333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.690744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.713123: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.810361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.838693: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.870712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:44.976486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:44.995796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.012770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.100926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.129492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.145638: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:45.246045: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:45.262506: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:45.272732: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:45.363248: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:45.385729: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:45.409075: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 25ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:45.544431: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:45.566956: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.585313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.694650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.714924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.724309: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:45.873420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.898178: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:45.934482: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.046325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.070491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:46.098548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.243364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.261430: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.283581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:52:46.412583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.431568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.450008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.565470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:46.581711: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:46.600311: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:46.707958: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:46.728097: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:46.746438: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:46.866952: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:46.889464: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2024-02-26 13:52:46.911493: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:47.020304: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:47.037939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:47.066058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:47.172866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:47.196905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:47.219190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:47.337834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:47.354120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:47.382381: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:47.533608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:47.562062: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:47.583558: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:47.690604: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:47.713049: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:47.735445: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:47.875641: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:47.904764: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:47.924481: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:52:48.009560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.031838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.051974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:48.155670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.179379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.197593: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.294850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.323483: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.342289: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:48.460488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.480957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.496864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.593682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.616231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.644540: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:48.767388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.792344: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:48.812370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:48.927170: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:48.951585: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:48.967861: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:49.080452: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.101414: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.124218: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.236695: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.262660: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.274965: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:49.335078: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.344804: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.380551: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.496117: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.518592: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:49.538422: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.660184: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.683918: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:52:49.694636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:49.799542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.823236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.847950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.962763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:49.985095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:52:50.008416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.120017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.136514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:50.163220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:50.265913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:50.288154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:50.310335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:50.423768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:50.445014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step

2024-02-26 13:52:50.467345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:50.590972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:50.619437: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.647467: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:50.760983: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.783118: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.788839: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.860073: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.882640: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:50.904538: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:51.000961: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.024254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.051459: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.155685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.176615: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.195118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:52:51.314672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.330757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.350067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.474847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.491623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:51.520754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.627268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.655619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.685805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:52:51.811888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.834175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.854051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:51.989826: I tensorflow/core/common_runtime/executor.cc:1197]

```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 1ms/step
```

```
2024-02-26 13:52:52.013501: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:52:52.032807: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:52:52.143342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:52:52.164574: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:52:52.185082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 3ms/step
```

```
2/2 [=====] - 0s 19ms/step
```

```
2024-02-26 13:52:52.255328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:52:52.300261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:52:52.314924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:52.444716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

Step: 3500, Discriminator Loss: 0.6941661834716797, Generator Loss:
0.6915587186813354
2/2 [=====] - 0s 26ms/step

2024-02-26 13:52:52.467743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:52.486851: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:52.634249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:52.659548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:52.679040: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:52.829775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:52.852502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:52.881127: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:53.010841: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:53.059224: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:53.078147: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:53.214763: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:53.237332: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:53.265813: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:53.375569: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:53.397834: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 18ms/step
2024-02-26 13:52:53.418467: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:53.550899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:53.567920: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:53.586621: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step
2024-02-26 13:52:53.711567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:53.739510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:53.759336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:53.807437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:53.827596: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:53.843373: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:52:53.996023: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.012380: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.031099: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.148581: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.172089: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.192360: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:54.317885: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:54.334230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:54.366197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:54.487086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:54.509074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:52:54.529604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:54.649013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:54.674105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:54.707110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:52:54.803317: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.823408: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.851994: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:54.989326: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:52:55.017805: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:55.039993: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:55.158588: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:55.180913: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:55.197059: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

```

2024-02-26 13:52:55.303523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.322925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.371305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.463208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.492120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:55.507614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.614962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.643401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.665569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:52:55.744349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.773130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.795179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.893456: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.918225: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:55.939365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:56.047487: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.073537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.089237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.196307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.218750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.241076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:52:56.354997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.368326: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.390567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.485276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.513420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.526412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:52:56.658067: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:56.680257: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:56.698580: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:56.798970: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:56.827312: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:56.857315: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:56.937492: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:56.963962: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:56.991973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.100802: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.116408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.132006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:57.232553: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.253980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.269553: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.353219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.373037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:57.401041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:52:57.499160: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.525097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.541015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.629276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.657097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.674152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:52:57.788689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.808689: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.827783: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.951774: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:57.971962: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:58.000727: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:58.104090: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:58.126467: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:52:58.154747: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:52:58.219350: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.247107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.271651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.360103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.379676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.402778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 48ms/step

2024-02-26 13:52:58.502110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.529977: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.558303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.694762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 20ms/step
2024-02-26 13:52:58.723514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.751258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.882373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:58.912357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 9ms/step
2024-02-26 13:52:58.934266: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.021403: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.049847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.071686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 22ms/step

```

```

2024-02-26 13:52:59.184824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.213370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.229825: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.313915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.337398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.343863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:52:59.467906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.485632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.507897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:52:59.620082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.638065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.660633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:52:59.774023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.796394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.818357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.923406: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.943800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:52:59.960491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:00.059745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.079714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.106503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.210871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.238861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:00.266928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.391608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.413382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.441078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:53:00.550458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.574322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.591675: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.711061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.729243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.750893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:00.878881: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:00.901868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:53:00.923697: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:01.053504: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:01.076427: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:01.099242: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:01.233941: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:01.257783: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:01.280512: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:01.413952: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:01.443529: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:01.468897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:01.577372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:01.602798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:01.631041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:01.717042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:01.745833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:01.769909: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:01.885857: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:01.914013: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:01.937329: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:02.041135: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:02.078769: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:02.106789: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:02.216379: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:02.237087: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:02.265457: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:02.343270: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.361723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.383307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.499271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.527718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.543348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:02.642921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.662580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.679004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.778897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.795987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.813998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:02.929821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.958318: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:02.981872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:03.094970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:03.123592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:03.152282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:03.262806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:03.284692: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:03.312988: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:03.400358: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:03.428313: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:03.451835: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:03.553940: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:03.582120: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:03.602239: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:53:03.718043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:03.739811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:03.777497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:53:03.864288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:03.886024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:03.907523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.002192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.029782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.051311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:04.127848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.155909: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.178158: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.262338: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.289789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.312471: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:04.394953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.416366: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:04.437809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:04.567512: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:04.588414: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:04.615537: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:04.721933: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:04.741738: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:04.774068: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 28ms/step

2024-02-26 13:53:04.875313: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:04.897490: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]


```

2024-02-26 13:53:04.917330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.034514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.058009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.073700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:05.203076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.224863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.247392: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.341796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.366156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:53:05.390274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:05.488985: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:05.516343: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:05.544592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:05.647983: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:05.676286: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:05.701880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:05.833257: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:05.852378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:05.873839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:05.998089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.021305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.039417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.145432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.171490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.193318: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:06.302494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:53:06.331013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.356847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.450227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.468971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.497393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:06.593302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.645632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.664189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:06.769670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 13ms/step

2024-02-26 13:53:06.800658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:06.818772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:06.949268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:06.969683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:06.991956: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:07.084569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:07.106660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:07.131285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:07.237245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.260040: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.278205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:07.377556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.405123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.418740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.521572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.538694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.560235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 9ms/step

```

```

2024-02-26 13:53:07.653099: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.682659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.708251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.812032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.827681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.845620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:07.949837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.972089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:07.994111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:53:08.115017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.128634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.145190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:08.265072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.280725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.302026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.390544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.411358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.433391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 26ms/step

2024-02-26 13:53:08.547006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.572866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.601486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.722294: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.741394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.746390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 25ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:08.817871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.849356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:08.871107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:08.974771: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:08.994091: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.016906: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:09.100817: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.124940: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.149286: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.254564: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.280217: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

```

2024-02-26 13:53:09.308519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:09.400081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:09.438003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:09.453850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:09.591980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:09.614744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:09.643661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:09.759281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:09.781558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:09.800794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.899549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.915629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:09.934865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:10.023327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.077254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.101298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.205391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:10.235948: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.267432: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.378981: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.406838: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.434770: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:53:10.534118: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.562090: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.579981: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.673358: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:10.701908: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:10.725972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:10.816892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:10.839762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:10.867909: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:10.962685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:10.992571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.014677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:11.109843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.131662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.146394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.301756: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:11.318789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.346813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.466442: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.494551: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:11.514186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:11.611035: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:11.633168: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:11.648744: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:11.750321: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:11.772118: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:11.788785: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:11.883069: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:11.906504: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:11.928303: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:12.029340: I tensorflow/core/common_runtime/executor.cc:1197]


```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.049735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.066702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:12.160359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.182942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.204955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.294164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.316844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.345126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:12.462884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.485871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.513298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.608994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.631350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.661873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:12.770019: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.791714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:12.808874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:12.910658: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:12.938841: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:12.967072: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:13.117458: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:13.140725: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:13.168649: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:13.268706: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:13.293962: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

```

2024-02-26 13:53:13.321470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:13.439030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:13.462766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:13.490382: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:53:13.595401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:13.617265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:13.635215: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:13.760872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:13.778699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:13.799525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:13.912923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:13.934862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:13.963981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:14.142549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.161890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.175353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.238657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.261686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.276070: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.331757: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:53:14.353816: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.375668: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.470700: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.487087: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.507479: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:14.680068: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.709764: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.737544: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.854332: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.880665: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:14.901473: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:14.993105: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.034839: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.053084: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:15.134619: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:15.162663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:15.187994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:15.295253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:15.320761: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:15.338818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:15.432436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:15.450110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:15.479252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:15.579125: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.593428: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.609117: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.711047: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.727424: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.743046: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:15.855420: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.878914: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:15.907251: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:16.015401: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.033563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.055945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:16.155242: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.180538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.202251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.304640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.330916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.349348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:16.464650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.488144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.517006: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.648162: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.661631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:16.676004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.783376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.808987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:16.837096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:16.943524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:16.969986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:16.993065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.123978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.146357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:17.170490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.299507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.326559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.354845: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:17.490549: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.523749: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.537585: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.679139: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:17.709344: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.725685: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.854564: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:17.879738: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:17.901935: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:18.011730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.034610: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.054696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.134816: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.205649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:18.235685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.351784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.367914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:18.391704: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:18.490587: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:18.519014: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:18.550255: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:18.663029: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:18.691994: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:18.712775: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:18.799064: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:53:18.827156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.848819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:18.971647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:18.999372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.036816: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.111950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.139670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.156275: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:19.217583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```



```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.236918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.243488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.349806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.375176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.400269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:53:19.520462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.534755: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.549616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:19.692731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:19.714285: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:19.733942: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:19.836240: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:19.851776: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:19.867991: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:19.963462: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:19.979523: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:19.996078: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:53:20.076716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.096674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.124633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:20.209616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.228630: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.256646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.338907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.360838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.388656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:20.474963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.503173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.521049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.613340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.641428: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.661562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:20.774595: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.797181: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:20.818923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:20.914989: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:20.937296: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:20.959029: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:21.076500: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.096856: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.114919: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.210809: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.233132: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.255901: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:21.372072: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.390269: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.412705: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.511688: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.534485: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.562751: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:21.673780: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:21.689999: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:21.709571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:21.796090: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:21.816241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:21.836304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:21.902284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:21.924431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:21.936255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:22.035460: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:22.057356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:22.085322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:22.175147: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.205450: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.228348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.330015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.352279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:22.380183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.492130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.514027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.535883: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:53:22.650165: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.667413: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.679202: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.770021: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.799880: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:22.820610: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:22.948536: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:22.971901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.000191: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.088688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.114742: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.139236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:23.244140: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.271939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.296061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.402997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.418774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.440362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:23.544767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.566485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.594243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.711139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.733695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:23.756865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:23.875272: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:23.897163: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:23.919132: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:24.030042: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.048383: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.071239: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.176237: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.201373: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.224310: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:24.343112: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.371921: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.401443: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.502869: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.528042: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:24.550761: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.657744: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.673482: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:24.703597: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:24.817661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:24.840782: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:24.868685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:24.951230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:24.959073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:24.968319: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:25.012544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:25.025204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:53:25.033672: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.116177: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.127666: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.145755: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.207542: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:25.228770: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.245610: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.362290: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.376894: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.392907: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:25.493454: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.509257: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.537320: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.660076: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.673635: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 29ms/step

2024-02-26 13:53:25.698091: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.825037: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:25.850189: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:25.871978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 28ms/step

2024-02-26 13:53:25.983718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:25.999416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:26.028988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:26.145239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:26.173322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:26.197601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:26.340732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:26.362566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:53:26.398560: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.497953: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.525770: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.543741: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 36ms/step

2024-02-26 13:53:26.662923: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.683872: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.695907: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.814337: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.830383: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.858487: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:26.940893: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.962858: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:26.976299: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.074917: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.100406: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.128440: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:27.216176: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.261719: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.279129: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.367529: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.384496: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.406260: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:27.517185: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.545399: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.573218: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.674617: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.694045: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.714358: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:27.819030: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.841302: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.859508: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.970545: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:27.991317: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.002523: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:28.117218: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.136325: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.158348: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.247089: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.278469: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.306033: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:28.415881: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.444296: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:28.462898: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:28.556753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:28.575143: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:28.593132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:28.685347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:28.713222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:28.735072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:28.871254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:28.895518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:28.916272: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:29.019996: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:29.040961: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:29.061661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:29.154159: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:29.182659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:29.204810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:29.319454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:29.344477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:29.372340: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.525861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:29.590572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.609396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.695821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.717611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.734848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:29.820157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.836760: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.858645: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:29.982009: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.010501: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:30.038420: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.123022: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.145231: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.173264: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:30.262663: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:30.283228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:30.311787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:30.423710: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:30.443892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:30.464130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:30.558921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:30.581364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:30.612657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:30.700023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.720150: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.739980: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.840095: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.867968: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:30.896406: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 24ms/step

2024-02-26 13:53:31.001570: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.020977: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.048878: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.177241: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.196914: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:31.222363: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.330723: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.358690: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.386526: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:31.475444: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.498615: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:31.520568: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:53:31.618219: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:31.640284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:31.663441: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 20ms/step
2024-02-26 13:53:31.756378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:31.778221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:31.796269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:31.898155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:31.920166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:31.938175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:53:32.055051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.076977: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.104895: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.209351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.232311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.254297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:32.365324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.387926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.410042: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:32.515075: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:32.543329: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:53:32.565221: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:32.630011: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:32.652427: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:32.659218: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:32.735077: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:32.758007: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step


```

2024-02-26 13:53:32.774844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.866262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.888658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:32.910784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:32.992419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:33.016748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:33.038740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:33.154049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:33.176370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:33.194568: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.300565: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.328704: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.350560: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:33.437358: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.465466: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.487575: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.590757: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.622417: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:33.650281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.750944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.778666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.798589: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:33.888647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.910535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:53:33.938165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.033186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.055151: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.082939: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:34.183628: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.211976: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.239968: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.344044: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.372559: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:53:34.390603: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.486729: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:34.514736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:34.536378: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:34.611418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:34.633231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:34.660986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:34.735951: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:34.756792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:34.777348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:34.882078: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.895915: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:34.915148: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.034333: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.054319: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:35.090682: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.217475: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.237779: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.266098: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

```

2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:35.370912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.390363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.407940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.508066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.528446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.556388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:53:35.651676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.671899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:35.707564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:35.818588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:35.841616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:35.858812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:35.969619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:35.991418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:36.010222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:36.082413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:36.115728: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:36.133066: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.213659: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.229670: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.270233: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:36.350837: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.371048: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.380449: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.464664: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.485061: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.513091: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:36.601607: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.625773: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.648620: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.730741: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.761826: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.782897: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:36.889362: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:36.910563: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:36.931927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.050026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.065525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:37.090633: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.170303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.197929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.217122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.282411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:37.321478: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.332806: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.464246: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.484810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.510943: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:37.656783: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.671328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.686464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.791398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:37.813828: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:37.835644: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:37.914471: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:37.934430: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:37.962406: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.063150: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.086463: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.108328: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:38.196120: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:38.216200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:38.244323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:38.346785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:38.379993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:38.397568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:38.511399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:38.533642: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:38.561656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:38.665327: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.693352: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.709170: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.811758: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.831928: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.851638: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:53:38.951667: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.966307: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:38.985193: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.077428: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:39.105585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:39.133269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:39.233303: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:39.251841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:39.284854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:39.357377: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:39.376205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:39.387657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:39.485333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.504878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.526410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.624438: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.646065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.673770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:39.755365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.785984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.813427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.888872: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.904735: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:39.918138: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:40.004151: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.032235: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.060160: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.162965: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.194045: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 25ms/step

```

2024-02-26 13:53:40.215916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:40.340164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:40.357993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:40.376149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:40.480670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:40.501730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:40.529851: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:40.633348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:40.650913: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:53:40.662413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:40.769356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.797798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.818000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.914677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.930374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:40.949155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:41.037991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.063987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.091889: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.192290: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.208077: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.229638: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 6ms/step

2024-02-26 13:53:41.330952: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.359671: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.378039: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.482306: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.507022: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.527193: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:41.671470: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.690917: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.712766: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.805859: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.834018: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:41.861833: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:41.952150: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:41.987726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:42.007684: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:42.115400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:42.138864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:42.164317: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:42.278330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:42.306122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:42.324665: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:42.431846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.460375: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.478524: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.584105: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.600039: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.618479: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:42.718592: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.738924: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.759210: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.855776: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.875412: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:42.893371: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:43.010839: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.036076: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.057762: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.142683: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.166163: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.194283: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

```

2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:43.284932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.310841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.316291: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.455691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.475889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 26ms/step

2024-02-26 13:53:43.503711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.585046: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.603689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.631483: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:43.729818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.750262: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.768619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.871066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.884522: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:43.906658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:44.020958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.035268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.050490: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.155969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.174580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.193502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:44.287269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.309134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.327249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.426970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.454910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.476547: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 24ms/step

2024-02-26 13:53:44.588006: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.607802: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.635624: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.752867: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.771838: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:53:44.792917: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.889867: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:44.909941: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:44.926112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 27ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:45.023104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.060486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.078602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.200878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.224058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2024-02-26 13:53:45.242154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.375808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.401060: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:45.416598: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2/2 [=====] - 0s 17ms/step

2024-02-26 13:53:45.542647: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:45.570773: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:45.589456: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:45.724825: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:45.747230: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:45.776438: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:45.891130: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.912797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:45.934738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:46.039005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:46.066828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:46.091440: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:46.182230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:46.205494: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:46.228446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:53:46.331879: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.350774: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.372549: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.481883: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.494911: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.523063: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:46.660975: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.716717: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.739240: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.822873: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.846736: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:53:46.876015: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.966654: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:46.994403: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:47.014573: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:47.091324: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:47.096459: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:47.101214: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.156261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.178067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.186009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.226139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.247356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:47.308581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.414360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.434265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.461832: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:47.574701: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.603200: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.625339: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.700548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.721350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.734789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:47.846458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.868765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:47.888678: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.024683: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:48.052751: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.074580: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.181114: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.197519: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.219210: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:48.317123: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.357726: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:48.385912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:48.503326: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:48.523007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:48.548094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:48.647439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:48.675203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:48.703233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:48.845354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:48.859368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.869899: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.964950: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:48.985431: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.007467: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:49.105767: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.129753: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.151685: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.259550: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.281737: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:53:49.310183: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.396804: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.416841: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.436643: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 7ms/step

2024-02-26 13:53:49.544864: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.563856: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.582664: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:49.640238: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:49.653847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:49.667624: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:53:49.745491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:49.773576: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:49.795404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:49.918277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:49.942866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:49.966647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.064986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.087848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.104082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:50.203395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.225339: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.253350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.374074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.393929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:50.415885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.536088: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.555650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.584080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:50.668865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.684581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.696150: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.795444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.813923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.829314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:53:50.911674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.936187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:50.954232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:51.065834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:51.093959: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:51.121840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:51.249624: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:51.269375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:51.291157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:51.403482: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.431764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.450095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.549600: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.577821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.591786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:53:51.673746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.694437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:53:51.722690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.872922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2024-02-26 13:53:51.893326: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:51.911454: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.048441: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.066838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.084964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:52.181489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.199555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:52.227507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:52.344927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:52.362318: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:52.384395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:52.473662: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:52.496418: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:52.510447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:52.614852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:52.646462: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.664258: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.763183: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.791283: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:53:52.822945: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.930582: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.948861: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:52.953840: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 32ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:53.058163: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.080231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.107906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.195746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.223660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.241758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:53:53.350764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.373109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.401148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.517821: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:53.540238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:53.562098: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:53.683570: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:53.711908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:53.739963: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:53.827325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:53.855703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:53.884151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:53:53.982797: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.008723: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:54.026809: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.128451: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.156441: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.179422: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:53:54.270390: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.298248: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.327338: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:54.434137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:54.460570: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:54.479067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:54.600374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:54.628809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:54.652104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:54.752670: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:54.780715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:54.802492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.909772: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.925267: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:54.953305: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:55.038468: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.054534: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.076215: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.188810: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.210910: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

```

2024-02-26 13:53:55.242575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:55.359035: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:55.381176: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:55.403608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:55.502024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:55.523688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:55.545252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:55.628900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:55.648434: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:53:55.670320: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:53:55.762004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.782569: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.810904: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.901617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.923307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:55.951385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:53:56.049062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:53:56.077716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.100497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.176416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.193519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.198745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 26ms/step

2024-02-26 13:53:56.319103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.336864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.360724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.437844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.452775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:56.478237: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:56.544547: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:56.575536: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:56.588079: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:56.694341: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:56.722282: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:56.739201: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:56.828767: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.848553: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.876223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.972329: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.986025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:56.991435: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:57.088022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.110847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.133659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.232195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.254197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.272412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:57.370536: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.398417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.426316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.543568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.560841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:57.579731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:57.671020: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:57.692827: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:57.714655: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:57.845663: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:57.868910: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:57.891784: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.003015: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.032833: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:58.054816: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.139540: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.167639: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.189458: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:58.313905: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.345572: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.375861: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.487128: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:58.508078: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:53:58.536171: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:58.683790: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:58.705047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:58.732817: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:53:58.828348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:58.855113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:58.886647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:58.993770: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.009874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2024-02-26 13:53:59.049690: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.173493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.189370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.205005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:53:59.299862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.321918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.343773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.433771: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.453496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.473213: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:59.560530: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:59.582832: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:59.604641: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:59.694329: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:59.722767: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:59.741051: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:53:59.844002: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:53:59.865765: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.881485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.971302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:53:59.990411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:00.022251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:00.138852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:00.166892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:00.196773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:00.297525: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:00.319900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:00.343995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.452435: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.479911: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.508057: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:00.583813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.611906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.627510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.713844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.733566: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.756691: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:00.855067: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.867754: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.893378: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:00.991209: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:01.019115: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:01.040661: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:01.129050: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.146788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.174850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.279371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.308607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.330215: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:01.429069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.442096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.454988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.556686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.578708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.607927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:01.690234: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.707474: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.726235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.796950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.835537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.856999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:54:01.952917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.974682: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:01.988264: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.096032: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.117780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.145945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:02.262376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.288680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.304987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:02.419029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.439411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.452791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:02.563113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.581153: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.604721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.713653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.741416: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:02.769588: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.860997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.877427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:02.899307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:03.017552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.035764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.053671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.159829: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.180138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.190773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:03.273992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:03.299537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:03.322557: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:03.416529: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:03.444534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:03.472388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:03.567323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:03.590714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:03.618439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.681295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.690354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.718314: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:03.796103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.811759: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.839375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.944513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:03.966457: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:03.989741: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:54:04.074083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.090092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.111311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.223798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.239711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.263715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:54:04.363583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.386313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.414135: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.523530: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.545517: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:04.567821: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.698948: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.718111: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:04.739883: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:04.811387: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:54:04.839623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:04.853088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:04.932749: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:04.961066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:04.986612: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 29ms/step

2024-02-26 13:54:05.109268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:05.137707: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:05.165863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:05.288167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:05.310242: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.322637: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.447424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.453106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.480809: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:54:05.587372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.609236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.630995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.758910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:05.781343: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:05.808757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.903216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.924927: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:05.966436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:06.078838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.102719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.120818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.216358: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:06.236083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:06.263944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:06.385137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:06.407086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:06.425405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:06.515846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:06.536164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:06.558286: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:06.670186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.698116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.719700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.814922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.842585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.862446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 33ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:06.974733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:06.993114: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.014848: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.120712: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.143079: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.171389: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

Step: 4000, Discriminator Loss: 0.6915116012096405, Generator Loss: 0.7321178317070007

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:07.275692: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.303739: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.322049: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.397551: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.413080: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:54:07.433472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:07.543940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.572796: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.594971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.701443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.721323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:07.747449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.844308: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:07.860133: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:07.881638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:54:08.001047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.020573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.043149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.144915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.166629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.194738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:08.324390: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:08.340261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.361840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.447420: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.467024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.494731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:08.583045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.610815: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.633113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:08.736814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:08.758475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:54:08.786920: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:08.899840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:08.919386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:08.946915: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:09.068366: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:09.094197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:09.112273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:09.205702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:09.233484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:09.255120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:54:09.363294: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:09.385278: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:09.400475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:09.567316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:09.581233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:09.609405: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:09.723047: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:09.748609: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:09.762761: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:54:09.864671: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:09.893231: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:09.929683: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:10.049215: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:10.067946: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:10.083342: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.178074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.214380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.234237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:54:10.319766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.324823: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.329195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.376788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.382091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.395141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.507788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:10.527334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.555238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.651543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.671447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.699612: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:10.803647: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.826230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.854196: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.940285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:10.971286: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:11.000797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:11.117449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:11.145417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:11.168350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:11.263007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:11.295026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:11.312552: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:11.419927: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.455917: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.480719: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.594932: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:11.624486: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.646290: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.730325: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.765591: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:11.793715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:54:11.884253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.900028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.914967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:11.994820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:12.012965: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:12.042227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:12.170896: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:12.185957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.206208: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.279062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.283914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.289323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.333136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.346165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.351355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:54:12.405368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:12.427632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.457173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.547667: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.567828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.595974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:12.718214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.738129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.756389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.858845: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:12.890508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:12.918271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:13.004725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.032631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.048283: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.132044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.156959: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.176204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:54:13.258045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:13.286262: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:13.314067: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:13.430224: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:13.458584: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:13.486912: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:13.591276: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:13.613547: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:13.635539: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 1ms/step

```

2024-02-26 13:54:13.735933: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.764067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.792018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.886631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:13.915133: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:54:13.943233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.059864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.082109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.095896: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:54:14.203363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.215686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.225893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.325675: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.347201: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.369316: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:54:14.479669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.503834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:14.532618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:14.664029: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:54:14.687128: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:14.707314: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:14.817977: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:14.840273: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:14.862583: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:54:14.989421: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.006379: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.034838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.143084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.164981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:15.188429: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.307410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.329214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.353361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:15.466427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:15.489861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.511437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.595995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.624666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.643211: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:15.744112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.765627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.775313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.854950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.877323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:15.905162: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:16.011166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.033722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.042929: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.157847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.182828: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:16.210432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.308862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.336665: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:16.354477: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:16.434041: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:16.456593: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:16.485420: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:16.596959: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:16.617493: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:16.638286: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:16.735684: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.763535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.785752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:54:16.911269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.931626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:16.953231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.050394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.072290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.077847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:54:17.134130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.142846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.158391: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.213397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.218868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.240397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.330689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:17.352174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.373580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.466610: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.494365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.509891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:17.601610: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.635304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.658138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.754924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.782472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:17.797446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 24ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:17.877328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:17.900165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:17.922542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.011822: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.039498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.052504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:18.158556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.183549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.208287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.301954: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.319783: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.335047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:18.425639: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.456106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.471890: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.557738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.579370: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:18.606811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:18.713658: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.733035: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.760667: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.863280: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:18.886225: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:18.914335: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.005111: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.026906: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:54:19.042744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:19.136754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.159747: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.187336: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.275436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.303146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.327253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:19.415530: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.437826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.456637: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.552542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.574100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.600465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:19.697966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.719108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.749485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.828426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:19.850884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:19.878617: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:19.980908: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:20.002440: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:20.023475: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:20.110644: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:20.133089: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:20.161142: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:20.258317: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.276437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.294434: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.372934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.398104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.415986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:20.541195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.554410: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.582547: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.680137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.695496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.722743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:20.826502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.847267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.865263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.948521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.968138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:20.985967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:21.083394: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.108276: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.126276: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.199601: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.224676: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.246290: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:21.350932: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.378864: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.407691: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.507778: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:21.529744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:21.542754: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:21.642592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:21.670152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:21.689650: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:21.765797: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:21.787548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:21.812448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:21.905152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.924885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:21.950687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.066485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.086539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:22.112001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.254723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.282516: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.287509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:22.374076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.397330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.402474: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.502407: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.524271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.542210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:22.630663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:54:22.652905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:22.680837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:22.741274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:22.807627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:22.820970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:22.962907: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:22.990840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:23.015108: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:23.110856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:23.131419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:54:23.150630: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:54:23.236683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.258684: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.278290: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.379981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.395905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.410949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:23.541348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.565120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.588988: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.698880: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.728882: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:23.757066: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.843340: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.867166: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:23.890477: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:23.978093: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:54:23.997539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.009550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.133393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.155321: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.178135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:54:24.298402: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.326082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.340080: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.473247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:24.501189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:24.519325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:24.604192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:24.622507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:24.650225: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:24.764177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:24.793789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:24.819091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:24.912628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:24.944293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2024-02-26 13:54:24.971841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.085613: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.105955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.130198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:25.235113: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.262939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.284317: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.382650: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:25.407689: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:25.426179: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:25.518227: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:25.544412: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:25.572376: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:25.679651: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:25.703693: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:25.732064: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.810414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.832520: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.854323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.922772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:25.927567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:25.962271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.059748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.084939: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.102850: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:54:26.185155: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.214520: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.226254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.319170: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.331696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.344730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:26.439442: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.453103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.471305: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.564738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.586514: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.614480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:54:26.708722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.722027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.743719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.850768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.880263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:26.902403: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:27.051207: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:27.071321: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:27.088043: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:27.203620: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:27.219623: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:27.247717: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:27.346170: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:27.374118: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.396618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.487138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.505275: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.518573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:27.619651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.630619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.653690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.744979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.764406: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.782236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:27.840327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.845226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.849735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.891517: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.908079: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:27.942386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.027366: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

```

2/2 [=====] - 0s 4ms/step

2024-02-26 13:54:28.049015: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.067455: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.146355: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.169014: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.191676: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:54:28.271802: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.313791: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.341429: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.452136: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2024-02-26 13:54:28.475628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.491353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.603018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.626620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.642789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 21ms/step
2024-02-26 13:54:28.724842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.746623: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.764717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:28.881431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:28.903780: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:28.928556: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.055155: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.073338: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.095506: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 26ms/step

2024-02-26 13:54:29.197784: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.219721: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.247710: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.357129: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.388658: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:29.410738: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.528610: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.550678: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.576717: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:54:29.669306: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.692113: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:29.714644: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:29.833162: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:29.861261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:29.883005: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.009297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.031563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.049893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:30.140487: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.160389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.188230: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:30.267755: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:30.293911: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:30.314686: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:30.451717: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:30.473746: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:30.492243: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:30.635313: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:30.657174: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.678847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.784120: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.811802: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.833792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:30.948776: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.972448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:30.994443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.090788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.118694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.141742: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:31.265369: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.284465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.297819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.428459: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.444097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:31.465940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.590755: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:31.619465: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:31.647382: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 25ms/step

2024-02-26 13:54:31.748458: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:31.773865: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:31.802077: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:31.921115: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:31.949701: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:31.971516: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:32.112148: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:54:32.141415: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:54:32.169764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:32.273101: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:32.301503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:32.321820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:32.404229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:32.426577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:32.451844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:32.553615: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.575197: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.603360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:32.686061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.705449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.727270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.824902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.846330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.867750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:54:32.967134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:32.994864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.023008: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.122573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.151238: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:33.179114: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.270146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.292243: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.321202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:54:33.460392: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.476636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.494719: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.604567: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.620788: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.627871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:54:33.739869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.761949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:33.784584: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:33.870333: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:33.889579: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:33.916975: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:54:33.992915: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.002295: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.016277: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.164708: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.193379: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

```

2024-02-26 13:54:34.212109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:34.304353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:34.326775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:34.343762: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:34.445766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:34.474478: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:34.502895: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:34.607507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:34.636365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:34.659161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.752380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.775953: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.803844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:34.895552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.917703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:34.941123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:35.055607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:35.077657: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:35.098010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.252406: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.275784: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:35.300015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.388629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.410680: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.438744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:35.539999: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.559443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.575319: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.682785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.706726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.728253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:54:35.821229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.849075: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.877376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.966333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:35.988598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:36.014119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:36.122594: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:36.150837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:36.178561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:36.286777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:54:36.324597: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:36.346222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:36.437096: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.462476: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.476100: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:36.565677: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.594150: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.615788: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.724116: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.746141: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.762219: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:54:36.852501: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.871843: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.890728: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:36.982836: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:37.006499: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:37.026660: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 21ms/step

2024-02-26 13:54:37.108751: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:37.130944: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:37.149196: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.286473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:37.314916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.337330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.422675: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.447552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.469087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:37.566137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.588795: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.613271: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.697149: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.722886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.747639: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:37.837277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.861668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.889353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:37.983044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:38.008690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:38.031303: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:54:38.140428: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.163341: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.184818: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.318938: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:38.347494: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.370719: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.479669: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.500822: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:38.529363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:38.625931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.639431: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.657092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.734052: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.761902: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.800027: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:54:38.861931: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.873765: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:38.909049: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:39.018007: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:39.037243: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:39.053040: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:39.135514: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:39.159021: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:39.179113: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:39.274487: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:39.297247: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.319561: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:39.400521: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.427581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.450304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.537769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.565641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.587175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:39.674975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.702639: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.734734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.848258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.868009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:39.890629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:39.986030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:40.008037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:40.026362: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:40.161243: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.183597: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.211599: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.320467: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.348726: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:40.372047: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.463024: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.490857: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.518721: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 13ms/step

2024-02-26 13:54:40.616033: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.638970: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.655333: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.778890: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.807243: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:54:40.831017: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.913568: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.946097: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:40.958988: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:41.075056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.095135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.117011: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.199556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.227555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.249776: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:41.357960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.373446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.398668: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:41.510713: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:41.535510: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:41.562507: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:41.656061: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:41.679264: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:41.702832: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:41.815266: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:41.839343: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.859632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.965783: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:41.987793: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:42.010368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2024-02-26 13:54:42.104879: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:42.131077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:42.139625: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:42.231729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:42.251851: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:42.277829: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:54:42.374672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.394573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.410076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.513651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.529843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.559716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:42.686087: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.714693: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.739959: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.838544: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.857869: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:42.879842: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:43.032642: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.047880: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.076049: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.199550: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.216206: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.232666: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:43.329796: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.338867: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.356105: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.464256: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.490984: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:43.514415: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:43.601934: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:43.615205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:43.632888: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:43.736061: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:43.764166: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:43.788867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:43.907280: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:43.935484: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:43.957573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:44.062654: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:44.085648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:44.111610: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.202051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.232003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.254037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:44.357325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.385003: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.406968: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.519464: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.535648: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.553878: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:44.648410: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.676480: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.698156: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.823255: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:44.847030: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2024-02-26 13:54:44.863582: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:44.967826: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:44.999512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:45.021472: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 19ms/step

2024-02-26 13:54:45.144129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:45.160506: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:45.178785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:45.290167: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:45.316573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:45.344868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:45.483554: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:45.499501: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:45.516607: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:45.652193: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:45.668195: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:45.690046: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:45.814989: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:45.844519: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

```

2024-02-26 13:54:45.866966: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:45.968247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:45.984279: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.006387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:46.100533: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.122688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.150640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.232168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.245366: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:46.258638: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:54:46.358098: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:46.373103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:46.401355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:46.521252: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:46.549696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:46.578160: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:46.683202: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:46.712023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.734247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:46.821024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.843433: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.863452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.950128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:46.972568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.000355: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:47.105737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:54:47.119463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.140876: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.230384: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.258187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.277073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:47.364523: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.392485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.414073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.508613: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:47.528028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.555692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:47.632743: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.660690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.688267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.795739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.823811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:47.851779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.933347: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.961540: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:47.984361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:48.132066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.158380: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.186634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.285358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.317315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:48.345884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.439962: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:48.459654: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:48.474491: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 6ms/step

2024-02-26 13:54:48.564709: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:48.593644: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:48.619164: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:48.754167: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:54:48.776938: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:48.804991: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.900661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.920274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:48.942720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 25ms/step

2024-02-26 13:54:49.043452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.059157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.086862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.206249: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.221004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.236189: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 25ms/step

2024-02-26 13:54:49.321575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.349867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.358169: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.474019: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.498758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2024-02-26 13:54:49.527028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.645444: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.673526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:49.695371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:49.800481: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:49.820483: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:49.838505: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:49.907052: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:49.934790: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:49.962244: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:50.053939: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.075071: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.081976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.179776: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.199701: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.227333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:54:50.322361: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.344437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.366221: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.469327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.491413: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```



```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:50.498593: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:50.592297: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.612013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.637691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.734082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.752780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.771954: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:50.863374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.886942: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:50.915206: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.000686: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.014006: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.041942: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:54:51.138517: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.163781: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.183544: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.268977: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.297218: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.316966: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:54:51.407635: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.435616: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.454786: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.551153: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.578623: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:51.601374: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:54:51.703835: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:51.731720: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:51.749698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:51.849124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:51.870870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:51.892398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 17ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:52.027109: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.049142: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.076957: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.222562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.228644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:52.258088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:52.347487: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:52.372874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:52.400635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:52.490841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:52.518493: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:52.543583: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:54:52.641058: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.668995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:52.690605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.792351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.810950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.828998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.888073: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 23ms/step

2024-02-26 13:54:52.915995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:52.944325: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.039932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.062071: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.081721: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:53.174463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.214687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.229897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.320401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.340270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.361994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:54:53.451756: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.479724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.495078: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.597791: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.625698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2024-02-26 13:54:53.653973: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.763663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.783598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:53.799192: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:53.901010: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:53.920898: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:53.948621: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.034262: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.056177: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.074957: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:54:54.170673: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.195072: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.217014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.297253: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.312950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.340800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:54.449379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.477126: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.499311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.586313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.614404: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:54.636217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:54.717724: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.740084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.761864: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.848785: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.864889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:54.878706: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:54.979735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.008717: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.025023: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.122592: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.144382: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.172233: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:54:55.264293: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.283548: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.303442: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.394230: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.403297: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.431181: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:54:55.510237: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.536456: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.556180: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.661037: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.667167: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:55.688927: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:55.786603: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:55.814660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:55.839257: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:55.944195: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:55.972183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:54:55.992246: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.070781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.098716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.126718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

```

```

2024-02-26 13:54:56.201812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.229773: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.250353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.324964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.344622: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.364170: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:56.450423: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.472453: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.500386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.562671: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.592787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.607862: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2024-02-26 13:54:56.654942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.668653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.680605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.790375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.802302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.824610: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:56.916992: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.947995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:56.969790: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.056807: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.085133: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.113518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 27ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:57.211165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.239115: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.267106: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:57.374133: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:57.402555: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:57.429037: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:57.514539: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:57.542605: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:57.567715: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:57.670659: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:57.693007: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:54:57.715373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.809736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.832014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.857501: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:54:57.942165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.964445: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:57.998207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:58.067114: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:58.095063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:54:58.112542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 22ms/step

2024-02-26 13:54:58.205529: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.227251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.249258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.349899: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.365734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.393624: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:54:58.485246: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.505130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.543228: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.635022: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.666584: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:54:58.695858: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.771410: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.799615: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.815615: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.885149: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:54:58.912867: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:58.931376: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.019469: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.039145: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.057177: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:54:59.151645: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.171383: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.199201: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.313603: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:54:59.329067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:59.350586: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:54:59.425389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:59.437130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:59.448649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:59.581223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:59.596960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:54:59.624698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:54:59.711611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.739675: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.755457: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.824794: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.846562: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:54:59.880061: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:00.008222: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.030655: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.058691: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.150484: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.178481: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.204615: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:00.317755: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.340896: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.369028: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.496440: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:00.512314: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:00.527685: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:00.626774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:00.652730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:00.681194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:55:00.773164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:00.788893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:00.812093: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:00.925781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:00.953968: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:00.972578: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.066699: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.086537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.108319: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:01.198603: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.218187: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.239722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.341354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.363233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.390722: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:55:01.498556: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:01.520368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:01.548047: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:01.665173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:01.682374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:01.696185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:01.815542: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:01.837559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:01.859676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.934807: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.955312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:01.978548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:55:02.099585: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:02.118210: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:02.140175: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:02.242138: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:02.270068: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:02.288713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:02.387464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.407323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.414882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.536629: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.555437: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.574056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:55:02.664998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.693398: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.712169: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.808562: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.831321: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.851517: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 34ms/step

2024-02-26 13:55:02.962893: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:02.981607: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:03.010023: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:03.151434: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

```

2024-02-26 13:55:03.167439: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.187097: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.275882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.298515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.320146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:03.412024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.435489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.449125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.561565: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2024-02-26 13:55:03.577188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.604976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:03.711324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.735889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.761718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.885105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:03.907009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:03.933426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.032064: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.063239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.081002: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:04.176332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.200641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.219093: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.316232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.337924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.361098: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:55:04.468737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.485084: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.512226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.585112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.613185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.634896: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:04.741659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.772672: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.788350: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:04.888435: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.910354: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:04.932304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:05.045713: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.068533: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.096510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.186601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.214534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.242443: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:05.355216: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.375470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.403491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.510130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.530281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:05.559502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.676088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.698239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:05.716694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:05.803801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:05.818655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:05.833447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:05.943674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:05.972095: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:05.991122: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:55:06.085363: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:06.115168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:06.146269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:06.256306: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:06.278987: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:06.297389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:06.409229: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:06.436464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:06.464466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:06.569618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:06.588261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:06.605990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:06.697300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:06.718039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:06.745611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:55:06.851245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:06.871411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:06.895104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:07.016345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:07.046765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:07.069273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.179564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.205696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.219683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:07.350702: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.379059: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.401641: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.494833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.508773: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.536498: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:55:07.640250: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.662313: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.676220: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.827623: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:07.849736: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.863991: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:07.949227: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:07.972146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:07.995668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:55:08.080937: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:08.109684: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:08.138023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:08.234564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:08.259969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:08.278324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:08.396044: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.424173: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.456362: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.580153: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:08.602779: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.633783: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.748046: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.770971: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.793790: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:08.911840: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.933796: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:08.950133: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:09.059073: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:09.068330: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:09.089343: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 18ms/step

2024-02-26 13:55:09.207317: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:09.230691: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:09.258825: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.367640: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.389248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.406560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:09.491868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.520164: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.538269: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.627856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.643475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:09.680669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:09.793446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:09.821277: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:09.850669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:09.994928: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:10.022792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:10.046859: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:10.128694: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:10.156649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:10.178429: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:10.280491: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.303254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.325652: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.407254: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.426701: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.449118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:55:10.556121: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.575173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```



```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.584589: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.696419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.720295: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.748733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:10.848733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.864492: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.878464: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.939508: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:10.968129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:10.983477: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:11.055048: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:11.083121: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:11.108125: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:11.208732: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:11.230646: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:11.252323: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 24ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:11.390843: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:11.418945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.440804: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.543764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.559515: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.577757: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:11.684442: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.706386: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.728152: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.826470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:11.848359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:11.870328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 18ms/step

2024-02-26 13:55:11.994085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:12.016906: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:12.045137: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:12.134513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:12.164010: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:12.182196: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:12.278068: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.297654: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.325441: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.418828: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.454960: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.473259: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:12.582023: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.602095: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.630301: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.763810: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:12.791741: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.815925: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.905147: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.927090: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:12.945032: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:55:13.033548: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.053138: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.074903: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:13.159654: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:13.180069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:13.204925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:13.332298: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:13.348663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:13.357125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:13.422941: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:13.464231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:13.480146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:13.568387: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.585083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.591469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.685840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.708820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.736792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:55:13.865311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.889703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:13.911385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.011637: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.033873: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.055482: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 23ms/step

2024-02-26 13:55:14.158980: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.186689: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.208318: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.297921: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.315720: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.337758: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:14.416268: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.444362: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.472108: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.538956: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.547234: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.609570: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:14.709613: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:14.737286: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:14.765412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:14.861824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:14.877503: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:14.905399: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 31ms/step

2024-02-26 13:55:14.990988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.027232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.048840: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step

2024-02-26 13:55:15.193734: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.217945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.240550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.350049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.371993: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.393818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:55:15.509276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.528723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.557766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.684103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:15.706076: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:15.734017: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:15.829343: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:15.848665: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:15.872274: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:15.962992: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:15.981353: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:16.002874: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:16.096241: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:16.136257: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.157991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:55:16.256780: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.281089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.302735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.429304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.441245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:55:16.460069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.577628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.599658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.626689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:16.714908: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.734157: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.761555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.855332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.882994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:16.904488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

```

2/2 [=====] - 0s 26ms/step

2024-02-26 13:55:16.973947: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:16.993771: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.021763: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.087047: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.094995: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.099589: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.171361: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:55:17.192569: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.220898: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:17.310712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:17.343570: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:17.370066: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:17.453546: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:17.481732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:17.509669: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:17.609886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:17.639337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:17.658552: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.757332: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.785338: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.807362: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:55:17.909913: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.931685: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:17.953548: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.064500: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.086439: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

```

2024-02-26 13:55:18.114077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.216742: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.239018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.267745: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:18.370649: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.398914: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.411940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.501156: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.516884: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:18.545276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:18.619023: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.646820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.668880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.752241: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.780510: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.802321: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:18.892926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:18.914836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:18.932820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:19.011385: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:19.037302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:19.052690: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:19.151700: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:19.171557: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:19.202043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:19.290932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:19.318803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.344031: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:55:19.434006: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.462118: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.489843: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.600504: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.620379: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:19.637406: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.749036: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.768962: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.796737: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

Step: 4500, Discriminator Loss: 0.6901944875717163, Generator Loss: 0.6641741394996643

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:19.866118: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.875674: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:19.893050: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:20.225742: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.282959: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.303810: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:20.445413: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.471221: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.500168: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.631199: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:20.658196: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.686369: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.788940: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.812034: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:20.840141: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]


```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:20.947082: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:20.963322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:20.979798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.064119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.086989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.118482: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:21.241729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.264726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.290063: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.387905: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.410935: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.427795: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:21.530124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.556099: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.576536: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.667958: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.700236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:21.716802: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:21.825291: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:21.842995: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:21.858047: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:21.991894: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.014410: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:22.036413: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.135517: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.156054: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:22.184575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 48ms/step

2024-02-26 13:55:22.283333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.305903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.332397: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.430739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.448301: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.468716: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:55:22.582412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.611077: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.629937: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.740239: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.756462: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:22.785306: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.894079: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.924512: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:22.953055: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:23.064515: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:23.093134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:23.115256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:23.232261: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:23.259803: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 35ms/step
2024-02-26 13:55:23.274564: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:23.383021: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:23.391891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:23.409688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 27ms/step
2024-02-26 13:55:23.565230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:23.594091: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:23.624325: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:23.738896: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:23.768626: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:23.787564: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:23.905340: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:23.926404: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:23.954542: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 3ms/step

```

2024-02-26 13:55:24.043024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.063714: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.082154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.186094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.215256: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.228251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:55:24.330495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.360852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.389475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```


2024-02-26 13:55:24.511863: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:24.528648: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:24.544629: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:24.634859: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:24.664628: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:24.683529: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:24.765759: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:24.795489: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:24.816404: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.922960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.937947: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:24.950375: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:25.058737: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.081389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.109794: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.206072: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.234480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:25.262794: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.404645: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.419485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.443691: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:25.549051: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.569708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.588813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.669433: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.698111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:25.730483: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:55:25.846985: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:25.868271: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:25.897337: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:26.020345: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:26.037521: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:26.048123: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:26.155536: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:26.183918: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.206214: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:55:26.331765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.358171: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.386735: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.517205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2024-02-26 13:55:26.544359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.563476: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.742753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step

```

```

2024-02-26 13:55:26.767445: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.787605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.895923: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.912268: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:26.934184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:27.033648: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:27.061502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:27.080230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:27.171857: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:27.193779: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.225462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:27.332663: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.352960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.386666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.485619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.495251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.503539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 27ms/step

2024-02-26 13:55:27.687456: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.715494: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.749391: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.856122: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.884479: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:27.901076: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:27.985076: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:28.005038: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:28.033745: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step


```

2024-02-26 13:55:28.139921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.168725: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.192538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.263837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.286151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.314353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:28.448222: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.470462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.496425: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:28.613412: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.629628: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.648207: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 16ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:28.815708: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.844763: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.867248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.963240: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:28.985616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.004321: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:29.126014: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.147250: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.161893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.271509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.299967: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.328131: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 26ms/step

2024-02-26 13:55:29.437555: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.459732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:29.478099: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:29.597763: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:29.620303: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:55:29.648906: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:29.847551: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:55:29.864833: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:29.887160: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.017532: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.045905: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:30.075480: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.196193: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.225025: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.248740: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:30.385046: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.405130: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.433741: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.540640: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:30.557108: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:30.579479: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:30.673677: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:30.702353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:30.722165: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:30.818878: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:30.827333: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:30.878034: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:30.971371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:30.991900: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.005574: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:31.101759: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.123788: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.142259: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.233879: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.255582: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.273565: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:31.348268: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.371027: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.387033: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.462167: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.467751: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.472613: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.517490: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.527117: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.539438: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:55:31.613186: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.629750: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.658860: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.760580: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.782963: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.805401: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:31.918788: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.941162: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:31.963421: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.089095: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.111401: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:32.141022: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.239996: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.260466: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.282823: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:55:32.374665: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.398704: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.412000: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:32.509882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:32.532774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:32.550131: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:32.658676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:32.682960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:32.707379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:32.817107: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:32.834968: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:32.848315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:55:32.944049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.964579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:32.992304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:33.101805: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:33.120345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:55:33.148627: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:33.318183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:33.346846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:33.375281: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.482421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.506604: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.528777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:33.623944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.646085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.671372: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.754463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.776601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:33.797683: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:33.881315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:33.903656: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:33.931571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.018632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.043994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.062001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:34.162883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.191019: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:34.212838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:34.315101: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:34.358774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:34.367342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:34.458717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:34.481365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:34.499537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 26ms/step

2024-02-26 13:55:34.590778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:34.612487: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.634309: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.742107: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.758670: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.778750: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:55:34.888687: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.907975: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:34.929917: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.030741: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.054570: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.082992: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:35.184504: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.206576: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.228274: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.315212: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.343487: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:35.371920: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:55:35.460203: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.488835: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.517818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.599373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.627389: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.649302: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:35.733818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.755696: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.777489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.867964: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.889360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:35.911469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:36.013231: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.018401: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.023024: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.072936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.078535: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.128778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 10ms/step

```

```

2024-02-26 13:55:36.249135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.279473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.303281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.419767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.448148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2024-02-26 13:55:36.471571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.599318: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.621393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.643289: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 28ms/step
2/2 [=====] - 0s 23ms/step

2024-02-26 13:55:36.771324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.793488: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.808218: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.917870: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.943089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:36.968009: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:37.069505: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:37.103388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:37.125495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.214508: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.239740: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.264763: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:37.349818: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.377459: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.398956: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.479298: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.497604: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.519304: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:55:37.593841: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.622145: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.649626: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.767808: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.781040: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:37.797906: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.902116: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:37.923977: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:37.951705: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:38.076356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.098729: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.128415: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.218134: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.239736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.252767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:38.350228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.378004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.406159: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.501734: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.529619: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:38.551201: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.650874: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.676063: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:38.701460: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:38.781503: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:38.809432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:38.837123: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:38.920869: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:38.948756: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:38.969558: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:39.097000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.128695: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.147038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.250894: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:39.279740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:39.301619: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:39.385129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:39.412926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:39.434683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:39.539177: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:39.551548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:39.575481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:39.690060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.712236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.730485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:39.830982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.858871: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.878471: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:39.982976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.007952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.028738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:55:40.124562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.140190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.167998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.260854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.288886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.306001: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:40.421366: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.447934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.475626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:40.574899: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:40.602690: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:40.630442: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:40.718211: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:40.740125: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:40.759481: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 5ms/step

2024-02-26 13:55:40.860665: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:40.878917: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:40.900661: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:40.983659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.019768: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.039910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:41.118136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.152186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.175074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.282025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.309842: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:41.337748: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.447889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.463786: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.485712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:41.585750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.607731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.625630: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.709844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.739232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:41.761249: I tensorflow/core/common_runtime/executor.cc:1197]

```



```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:41.842312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:41.870026: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:41.897335: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:41.992910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:42.020832: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:42.038800: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:42.146668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:42.166601: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.194392: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.297396: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.322373: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.348148: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:42.477105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.496686: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.519258: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.602774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.622607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.636527: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:55:42.744703: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.765183: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.784635: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.884776: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.906861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:42.934417: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:43.036339: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:43.056376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.076168: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.178882: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.200752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.222281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 5ms/step

2024-02-26 13:55:43.361025: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.378352: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.406174: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.496984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:43.524758: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.546466: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:43.633322: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.655287: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.683092: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.780778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.808540: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:43.836543: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.923507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.951056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:43.963867: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:44.042998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:44.070661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:44.092130: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:44.198812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:44.215942: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:44.243581: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

```

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:44.320219: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.325164: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.329709: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.386834: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.392285: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.396990: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.440638: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.445722: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.475272: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:44.573331: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.608588: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.622609: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.724704: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.744161: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.764081: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:44.864470: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.888605: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:44.907079: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.012415: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.043271: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:45.062036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.147681: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.175730: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.190653: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:45.321469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.341044: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.362915: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.476330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.504470: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.522795: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:45.604528: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.630358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.652212: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.780041: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:45.803709: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:45.822469: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:45.943339: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:45.960209: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:45.976620: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 24ms/step

2024-02-26 13:55:46.093053: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.121343: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.150290: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.283552: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.290245: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
1/2 [=====>...] - ETA: 0s

2024-02-26 13:55:46.297644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.371358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.401069: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.416505: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:46.506634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.536204: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.554374: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.639038: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:46.663310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.684632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:46.773339: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.794989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.812607: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.899132: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.920861: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:46.936255: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:47.039844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.061371: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.089138: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.178347: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.209174: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.236821: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:47.334704: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.355249: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.382521: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.487605: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.515303: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.534941: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:55:47.636360: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.664517: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.679873: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.771192: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.794801: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.817839: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:47.897980: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.919842: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:47.935205: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.014438: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.040390: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.055566: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:48.159816: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.177608: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.188425: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.266452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.285781: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.305141: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 25ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:48.415145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.437301: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.452676: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.548136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.571411: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:48.589441: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:48.691028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.718452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.740315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.829901: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.845436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.865428: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:48.950698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:48.975872: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:48.992296: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:49.095866: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:49.117834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:49.145518: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 8ms/step

2024-02-26 13:55:49.209659: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:49.237539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:49.259541: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:49.326859: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:49.361451: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:49.379837: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:49.540414: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.557571: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.579661: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.682103: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.710310: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.728281: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:49.864846: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.887248: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.910540: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:49.998436: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.023032: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.050863: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:50.151237: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.169886: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.183793: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.250132: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.268680: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.287014: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:50.371370: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.399407: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.427071: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.502529: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.518822: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:50.536384: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:55:50.657546: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:50.685787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:50.715142: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:50.806580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:50.825124: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:50.843353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:50.965220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:50.991205: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.013228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.111186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.139849: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.158557: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 12ms/step

2024-02-26 13:55:51.298733: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.327203: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.365393: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.465436: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.485833: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 21ms/step

2024-02-26 13:55:51.507751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:51.616811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```


error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:51.641591: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:51.663505: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:51.773610: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:51.802569: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:51.820586: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:51.930935: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:51.950756: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:51.980990: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:52.068646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.099017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.126897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:52.219736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.239184: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.264475: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.355874: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.383632: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.401634: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:55:52.481198: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.503458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.523178: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.628847: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.656644: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.678509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:52.785223: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.810449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:52.828480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:52.932657: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:52.958542: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:52.986273: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:53.071715: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.094324: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.116122: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.228216: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.250400: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.268992: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:53.364360: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.386939: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.416764: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.507500: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.527541: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.549177: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:55:53.635649: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:53.655189: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:53.675898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:53.775873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:53.797889: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:53.826118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:53.945402: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:53.975088: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:53.993462: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.092568: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.115926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.129824: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:54.218885: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:54.240233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:54.258575: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:54.365334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:54.384060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:54.399900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:54.508305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:54.528090: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.544228: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.673039: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.689448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.705765: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:55:54.801056: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.822830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.841063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.946315: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:54.968487: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:54.988472: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:55.082480: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:55.099038: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:55.112765: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:55.209148: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:55.228971: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:55.249587: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:55.364829: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.387296: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.412091: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.504997: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.524643: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.556495: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:55.653324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.669065: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.687539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.781989: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.803972: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.828094: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:55:55.925819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.945021: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:55.960926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.033853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.057224: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.075408: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:55:56.193815: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.214432: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.246151: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.348118: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.371512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.387687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:56.477352: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.504654: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.522912: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:55:56.619936: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.634926: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.651463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:56.737304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.753033: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.771135: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.870704: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.890813: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:55:56.907307: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:56.984193: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.012868: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.040979: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.143559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.173045: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:57.191179: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.303626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.333778: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.353787: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:57.439845: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.455808: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.460727: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.515559: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.536496: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.552232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.627830: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:55:57.651545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:55:57.681524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.767379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.795981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.819739: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:57.882922: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.951365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:57.968036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:58.098324: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:58.114452: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.134400: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.227969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.247593: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.266738: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 8ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:58.402469: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.422497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.443489: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.534170: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.549976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.570916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:58.686342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.715524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.741136: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.851049: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.875002: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:55:58.894580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:58.990519: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.016260: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:59.045063: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2/2 [=====] - 0s 16ms/step

2024-02-26 13:55:59.183440: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:59.200324: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:59.228533: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:59.340565: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:59.363198: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:55:59.376072: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:55:59.460723: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.489043: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.512237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.609276: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.634145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.661507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:55:59.744100: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.772334: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.793774: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.889548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.905146: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:55:59.927477: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:00.039485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.068239: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.097732: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.232098: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:00.253077: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.272213: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.414637: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:00.436014: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:00.459810: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:00.567546: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:00.589818: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:00.608029: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:00.700705: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:00.723140: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:00.743989: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.828855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.851683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.867921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:00.955526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.977728: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:00.995718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.090368: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.112550: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.134490: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:01.214981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.242952: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.268112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.359877: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.378602: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.396230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:01.473678: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.496226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:01.531925: I tensorflow/core/common_runtime/executor.cc:1197]

```


[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:01.652160: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:01.671400: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:01.695470: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:01.819467: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:01.845567: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:01.869255: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:01.966680: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:01.989938: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.011683: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.100270: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.120473: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.142260: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:02.228104: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.234646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.240811: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.314898: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.335605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.354004: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.419360: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:02.447237: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.478608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.573962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.594145: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.621944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:02.715300: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:02.738117: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:02.761026: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:02.832215: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:02.860234: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:02.888208: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:02.988440: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:03.008843: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:03.031604: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:03.130164: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:03.149155: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.176858: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:03.271880: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.280925: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.298984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.413995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.433345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.448752: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 5ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:03.538685: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.565448: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.583798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.653332: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.678323: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.696293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:03.798592: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.826348: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.854105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.932935: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.955986: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:03.978446: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:56:04.084887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.106916: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.122580: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.265798: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.287161: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:04.308660: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.448908: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.465331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.487172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:04.587764: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.609746: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.631534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.714499: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.744751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.764995: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:56:04.848618: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.867364: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.885775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.981921: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:04.991321: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:05.028251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:56:05.116067: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:05.156185: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:05.182233: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.270162: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.298178: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:05.319821: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.404626: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.426542: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.448194: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:05.563234: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.588570: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.604526: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.715267: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.743296: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:05.771251: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.871063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.899227: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:05.927007: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:06.026015: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.053426: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:06.081512: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:06.208974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:06.237792: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:06.260312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:06.359614: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:06.383194: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:06.407538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:06.495815: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:06.515323: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.543168: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.628970: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.649774: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.667908: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:06.770714: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.792508: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.810470: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:06.953512: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:06.981534: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:07.009626: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:07.094551: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:07.122339: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:07.150154: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:07.258480: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:07.287117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:07.311726: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:07.405504: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.433445: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:07.461330: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.553105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.581029: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.596769: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:07.679206: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.695879: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.718022: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.821481: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.843421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:07.865646: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:07.984353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.013299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.043971: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.122037: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.144182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.165955: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 7ms/step
2/2 [=====] - 0s 13ms/step

2024-02-26 13:56:08.279718: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.301513: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.323159: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.456282: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:08.484775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.500549: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.605994: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.633897: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:08.662182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 6ms/step

2024-02-26 13:56:08.746856: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:08.759058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:08.766172: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:08.903371: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:08.922463: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:08.943128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step
2/2 [=====] - 0s 30ms/step

2024-02-26 13:56:09.073451: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:09.107337: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

2024-02-26 13:56:09.127247: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:09.274030: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:09.302255: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:09.330643: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:09.415916: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:09.436624: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:09.464619: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:09.571391: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:09.591962: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:09.611265: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:09.697328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:09.723017: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:09.751117: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 26ms/step

2024-02-26 13:56:09.861974: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:09.881060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:09.897692: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:10.019110: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:10.038002: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:10.066028: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.151394: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.173312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.189186: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 7ms/step

2024-02-26 13:56:10.283000: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.314328: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.342924: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.421055: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.447187: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.475287: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 11ms/step

2024-02-26 13:56:10.567726: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.595936: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.624067: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.731475: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.747800: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 7ms/step

2024-02-26 13:56:10.775668: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:10.865545: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:10.884190: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:10.903819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:11.010476: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:11.048651: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:11.070852: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:11.188838: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:11.210893: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:11.232537: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:11.297065: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.309314: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.330716: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.426944: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:11.448044: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.466703: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.550198: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.578178: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.599810: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:11.688636: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.716912: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.745278: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.785330: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.793524: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.802929: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 8ms/step

2024-02-26 13:56:11.923567: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.948578: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:11.970567: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:12.090105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:12.105498: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:12.134111: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:12.281827: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:12.306883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:12.332918: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:12.452717: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:12.476209: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:12.501107: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:12.607442: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:12.644202: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2024-02-26 13:56:12.667408: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:12.775545: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:12.798764: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:12.814190: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:12.969287: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:12.986100: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.008031: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.138950: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.167598: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:13.181991: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.302395: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.324639: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.330247: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:13.441259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.466668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:13.490539: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:13.608035: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:13.630362: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:13.658077: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:13.744450: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:13.766543: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:13.788052: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:13.853069: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

```

2024-02-26 13:56:13.865611: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.890304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:13.981687: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:14.005960: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:14.031305: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:56:14.129886: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:14.149424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:14.167063: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:14.305351: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2/2 [=====] - 0s 6ms/step

2024-02-26 13:56:14.332318: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.350284: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:14.539040: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.554293: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.572586: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.680750: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.703419: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.721891: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:14.819410: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.841620: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.863411: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:14.986656: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.013458: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:56:15.035976: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.151699: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.168530: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.194018: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 3ms/step

2024-02-26 13:56:15.287631: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.309531: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.338991: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.438159: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.466255: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:56:15.494279: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.590400: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.613824: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:15.662503: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:56:15.793502: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:15.819409: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:15.847424: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:15.952612: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:15.976984: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:15.992367: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:16.090201: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:16.114932: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:16.137619: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.239696: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.264366: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:16.292528: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.431936: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.447763: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.476046: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:56:16.595307: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.618186: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:16.647799: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 21ms/step

2024-02-26 13:56:16.810236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.846566: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.883327: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:16.983744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:17.013311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.031839: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.136723: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.157081: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.173401: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:17.280107: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.303333: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.322137: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.425070: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.451250: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

1/2 [=====>...] - ETA: 0s

2024-02-26 13:56:17.484197: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:17.569177: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.597636: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.618060: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 4ms/step
2/2 [=====] - 0s 4ms/step

2024-02-26 13:56:17.695772: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.711789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.737486: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.821748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.850070: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.886226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 19ms/step
2/2 [=====] - 0s 2ms/step

```

```

2024-02-26 13:56:17.988980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:17.997447: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.021903: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.135427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.140457: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.145062: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 4ms/step
2024-02-26 13:56:18.190814: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.196736: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.201818: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.309025: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.337539: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.365843: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 11ms/step

2024-02-26 13:56:18.452748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.475582: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.494975: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.578058: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.606530: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.628573: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```



```

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 20ms/step

2024-02-26 13:56:18.717544: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.747331: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.767497: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.864232: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.869810: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:18.885312: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:19.040563: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:19.062101: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:19.090188: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.175137: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.194478: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.219858: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:19.316317: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.335209: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.357115: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.455203: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.483156: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.501810: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:19.594787: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.623669: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.629799: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.687820: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.717906: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.733966: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:19.858424: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:19.886869: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:19.906658: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:19.968759: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:19.997086: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.024910: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 14ms/step

2024-02-26 13:56:20.096836: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.124853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.152982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.250013: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.270112: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:20.314201: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.396353: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.429304: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.447944: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.495217: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:20.524036: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.544376: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.630608: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:20.663572: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:20.668769: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 14ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:20.775553: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:20.799473: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:20.815362: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:20.946304: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:20.968493: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:20.987050: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.111123: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

```

2024-02-26 13:56:21.129577: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:21.139753: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:21.229631: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:21.255832: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:21.278801: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:21.358934: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:21.384242: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:21.398263: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 22ms/step
2/2 [=====] - 0s 16ms/step

2024-02-26 13:56:21.542711: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.548468: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.586963: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.682575: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.708093: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.732662: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step

2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:21.845313: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.878064: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.896360: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.958324: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:21.978880: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.001545: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 11ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:22.077017: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.090381: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.113603: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.178564: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.195842: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.213792: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:56:22.309469: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.331780: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.359897: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.472574: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.489016: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.505200: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:22.594778: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.624988: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:22.653226: I tensorflow/core/common_runtime/executor.cc:1197
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:22.748731: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:22.761767: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:22.790655: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step
2/2 [=====] - 0s 17ms/step

2024-02-26 13:56:22.901299: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:22.929560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:22.945259: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.048940: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.063579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.079403: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:56:23.202617: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:23.230689: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:23.247715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:23.321740: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:23.349819: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:23.371579: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 6ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:23.457777: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:23.482451: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:56:23.510379: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.610834: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.631854: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.651909: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:23.730560: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.739485: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.748089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.803715: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:23.823820: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:56:23.843524: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:23.952345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:23.981074: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.017116: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.091812: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.128102: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.144230: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step
2/2 [=====] - 0s 15ms/step

2024-02-26 13:56:24.250998: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.280789: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

```

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.309442: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.433861: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:24.460532: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.486458: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.592891: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.615236: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.638729: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 19ms/step

2024-02-26 13:56:24.750480: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.770910: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.807560: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.926915: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 28ms/step

2024-02-26 13:56:24.955010: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:24.980204: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:25.090974: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:25.119443: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:25.144976: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:25.247459: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.269844: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.295668: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.380212: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.408125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.436311: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:25.543085: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.571235: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.599481: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.711766: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:25.732345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:25.748841: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:56:25.863949: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:56:25.880816: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:56:25.896698: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:25.995173: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.031365: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.063129: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.163999: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.190879: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:26.198775: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.315079: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.333568: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.353412: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 26ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:26.500909: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.531958: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.560088: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2024-02-26 13:56:26.680853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2024-02-26 13:56:26.706917: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.739089: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.874562: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2024-02-26 13:56:26.916863: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:26.934892: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.061285: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.089458: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.117358: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:27.197226: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.217054: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.221245: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.298030: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.328083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.347321: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 13ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:27.465449: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:27.487858: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:56:27.507536: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:27.611748: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:27.631455: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:27.649105: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:27.747855: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:27.775273: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:27.794507: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:27.895775: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:27.910873: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

```

```

2024-02-26 13:56:27.933421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 24ms/step

2024-02-26 13:56:28.017532: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.053427: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.081018: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.183538: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.215201: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:28.236982: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.317684: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.340742: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value

```

```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:28.363433: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:28.453688: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:28.481980: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:28.503853: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:28.566548: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:28.578978: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:28.591083: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:28.699388: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

```


2024-02-26 13:56:28.720845: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.733313: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.831953: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.853547: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.868931: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 4ms/step

2024-02-26 13:56:28.962941: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:28.985902: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.001672: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.081826: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.107313: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.142990: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 1ms/step

2/2 [=====] - 0s 14ms/step

2024-02-26 13:56:29.229976: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.251119: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.278403: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.377342: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.392865: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.411970: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 1ms/step

2024-02-26 13:56:29.546220: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.552074: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.575939: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.673709: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.701776: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.729684: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:29.815143: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.846313: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.852017: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.970573: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an

error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:29.995863: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.007913: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 15ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:30.129495: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.157561: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.177018: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.266789: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.287226: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.317578: I tensorflow/core/common_runtime/executor.cc:1197 [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:30.398870: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.422122: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.451773: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.564441: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.587498: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 10ms/step

2024-02-26 13:56:30.615866: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.700162: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.720387: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:30.743595: I tensorflow/core/common_runtime/executor.cc:1197] [/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

[[{{node Placeholder/_2}}]]
2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:30.841945: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:30.861128: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:30.880048: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:30.957274: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:30.976712: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:30.996099: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 38ms/step
2/2 [=====] - 0s 9ms/step

2024-02-26 13:56:31.093545: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.109139: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.131026: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.220883: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.237509: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.265674: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 12ms/step
2/2 [=====] - 0s 3ms/step

2024-02-26 13:56:31.365887: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.394125: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.416981: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.508421: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.525620: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
[[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.553464: I tensorflow/core/common_runtime/executor.cc:1197]

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 3ms/step

2/2 [=====] - 0s 12ms/step

2024-02-26 13:56:31.643335: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:31.671346: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:31.700880: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:31.798109: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:31.826914: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step

2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:31.848835: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:31.947796: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

[[{{node Placeholder/_2}}]]

2024-02-26 13:56:31.975809: I tensorflow/core/common_runtime/executor.cc:1197]

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an error and you can ignore this message): INVALID_ARGUMENT: You must feed a value


```

for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:31.991666: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 25ms/step

2024-02-26 13:56:32.051969: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.057616: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.062962: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.134359: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.162988: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.191900: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 18ms/step
2/2 [=====] - 0s 27ms/step

2024-02-26 13:56:32.355288: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
  [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.384500: I tensorflow/core/common_runtime/executor.cc:1197]

```

```

[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.413605: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.525356: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.553349: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]

2/2 [=====] - 0s 2ms/step
2/2 [=====] - 0s 2ms/step

2024-02-26 13:56:32.575357: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.655182: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.671144: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.678236: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.740751: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
    [[{{node Placeholder/_2}}]]
2024-02-26 13:56:32.762924: I tensorflow/core/common_runtime/executor.cc:1197]

```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 2ms/step
```

```
2024-02-26 13:56:32.780267: I tensorflow/core/common_runtime/executor.cc:1197]
```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:56:32.834889: I tensorflow/core/common_runtime/executor.cc:1197]
```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:56:32.853195: I tensorflow/core/common_runtime/executor.cc:1197]
```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2024-02-26 13:56:32.863995: I tensorflow/core/common_runtime/executor.cc:1197]
```

```
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]
```

```
[[{{node Placeholder/_2}}]]
```

```
2/2 [=====] - 0s 2ms/step
```

```
2/2 [=====] - 0s 10ms/step
```

	a	b	c	d
0	0.314705	0.224256	0.594759	0.508005
1	0.338611	0.269141	0.593720	0.498081
2	0.326729	0.241922	0.587457	0.487871
3	0.315380	0.229031	0.577700	0.489407
4	0.298809	0.235989	0.544647	0.461229
5	0.308292	0.223535	0.570119	0.487742
6	0.288240	0.231943	0.528671	0.443673
7	0.289274	0.219383	0.538677	0.457612
8	0.327768	0.249428	0.588801	0.494473
9	0.292381	0.239379	0.536959	0.452319
10	0.316777	0.244524	0.578290	0.483724
11	0.304881	0.247561	0.550022	0.469058
12	0.293716	0.239754	0.543248	0.458472
13	0.314639	0.242820	0.570938	0.475285
14	0.329585	0.250684	0.591847	0.502478
15	0.306345	0.245568	0.549143	0.465736
16	0.338322	0.279582	0.595736	0.498870
17	0.285073	0.242834	0.518664	0.433179

```

18 0.306118 0.246615 0.552615 0.467372
19 0.325028 0.247502 0.592671 0.496582
20 0.297105 0.247853 0.534097 0.452089
21 0.287896 0.225287 0.541579 0.461323
22 0.310507 0.245936 0.570204 0.480076
23 0.307870 0.220038 0.574505 0.489880
24 0.308885 0.245076 0.555750 0.464914
25 0.293059 0.229082 0.550081 0.468379
26 0.292801 0.208311 0.554747 0.473977
27 0.299240 0.251672 0.527868 0.444200
28 0.305177 0.258222 0.535549 0.459029
29 0.326516 0.229370 0.617706 0.520179
30 0.363583 0.270869 0.620010 0.531730
31 0.305731 0.251532 0.546516 0.459858
32 0.302762 0.252417 0.531475 0.458280
33 0.296969 0.237061 0.526758 0.438497
34 0.339559 0.241948 0.622996 0.527534
35 0.337741 0.259228 0.580108 0.483774
36 0.324408 0.238675 0.599468 0.510208
37 0.303095 0.243496 0.547083 0.458616
38 0.339199 0.274968 0.572511 0.473265
39 0.309112 0.239891 0.560629 0.476565

```

```

2024-02-26 13:56:33.000218: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```
[[{{node Placeholder/_2}}]]
```

```

2024-02-26 13:56:33.028345: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```
[[{{node Placeholder/_2}}]]
```

```

2024-02-26 13:56:33.041744: I tensorflow/core/common_runtime/executor.cc:1197]
[/device:CPU:0] (DEBUG INFO) Executor start aborting (this does not indicate an
error and you can ignore this message): INVALID_ARGUMENT: You must feed a value
for placeholder tensor 'Placeholder/_2' with dtype float and shape [64,1]

```

```
[[{{node Placeholder/_2}}]]
```

```
[2]: # Use the trained generator to get synthetic data
```

```
[3]: # Generate 50 instances for each class
```

```

synthetic_data_class_0 = generate_data(generator, 0, 50)
synthetic_data_class_1 = generate_data(generator, 1, 50)
synthetic_data_class_2 = generate_data(generator, 2, 50)

```

```

# Combine all synthetic data into a single DataFrame and apply inverse_
↳ transform to bring it back to original scale

```

```

synthetic_data = pd.concat([synthetic_data_class_0, synthetic_data_class_1,
    ↪synthetic_data_class_2], ignore_index=True)
synthetic_data = pd.DataFrame(scaler.inverse_transform(synthetic_data),
    ↪columns=['sepal length (cm)', 'sepal width (cm)', 'petal length (cm)',
    ↪'petal width (cm)'])

# Create corresponding class labels
synthetic_labels = [0]*50 + [1]*50 + [2]*50

# Add labels to the synthetic data
synthetic_data['class'] = synthetic_labels

# Save synthetic data as a CSV file
synthetic_data.to_csv('/home/nmit/Downloads/iris.csv', index=False)

```

```

2/2 [=====] - 0s 9ms/step
2/2 [=====] - 0s 10ms/step
2/2 [=====] - 0s 9ms/step

```

[4]: *# Let's visualize how this synthetic data is distributed*

```

[5]: import pandas as pd
import matplotlib.pyplot as plt
from sklearn import datasets

# Load the Iris dataset from sklearn
iris = datasets.load_iris()
real_data = pd.DataFrame(iris.data, columns=iris.feature_names)
real_data['class'] = iris.target

# Load the synthetic dataset
synthetic_data = pd.read_csv('/home/nmit/Downloads/iris.csv')

# For each feature, create a histogram for the real and synthetic data
for feature in ['sepal length (cm)', 'sepal width (cm)', 'petal length (cm)',
    ↪'petal width (cm)']:
    plt.figure(figsize=(10, 5))

    plt.subplot(1, 2, 1)
    plt.hist(real_data[feature], bins=20, alpha=0.5, color='g', label='Real')
    plt.title(f"Real Data: {feature}")
    plt.legend()

    plt.subplot(1, 2, 2)
    plt.hist(synthetic_data[feature], bins=20, alpha=0.5, color='b',
    ↪label='Synthetic')
    plt.title(f"Synthetic Data: {feature}")

```

```

plt.legend()

plt.show()

# Print the summary statistics for the real and synthetic data
print("Summary statistics for the real data:")
print(real_data.describe())
print("\nSummary statistics for the synthetic data:")
print(synthetic_data.describe())


# For each pair of features, create a scatter plot for the real and synthetic
↳data
features = ['sepal length (cm)', 'sepal width (cm)', 'petal length (cm)',
↳'petal width (cm)']
for i in range(len(features)):
    for j in range(i+1, len(features)):
        plt.figure(figsize=(10, 5))





        plt.subplot(1, 2, 1)
        plt.scatter(real_data[features[i]], real_data[features[j]], alpha=0.5,
↳color='g')
        plt.title(f"Real Data: {features[i]} vs {features[j]}")


        plt.subplot(1, 2, 2)
        plt.scatter(synthetic_data[features[i]], synthetic_data[features[j]],
↳alpha=0.5, color='b')
        plt.title(f"Synthetic Data: {features[i]} vs {features[j]}")

plt.show()

```

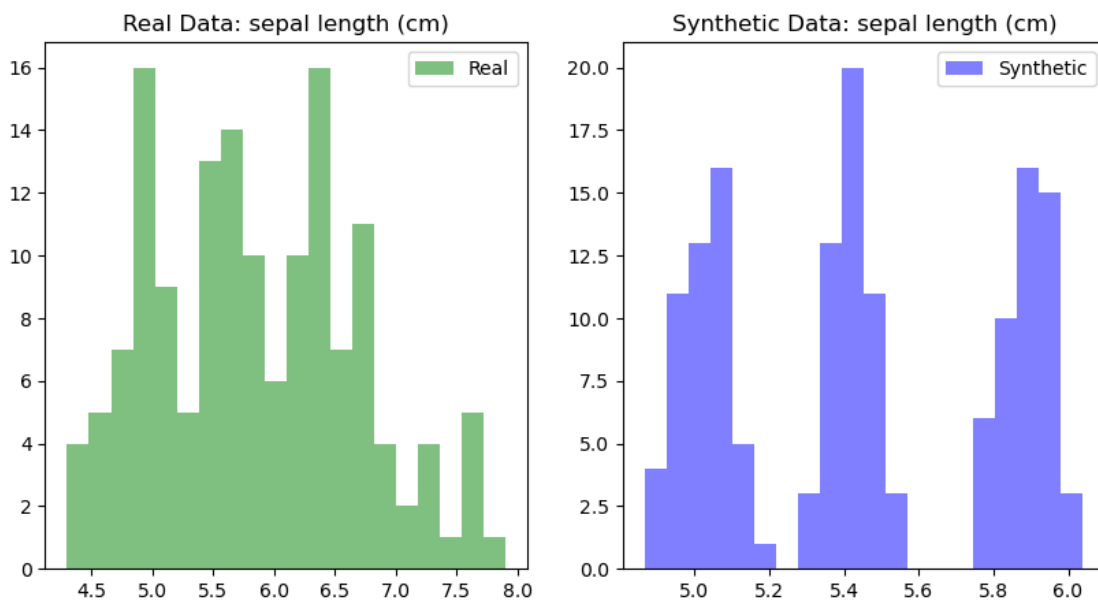

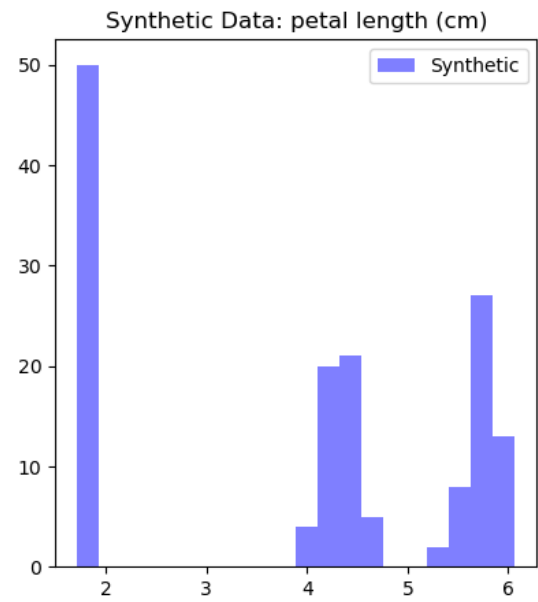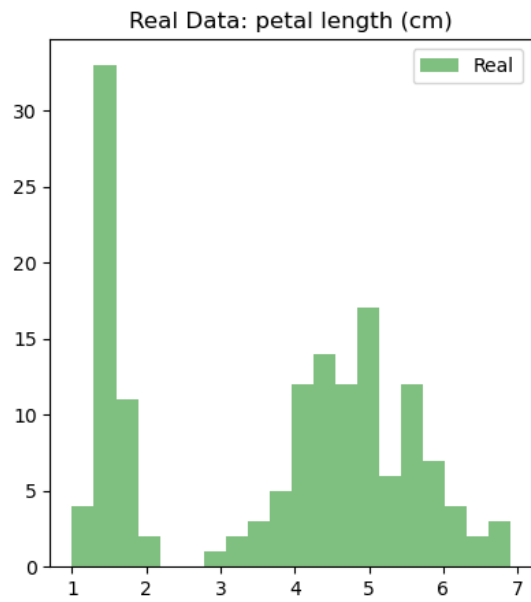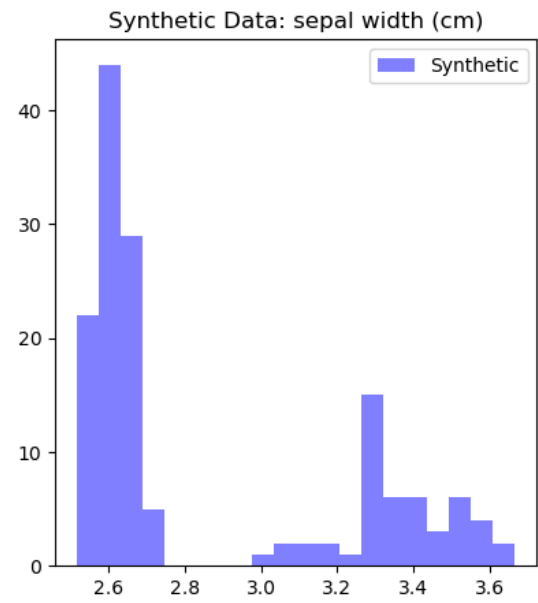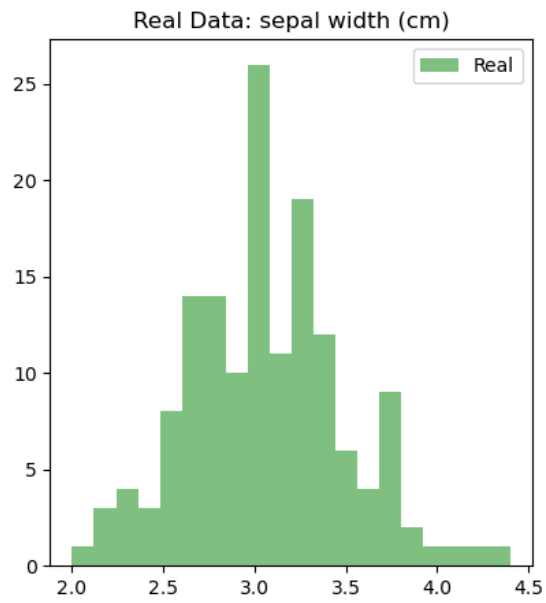

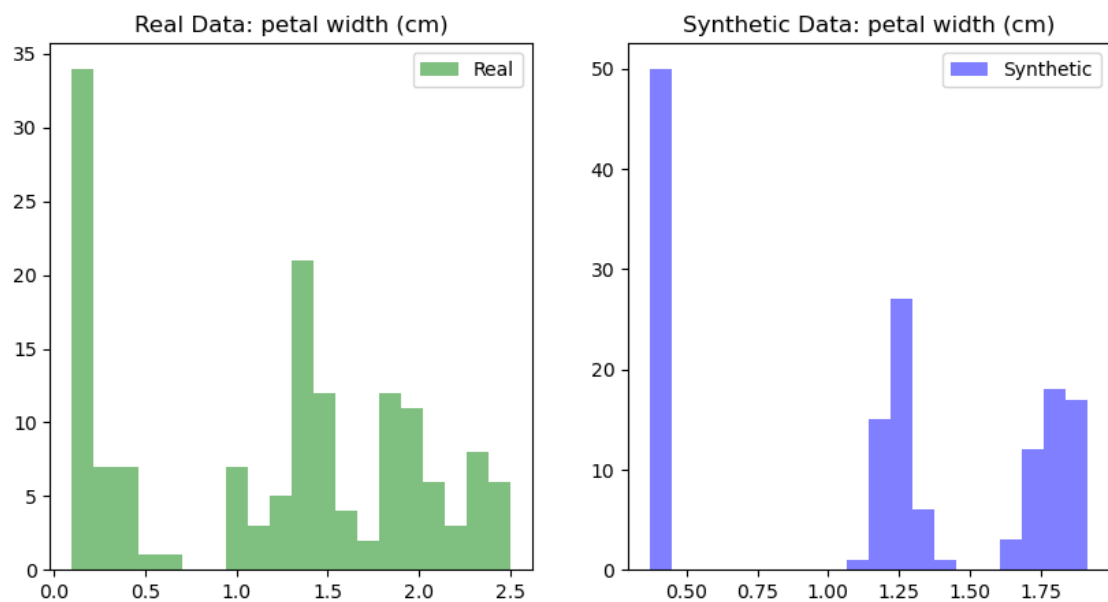

Summary statistics for the real data:

	sepal length (cm)	sepal width (cm)	petal length (cm) \
count	150.000000	150.000000	150.000000
mean	5.843333	3.057333	3.758000
std	0.828066	0.435866	1.765298
min	4.300000	2.000000	1.000000
25%	5.100000	2.800000	1.600000
50%	5.800000	3.000000	4.350000
75%	6.400000	3.300000	5.100000
max	7.900000	4.400000	6.900000

	petal width (cm)	class
count	150.000000	150.000000
mean	1.199333	1.000000
std	0.762238	0.819232
min	0.100000	0.000000
25%	0.300000	0.000000
50%	1.300000	1.000000
75%	1.800000	2.000000
max	2.500000	2.000000


Summary statistics for the synthetic data:

	sepal length (cm)	sepal width (cm)	petal length (cm) \
count	150.000000	150.000000	150.000000
mean	5.447881	2.862675	3.957464
std	0.364279	0.367825	1.645201
min	4.867506	2.517391	1.712114



25%	5.070535	2.588816	1.817874
50%	5.420049	2.644844	4.327870
75%	5.853360	3.290651	5.661203
max	6.040025	3.667536	6.069119

	petal width (cm)	class
count	150.000000	150.000000
mean	1.148706	1.000000
std	0.579742	0.819232
min	0.372152	0.000000
25%	0.409137	0.000000
50%	1.238630	1.000000
75%	1.753566	2.000000
max	1.917629	2.000000



Real Data: sepal length (cm) vs sepal width (cm) Synthetic Data: sepal length (cm) vs sepal width (cm)

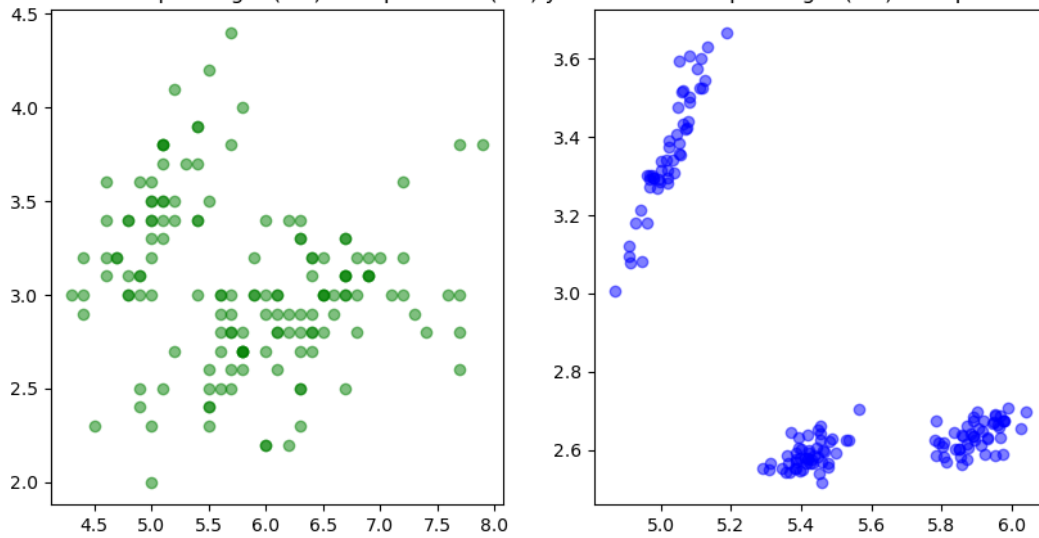



Real Data: sepal length (cm) vs petal length (cm) Synthetic Data: sepal length (cm) vs petal length (cm)

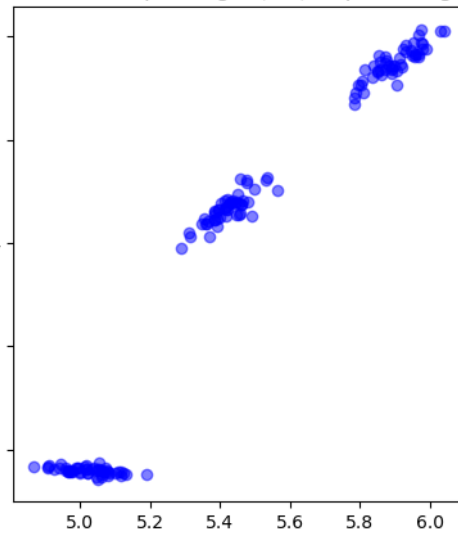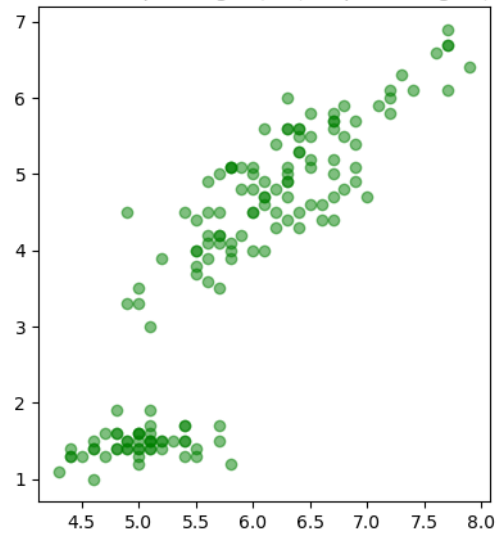



Real Data: sepal length (cm) vs petal width (cm) Synthetic Data: sepal length (cm) vs petal width (cm)

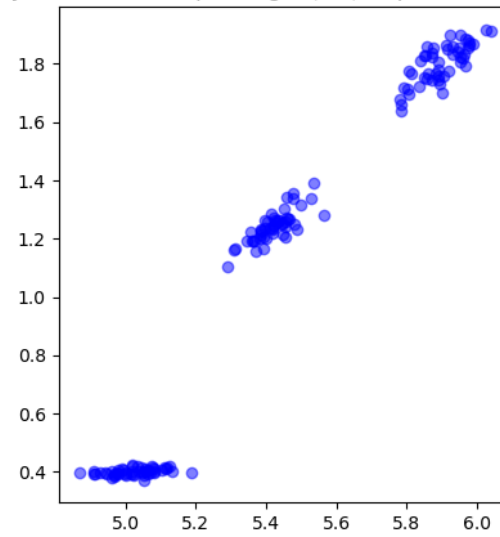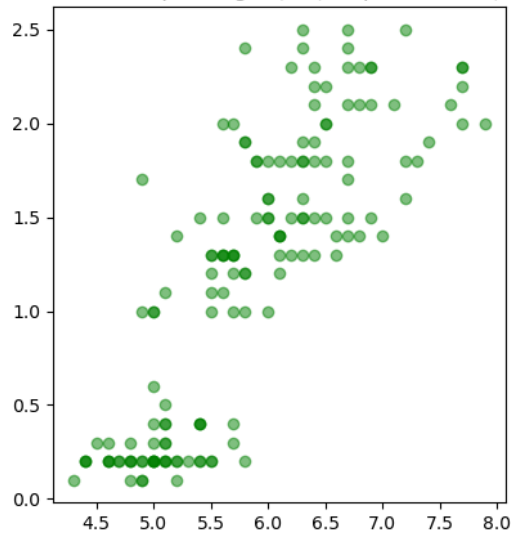


Real Data: sepal width (cm) vs petal length (cm) Synthetic Data: sepal width (cm) vs petal length (cm)

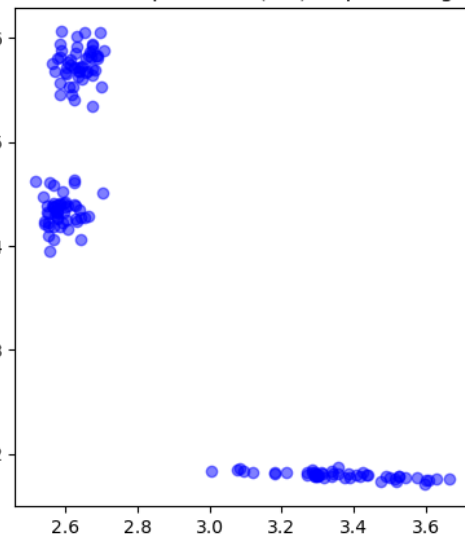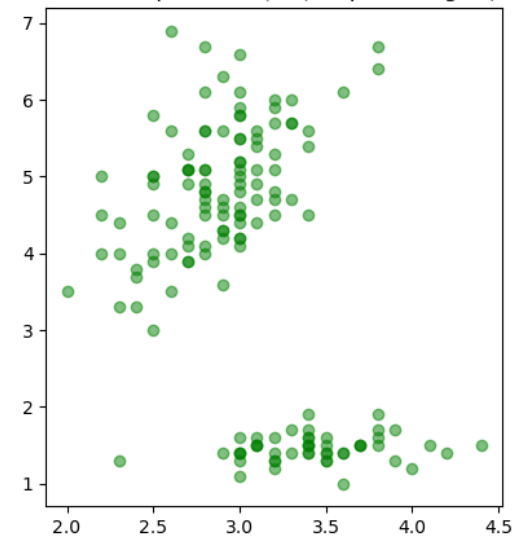

Real Data: sepal width (cm) vs petal width (cm) Synthetic Data: sepal width (cm) vs petal width (cm)

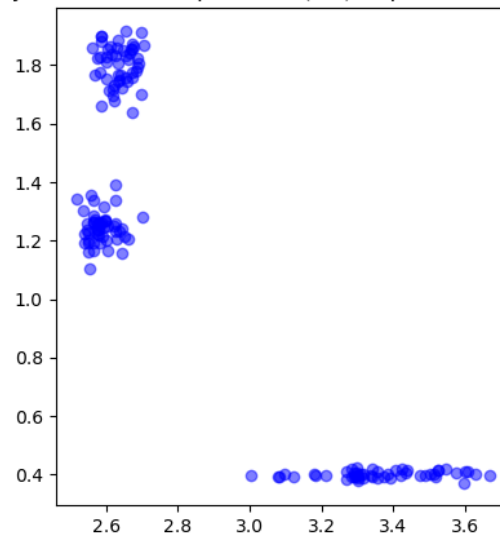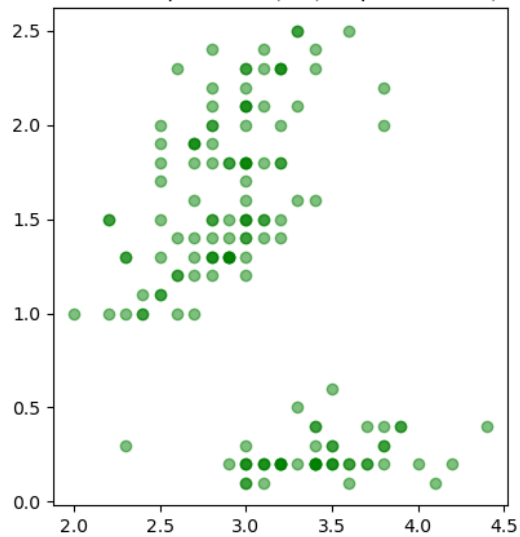

Real Data: petal length (cm) vs petal width (cm) Synthetic Data: petal length (cm) vs petal width (cm)

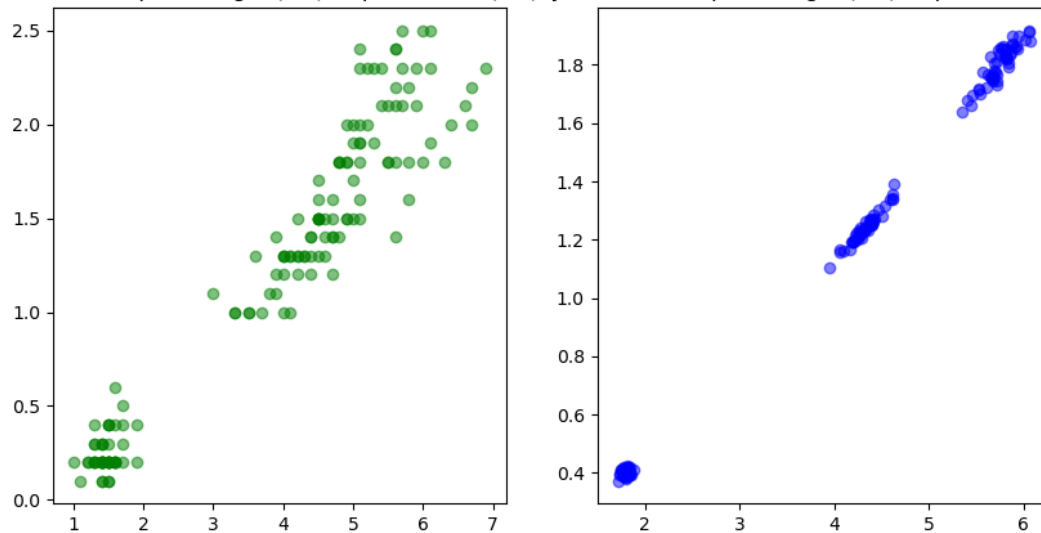

```
[6]: # Training ML models on synthetic data
```

```
[7]: from sklearn.model_selection import train_test_split
from sklearn.preprocessing import StandardScaler
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import classification_report, confusion_matrix

# Load the synthetic dataset
synthetic_data = pd.read_csv('/home/nmit/Downloads/iris.csv')

# Separate the features and the target variable
X = synthetic_data.drop(columns=['class'])
y = synthetic_data['class']

# Split the dataset into training and testing datasets
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2,
    ↪random_state=42)

# Standardize the feature values
scaler = StandardScaler()
X_train = scaler.fit_transform(X_train)
X_test = scaler.transform(X_test)

# Train a K-Nearest Neighbors model
knn = KNeighborsClassifier(n_neighbors=3)
knn.fit(X_train, y_train)

# Make predictions on the test dataset
```

```

y_pred = knn.predict(X_test)

# Evaluate the model
print("Confusion Matrix:\n", confusion_matrix(y_test, y_pred))
print("\nClassification Report:\n", classification_report(y_test, y_pred))

```

Confusion Matrix:

```

[[10  0  0]
 [ 0  9  0]
 [ 0  0 11]]

```

Classification Report:

	precision	recall	f1-score	support
0	1.00	1.00	1.00	10
1	1.00	1.00	1.00	9
2	1.00	1.00	1.00	11
accuracy			1.00	30
macro avg	1.00	1.00	1.00	30
weighted avg	1.00	1.00	1.00	30

```
[8]: # Use the synthetic model on real data
```

```

[9]: from sklearn.metrics import accuracy_score

# Load the real Iris data from sklearn
iris = datasets.load_iris()
real_data = pd.DataFrame(iris.data, columns=iris.feature_names)
real_labels = iris.target

# Standardize the real data
real_data = scaler.transform(real_data)

# Use the trained KNN model to make predictions on the real data
real_pred = knn.predict(real_data)

# Calculate the accuracy of the model on the real data
accuracy = accuracy_score(real_labels, real_pred)
print("Accuracy of the model on the real data: ", accuracy)

```

Accuracy of the model on the real data: 0.8266666666666667

```

[10]: # we can train another KNN model with real data and test both models with just
      ↪ the test split of the real dataset

```

```
[11]: # Split the real data into training and testing datasets
X_train_real, X_test_real, y_train_real, y_test_real = \
    train_test_split(real_data, real_labels, test_size=0.2, random_state=42)

# Standardize the feature values
scaler_real = StandardScaler()
X_train_real = scaler_real.fit_transform(X_train_real)
X_test_real = scaler_real.transform(X_test_real)

# Train a K-Nearest Neighbors model on the real data
knn_real = KNeighborsClassifier(n_neighbors=3)
knn_real.fit(X_train_real, y_train_real)

# Make predictions on the test dataset
y_pred_real = knn_real.predict(X_test_real)

# Evaluate the model
accuracy_real = accuracy_score(y_test_real, y_pred_real)
print("Accuracy of the model trained on real data: ", accuracy_real)
```

Accuracy of the model trained on real data: 1.0

```
[12]: # compare side-by-side with the synthetic model, evaluating the same
      X_test_real.
```

```
[13]: # Make predictions on the real test data with the model trained on synthetic
      data
y_pred_synthetic_model = knn.predict(X_test_real)

# Evaluate the model trained on synthetic data
accuracy_synthetic_model = accuracy_score(y_test_real, y_pred_synthetic_model)
print("Accuracy of the model trained on synthetic data: ",
      accuracy_synthetic_model)

# Make predictions on the real test data with the model trained on real data
y_pred_real_model = knn_real.predict(X_test_real)

# Evaluate the model trained on real data
accuracy_real_model = accuracy_score(y_test_real, y_pred_real_model)
print("Accuracy of the model trained on real data: ", accuracy_real_model)
```

Accuracy of the model trained on synthetic data: 0.9333333333333333
 Accuracy of the model trained on real data: 1.0

```
[ ]:
```