

HATEX 3

The User's Guide, version 1.3.1.0 (using H_AT_EX 3.13.0.0)

<https://github.com/Daniel-Diaz/HaTeX>

Main author: Daniel Díaz (dhelta.diaz@gmail.com)

Date of creation: May 16, 2014.

Contents

1	Preface	1
1.1	Introduction	1
1.2	What is HaTeX?	1
2	Basics	2
2.1	The Monoid class	2
2.2	LaTeX blocks	2
2.3	Creating blocks	3
2.3.1	From strings	3
2.3.2	More blocks	4
2.4	Putting blocks together	4
2.5	Rendering	5
2.6	Try yourself	6
3	LaTeX blocks and the Writer monad	7
3.1	The Writer Monad	7
3.2	The LaTeX Monad	9
3.3	Composing monads	10
4	The LaTeXC class	12
5	Packages	13
5.1	Inputenc	13
5.2	Graphicx	13

6	Epilogue	14
6.1	Notes about this guide	14
6.2	Notes from the author	14

1 Preface

1.1 Introduction

If you are here to learn more about HAT_EX, or are just curious, you are in the right place. First of all, note that this guide is aimed at those who already know the basics of both Haskell and L_AT_EX. If you don't, first try to learn a bit of each (both are quite useful). To learn Haskell, start with some tutorials and suggestions at the excellent Haskell website [<http://haskell.org>]. To learn L_AT_EX, start with *The not so short introduction to L_AT_EX* [<http://tobi.oetiker.ch/lshort/lshort.pdf>].

The HAT_EX library aspires to be the tool with which Haskellers want to construct their L_AT_EX documents while working within their beloved language. HAT_EX tries to be as comprehensive and well constructed as possible. Do you still think that something could be better? Is something lacking, perhaps? Then go to the HAT_EX mailing list [<http://projects.haskell.org/cgi-bin/mailman/listinfo/hatex>] and complain without mercy! Or, if you are a GitHub user, create an issue [<https://github.com/Daniel-Diaz/HaTeX/issues>] or, to be awesome, create a patch and send a pull request. This is one of the great things about open source projects!

1.2 What is HaTeX?

Before explaining *how* HAT_EX works, it is convenient to state *what* HAT_EX actually is.

HAT_EX is a Haskell library that provides functions to create, manipulate and parse L_AT_EX code.

People often say that HAT_EX is a *L_AT_EX DSL*, or Domain Specific Language. With it you can enjoy all the many advantages of Haskell while creating L_AT_EX documents. A common use is the automatic creation of such documents, perhaps from a Haskell data source. A more exotic one is to render chessboard situations. Possibilities are limited only by the imagination. The goal is this: if you can do it with L_AT_EX, you can do it with HAT_EX, while taking advantage of all that Haskell offers.

2 Basics

Through this section you will learn the basics of HAT_EX. Essentially, *how* it works.

2.1 The Monoid class

If you are already familiar with the `Monoid` class, jump to the next point. The `Monoid` class is something that you must get used to in Haskell. But don't worry, it is quite simple (in spite of the similarity in the name with the `Monad` class). A *monoid* in Mathematics is an algebraic structure consisting of a set of objects with an operation between them, being this operation *associative* and with a *neutral element*. Phew! But what is the meaning of this? By *associative* we mean that, if you have three elements a , b and c , then $a * (b * c) = (a * b) * c$. A *neutral element* is the one that does not worth to operate with, because it does nothing! To say, e is a *neutral element* if $e * a = a * e = a$, given any object a . As an example, you may take the *real numbers* as objects and the ordinary multiplication as operation.

Now that you know the math basics behind the `Monoid` class, let's see its definition:

```
class Monoid m where
  mempty :: m
  mappend :: m -> m -> m
  mconcat :: [m] -> m
```

See that `mappend` corresponds to the monoid operation and `mempty` to its neutral element. The names of the methods may seem insuitable, but they correspond to an example of monoid: the lists with the appending (`++`) operation. Who is the neutral element here? The empty list:

```
xs ++ [] = [] ++ xs = xs
```

This class plays a significant role in HAT_EX. Keep reading.

2.2 LaTeX blocks

Suppose we have a well-formed¹ piece of L_AT_EX code, call it a . Now, let `LaTeX` be a Haskell type in which each element represents a well-formed piece of L_AT_EX code. Then, a can be seen as a Haskell expression `a` of type `LaTeX`. We can say that `a` is a **LaTeX block**. What happens if we append, by juxtaposition, two `LaTeX` blocks? As both are well-formed, so is the result. Thus, two blocks appended form another block. This way,

¹ With *well-formed* we mean that all braces, environments, math expressions, ... are closed.

we can define an operation over the **LaTeX** blocks. If we consider that a totally empty code is a well-formed piece of **L_AT_EX** code, we can speak about the empty block. And, as the reader may notice, these blocks with its appending form a monoid. Namely, **LaTeX** can be done an instance of the **Monoid** class.

Of course, our mission using H_AT_EX is to create a **LaTeX** block that fits our purpose. The way to achieve this is to create a multitude of **LaTeX** blocks and, then, use the **Monoid** operation to collapse them all in a single block.

2.3 Creating blocks

We have now a universe of blocks forming a monoid. What we need now is a way to create these blocks. As we said, a block is the representation of a well-formed piece of **L_AT_EX** code. Let **a** be the block of the **L_AT_EX** expression `\delta{}2`. Since this is a constant expression, it has a constant value in Haskell, named **delta**. Calling this value will generate the desired block.

Other **L_AT_EX** expressions depend on a given argument. For example `\linespread{x}`, where **x** is a number. How we deal with this? As you expect, with functions. We can create blocks that depend on values with functions that take these values as arguments, where these arguments can be blocks as well. For instance, we have the function **linespread** with type:

```
linespread :: Float -> LaTeX
```

As you may know, a title in **L_AT_EX** can contain itself **L_AT_EX** code. So the type for the Haskell function **title** is:

```
title :: LaTeX -> LaTeX
```

And this is, essentially, the way to work with H_AT_EX: **to create blocks and combine them**. Once you have your final block ready, you will be able to create its corresponding **L_AT_EX** code (we will see how later). Note that for every block there is a **L_AT_EX** code, but not for every code there is a block, because a malformed (in the sense of the negation of our well-formed concept) code has **not** a block in correspondence. This fact has a practical consequence: **we cannot create malformed **L_AT_EX** code**. *And that's a good deal!*

2.3.1 From strings

Inserting text in a **L_AT_EX** document is a constant task. You can create a block with text given an arbitrary **String** with the **fromString** function, method of the **IsString** class:

² Please, note that the **LaTeX** block is **not** the same that the **L_AT_EX** expression. The former is a Haskell value, not the **L_AT_EX** code itself.

```
class IsString a where
  fromString :: String -> a
```

Since there is a set of characters reserved to create commands or another constructions, HAT_EX takes care and avoids them replacing each reserved character with a command which output looks like the original character. For example, the backslash `\` is replaced with the `\backslash{}` command.

The function that avoids reserved characteres is exported with the name `protectString`. Also, there is a variant for `Text` values called `protectText`.

The use of the `IsString` class is because the *Overloaded Strings* extension. This one is similar to the *Overloaded Numbers* Haskell feature, which translates the number `4` to `fromInteger 4`. In a similar way, with `OverloadedStrings` enabled, the string `"foo"` is translated to `fromString "foo"`. If we now apply this to our blocks, the string `"foo"` will be automatically translated to a `latex` block with *foo* as content. Quite handy! We will assume the `OverloadedStrings` extension enabled from now.

2.3.2 More blocks

There is a lot of functions for create blocks. In fact, we can say that this is the main purpose of the library. L^AT_EX has a lot of commands, in order to set font attributes, create tables, insert graphics, include mathematical symbols, etc. So HAT_EX have a function for each command defined in L^AT_EX (to tell the truth, only for a small subset). Please, go to the API documentation to read about particular functions. Build it locally or find it in Hackage: <http://hackage.haskell.org/package/HaTeX>. You will find the class constraint `LaTeXC l` in every entity. `LaTeX` is an instance of this class, so you can assume that `l` is the `LaTeX` datatype without any problem. More about this in section about the `LaTeXC` class.

2.4 Putting blocks together

Once you have the blocks, as we said before, you need to append them. The `mappend` method of the `Monoid` class does this work. If `a` and `b` are two blocks, `mappend a b`, or `a 'mappend' b`, or even `a <> b`³, is the block with `a` and `b` juxtaposed. For long lists of blocks, you can try it with `mconcat` as follows:

```
mconcat [ "I can see a " , textbf "rainbow"
        , " in the blue " , textit "sky" , "." ]
```

³ From **GHC 7.4**, `<>` is defined as a synonym for `mappend`. For previous versions of GHC, HAT_EX exports the synonym.

2.5 Rendering

This is the last step in our L^AT_EX document creation. When we have our final L^AT_EX block `a`, the function `renderFile` can output it into a file, in the form of its correspondent L^AT_EX code.

Say we have the next definition:

```
short =
  documentclass [] article
  <> title "A short message"
  <> author "John Short"
  <> document (maketitle <> "This is all.")
```

Then, after calling `renderFile "short.tex" short`, the following file appears in the current working directory (line breaks added for easier visualization):

```
\documentclass{article}
\title{A short message}
\author{John Short}
\begin{document}
\maketitle{}
This is all
\end{document}
```

Finally, you may use commands like `latex` or `pdflatex` to compile the L^AT_EX output to dvi or pdf.

The function `renderFile` is not only for L^AT_EX values. Let's see its type:

```
renderFile :: Render a => FilePath -> a -> IO ()
```

The `Render` class that appears in the context is defined:

```
class Render a where
  render :: a -> Text
```

So, it is the class of types that can be rendered to a `Text` value. The type `LaTeX` is an instance, but other types, like `Int` or `Float`, so are too. These instances are useful for creating blocks from other values. With the function `rendertext`, any value in the `Render` class can be transformed to a block. First, the value is converted to `Text`, and then to `LaTeX` the same way we did with strings. But, **be careful!** Because `rendertext` does **not** escape reserved characters.

2.6 Try yourself

As always, the best way to learn something well is to try it by yourself. Since to see code examples can give you a great help, HAT_EX comes with several examples where you can see by yourself how to get the work done.

The API reference is also a good point to keep in mind. Descriptions of functions make you know how exactly they works. And, when they are not present, function names with type signatures may be very helpful and descriptive.

3 LaTeX blocks and the Writer monad

3.1 The Writer Monad

Fixed a monoid M , the M -writer monad is just all possible pairs of elements from M and elements from other types. Thus, the Haskell declaration is as follows⁴:

```
data W m a = W m a
```

Note that to get the monad we need to fix the type m (kind of monads is $* \rightarrow *$). To inject an arbitrary value into the monad (the Haskell `return` function) we use the neutral element (`mempty`) of the monoid.

```
inject :: Monoid m => a -> W m a
inject a = W mempty a
```

Think that no other element of m is possible to think: it is the only element we know of it! Like any other monad, $W\ m$ is also a **Functor**. We just apply the function to the value.

```
instance Functor (W m) where
  fmap f (W m a) = W m (f a)
```

Every **Monad** instance can be given by the two monad operations `inject` and `join`. We already defined the `inject` function. The other one deletes one monad type constructor.

```
join :: Monoid m => W m (W m a) -> W m a
join (W m (W m' a)) = W (mappend m m') a
```

In this function we use the other **Monoid** method to combine both values. It is important to note that in both monad operations `inject` and `join` we used `mempty` and `mappend` respectively. In practice, this is because they act equal. Indeed, they are equal if we forget the a value. Now, we are ready to define the **Monad** instance:

```
instance Monoid m => Monad (W m) where
  return = inject
  w >>= f = join (fmap f w)
```

⁴ Some authors write it using tuples, like this: `data W m a = W (a,m)`.

There is nothing to say about this instance. It is and standard definition valid to any monad.

What we have done here is to hide in a monad a monoid with all its operations. We have created a machine that operates monoid values. To insert a value into the machine we need the `tell` function:

```
tell :: m -> W m ()
tell m = W m ()
```

When we execute the machine, it returns to us the result of operate all the values we have put on it.

```
execute :: W m a -> m
execute (W m a) = m
```


Let's see the machine working. For example, the `Int` type with addition forms a `Monoid`.

```
instance Monoid Int where
  mempty = 0
  mappend = (+)

example :: Int
example = execute $ do
  tell 1
  tell 2
  tell 3
  tell 4
```

When we evaluate `example` we get `10`, as expected. Using `mapM_` we can rewrite `example`.

```
example :: Int
example = execute $ mapM_ tell [ 1 .. 4 ]
```

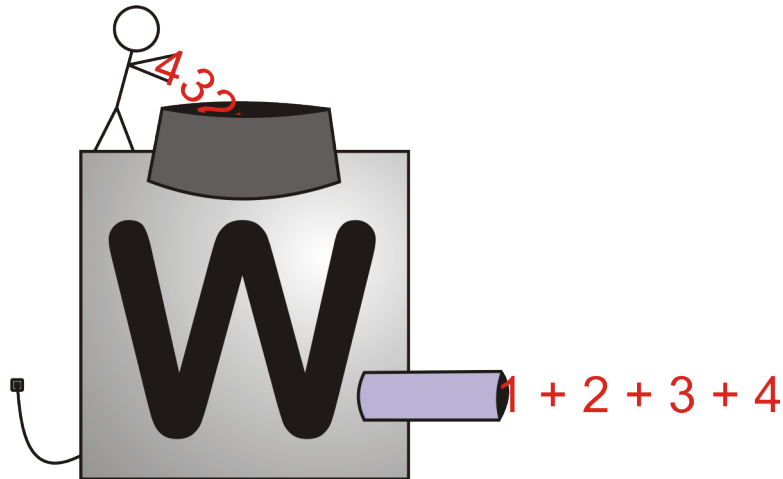

3.2 The LaTeX Monad

Let's go back to the `LaTeX` type. Since `LaTeX` is an instance of `Monoid` we can construct its correspondent `Writer` monad.

```
type LaTeXW = W LaTeX
```

The `W` machine is waiting now for `LaTeX` values.

```
example :: LaTeX
example = execute $ do
  tell $ documentclass [] article
  tell $ author "Monads lover"
  tell $ title "LaTeX and the Writer Monad"
```

We put all that blocks in the machine, and it returns the concatenated block. We saved a lot of `mappend`'s, but we now have a lot of `tell`'s. No problem. Just redefine each function of blocks with `tell` and `execute`.

```
author' :: LaTeXW a -> LaTeXW ()
author' = tell . author . execute
```

If it is done in a similar way with `documentclass` and `title`, every `tell` in `example` disappears.

```
example :: LaTeX
```

```
example = execute $ do
  documentclass' [] article
  author' "Monads lover"
  title' "LaTeX and the Writer Monad"
```

And we can now use the LaTeX machine more comfortably. However, we have all functions duplicated. This is why the LaTeXC class exists. We are going to talk about it later.

3.3 Composing monads

To add flexibility to HAT_EX, the writer monad explained above is defined as a monad transformer, named LaTeXT. The way to use it is the same, there are just a few changes.

The first change is in type signatures. We need to carry an inner monad in every type.

```
foo :: Monad m => LaTeXT m a
```

However, in practice, we can avoid it. Say we going to use an specific monad M.

```
type LaTeXW = LaTeXT M

foo :: LaTeXW a
```

Now, type signatures remain unchanged.

The other change is a new feature: the `lift` function. With it we can do any computation of our inner monad at any time. For example, suppose we want to output some code we have in the file *foo.hs*. Instead of copy all its content, or read and carry it as an argument along the code, you can simply read that file using `lift` wherever you want.

```
type LaTeXIO = LaTeXT IO

readCode :: FilePath -> LaTeXIO ()
readCode fp = lift (readFileTex fp) >>= verbatim . raw

example :: LaTeXIO ()
example = do
  "This is the code I wrote this morning:"
```

```
readCode "foo.hs"  
"It was a funny exercise."
```

Different monads will give different features. In the case we are not interested in any of these features, it is enough to use the Identity monad.

```
type LaTeXW = LaTeXT Identity
```

4 The LaTeXC class

HAT_EX has two different interfaces. One uses blocks as **Monoid** elements and the other as **Monad** actions. If we want to keep both interfaces we have two choices: to duplicate function definitions⁵ or to have a typeclass which unifies both interfaces. Since duplicate definitions is a hard work and can arise problems⁶, we took the second alternative and defined the **LaTeXC** typeclass. Both **LaTeX** and **LaTeX_T m a** are instances of **LaTeXC** (the second one is a little tricky), so every function in HAT_EX is defined using the typeclass. This way, we have both interfaces with a single import, without being worry about maintaining duplicated code. The cost is to have class constraints in type signatures. But these constraints are only required in the package. At the user level, you choose your interface and write type signatures in consequence.

⁵ This was the approach taken in HAT_EX 3 until the version 3.3, where the **LaTeXC** class was included.

⁶ In fact, we had a problem with HAT_EX-meta, the program that automatically generated the duplicated functions. The problem was described in a blog post: <http://deltadiaz.blogspot.com.es/2012/04/hatex-trees-and-problems.html>.

5 Packages

L^AT_EX, in addition to its predefined commands, has a big number of packages that increase its power. H_AT_EX functions for some of these packages are defined in separated modules, with one or more modules per package. This way, you can import only those functions you actually need. Some of these modules are below explained.

5.1 Inputenc

This package is of vital importance if you use non-ASCII characters in your document. For example, if my name is *Ángela*, the *Á* character will not appear correctly in the output. To solve this problem, use the `Inputenc` module.

```
import Text.LaTeX.Base
import Text.LaTeX.Packages.Inputenc

thePreamble :: LaTeX
thePreamble =
    documentclass [] article
    <> usepackage [utf8] inputenc
    <> author "Ángela"
    <> title "Issues with non-ASCII characters"
```

Don't forget to set to UTF-8 encoding your Haskell source too.

5.2 Graphicx

With the `Graphicx` package you can insert images in your document and do some other transformations. In order to insert an image use the `includegraphics` function.

```
includegraphics :: LaTeXC l => [IGOption] -> FilePath -> l
```

The list of `IGOption`'s allows you to set some properties of the image, like width, height, scaling or rotation. See the API documentation for details.

6 Epilogue

6.1 Notes about this guide

This guide is not static. It will certainly be changed with the time. Any reader can participate as a writer since the guide is itself open source (and written in Haskell!). The source repository can be reached at: <https://github.com/Daniel-Diaz/hatex-guide>. Read more detailed instructions in the README file.

If you think there is something unclear, something hard to understand, please, report it.

6.2 Notes from the author

I would like to end this guide saying thanks to all the people that has been interested in HAT_EX somehow, especially to those who contributed to it with patches, opinions or bug reports. **Thanks.**