


## Mini Project using HTML, CSS, Bootstrap and JavaScript

### Event Billing

Design an HTML page with data fields for entering the details of the events and the 'add to cart' option for undertaking bulk orders and removing the events using javascript functions.


**Sample Screenshot :**

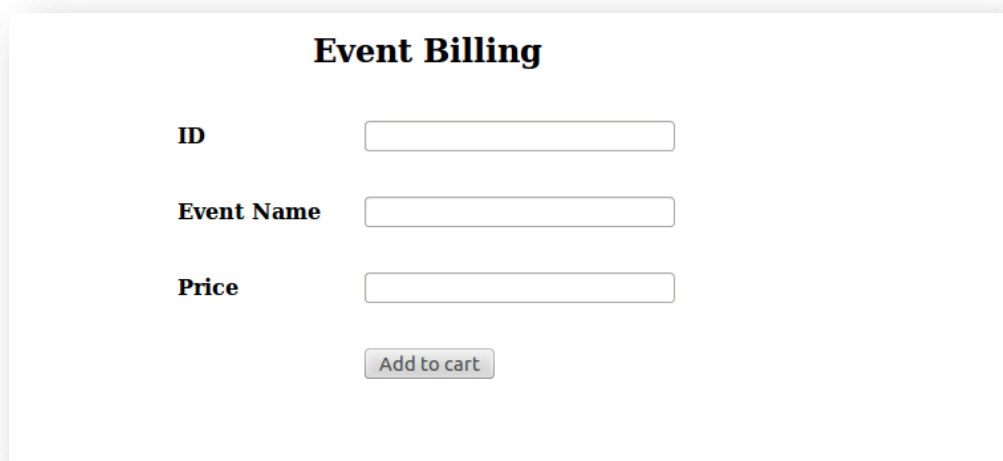

A screenshot of a web form titled "Event Billing". The form contains three input fields: "ID", "Event Name", and "Price". Below these fields is a button labeled "Add to cart".

Event Billing	
ID	<input type="text"/>
Event Name	<input type="text"/>
Price	<input type="text"/>
<input type="button" value="Add to cart"/>	

**Constraints :**

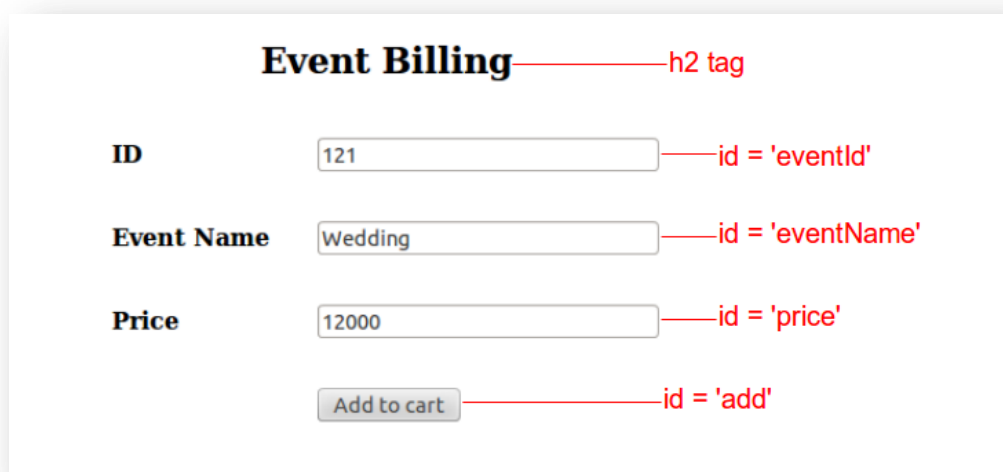

A screenshot of the same "Event Billing" form, but with sample data entered and red annotations. The "ID" field contains "121", the "Event Name" field contains "Wedding", and the "Price" field contains "12000". The "Add to cart" button is also present. Red lines and text point to specific elements: "h2 tag" points to the title, "id = 'eventId'" points to the ID field, "id = 'eventName'" points to the Event Name field, "id = 'price'" points to the Price field, and "id = 'add'" points to the Add to cart button.

Event Billing	
ID	<input type="text" value="121"/>
Event Name	<input type="text" value="Wedding"/>
Price	<input type="text" value="12000"/>
<input type="button" value="Add to cart"/>	

### Event Billing

**ID**

**Event Name**

**Price**

**onclick='addPrice()'**  **id = 'result'**

ID	Product Name	Price	Quantity	Remove from cart
121	Wedding	12000	1	<a href="#">Remove</a>

The total cost is 12000 **id = 'total'**

Dynamically create and assign the id value for remove link (for eg: link0, link1, link2, etc.,)

Dynamically create and assign the id value for the select box in the quantity column (for eg: select0, select1, select2, etc.,)

### Event Billing

**ID**

**Event Name**

**Price**

ID	Product Name	Price	Quantity	Remove from cart
121	Wedding	12000	2	<a href="#">Remove</a>
122	Seminar	10000	3	<a href="#">Remove</a>
123	Birthday Party	5000	1	<a href="#">Remove</a>

The total cost is 59000

## Event Billing

ID

Event Name

Price

Add to cart

ID	Product Name	Price	Quantity	Remove from cart
121	Wedding	12000	<input type="text" value="2"/>	<a href="#">Remove</a>
122	Seminar	10000	<input type="text" value="3"/>	<a href="#">Remove</a>
123	Birthdat Party	5000	<input type="text" value="1"/>	<a href="#">Remove</a>

id = 'link1'

The total cost is 59000

## Event Billing

ID

Event Name

Price

Add to cart

ID	Product Name	Price	Quantity	Remove from cart
121	Wedding	12000	<input type="text" value="2"/>	<a href="#">Remove</a>
123	Birthday Party	5000	<input type="text" value="1"/>	<a href="#">Remove</a>

The total cost is 29000

### Additional Constraints :

Design the HTML page as given in the sample screenshots.

h2 tag - Event Billing

Refer to screenshot for id's specification

The event details should be stored in an array and the total cost must be displayed along with the event details.

Select box must be present to select the quantities and the total cost should be changed accordingly.

Remove link must be present to delete the event and the total cost should be changed accordingly.

The select box and the remove link should be created dynamically while displaying the details.