

QUESTION:An organization is maintaining the data of employee to cadre of employee with following parameters name,id,designation,salary ,promotion status.Apply the constructor overloading to implement it.


Steps for Execution


- 1.Open IntelliJ IDEA / Eclipse / VS Code.
- 2.Create a Java project.
- 3.Create a package named javaprograms.
- 4.Create a class named Employee.
- 5.Enter the given code and save it.
- 6.Run the Employee class.
- 7.Three Employee1 objects are created using three different constructors.
- 8.The details of all three employees are displayed.

Algorithm

- 1.Start.
- 2.Define the Employee1 class with employee details.
- 3.Create a no-argument constructor and assign default values.
- 4.Create a constructor with name and ID.
- 5.Create a constructor with all employee details.
- 6.Create a display() method to print employee details.
- 7.In main(), create three employee objects using the three constructors.
- 8.Call display() for each object.
- 9.Display the employee details.
- 10.Stop.

UML Class Diagram

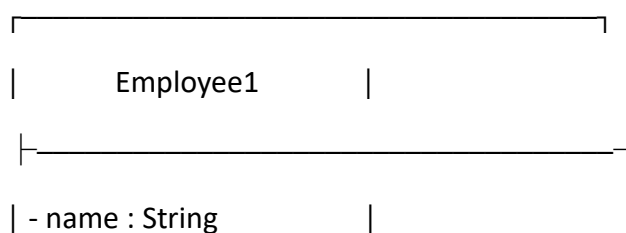

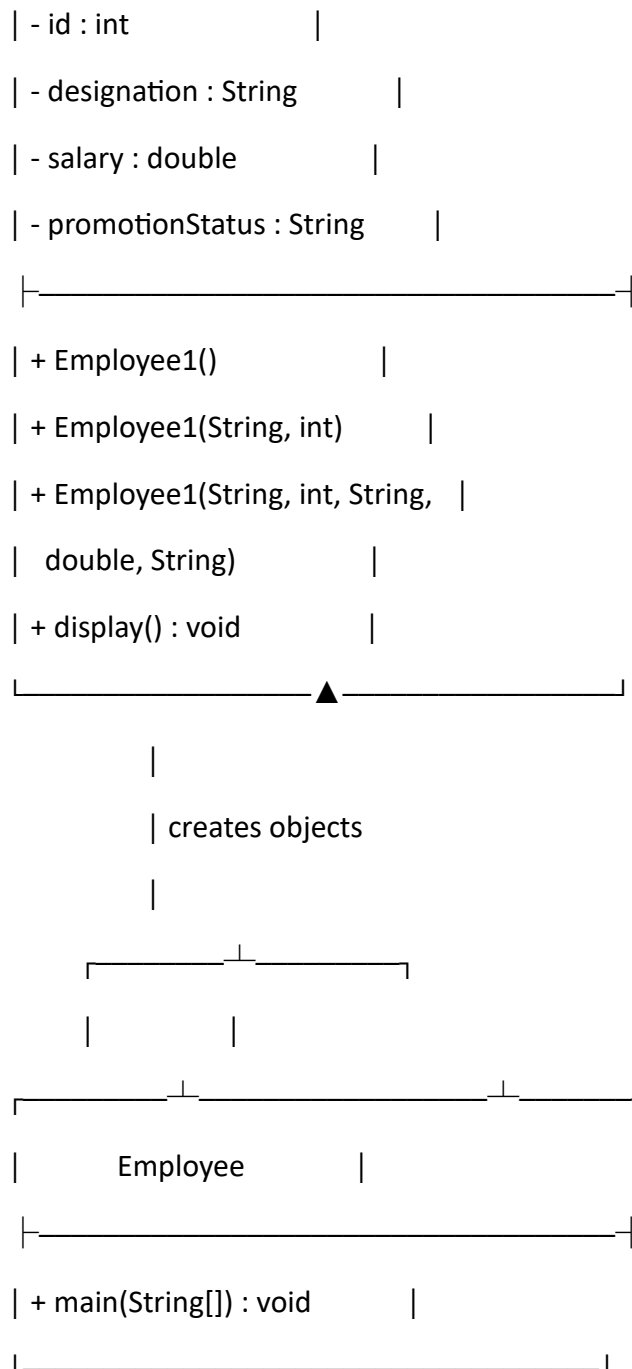

Code:

```

package javaprograms;

class Employee1 {
    String name;
    int id;
    String designation;
    double salary;
    String promotionStatus;
  
```

```

// Constructor 1: No parameters
public Employee1() {
    name = "Unknown";
    id = 0;
    designation = "Not Assigned";
    salary = 0;
    promotionStatus = "Not Decided";
}

// Constructor 2: Name, ID
public Employee1(String name, int id) {
    this.name = name;
    this.id = id;
    designation = "Not Assigned";
    salary = 0;
    promotionStatus = "Not Decided";
}

// Constructor 3: All info
public Employee1(String name, int id, String designation,
    double salary, String promotionStatus) {
    this.name = name;
    this.id = id;
    this.designation = designation;
    this.salary = salary;
    this.promotionStatus = promotionStatus;
}

void display() {
    System.out.println("Name: " + name);
    System.out.println("ID: " + id);
    System.out.println("Designation: " + designation);
    System.out.println("Salary: " + salary);
    System.out.println("Promotion Status: " + promotionStatus);
    System.out.println();
}
}

public class Employee {
    public static void main(String[] args) {

```

```
Employee1 e1 = new Employee1();

Employee1 e2 = new Employee1("Ravi", 102);

Employee1 e3 = new Employee1("Anil", 112, "Manager", 10000, "Promoted");

    e1.display();
    e2.display();
    e3.display();
}
}
```

output:

Name: Unknown
ID: 0
Designation: Not Assigned
Salary: 0.0
Promotion Status: Not Decided

Name: Ravi
ID: 102
Designation: Not Assigned
Salary: 0.0
Promotion Status: Not Decided

Name: Anil
ID: 112
Designation: Manager
Salary: 10000.0
Promotion Status: Promoted