

Question

Write a Java program to demonstrate the implementation of an interface.

Create an interface I1 containing a constant variable x and an abstract method add().

Implement the interface in class C1, perform addition, and access the interface variable.


Steps for Execution

1. Create an interface I1.
2. Declare int x = 65 inside the interface.
3. Declare the abstract method add().
4. Create class C1 that implements interface I1.
5. Declare variables a = 10 and b = 5.
6. Implement the add() method.
7. Calculate a + b.
8. Create an object c of class C1.
9. Call the add() method using c.
10. Access the interface variable x using c.x.
11. Display the results.

Algorithm

1. **Start**
2. Define interface I1.
3. Declare constant x = 65 in I1.
4. Declare method add().
5. Define class C1 implementing I1.
6. Initialize a = 10 and b = 5.
7. Implement add() and calculate a + b.
8. Create an object c of class C1.
9. Call c.add().
10. Display c.x.
11. **Stop**

UML Class Diagram

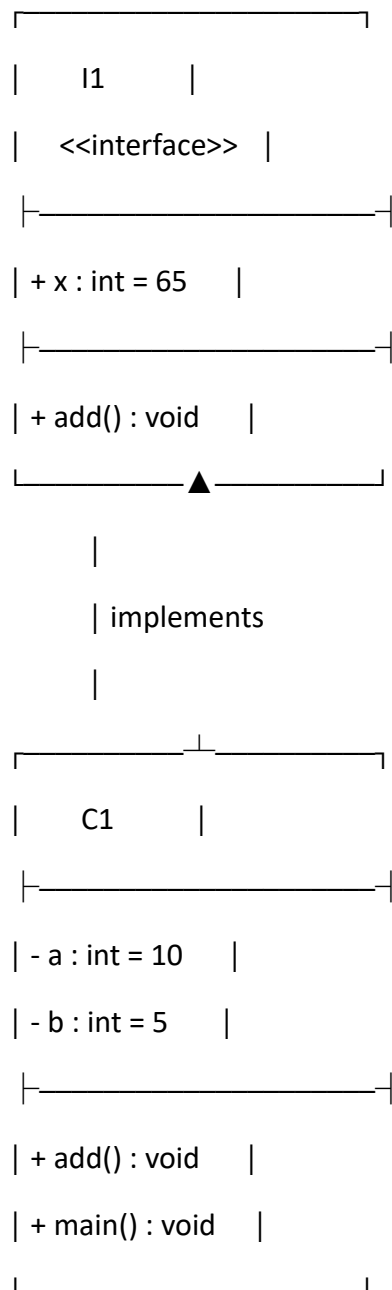

Code

Java Interface Implementation

```
package javapractice;
```

```
interface I1 {
```

```
    int x = 65;
```

```
    void add();
```

```
}
```

```
class C1 implements I1 {
```

```
    int a = 10, b = 5;
```

```
    @Override
```

```
    public void add() {
```

```
        System.out.println("Addition = " + (a + b));
```

```
    }
```

```
    public static void main(String[] args) {
```

```
        C1 c = new C1();
```

```
        c.add();
```

```
        System.out.println(c.x);
```

```
    }
```

```
}
```

Output

Addition = 15

65