Import Libraries

In [1]:
```
import pandas as pd
import matplotlib.pyplot as  plt
```

Read the Dataset

In [2]:
```
movies = pd.read_csv(r'C:\Users\Ramya\Downloads\archive\movie.csv')
```

print(type(movies))

In [3]:
```
movies.head(20) #print 1st 20 rows
```

Out[3]:

	movieId	title	genres
0	1	Toy Story (1995)	Adventure|Animation|Children|Comedy|Fantasy
1	2	Jumanji (1995)	Adventure|Children|Fantasy
2	3	Grumpier Old Men (1995)	Comedy|Romance
3	4	Waiting to Exhale (1995)	Comedy|Drama|Romance
4	5	Father of the Bride Part II (1995)	Comedy
5	6	Heat (1995)	Action|Crime|Thriller
6	7	Sabrina (1995)	Comedy|Romance
7	8	Tom and Huck (1995)	Adventure|Children
8	9	Sudden Death (1995)	Action
9	10	GoldenEye (1995)	Action|Adventure|Thriller
10	11	American President, The (1995)	Comedy|Drama|Romance
11	12	Dracula: Dead and Loving It (1995)	Comedy|Horror
12	13	Balto (1995)	Adventure|Animation|Children
13	14	Nixon (1995)	Drama
14	15	Cutthroat Island (1995)	Action|Adventure|Romance
15	16	Casino (1995)	Crime|Drama
16	17	Sense and Sensibility (1995)	Drama|Romance
17	18	Four Rooms (1995)	Comedy
18	19	Ace Ventura: When Nature Calls (1995)	Comedy
19	20	Money Train (1995)	Action|Comedy|Crime|Drama|Thriller

In [4]:
```
tags = pd.read_csv(r"C:\Users\Ramya\Downloads\archive\tag.csv")
tags.head() #print 1st 5 rows and col
```

Out[4]:

	userId	movieId	tag	timestamp
0	18	4141	Mark Waters	2009-04-24 18:19:40
1	65	208	dark hero	2013-05-10 01:41:18
2	65	353	dark hero	2013-05-10 01:41:19
3	65	521	noir thriller	2013-05-10 01:39:43
4	65	592	dark hero	2013-05-10 01:41:18

In [5]:
```
ratings =  pd.read_csv(r"C:\Users\Ramya\Downloads\archive\rating.csv")
ratings.head()
```

Out[5]:

	userId	movieId	rating	timestamp
0	1	2	3.5	2005-04-02 23:53:47
1	1	29	3.5	2005-04-02 23:31:16
2	1	32	3.5	2005-04-02 23:33:39
3	1	47	3.5	2005-04-02 23:32:07
4	1	50	3.5	2005-04-02 23:29:40

In [6]:
```
del ratings['timestamp']
del tags['timestamp']
```

Data Structures:

Series

In [7]:
```
row_0=tags.iloc[0] #prints index location
type(row_0)
```

Out[7]:
```
pandas.core.series.Series
```

In [8]:
```
print(row_0)
```

```
userId              18
movieId           4141
tag        Mark Waters
Name: 0, dtype: object
```

In [9]:
```
row_0.index
```

Out[9]:
```
Index(['userId', 'movieId', 'tag'], dtype='object')
```

In [10]:
```
row_0['userId']
```

Out[10]:
```
18
```

In [11]:
```
'rating' in row_0
```

Out[11]:
```
False
```

In [12]:
```
row_0.name
```

Out[12]:
```
0
```

In [13]:
```
row_0=row_0.rename('firstRow')
row_0.name
```

Out[13]:
```
'firstRow'
```

DataFrames

In [14]:
```
tags.head()
```

Out[14]:

	userId	movieId	tag
0	18	4141	Mark Waters
1	65	208	dark hero
2	65	353	dark hero
3	65	521	noir thriller
4	65	592	dark hero

In [15]:
```
tags.index
```

Out[15]:
```
RangeIndex(start=0, stop=465564, step=1)
```

In [16]:
```
tags.columns
```

Out[16]:
```
Index(['userId', 'movieId', 'tag'], dtype='object')
```

In [17]:
```
tags.iloc[ [0,11,500] ] #printing loation 0,11,500 only
```

Out[17]:

	userId	movieId	tag
0	18	4141	Mark Waters
11	65	1783	noir thriller
500	342	55908	entirely dialogue

Descriptive Statistics

how the ratings are distributed!

In [18]:
```
ratings['rating'].describe()
```

Out[18]:
```
count    2.000026e+07
mean     3.525529e+00
std      1.051989e+00
min      5.000000e-01
25%      3.000000e+00
50%      3.500000e+00
75%      4.000000e+00
max      5.000000e+00
Name: rating, dtype: float64
```

In [19]:
```
ratings.describe()
```

Out[19]:

	userId	movieId	rating
count	2.000026e+07	2.000026e+07	2.000026e+07
mean	6.904587e+04	9.041567e+03	3.525529e+00
std	4.003863e+04	1.978948e+04	1.051989e+00
min	1.000000e+00	1.000000e+00	5.000000e-01
25%	3.439500e+04	9.020000e+02	3.000000e+00
50%	6.914100e+04	2.167000e+03	3.500000e+00
75%	1.036370e+05	4.770000e+03	4.000000e+00
max	1.384930e+05	1.312620e+05	5.000000e+00

In [20]:
```
ratings.mean()
```

Out[20]:
```
userId     69045.872583
movieId     9041.567330
rating         3.525529
dtype: float64
```

In [21]:
```
ratings['rating'].min()
```

Out[21]:
```
0.5
```

In [22]:
```
ratings['rating'].max()
```

Out[22]:
```
5.0
```

In [23]:
```
ratings['rating'].std() #calculates the standard deviation
```

Out[23]:
```
1.051988919275684
```

In [24]:
```
ratings['rating'].mode()#rating col,the most frequently occurring value(s).
```

Out[24]:
```
0    4.0
Name: rating, dtype: float64
```

In [25]:
```
ratings.corr()#two numerical columns are linearly related
```

Out[25]:

	userId	movieId	rating
userId	1.000000	-0.000850	0.001175
movieId	-0.000850	1.000000	0.002606
rating	0.001175	0.002606	1.000000

In [26]:
```
filter1 = ratings['rating'] > 10
print(filter1)
filter1.any()
```

```
0           False
1           False
2           False
3           False
4           False
            ...
20000258    False
20000259    False
20000260    False
20000261    False
20000262    False
Name: rating, Length: 20000263, dtype: bool
```

Out[26]: False

In [27]:
```
filter2 = ratings['rating'] > 0
filter2.all()
```

Out[27]: True

Data Cleaning: Handling Missing Data

In [28]:
```
movies.shape #how many rows &columns are there
```

Out[28]: (27278, 3)

In [29]:
```
movies.isnull().any().any()
```

Out[29]: False

In [30]:
```
ratings.shape
```

Out[30]: (20000263, 3)

In [31]:
```
ratings.isnull().any().any()
```

Out[31]: False

In [32]:
```
tags.shape
```

Out[32]: (465564, 3)

In [33]:
```
tags.isnull().any().any()
```

Out[33]: True

In [34]:
```
tags=tags.dropna()
```

In [35]:
```
tags.isnull().any().any()
```

Out[35]: False

In [36]:
```
tags.shape
```

Out[36]: (465548, 3)

Data Visualization

In [37]:
```
%matplotlib inline
ratings.hist(column='rating', figsize=(10,5))
plt.show()
```

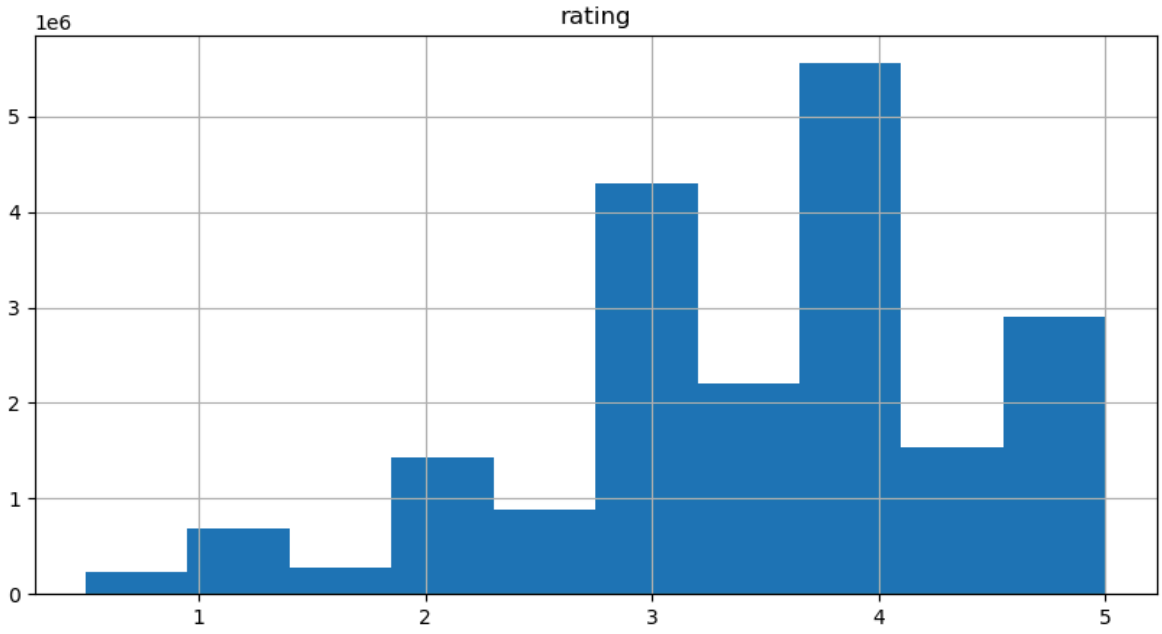

In [38]:
```
ratings.boxplot(column='rating', figsize=(10,5))
plt.show()
```

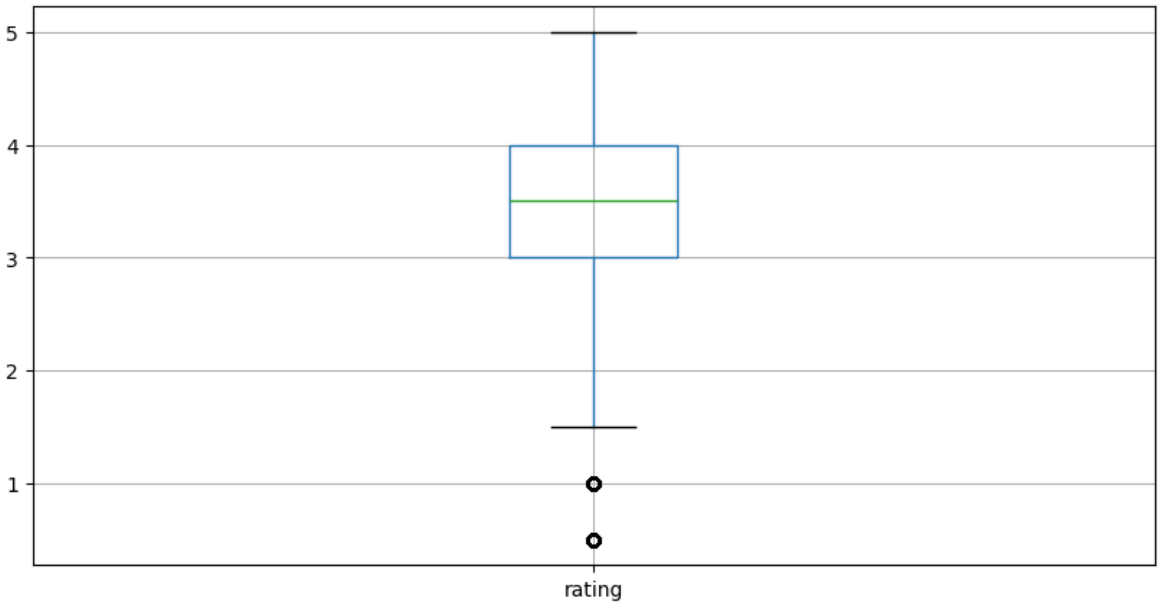

Slicing Out Columns

In [39]:
```
tags['tag'].head()
```

Out[39]:
```
0      Mark Waters
1        dark hero
2        dark hero
3    noir thriller
4        dark hero
Name: tag, dtype: object
```

In [40]:
```
movies[['title','genres']].head()
```

Out[40]:

	title	genres
0	Toy Story (1995)	Adventure|Animation|Children|Comedy|Fantasy
1	Jumanji (1995)	Adventure|Children|Fantasy
2	Grumpier Old Men (1995)	Comedy|Romance
3	Waiting to Exhale (1995)	Comedy|Drama|Romance
4	Father of the Bride Part II (1995)	Comedy

In [41]:
```
ratings[-10:]
```

Out[41]:

	userId	movieId	rating
20000253	138493	60816	4.5
20000254	138493	61160	4.0
20000255	138493	65682	4.5
20000256	138493	66762	4.5
20000257	138493	68319	4.5
20000258	138493	68954	4.5
20000259	138493	69526	4.5
20000260	138493	69644	3.0
20000261	138493	70286	5.0
20000262	138493	71619	2.5

In [48]:
```
tag_counts = tags['tag'].value_counts()
```

In [49]:
```
tag_counts[-10:]
```

Out[49]:
```
tag
missing child                  1
Ron Moore                      1
Citizen Kane                   1
mullet                         1
biker gang                     1
Paul Adelstein                 1
the wig                        1
killer fish                    1
genetically modified monsters  1
topless scene                  1
Name: count, dtype: int64
```

In [59]:
```
tag_counts[:10].plot(kind='bar',figsize=(10,5))
colors = ['red', 'orange', 'yellow', 'green', 'blue', 'indigo', 'violet', 'pink'
tag_counts[:10].plot(kind='bar', figsize=(10,5), color=colors)
plt.show()
```

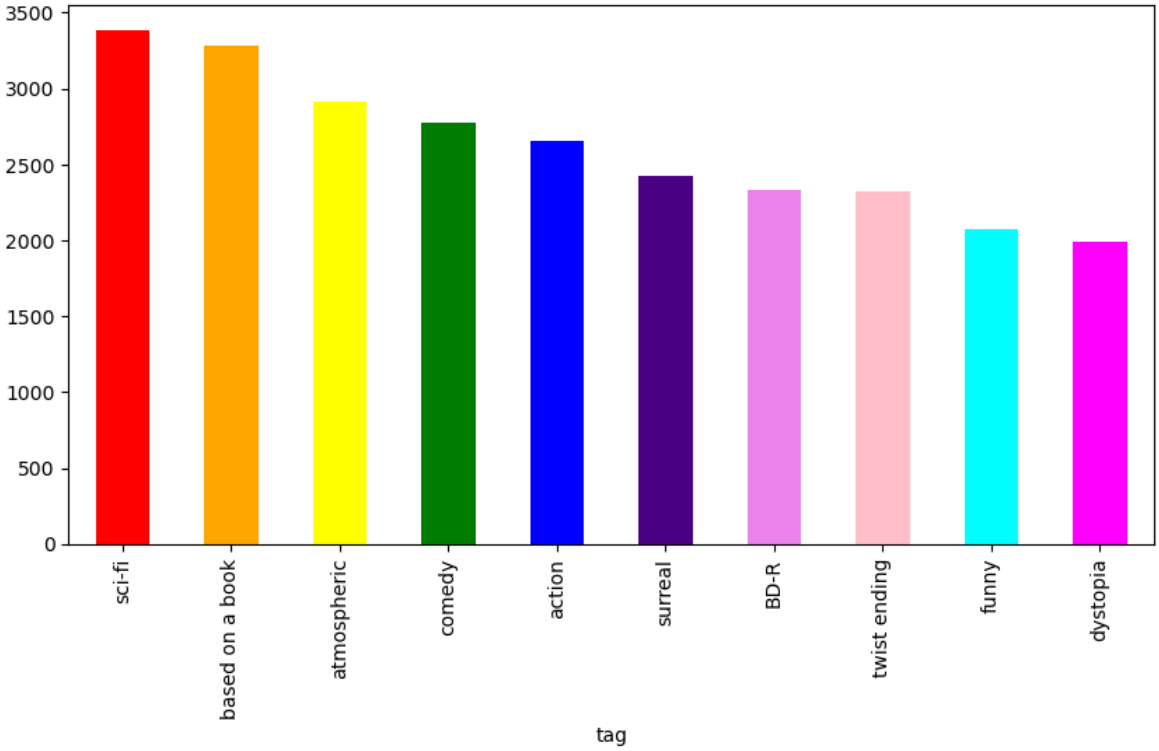
3500
3000
2500
2000
1500
1000
500
0
sci-fi
based on a book
atmospheric
comedy
action
surreal
BD-R
twist ending
funny
dystopia
tag

In [ ]:

In [ ]: