

CSA1503-CLOUD COMPUTING AND BIG DATA ANALYTICS

Experiment-15

Create a Snapshot of a VM and Test it by loading the Previous Version/Cloned VM

AIM

To create a **snapshot** of a Virtual Machine using VMware Workstation and restore the virtual machine to the previous saved state using the snapshot feature.

PROCEDURE

Part A: Creating a Snapshot

Step 1: Open VMware Workstation.

Step 2: Select the Virtual Machine (e.g., Ubuntu).

Step 3: Power on the Virtual Machine.

Step 4: After the operating system loads completely, click **VM** from the menu bar.

Step 5: Select **Snapshot** → **Take Snapshot**.

Step 6: Enter a **Snapshot Name** (e.g., *Snapshot1*) and an optional description.

Step 7: Click **Take Snapshot**.

The snapshot is now created successfully.

Part B: Testing the Snapshot

Step 8: Make some changes inside the Virtual Machine (for example, create a folder named **TestFolder** on the desktop).

Step 9: Shut down or keep the VM running.

Step 10: Click **VM** → **Snapshot** → **Snapshot Manager**.

Step 11: Select the snapshot (**Snapshot1**) from the list.


Step 12: Click **Go To (Restore)**.

Step 13: Confirm the restore operation.


Step 14: Verify that the Virtual Machine has returned to the previous state (for example, the **TestFolder** created after the snapshot no longer exists).

IMPLEMENTATION


STEP 1: Select the Create a new virtual machine

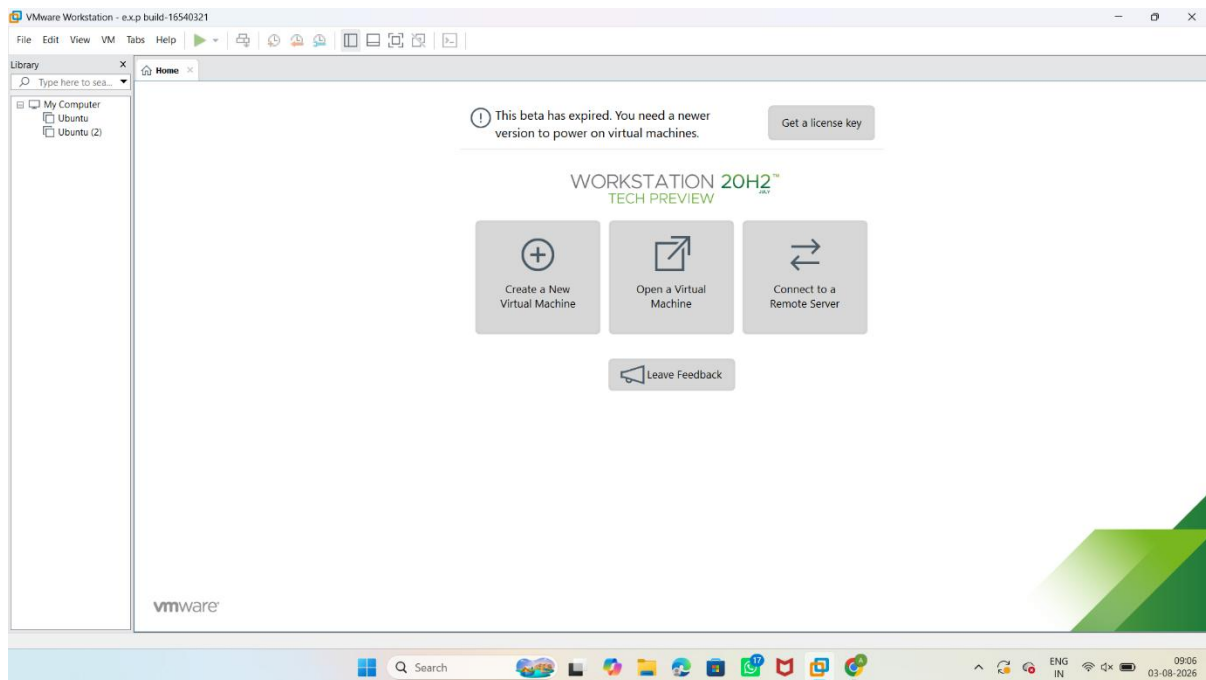


STEP 2: click VM from the menu bar.

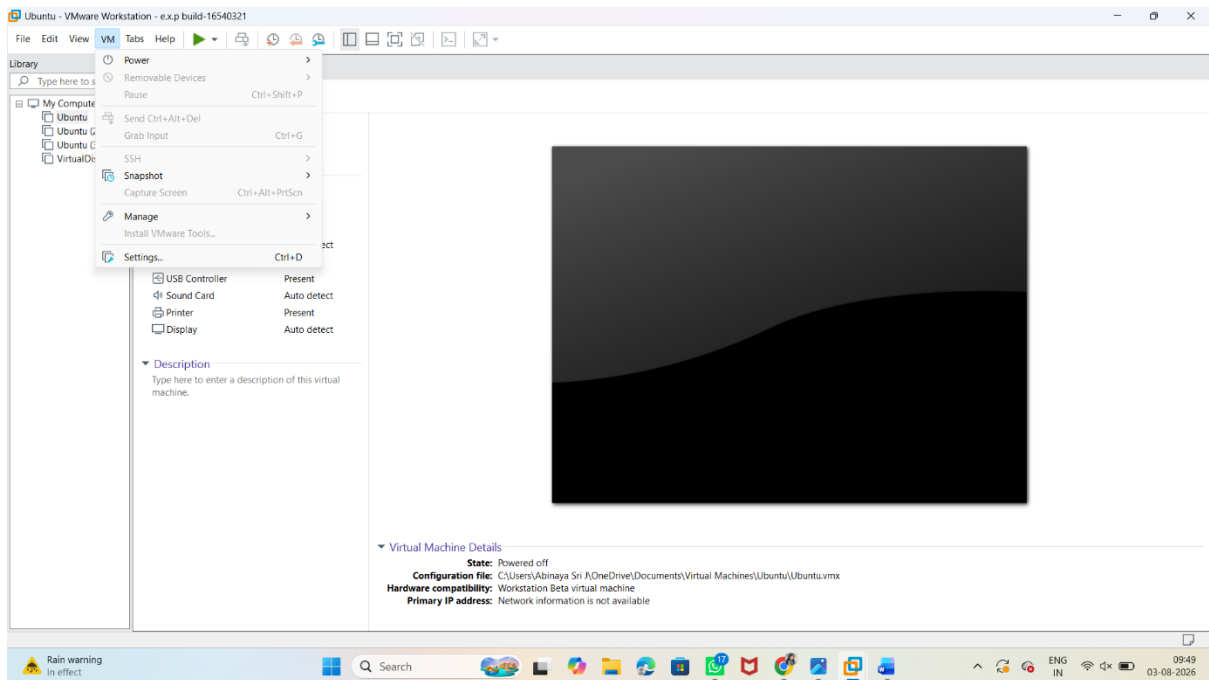


Step 3: Select Snapshot → Take Snapshot.

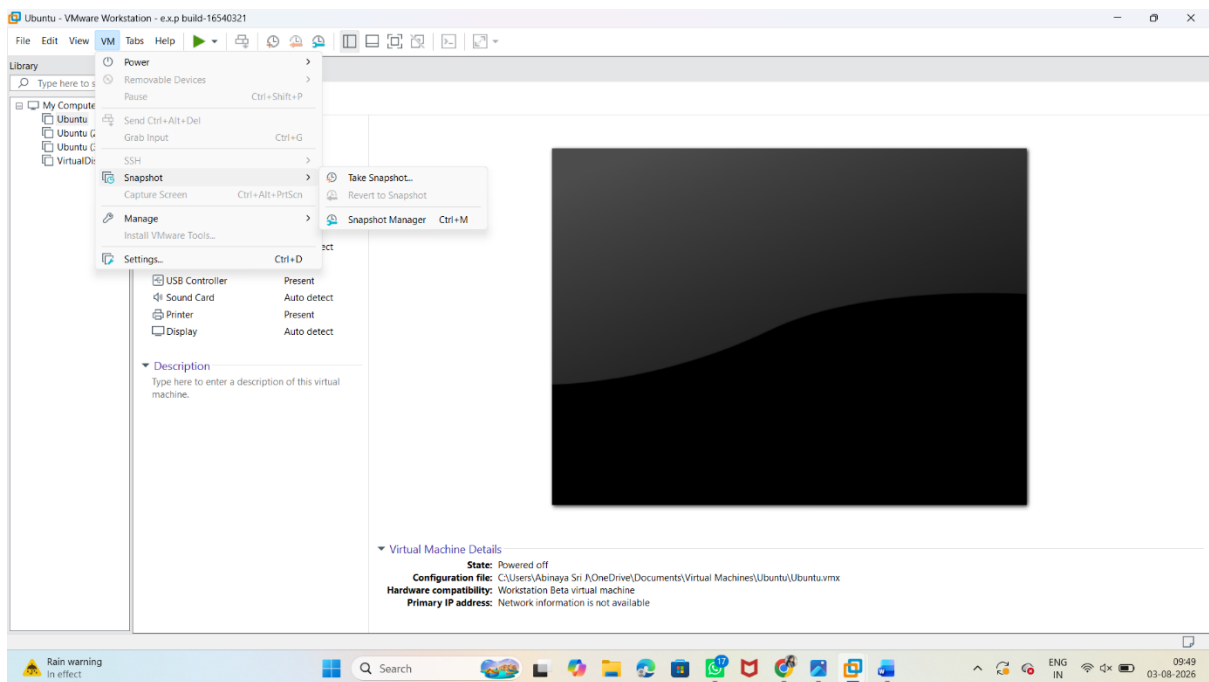

STEP 4: Enter a Snapshot Name


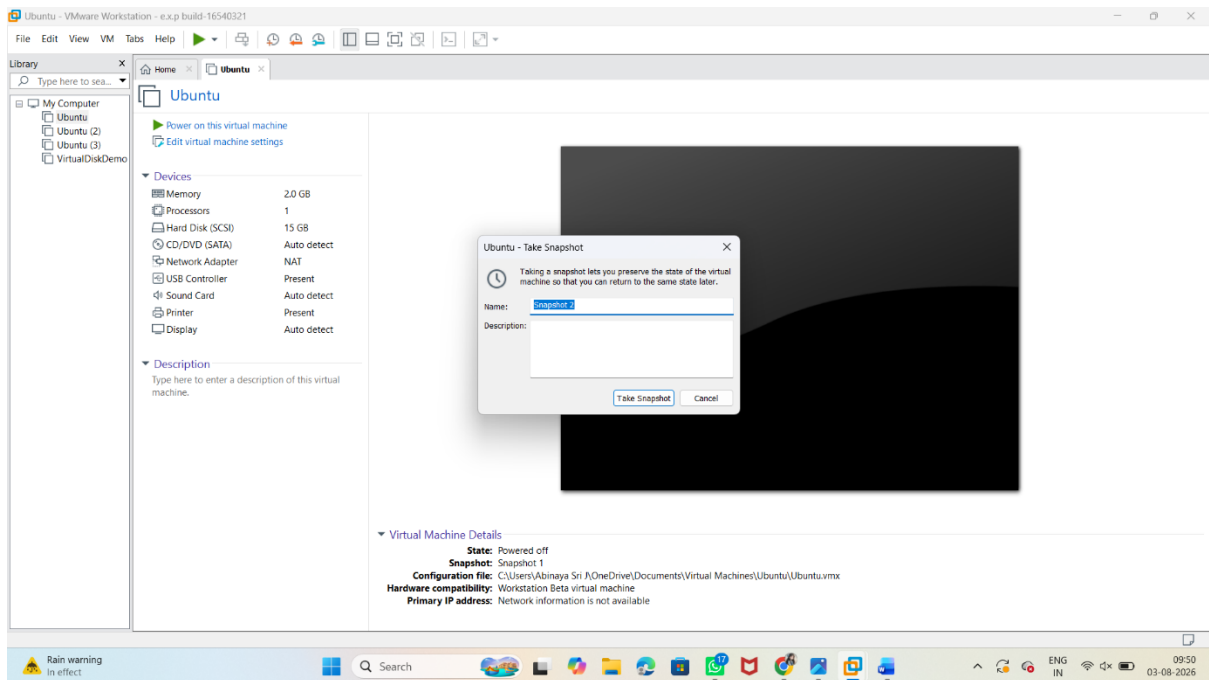


OUTPUT

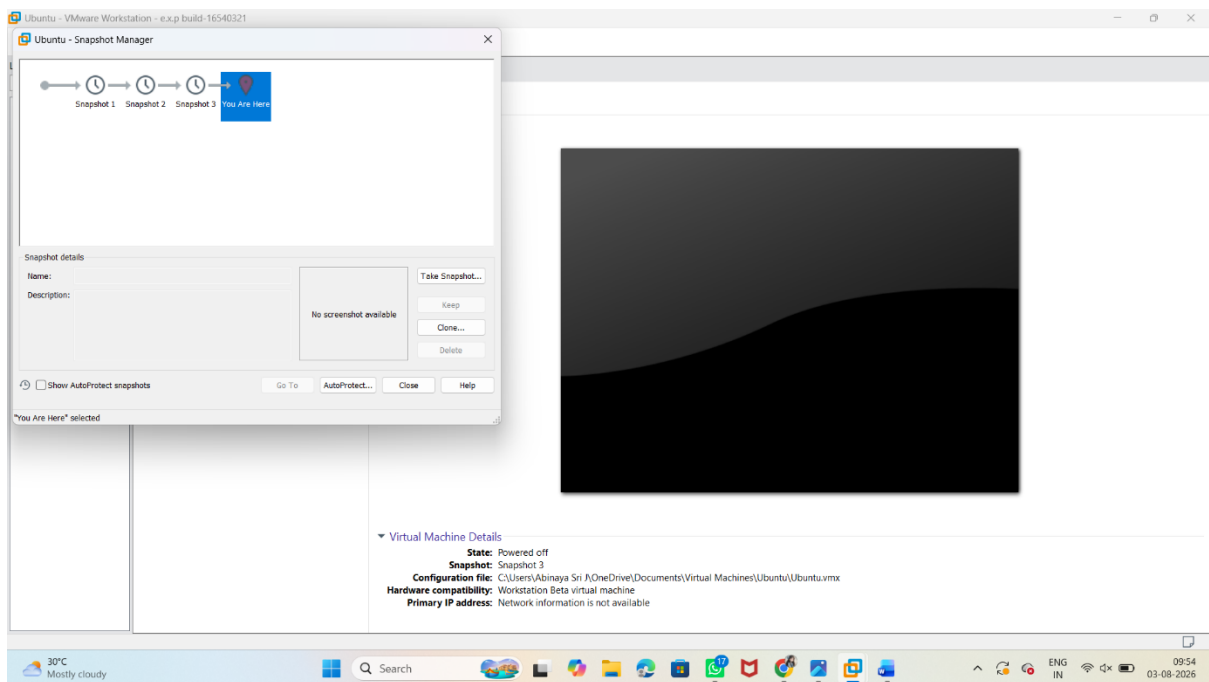


Part B: Testing the Snapshot

Click VM → Snapshot → Snapshot Manager.

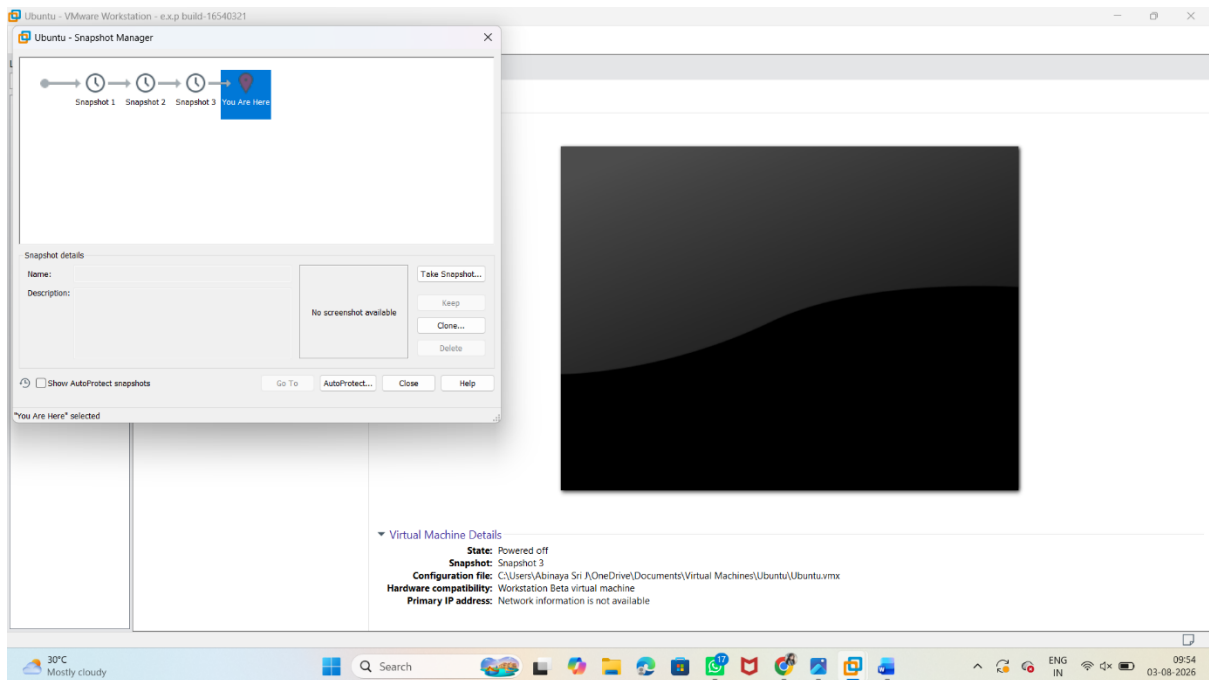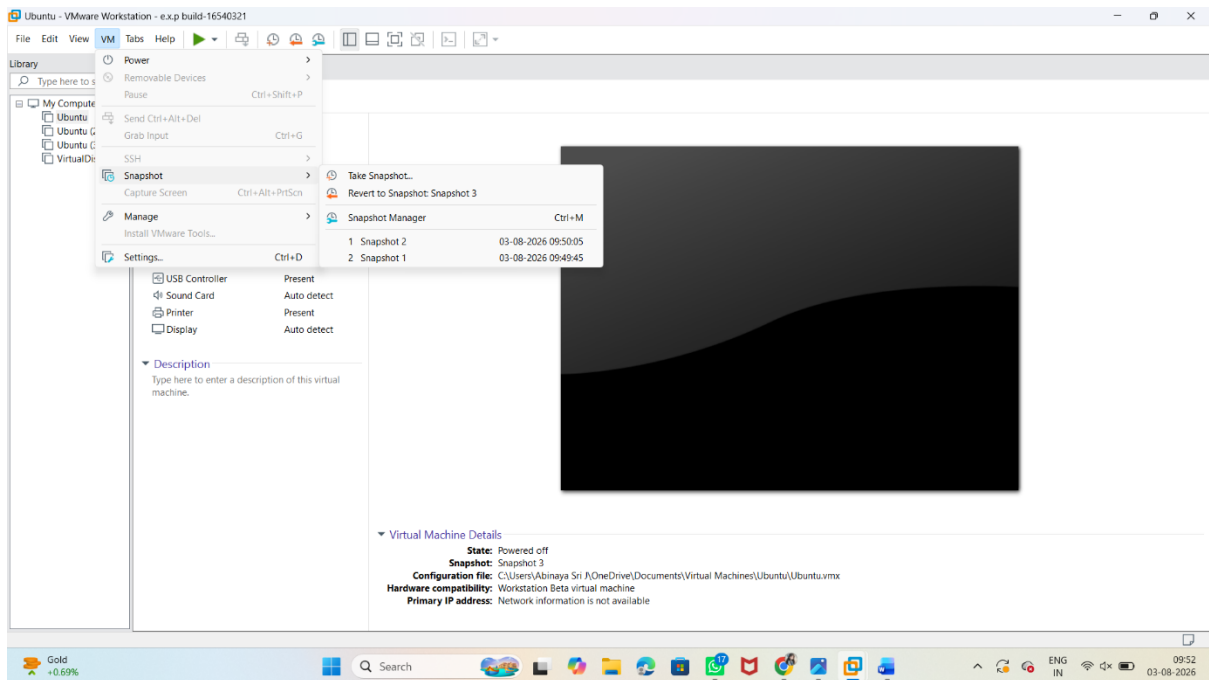

Select the snapshot (Snapshot2) from the list.

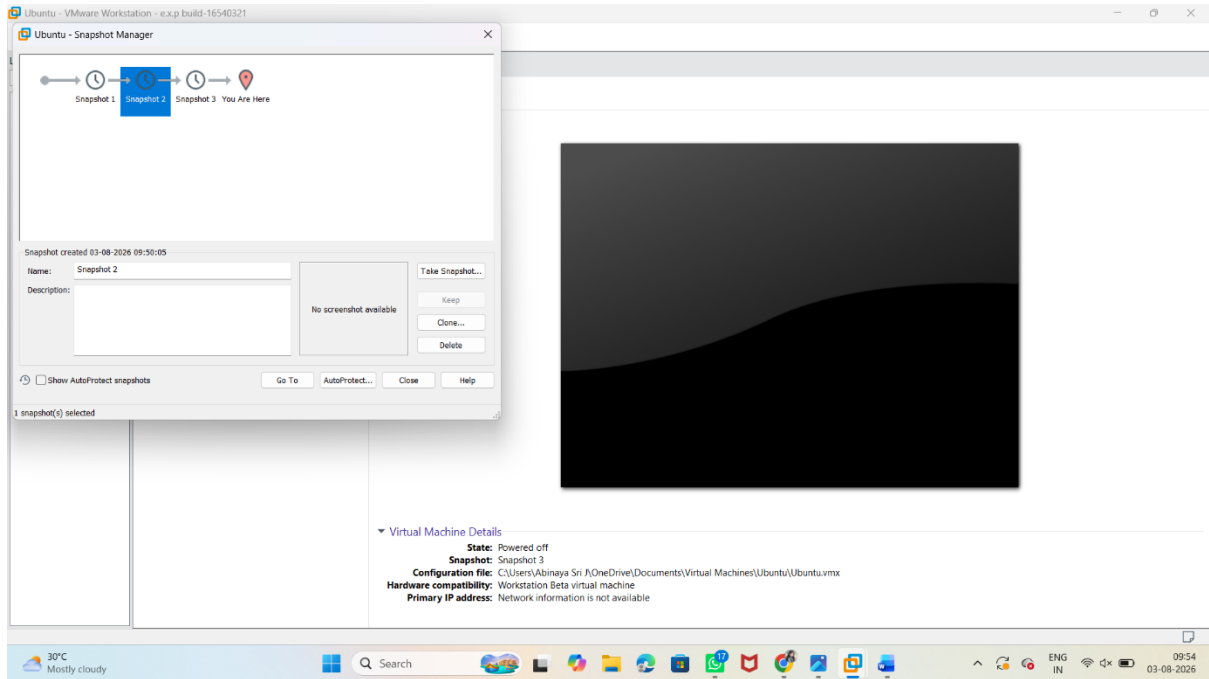

Click **Go To (Restore)**. Verify that the Virtual Machine has returned to the previous state

