


How to Install the AD FS Role Service

You can use the following procedure to install the AD FS role service on a computer that is running Windows Server to become the first federation server in a federation server farm or a federation server in an existing federation server farm, allow the below communication if the server AD FS in another VLAN, and create a service account, create group policy and add this account on **Log on as a service**


Note:- add NT SERVICE\ALL SERVICES on the same GPO for the service account.

System	Source IP	Destination IP	Protocol	Port	Connection
MFA to AD	ADFS	Domain Control	TCP	PING,135, 389, 443, 80, 3268, 3268,445,636	One Way

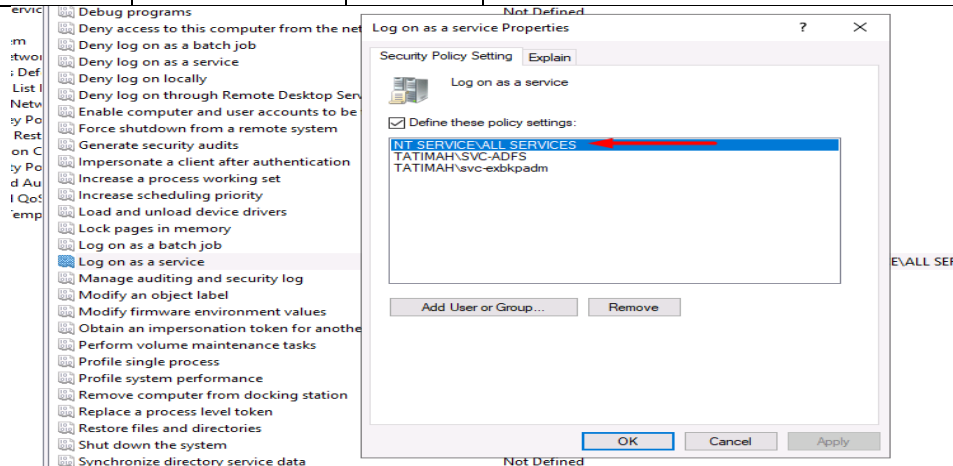


Name	Description	Status	Startup Type	Log On As
Active Directory Federation Services	Enables Active Directory .	Running	Automatic (Delayed Start)	TATIMAH\SVC-ADFS
ActiveX Installer (AxInstSV)	Provides User Account C...	Disabled	Disabled	Local System
AllJoyn Router Service	Routes AllJoyn message...		Manual (Trigger Start)	Local Service


- **First PowerShell,**
- you can use PowerShell to install the ADFS same screenshot.
1- `Install-WindowsFeature adfs-federation -IncludeManagementTools`

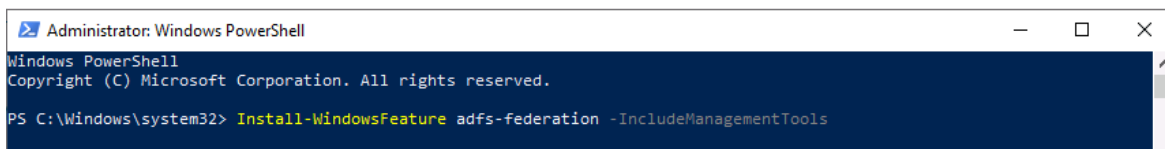


- 2- Will take more time for this step.

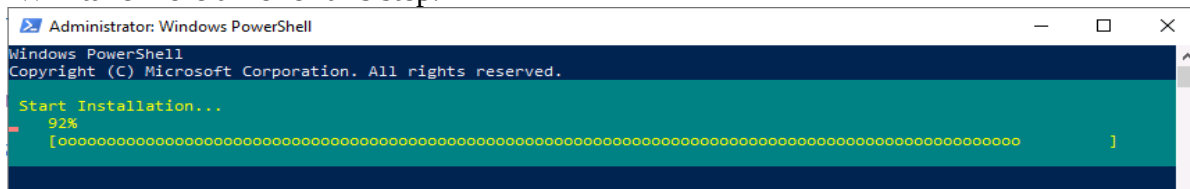

- 3- The service installed ,and will open new window for configuring ADFS

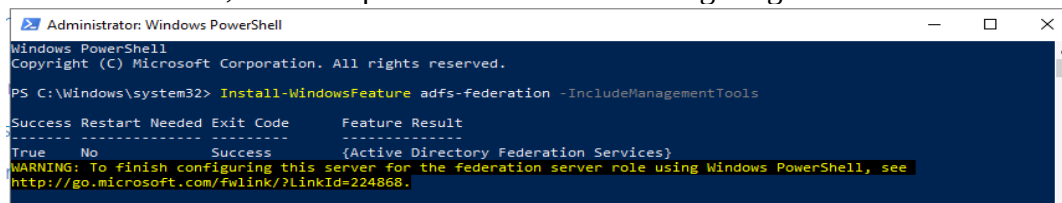



4- Complete the configuration for AD FS,

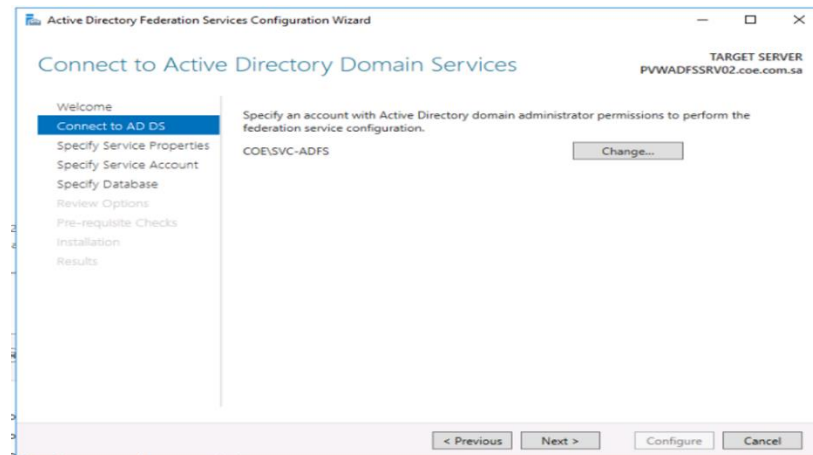


➤ Second use GUI,

1- Open Server Manager. To open Server Manager, click **Server Manager** on the **Start** screen, or **Server Manager** in the taskbar on the desktop. In the **Quick Start** tab of the **Welcome** tile on the **Dashboard** page, click **Add roles and features**. Alternatively, you can click **Add Roles and Features** on the **Manage** menu.


2- On the **Select server roles** page, click **Active Directory Federation Services**, and then click **Next**.

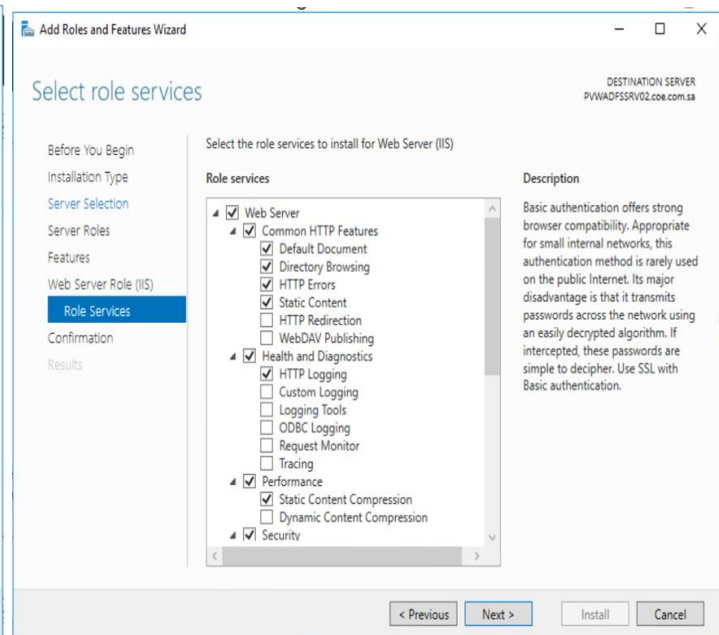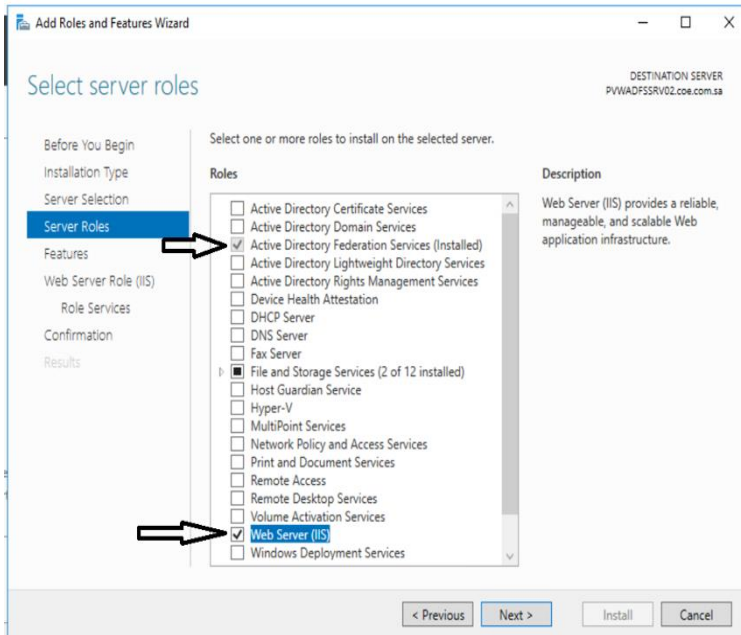

3- On the **Select features** page, click **Next**. The required prerequisites are preselected for you. You do not have to select any other features.

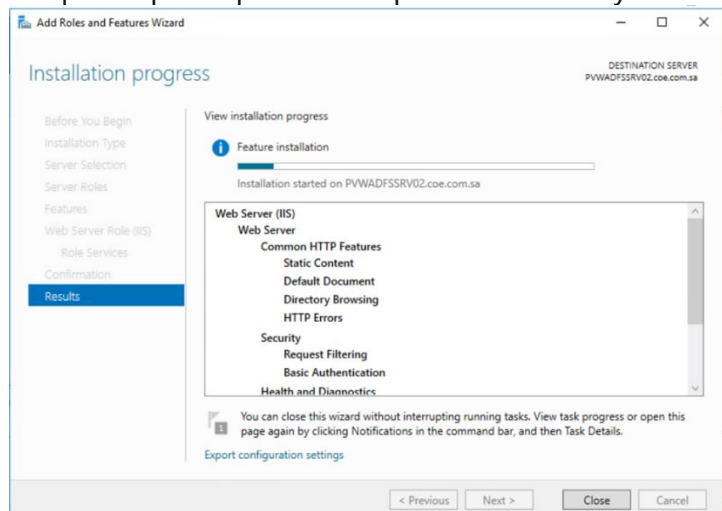


4-On the **Installation progress** page, verify that everything is installed correctly, and then click **Close**.

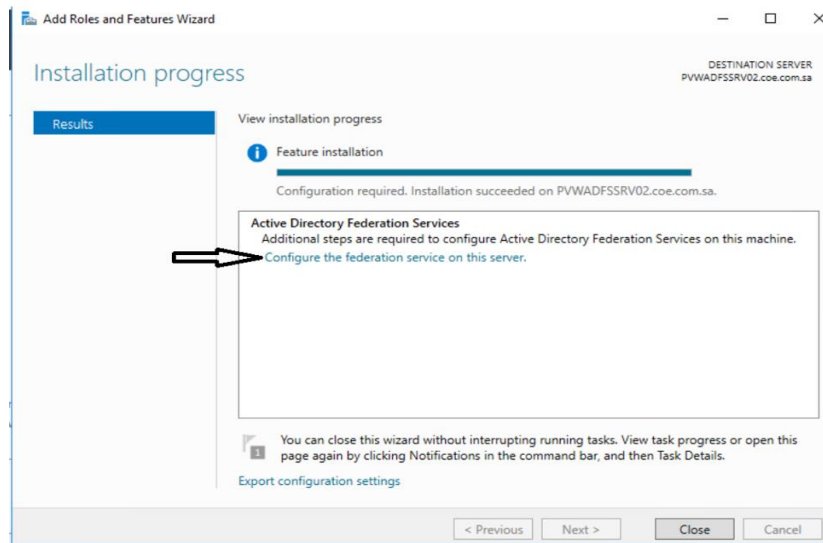

5- **Configure** AD FS, if you have another server AD FS will choose the second operation (Add,,,server farm).


Note Important: if choose the second option, don't write any name write the same FARM for the existing AD FS or write the server name for the first AD FS, and run this command to check the FARM or check the form console for ADFS as per the screenshot. (**get-adfsfarminformation, Get-AdfsSyncProperties**)

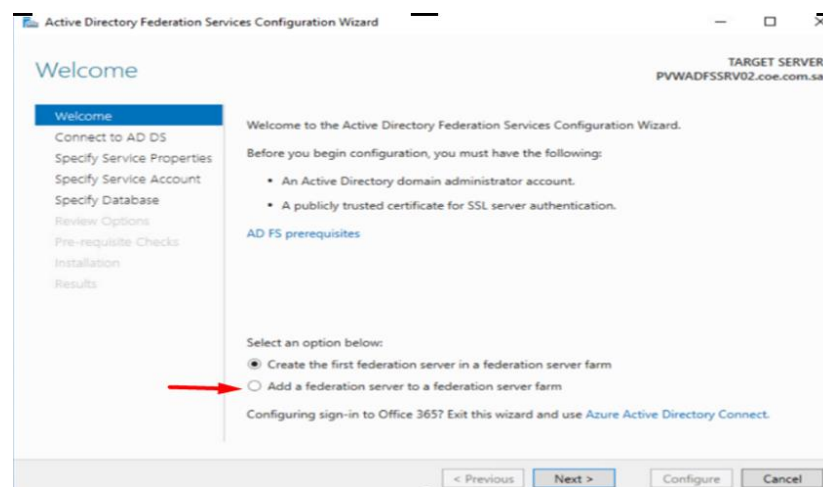

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Windows\system32> Get-AdfsSyncProperties

LastSyncFromPrimaryComputerName : adfs.aluladev.com.sa
LastSyncStatus                  : 0
LastSyncTime                    : 3/22/2024 12:28:55 AM
PollDuration                    : 300
PrimaryComputerName             : adfs.aluladev.com.sa
PrimaryComputerPort             : 80
Role                            : SecondaryComputer
```


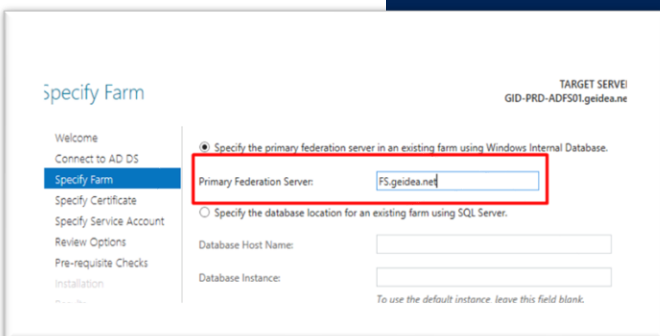


```
PS C:\Windows\system32> Get-AdfsFarmInformation


CurrentFarmBehavior FarmNodes FarmRoles
-----
4 {GID-PRD-ADFS01.geidea.net} {UserState}

PS C:\Windows\system32> Get-AdfsFarmInformation


CurrentFarmBehavior FarmNodes FarmRoles
-----
4 {GID-PRD-ADFS01.geidea.net, GID-PRD-ADFS02.geidea.net} {UserState}
```

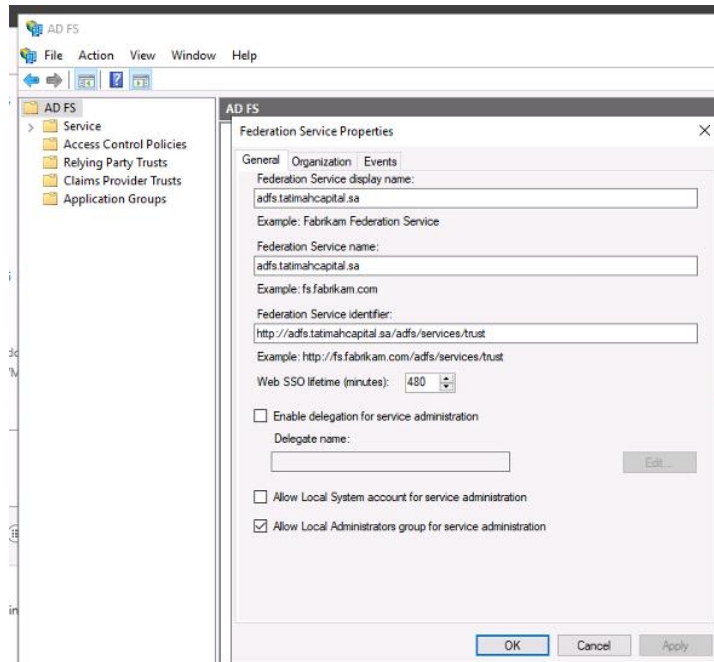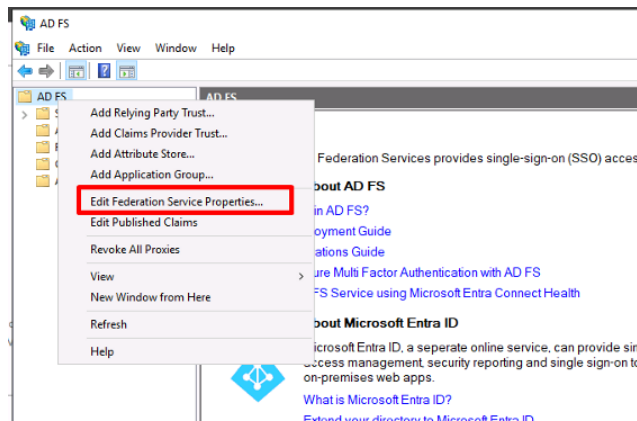



6- write username and password (Any user has permission **DOMAN ADMIN**).

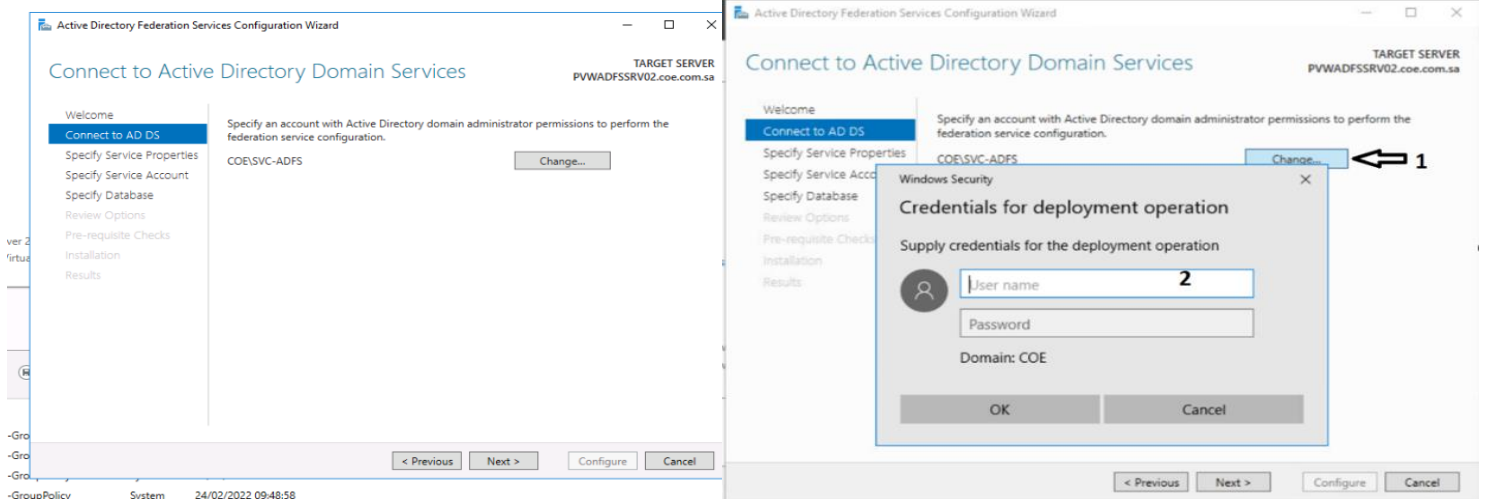


Note: - if you see the below error check the permissions (**Domain Admin Permissions**).

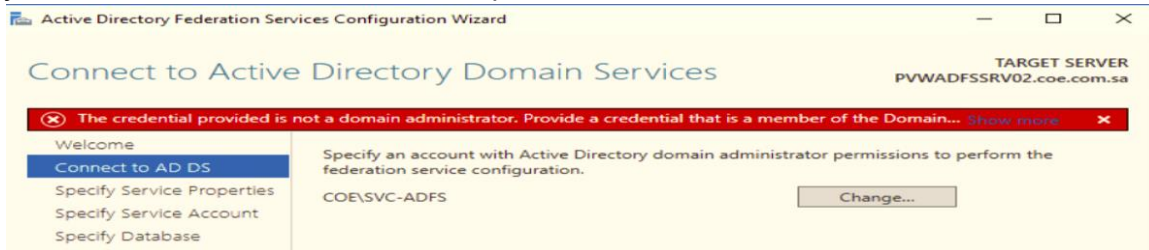


7- Import the certificate, please follow the below steps.

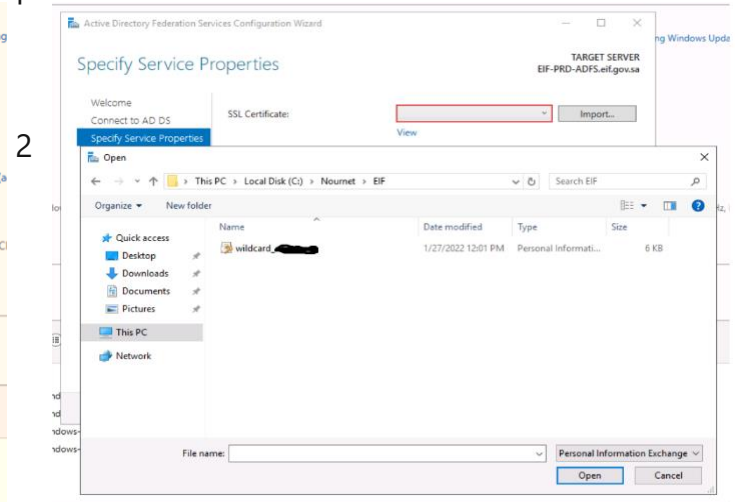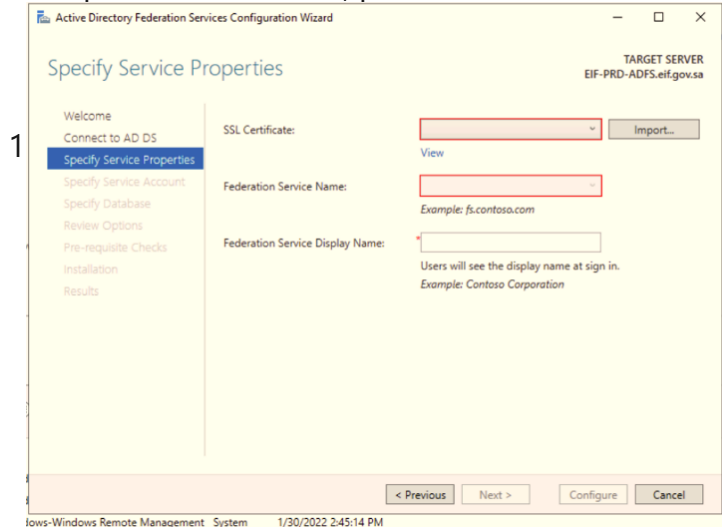

Note: - enter the password for the Certificate.

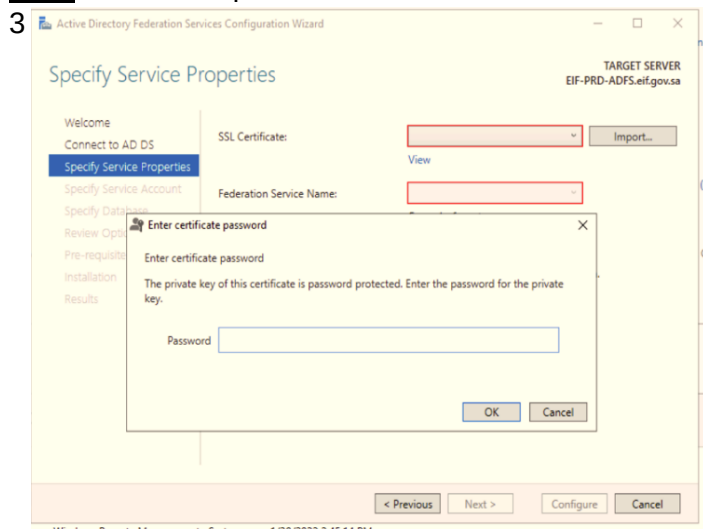

Note: you can remove * and add ADFS.domainname.sa

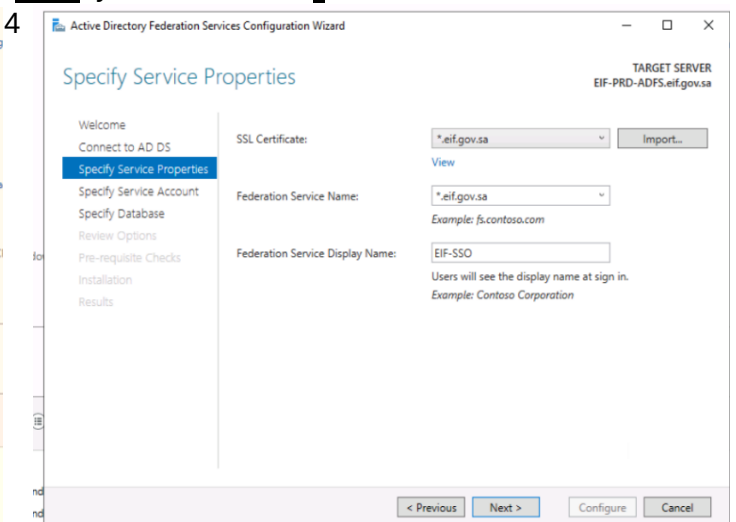

Note: if you see the below error, change the Federation Service Name and Next.



The left screenshot shows the 'Specify Service Properties' step with an error message: 'The federation service name does not match any of the subject names found in the certificate.' The right screenshot shows the same step with the Federation Service Name set to 'www.eif.gov.sa' and the Federation Service Display Name set to 'EIF-SSO'.

8- write the service account (username and password) this account his **domain admin** permission.



The first screenshot shows the 'Specify Service Account' step with the 'Account Name' field empty. The second screenshot shows a 'Select User or Service Account' dialog box with 'SVC ADFS (svc-adfs@eif.gov.sa)' selected. The third screenshot shows the 'Specify Service Account' step with the 'Account Name' field set to 'EIF\svc-adfs' and the 'Account Password' field filled with dots.

9- Create Databases



Note: At the same time we Installation failed we will see the below error; no problem click Overwrite and Next

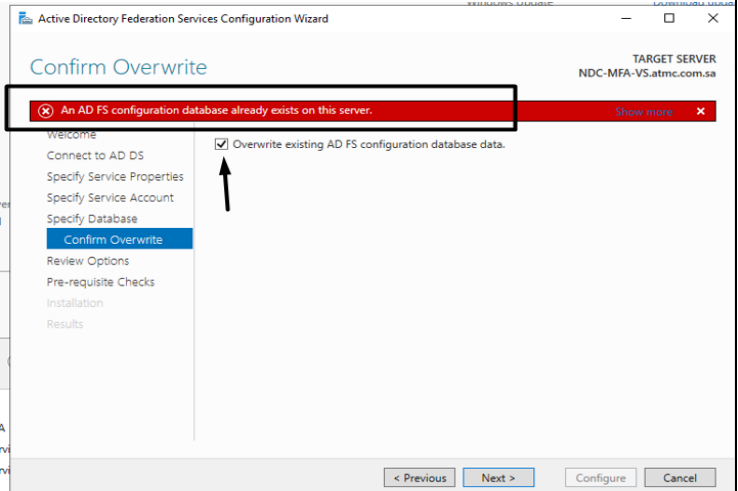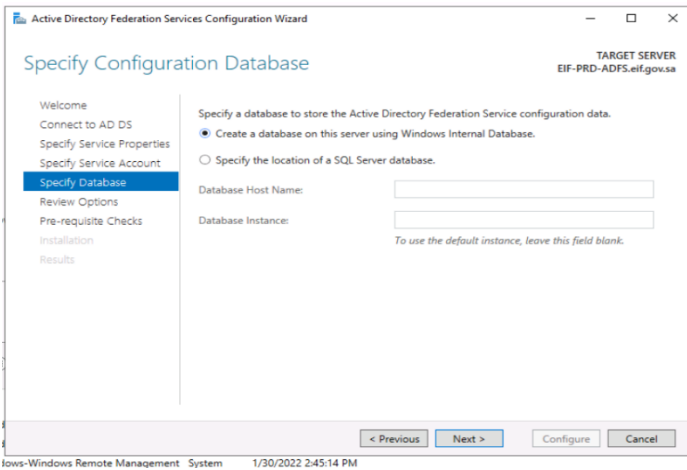

10- Next:

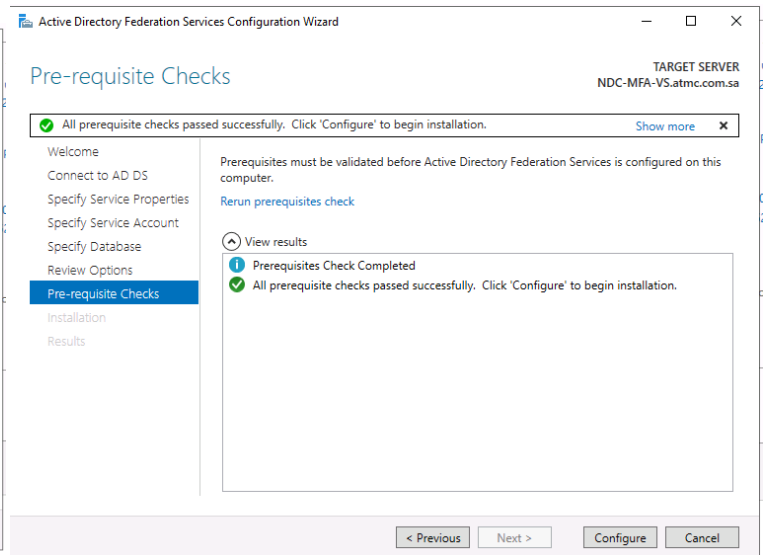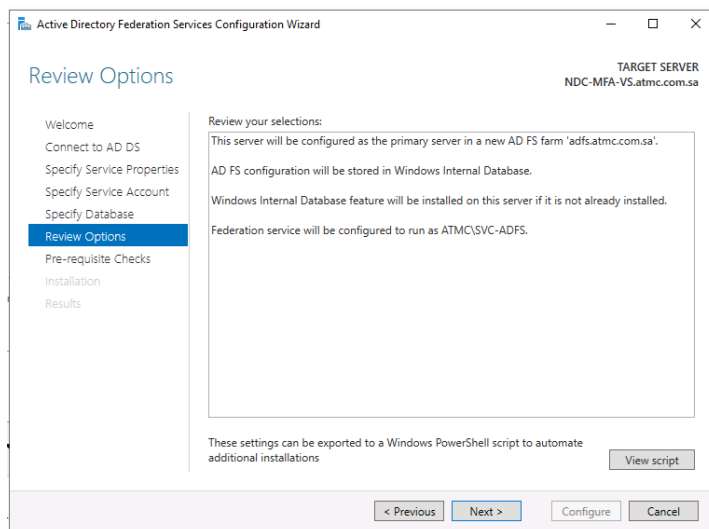


11- This server was successfully configured.

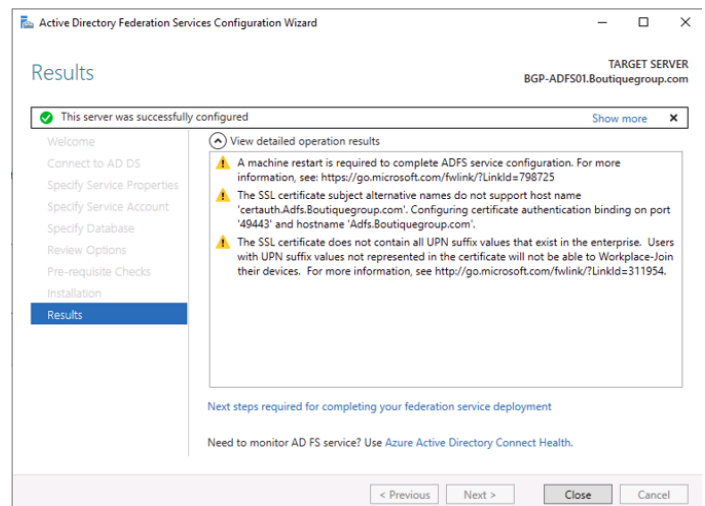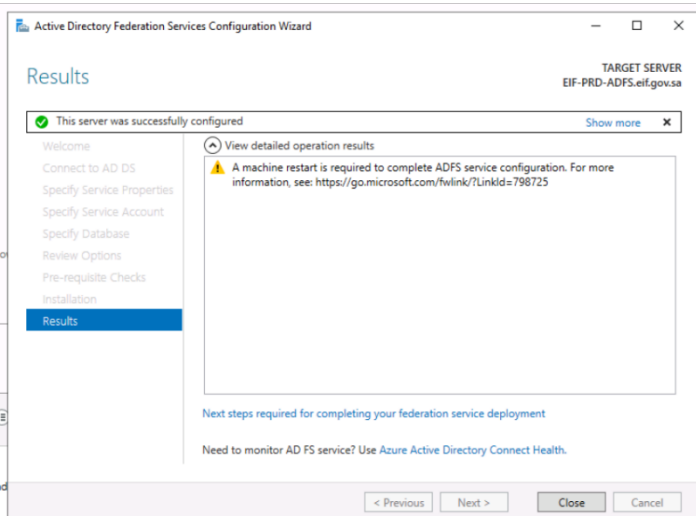


Note: if you see the below error for the last step, check the communication between the server (ADFS) and PDC, and check the port numbers 443 & 389 & 636 & 80 and the PDC role (FSMO Role).


<https://social.technet.microsoft.com/Forums/ie/en-US/c0922273-5294-44eb-a9c2-fb0d3bb9c39e/adfs-30-error-installing-quotthe-server-is-not-operationalquot?forum=winsrvrDS>

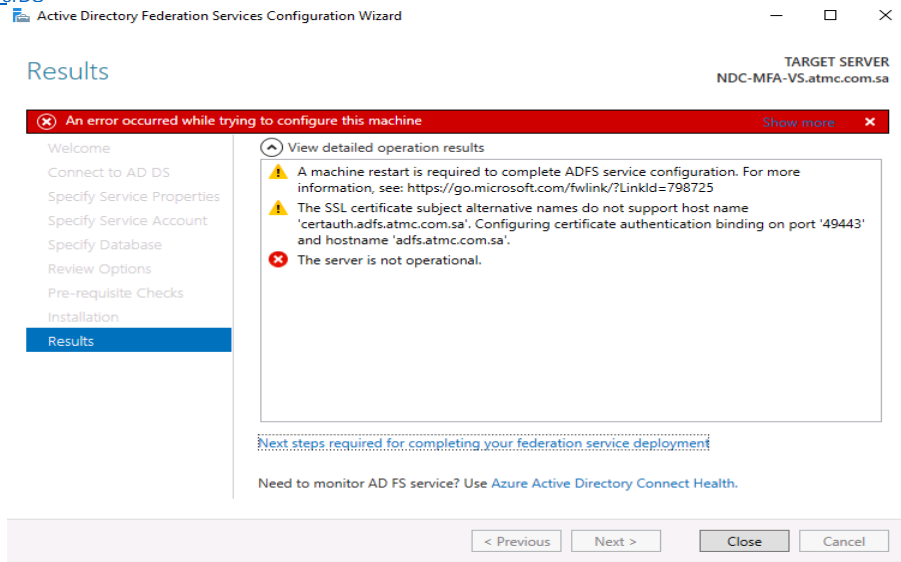

Note: If you see the below error this is error related to the permission for Database service account

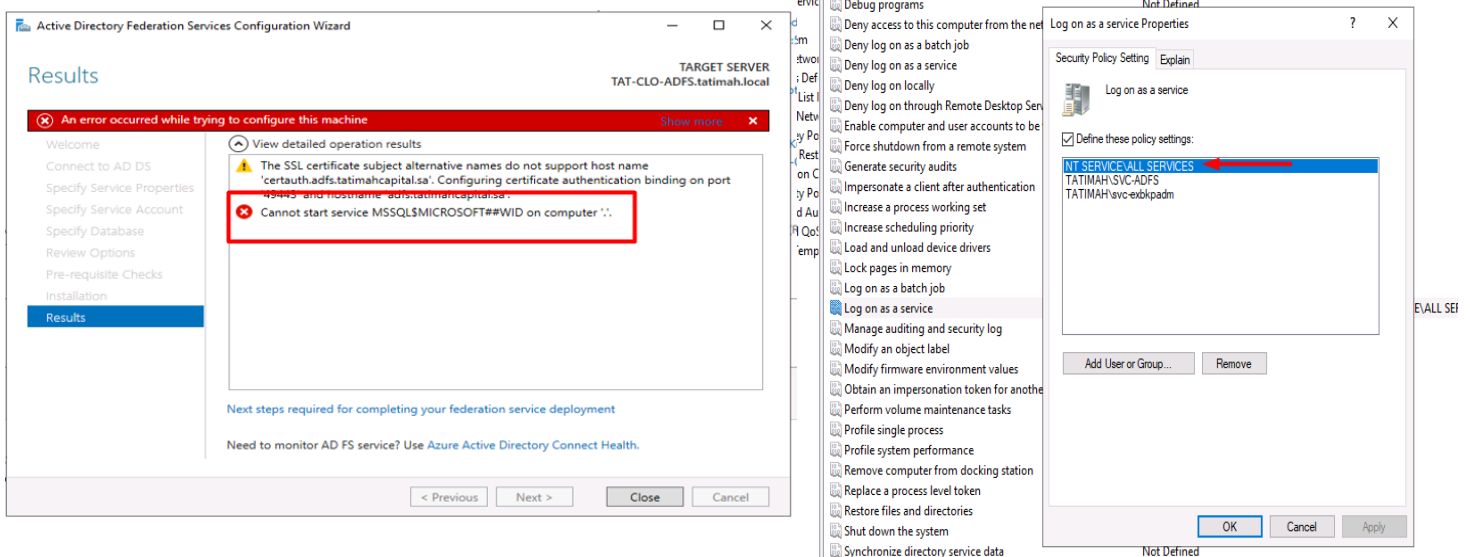


12- After completed and solving the above error, check whether the service is Running or not.

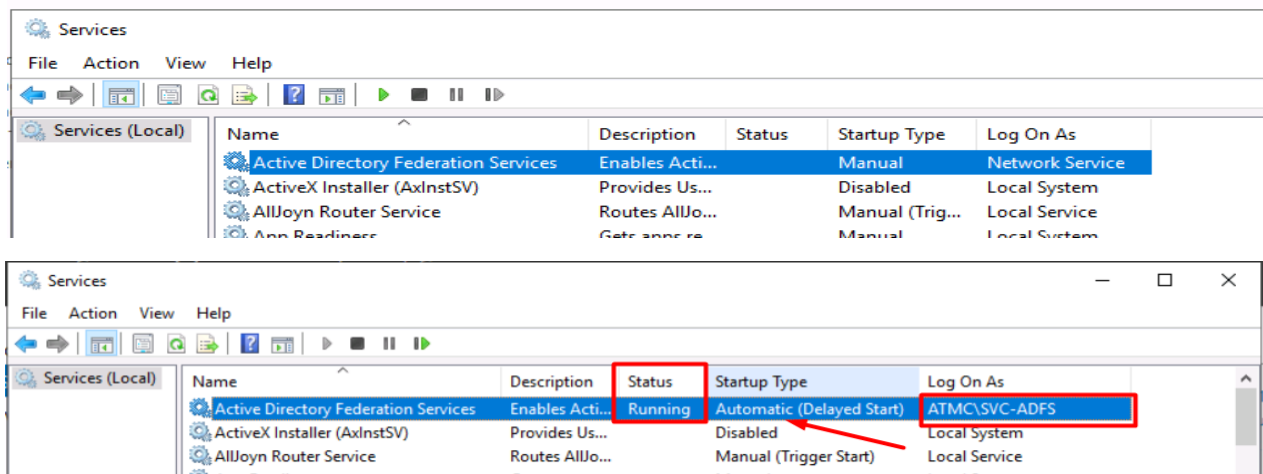


Open the AD FS console and check the certificate.


- First check this link for AD FS is working or not <https://adfs.ask.com/adfs/ls/IdpInitiatedSignOn>.
- From the certificate will see all the certificates you have.

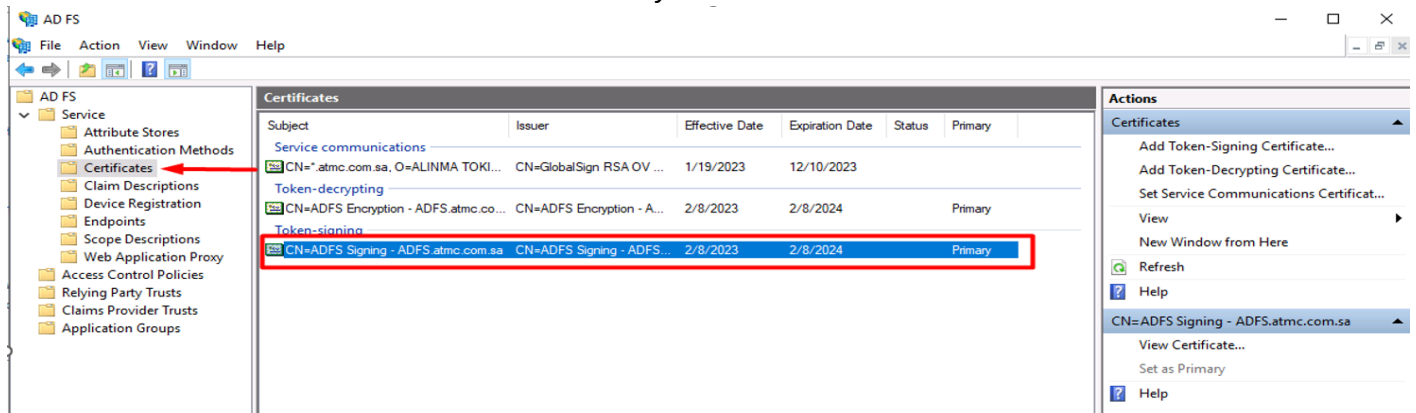


- Go to the Relying Party Trusts, Defiled, and Next.

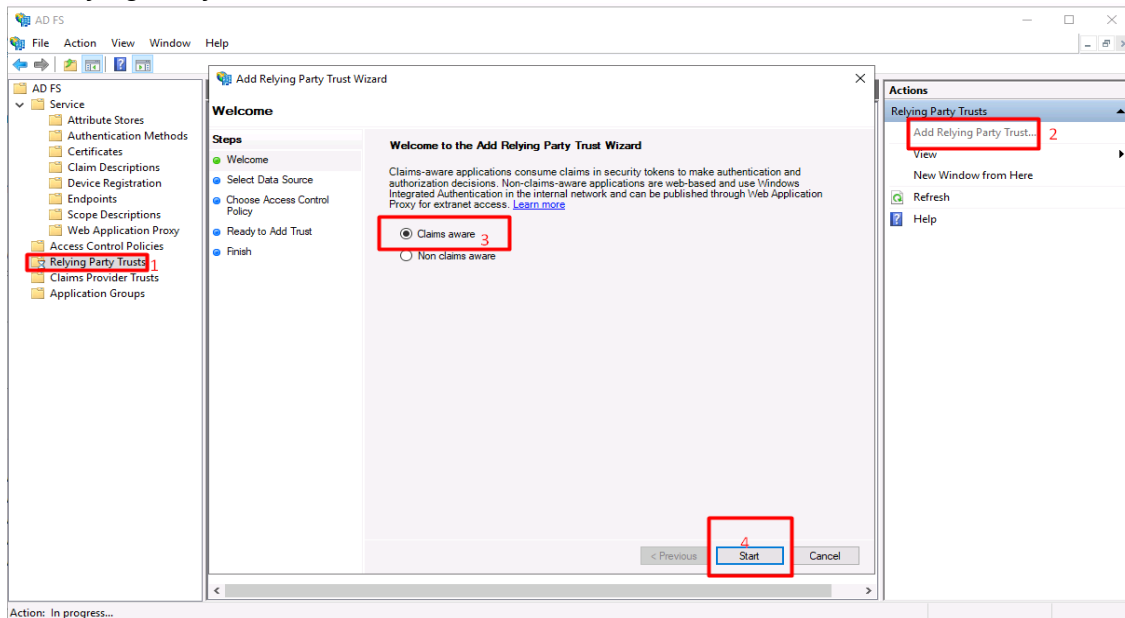


- Select Enter Data about the party and Next. (if you have metadata select second option).

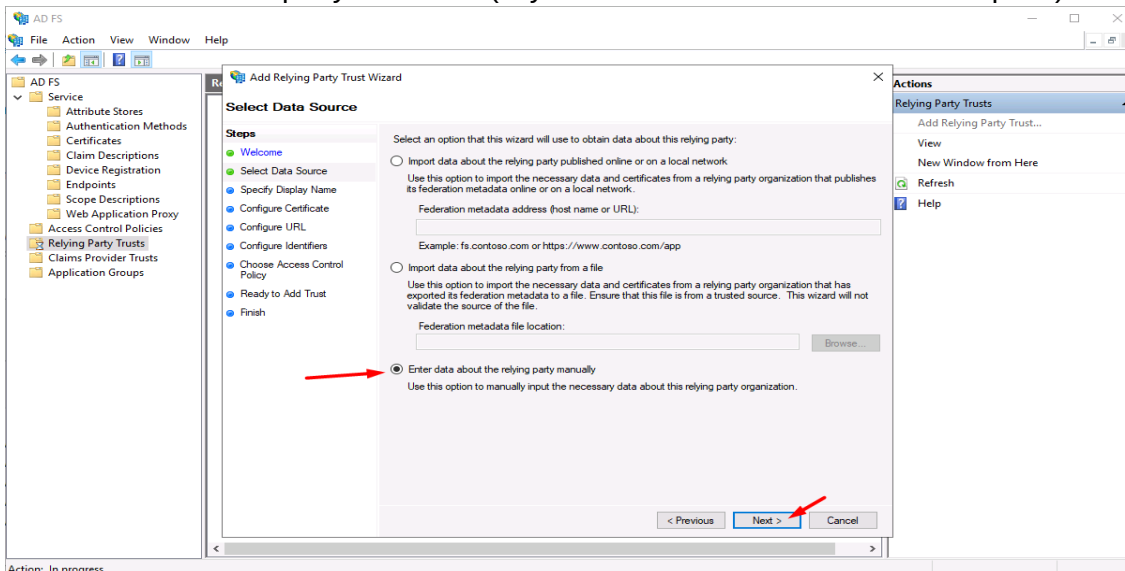


- Write any name and Next.

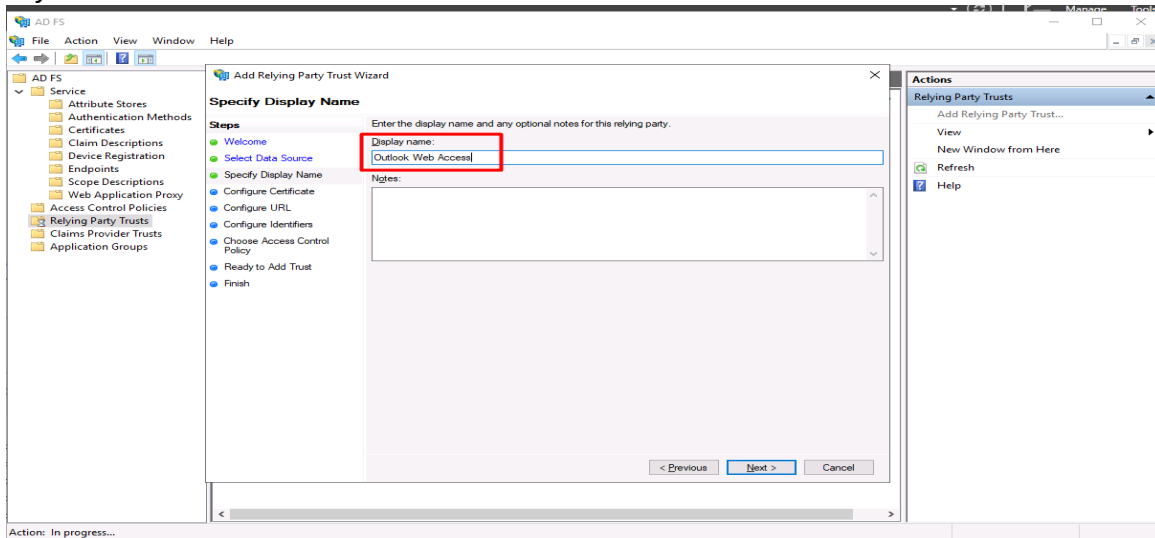


- Default and Next.

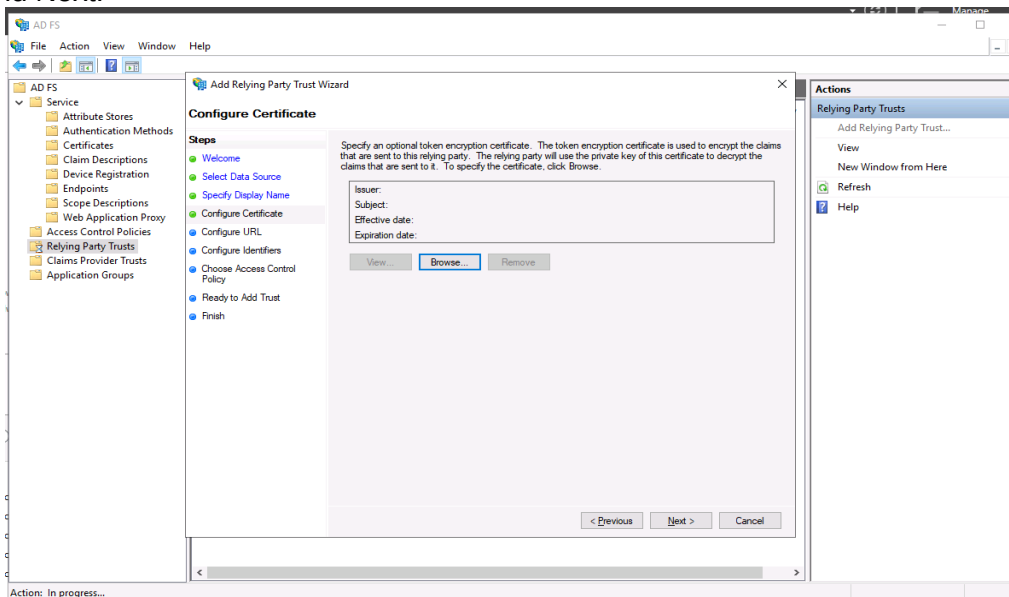


- Choose and write the URL <https://mail.domainname.com.sa/OWA> or ECP/

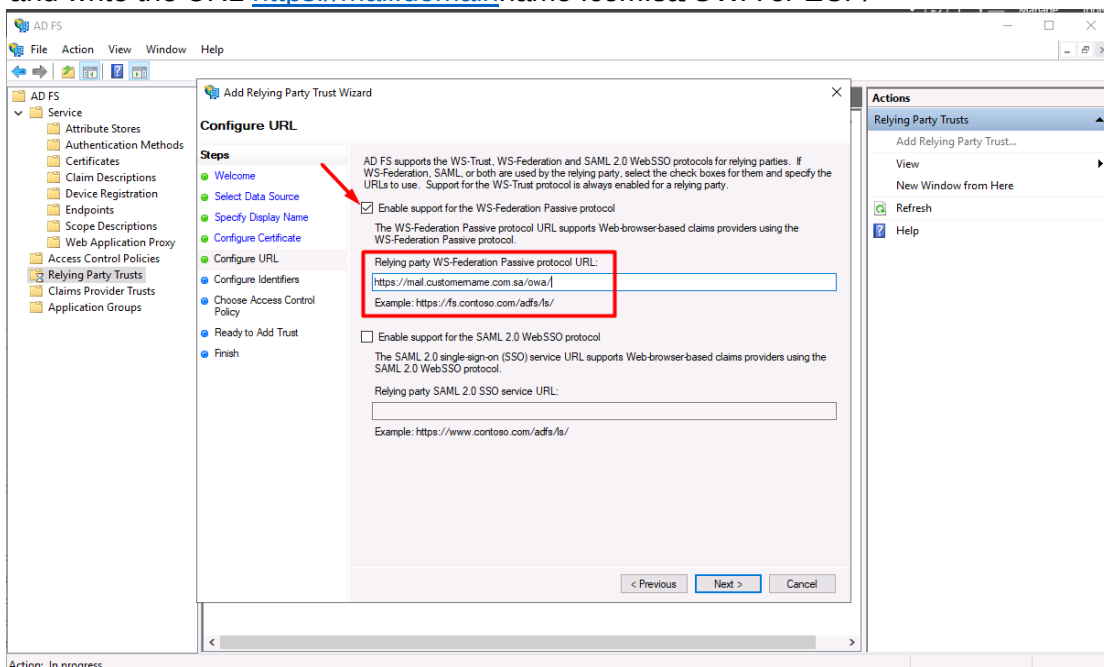


- Default and Next.

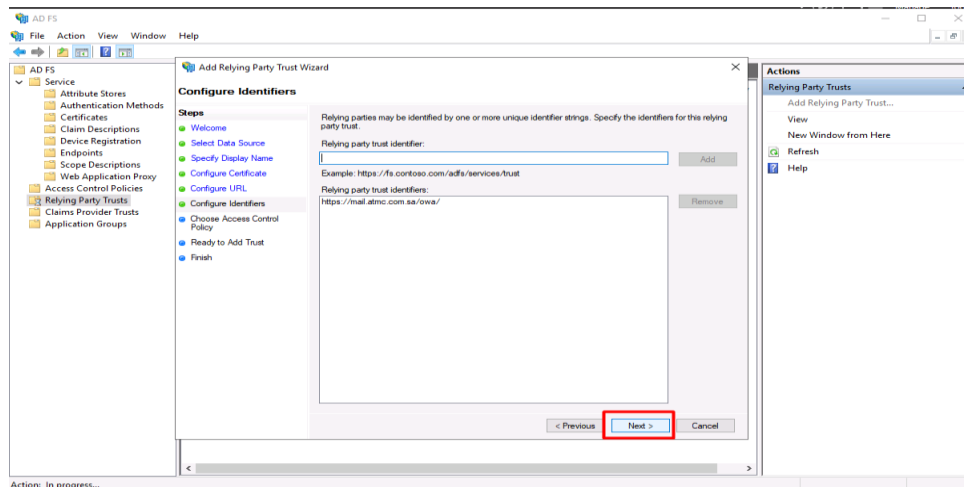



- Select Permit everyone, if you have Group select the second option that requires MFA and Next.

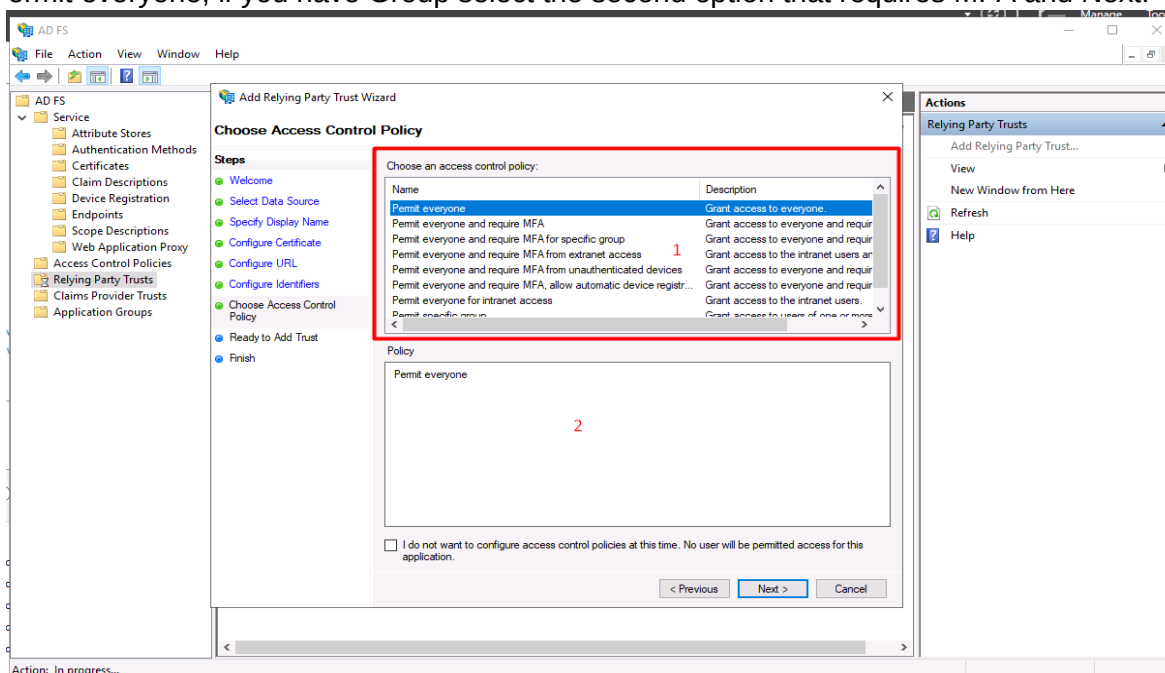


- Check the Identifiers and Next.

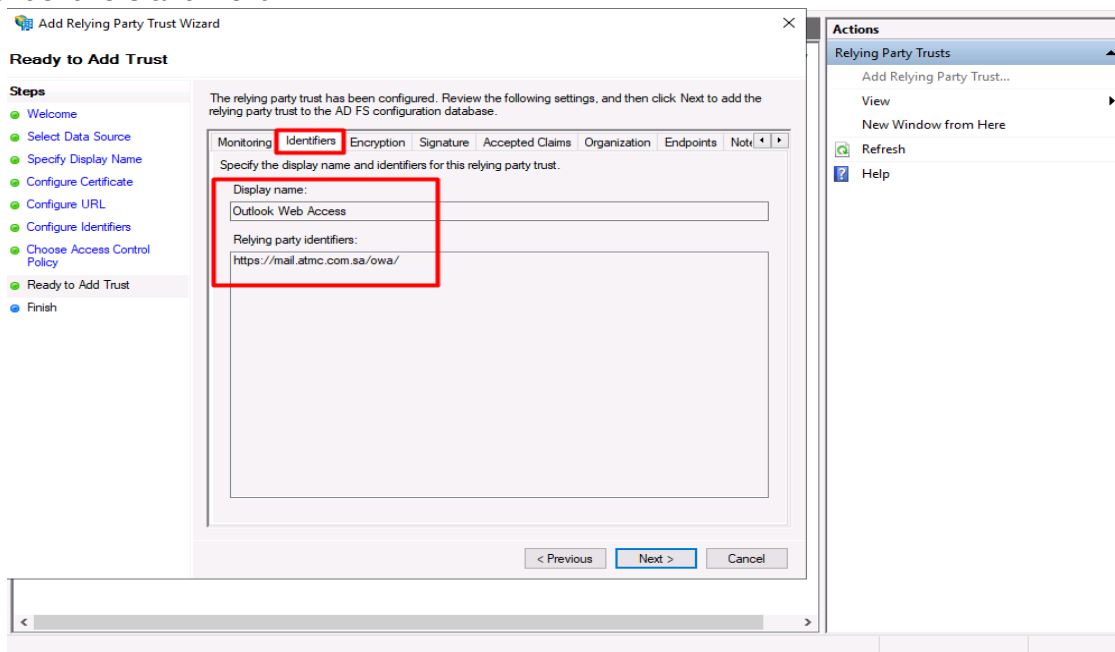


- If select the Configure Automatic will open the below screen and Add Rule,

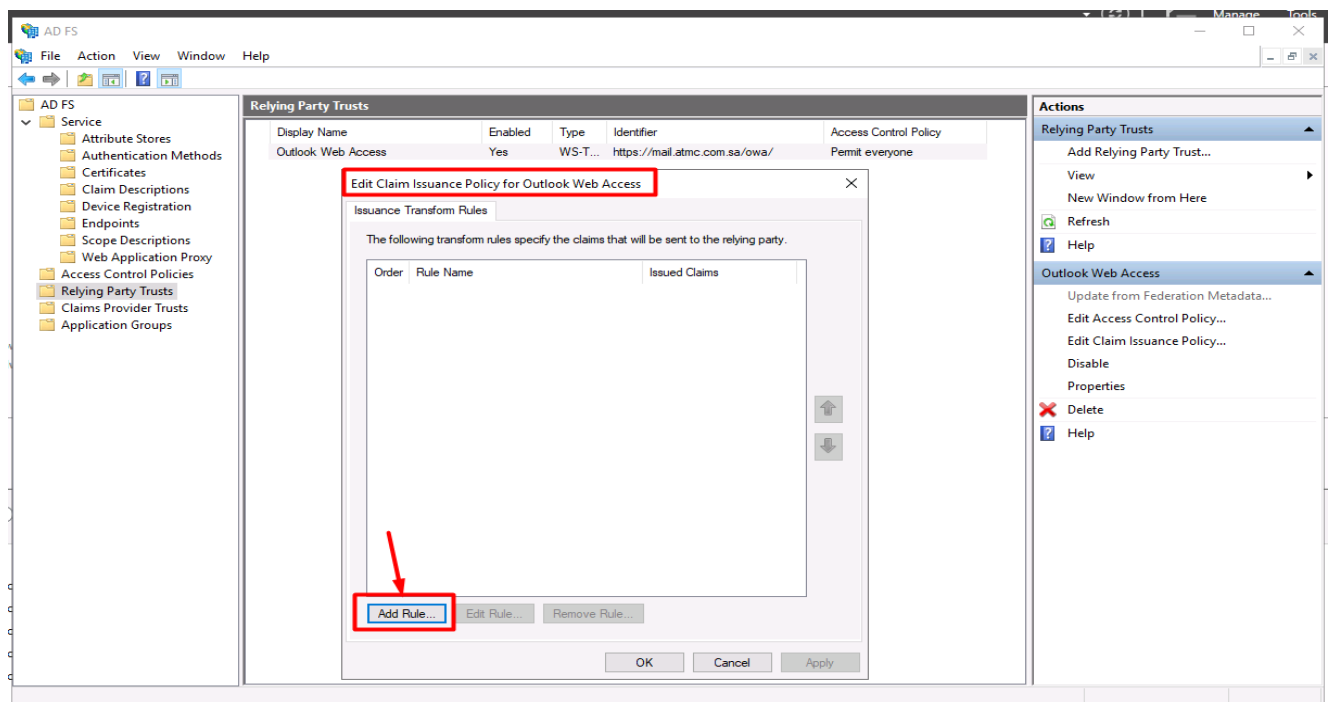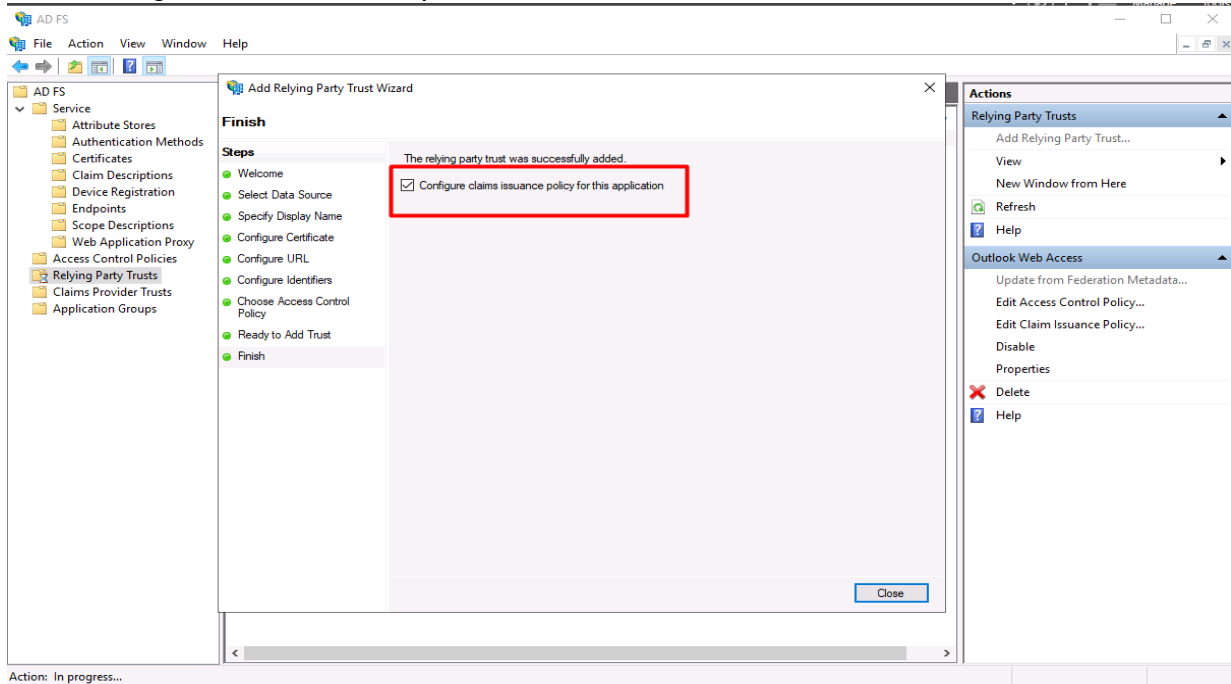

Note: - if not open click on Relying and Edit Claim as per the screenshot below.

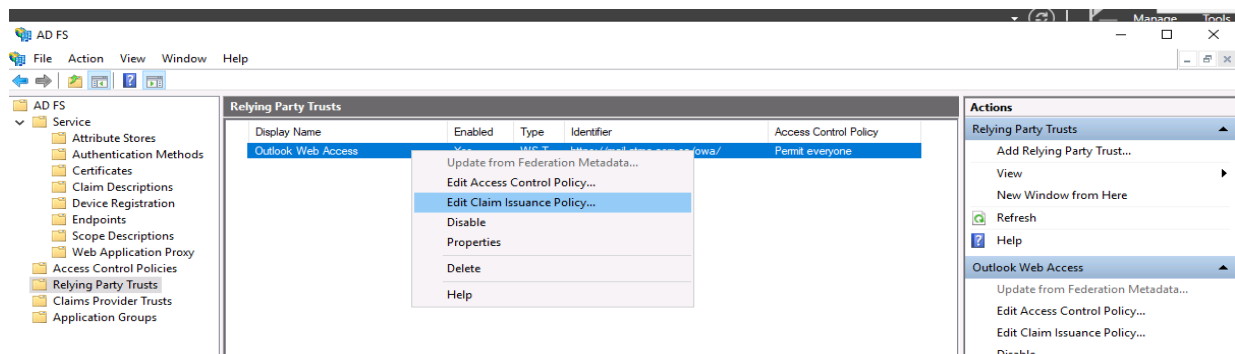

- Once you click on Add Rule will open a new window and choose watch Claim rule you need (for this customer will choose to **Send Claims Using,,,,,**).

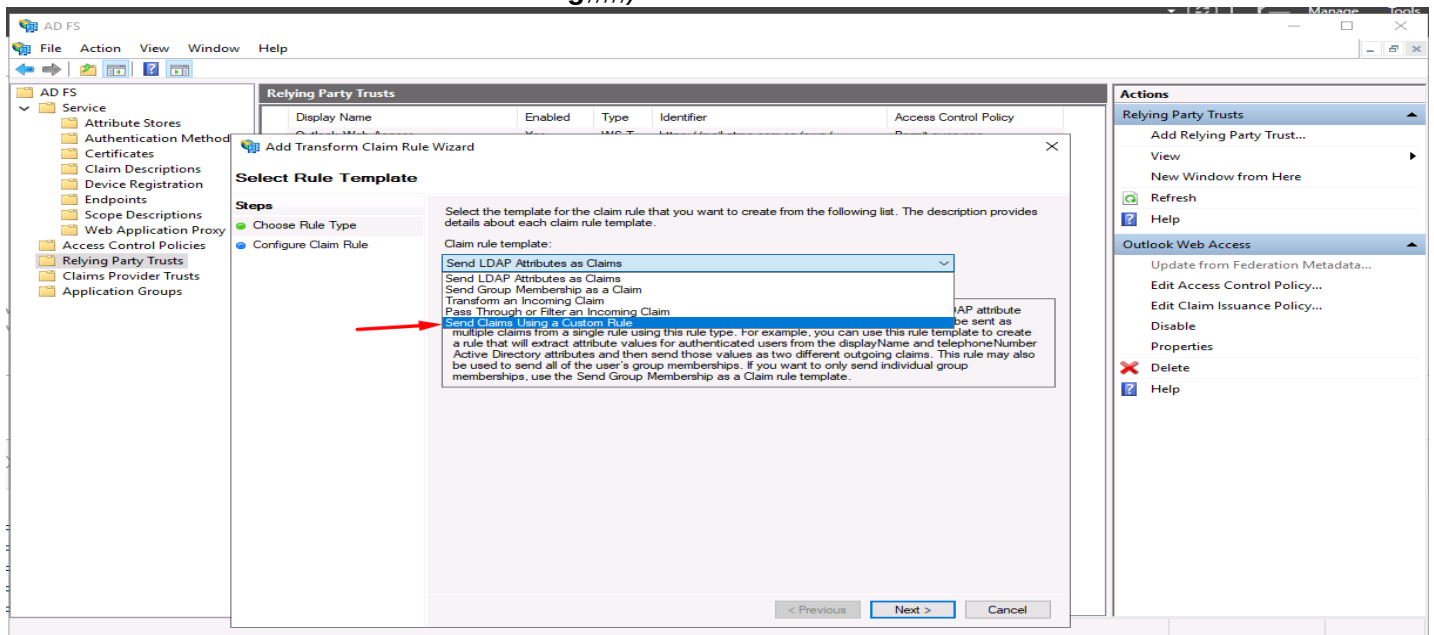

After configure AD FS will configure policy for the relying (OWA/ECP)

- For this step copy the below text and add the same below screenshot, follow the below steps:

1- **ActiveDirectoryUserSID**


```
c:[Type == "http://schemas.microsoft.com/ws/2008/06/identity/claims/windowsaccountname", Issuer == "AD AUTHORITY"] => issue(store = "Active Directory", types = ("http://schemas.microsoft.com/ws/2008/06/identity/claims/primarysid"), query = ";objectSID:{0}", param = c.Value);
```

2- **ActiveDirectoryUPN**


```
c:[Type == "http://schemas.microsoft.com/ws/2008/06/identity/claims/windowsaccountname", Issuer == "AD AUTHORITY"] => issue(store = "Active Directory", types = ("http://schemas.xmlsoap.org/ws/2005/05/identity/claims/upn"), query = ";userPrincipalName:{0}", param = c.Value);
```

3- **ActiveDirectoryGroupSID**

```
c:[Type == "http://schemas.microsoft.com/ws/2008/06/identity/claims/windowsaccountname", Issuer == "AD AUTHORITY"] => issue(store = "Active Directory", types = ("http://schemas.microsoft.com/ws/2008/06/identity/claims/groupsid"), query = ";tokenGroups(SID);{0}", param = c.Value);
```

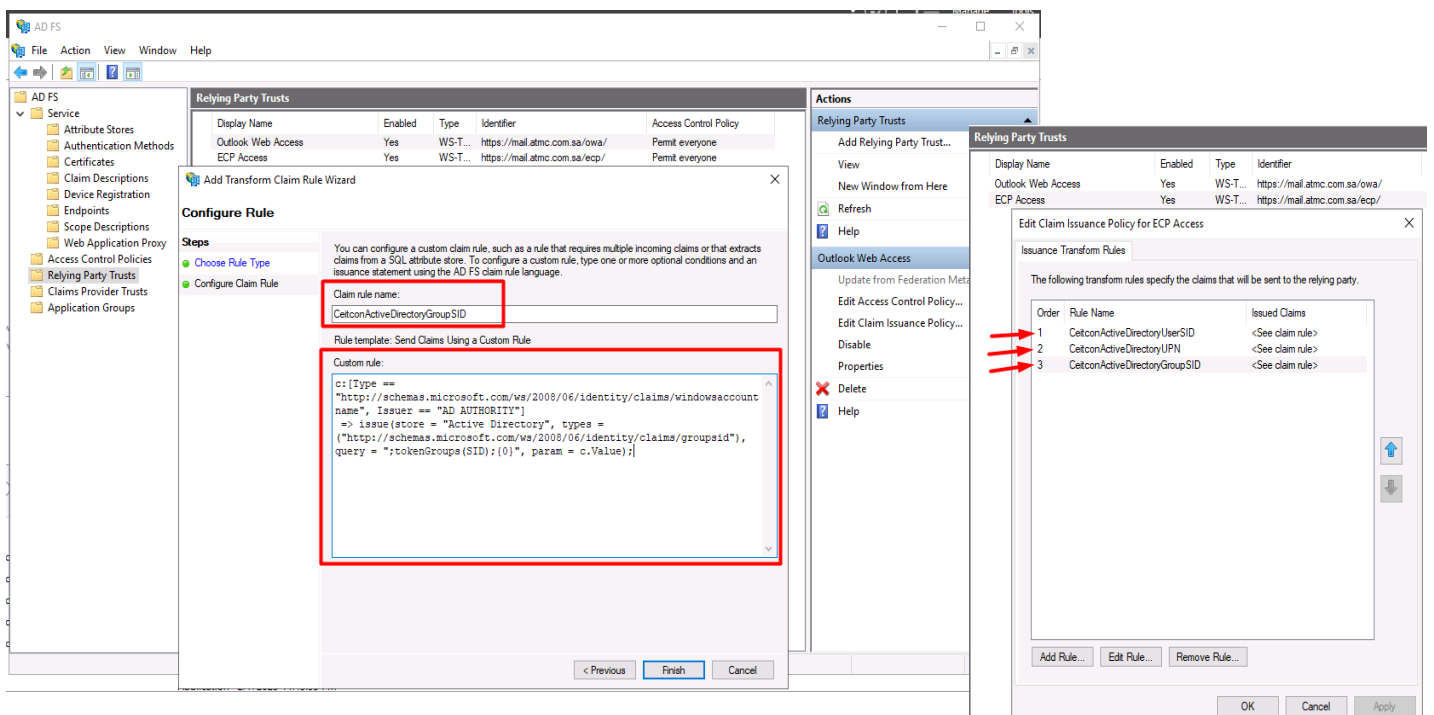


Note- you can change the policy for the relying, follow the below screenshot.

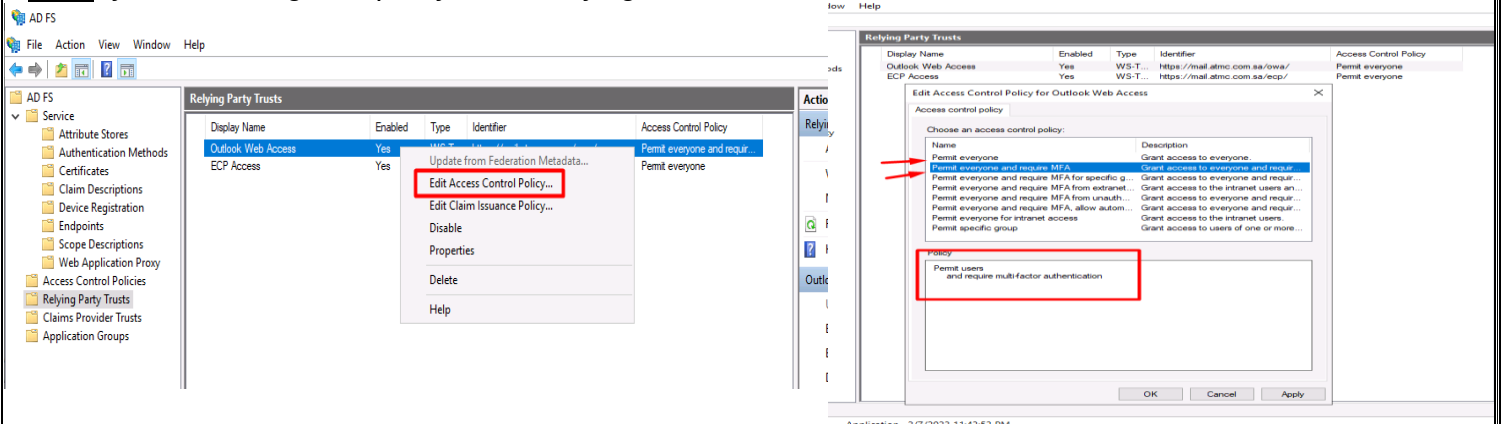


- Open the Server AD FS and run the below command, this command is for getting the ADFS Token signing certificate.


C:\Get-AdfsCertificate -CertificateType Token-Signing

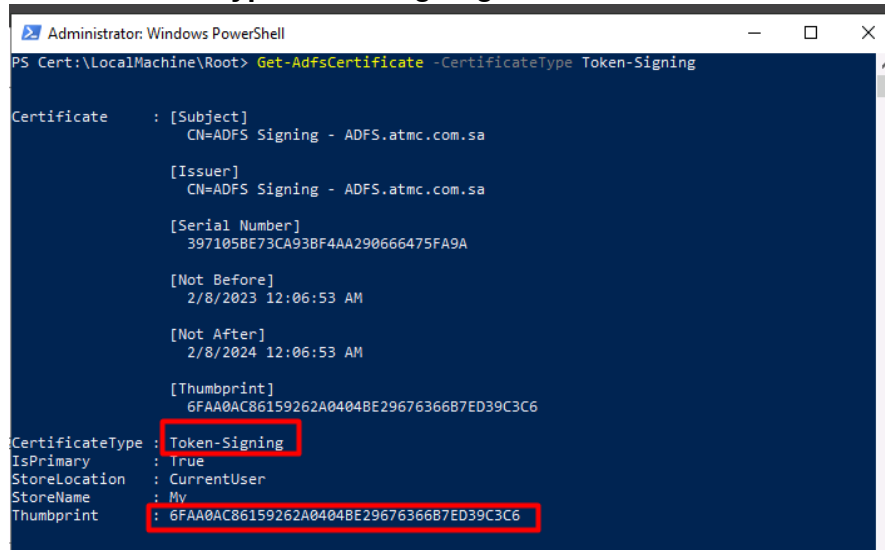


Note important: down the thumbprint and update in Exchange URI as per below for OWA/ECP

- **Export** and Install the AD FS **Token signing certificate** on both Exchange Servers.
 - First Export the certificate and copy it on both servers.

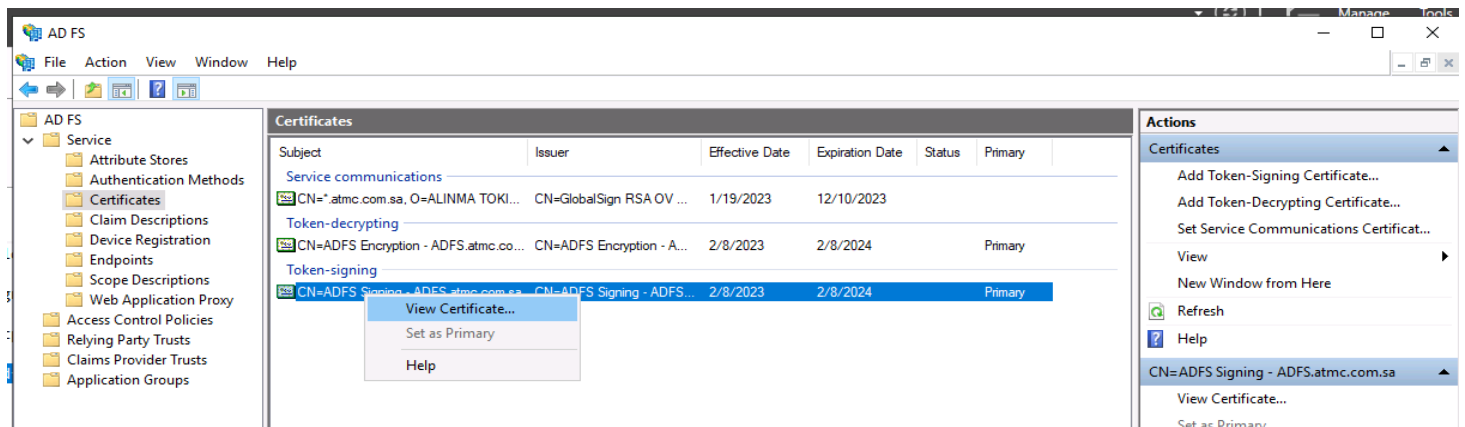

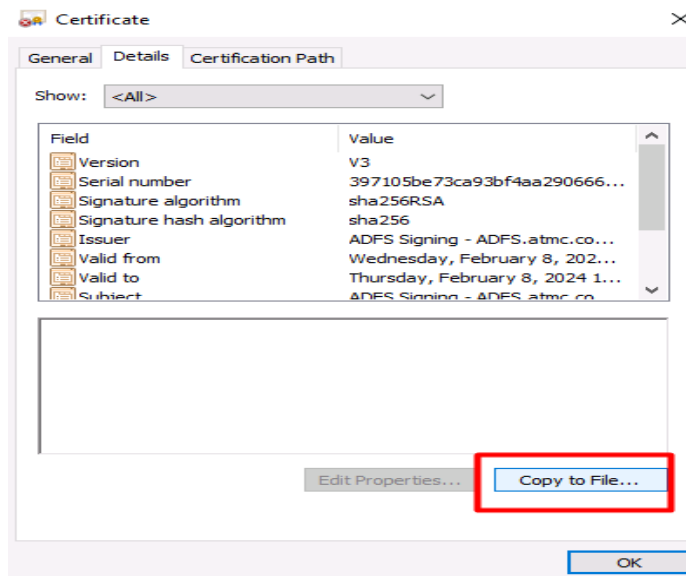

1-




Welcome to the Certificate Export Wizard



This wizard helps you copy certificates, certificate trust lists and certificate revocation lists from a certificate store to your disk.

A certificate, which is issued by a certification authority, is a confirmation of your identity and contains information used to protect data or to establish secure network connections. A certificate store is the system area where certificates are kept.


To continue, click Next.




2-

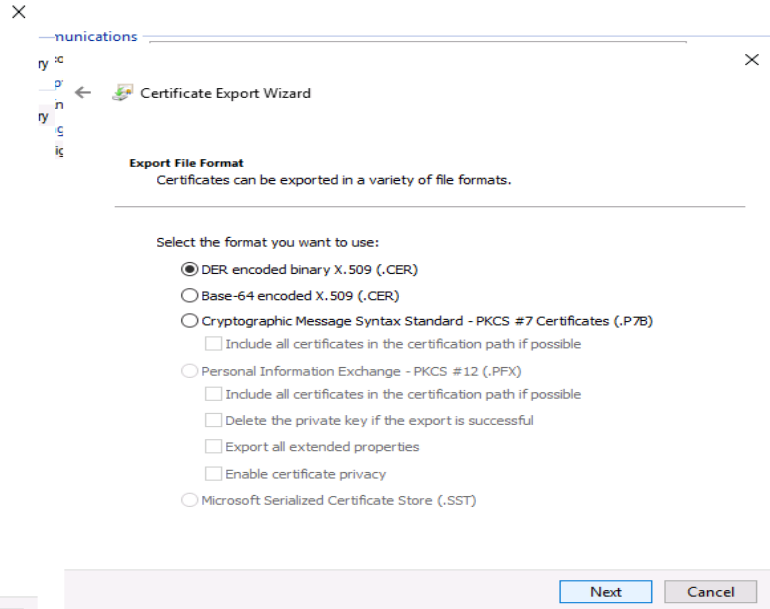


3

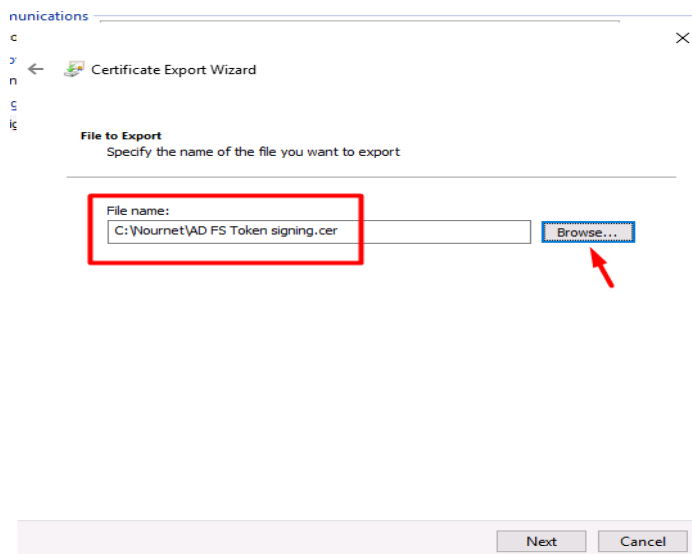


4

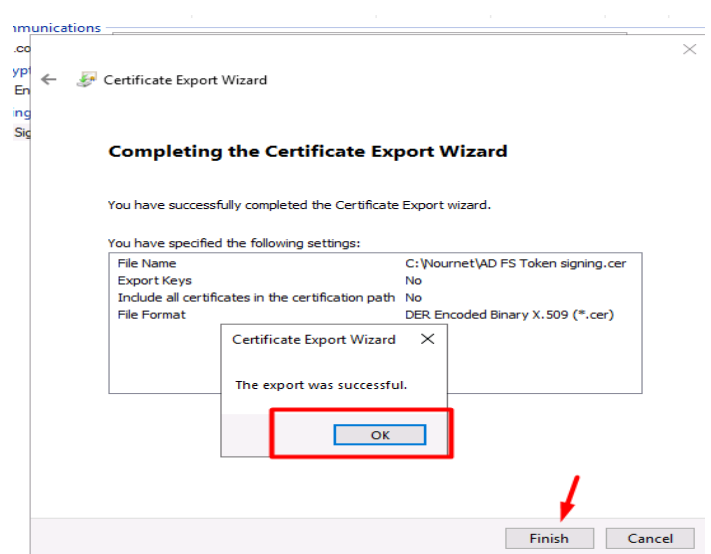

- **Import: once you Export the Token signing certificate Installation Token certificate on Exchange Servers (Personal/Trusted Root)**

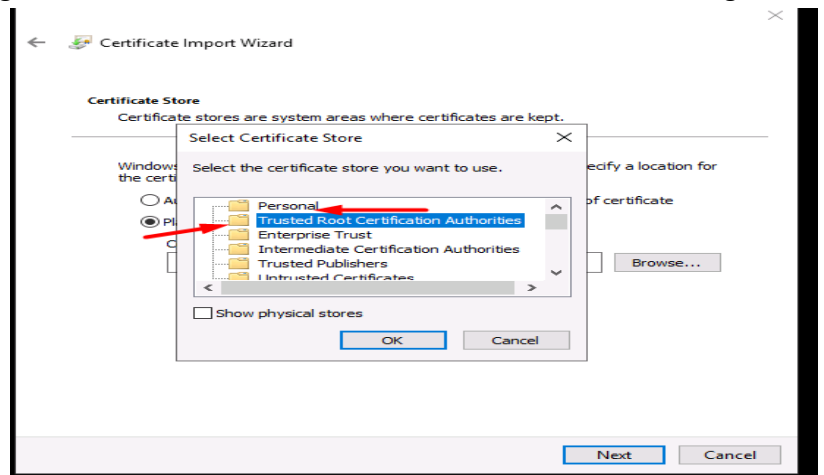

- One MMC and check the **Token signing certificate** in the Personal and Trusted Root.

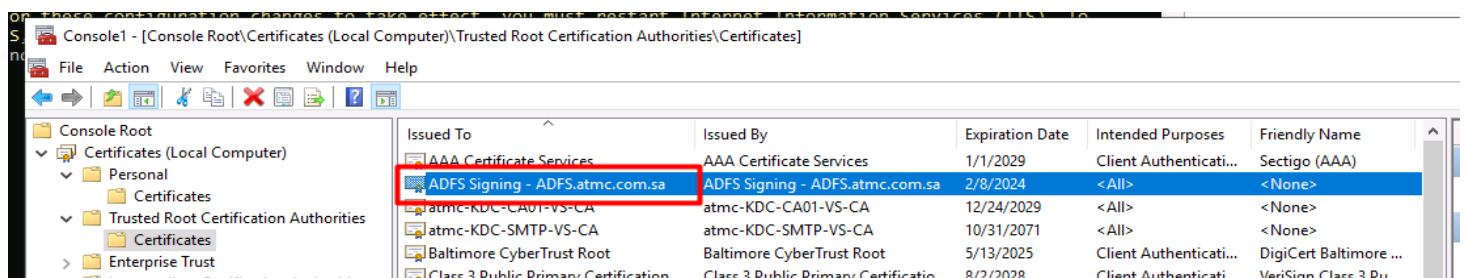


- **Second Open Exchange Manage shall and run the below command**


- 1- `C:\ $uris = @"(https://mail.custmername.com.sa/owa/","https://mail.custmername.com.sa/ecp/)"`
- 2- `C:\ Set-OrganizationConfig -AdfsIssuer "https://adfs.atmc.com.sa/adfs/ls/" -AdfsAudienceUris $uris -AdfsSignCertificateThumbprint 6FAA0AC86159262A0404BE29676366B7ED39C3C6` (this cord from **Token-Signing**).

`C:\ $uris = @"(https://mail.atmc.com.sa/owa/","https://mail.atmc.com.sa/ecp/)"`

`C:\ Set-OrganizationConfig -AdfsIssuer "https://adfs.custmername.com.sa/adfs/ls/" -AdfsAudienceUris $uris -AdfsSignCertificateThumbprint 6FAA0AC86159262A0404BE29676366B7ED39C3C6`

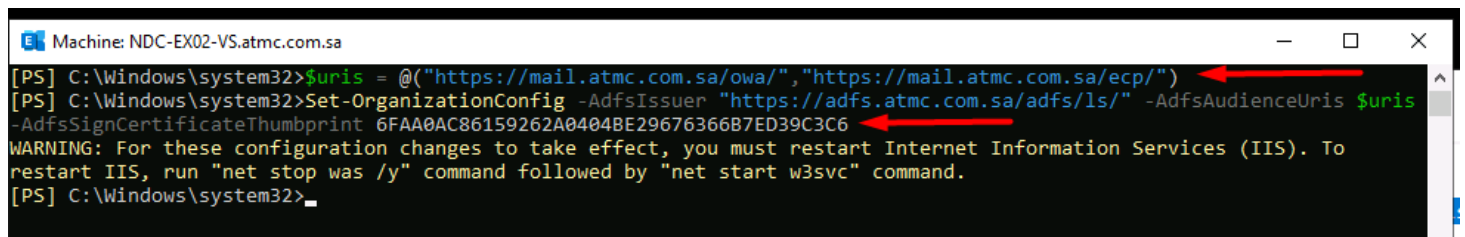

- Once you import the certificate create a local record in the DNS.

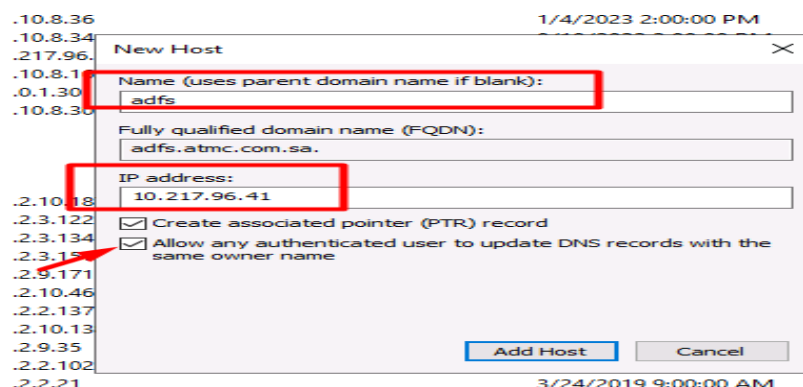



Add the certificate from the Ceitcon Team


1- Before start you need to allow communication as allowed table.

MFA to AD					
System	Source IP	Destination IP	Protocol	Port	Connection
MFA to AD	10.214.25.206 Ceitcon MFA	Ips for Domain Controller	TCP	PING, 389	One Way

MFA to AD FS					
System	Source IP	Destination IP	Protocol	Port	Connection
MFA to AD	10.214.25.206 Ceitcon MFA	Ips for AD FS Servers	TCP	80, 443	BI-Direction


2- Copy the certificate on the server (both servers), and add in the Personal and Trusted Root Certification Authorities

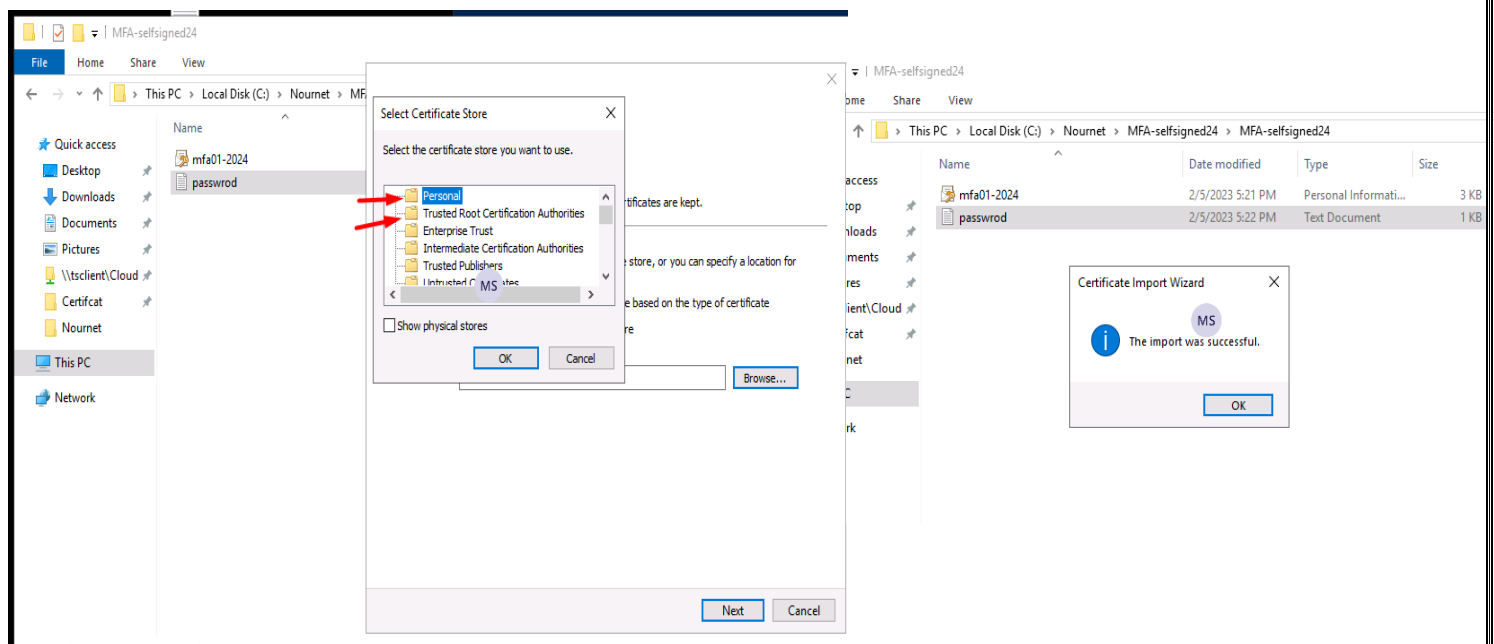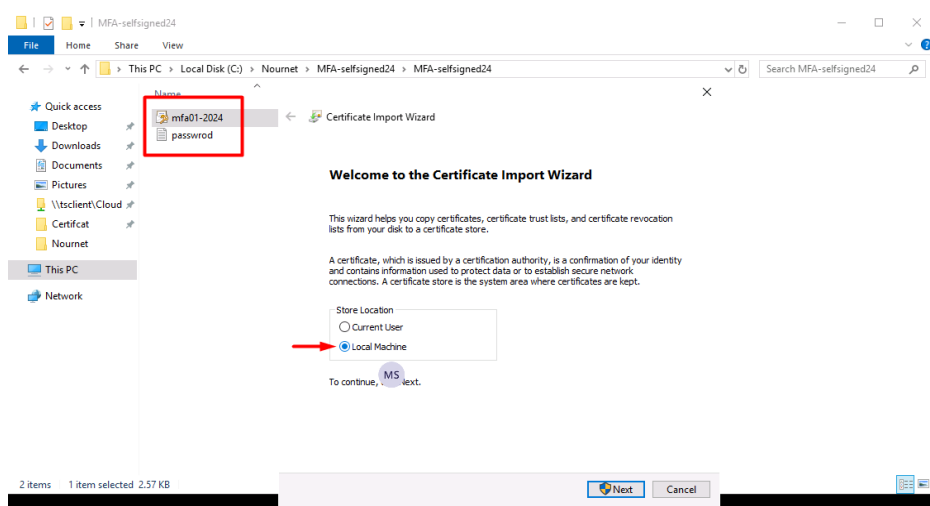

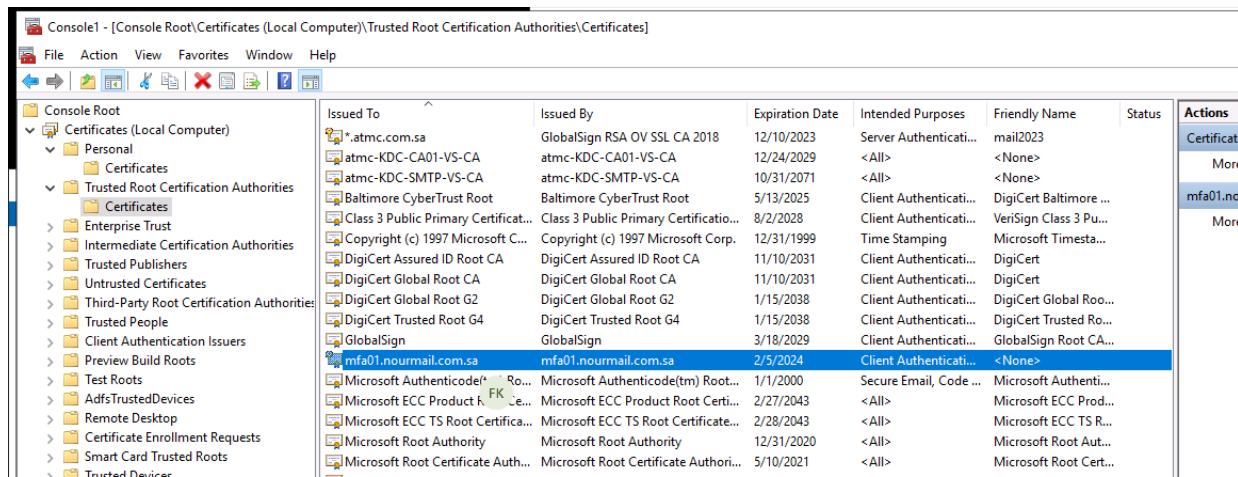

3- After adding the certificate for the Ceitcon Team copy this file CMFA (Same Fail for this Document), and opens the file name **config** and **Follow the steps as screenshot.**

- 1- adds this URL in the host file, (10.214.25.206 mfa01.nourmail.com.sa)
- 2- open the CMFA and Change the domain name to the **Domain controller to the customer.**

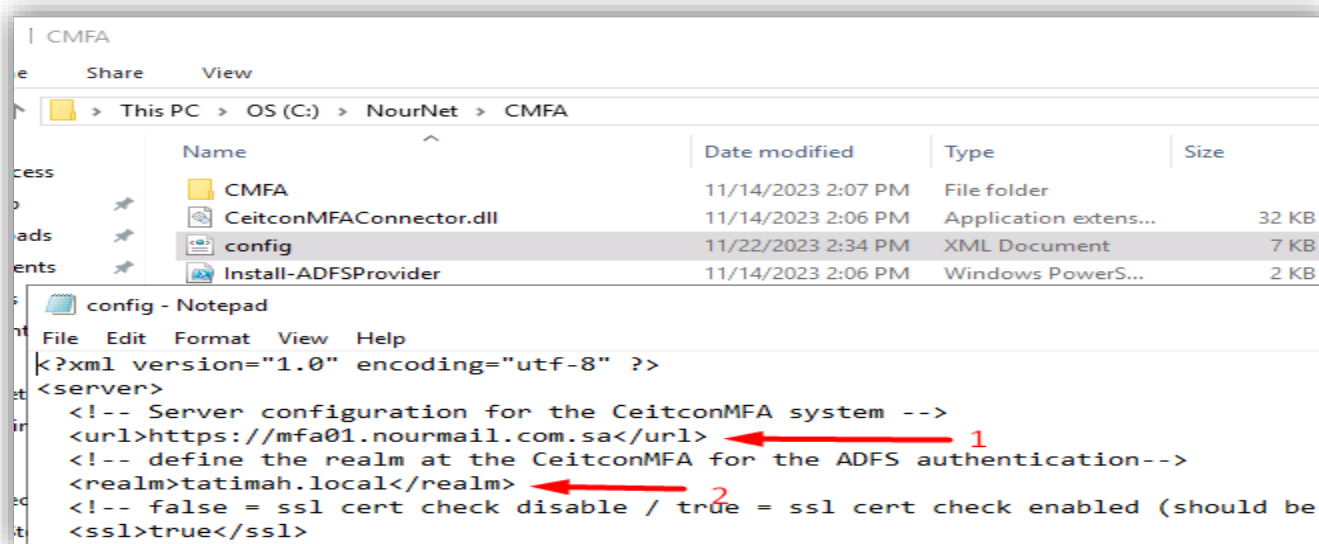

4- After finishing Step number 1, RUN the below command as below screenshot.

- 1- Install-ADFSPProvider.ps1
- 2- CeitconMFAConnector.dll

```

PS C:\Nournet> cd .\CMFA\
PS C:\Nournet\CMFA> .\Install-ADFSPProvider.ps1 1
C:\Nournet\CMFA\CeitconMFAConnector.dll 2
Log source created
Gac-Util: Assembly C:\Nournet\CMFA\CeitconMFAConnector.dll gacced
WARNING: PS0114: The authentication provider was successfully registered with the policy store. To enable this
provider, you must restart the AD FS Windows Service on each server in the farm.
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to start...
PS C:\Nournet\CMFA>
  
```

Note important: if you have a second ADFS, apply the same configuration for the CEITCON TEAM

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.


PS C:\Windows\system32> cd C:\Nounet\CMFA
PS C:\Nounet\CMFA> .\Install-ADFSProvider.ps1
C:\Nounet\CMFA\CeitconMFAConnector.dll
Log source created
Gac-Util: Assembly C:\Nounet\CMFA\CeitconMFAConnector.dll gacced
Register-AdfsAuthenticationProvider : PS0033: This cmdlet cannot be executed from a secondary server in a local
database farm. The primary server is presently: adfs.boutiquegroup.com. To execute management cmdlets, either log
onto the primary server or connect using PowerShell remoting. For more information see
https://go.microsoft.com/fwlink/?LinkId=294129.
At C:\Nounet\CMFA\Install-ADFSProvider.ps1:50 char:1
+ Register-AdfsAuthenticationProvider -TypeName $typeName -Name "Ceitco ...
+ ~~~~~
+ CategoryInfo          : OpenError: (:) [Register-AdfsAuthenticationProvider], InvalidOperationException
+ FullyQualifiedErrorId : PS0033,Microsoft.IdentityServer.Management.Commands.AddExternalAuthProviderCommand
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
PS C:\Nounet\CMFA>
```

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Windows\system32> cd C:\Nounet\CMFA
PS C:\Nounet\CMFA> .\Install-ADFSProvider.ps1
C:\Nounet\CMFA\CeitconMFAConnector.dll
Log source created
Gac-Util: Assembly C:\Nounet\CMFA\CeitconMFAConnector.dll gacced
Register-AdfsAuthenticationProvider : PS0033: This cmdlet cannot be executed from a secondary server in a local
database farm. The primary server is presently: adfs.boutiquegroup.com. To execute management cmdlets, either log
onto the primary server or connect using PowerShell remoting. For more information see
https://go.microsoft.com/fwlink/?LinkId=294129.
At C:\Nounet\CMFA\Install-ADFSProvider.ps1:50 char:1
+ Register-AdfsAuthenticationProvider -TypeName $typeName -Name "Ceitco ...
+ ~~~~~
+ CategoryInfo          : OpenError: (:) [Register-AdfsAuthenticationProvider], InvalidOperationException
+ FullyQualifiedErrorId : PS0033,Microsoft.IdentityServer.Management.Commands.AddExternalAuthProviderCommand
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
PS C:\Nounet\CMFA> .\Remove-ADFSProvider.ps1
Unregister-AdfsAuthenticationProvider : PS0033: This cmdlet cannot be executed from a secondary server in a local
database farm. The primary server is presently: adfs.boutiquegroup.com. To execute management cmdlets, either log
onto the primary server or connect using PowerShell remoting. For more information see https://go.microsoft.com/fwlink/?LinkId=294129.
At C:\Nounet\CMFA\Remove-ADFSProvider.ps1:8 char:1
+ Unregister-AdfsAuthenticationProvider -Name "CeitconMFAConnector"
+ ~~~~~
+ CategoryInfo          : OpenError: (:) [Unregister-AdfsAuthenticationProvider], InvalidOperationException
+ FullyQualifiedErrorId : PS0033,Microsoft.IdentityServer.Management.Commands.RemoveExternalAuthProviderCommand

GAC    Version      Location
----
True   v4.0.30319      C:\Windows\Microsoft.Net\assembly\GAC_64\System.EnterpriseServices\v4.0.4.0.0.0_b03f5f7f11d50a3a\System.EnterpriseServices.dll
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
WARNING: Waiting for service 'Active Directory Federation Services (adfssrv)' to stop...
PS C:\Nounet\CMFA>
```

5- Open the AD FS, Authentication Methods, Edit Multi, and select the CeitconMFA as below screenshot.

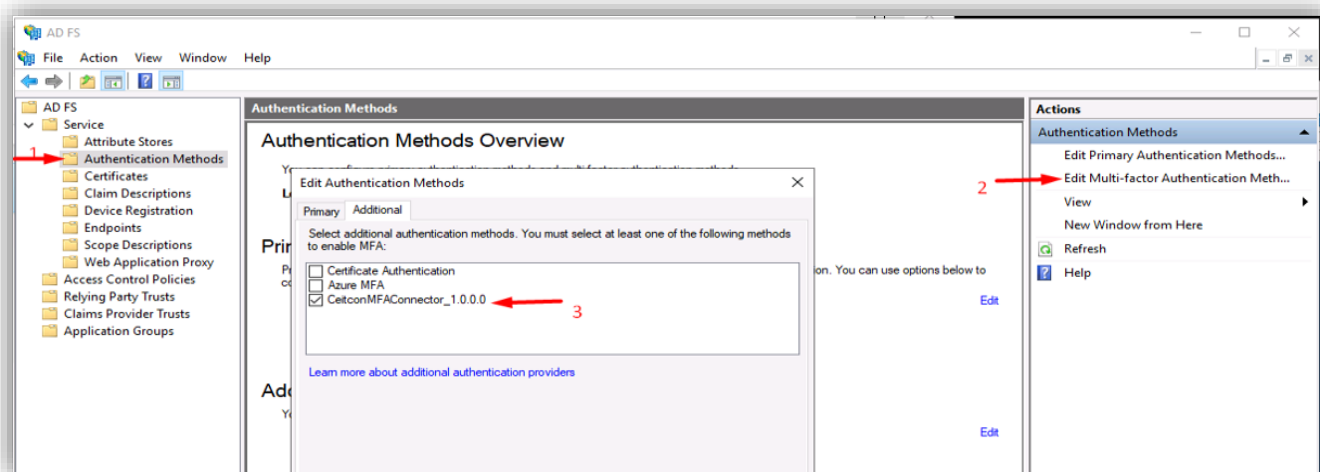

How to Enable ADFS Redirection (one for ECP and one for OWA)

6- Run these comments on both exchange servers and follow the screenshot.

7- Set-ECPVirtualDirectory -Identity "exchange server name\ecp (Default Web Site)" -AdfsAuthentication \$true - BasicAuthentication \$false -DigestAuthentication \$false -FormsAuthentication \$false -WindowsAuthentication \$false

8- Set-OWAVirtualDirectory -Identity "exchange server name\owa (Default Web Site)" -AdfsAuthentication \$true - BasicAuthentication \$false -DigestAuthentication \$false -FormsAuthentication \$false -OAuthAuthentication \$false - WindowsAuthentication \$false

Note important: open the Exchange **PowerShell** as administrator.

Set-ECPVirtualDirectory -Identity "BGP-EX-01\ecp (Default Web Site)" -AdfsAuthentication \$true - BasicAuthentication \$false -DigestAuthentication \$false -FormsAuthentication \$false -WindowsAuthentication \$false

Set-ECPVirtualDirectory -Identity "BGP-EX-02\ecp (Default Web Site)" -AdfsAuthentication \$true - BasicAuthentication \$false -DigestAuthentication \$false -FormsAuthentication \$false -WindowsAuthentication \$false

Note: if you see the below error run the highlight command and run your command again

```
[PS] C:\Windows\system32>Set-OWAVirtualDirectory -Identity "MS-SRV-EX01\owa (Default Web Site)" -AdfsAuthentication $true -BasicAuthenticat
ion $false -DigestAuthentication $false -FormsAuthentication $false -OAuthAuthentication $false -WindowsAuthentication $false
WARNING: For these configuration changes to take effect, you must restart Internet Information Services (IIS). To
restart IIS, run "net stop was /y" command followed by "net start w3svc" command.
Before you enable ADFS authentication for Outlook Web App, you have to enable it for the Exchange admin center by
running Set-EcpVirtualDirectory | Set-EcpVirtualDirectory -AdfsAuthentication $true
+ CategoryInfo          : InvalidOperation. (:) [Set-OwavirtualDirectory], TaskException
+ FullyQualifiedErrorId : [Server=MS-SRV-EX01,RequestId=8d2da14a-1339-45a0-b47a-98f48896b1fb,TimeStamp=11/17/2023
2:13:22 PM] [FailureCategory=Cmdlet-TaskException] 9320CDA4,Microsoft.Exchange.Management.SystemConfigurationTasks
.SetOwaVirtualDirectory
+ PSComputerName        : ms-srv-ex01.ask.local
```

```
Machine: NDC-EX02-VS.atmc.com.sa
[PS] C:\Windows\system32>Set-ECPVirtualDirectory -Identity "NDC-EX01-VS\ecp (Default Web Site)" -AdfsAuthentication $true
e -BasicAuthentication $false -DigestAuthentication $false -FormsAuthentication $false -WindowsAuthentication $false
Creating a new session for implicit remoting of "Set-EcpVirtualDirectory" command...
WARNING: For these configuration changes to take effect, you must restart Internet Information Services (IIS). To
restart IIS, run "net stop was /y" command followed by "net start w3svc" command.
WARNING: You've changed the authentication method for the ECP virtual directory. Please make the same change to the OWA
virtual directory in the same website.
[PS] C:\Windows\system32>Set-ECPVirtualDirectory -Identity "NDC-EX02-VS\ecp (Default Web Site)" -AdfsAuthentication $true
e -BasicAuthentication $false -DigestAuthentication $false -FormsAuthentication $false -WindowsAuthentication $false
WARNING: For these configuration changes to take effect, you must restart Internet Information Services (IIS). To
restart IIS, run "net stop was /y" command followed by "net start w3svc" command.
WARNING: You've changed the authentication method for the ECP virtual directory. Please make the same change to the OWA
virtual directory in the same website.
[PS] C:\Windows\system32>
```

Set-OWAVirtualDirectory -Identity "BGP-EX-01\ecp (Default Web Site)" -AdfsAuthentication \$true - BasicAuthentication \$false -DigestAuthentication \$false -FormsAuthentication \$false -WindowsAuthentication \$false

Set-OWAVirtualDirectory y -Identity "BGP-EX-02\ecp (Default Web Site)" -AdfsAuthentication \$true - BasicAuthentication \$false -DigestAuthentication \$false -FormsAuthentication \$false -WindowsAuthentication \$false

```
Machine: NDC-EX02-VS.atmc.com.sa
[PS] C:\Windows\system32>Set-OwaVirtualDirectory -Identity "NDC-EX01-VS\owa (Default Web Site)" -AdfsAuthentication $true
e -BasicAuthentication $false -DigestAuthentication $false -FormsAuthentication $false -OAuthAuthentication $false -Wind
owsAuthentication $false
WARNING: For these configuration changes to take effect, you must restart Internet Information Services (IIS). To
restart IIS, run "net stop was /y" command followed by "net start w3svc" command.
[PS] C:\Windows\system32>Set-OWAVirtualDirectory -Identity "NDC-EX02-VS\owa (Default Web Site)" -AdfsAuthentication $true
e -BasicAuthentication $false -DigestAuthentication $false -FormsAuthentication $false -OAuthAuthentication $false -Wind
owsAuthentication $false
WARNING: For these configuration changes to take effect, you must restart Internet Information Services (IIS). To
restart IIS, run "net stop was /y" command followed by "net start w3svc" command.
[PS] C:\Windows\system32>
```

Run this command to check your configuration C:\>Get-OrganizationConfig | select *adfs*

1- For Token AD FS, 2- For All URL

```
[PS] C:\>Get-OrganizationConfig | select *adfs*
Creating a new session for implicit remoting of "Get-OrganizationConfig" command...

AdfsAuthenticationConfiguration : <service><federatedAuthentication><wsFederation passiveRedirectEnabled="true" issuer="https://adfs.tatimahcapital.sa/adfs/ls/" realm="https://fake realm/"
requireHttps="true" /><cookieHandler requireSsl="true" path="/" /></federatedAuthentication><certificateValidation certificateValidationMode="PeerOrChainTrust"
/><audienceUris><add value="https://mail.tatimahcapital.sa/owa/" /><add value="https://mail.tatimahcapital.sa/owa/" /><add
value="https://mail.tatimahcapital.sa/ecp/" /><add value="https://mail.tatimahcapital.sa/ecp/" /></audienceUris><issuerNameRegistry
type="Microsoft.IdentityModel.Tokens.ConfigurationBasedIssuerNameRegistry, Microsoft.IdentityModel, Version=3.5.0.0, Culture=neutral,
PublicKeyToken=31bf3856ad364e35"><trustedIssuers><add thumbprint="7F90CED38341E9917E50EFA29FA6D120A53B642E" name="Adfs" /></trustedIssuers></issuerNameRegistry></service> 1
AdfsIssuer : https://adfs.tatimahcapital.sa/adfs/ls/
AdfsAudienceUris : {https://mail.tatimahcapital.sa/owa/, https://mail.tatimahcapital.sa/ecp/, https://mail.tatimahcapital.sa/ecp/} 2
AdfsSignCertificateThumbprints : {7F90CED38341E9917E50EFA29FA6D120A53B642E}
AdfsEncryptCertificateThumbprint :
```


Note: If the server AD FS is not some VLAN we need to allow communication between AD FS and Exchange servers and allow communication to all VLANs.

MFA to Exchange server

System	Source IP	Destination IP	Protocol	Port	Connection
MFA to AD	Exchange Servers	AD FS	TCP	PING, 443	One Way

<https://adfs.mydomain.com/adfs/ls/ldplinitiatedSignOn>

<https://adfs.domainname.com/adfs/ls/ldplinitiatedSignOn>

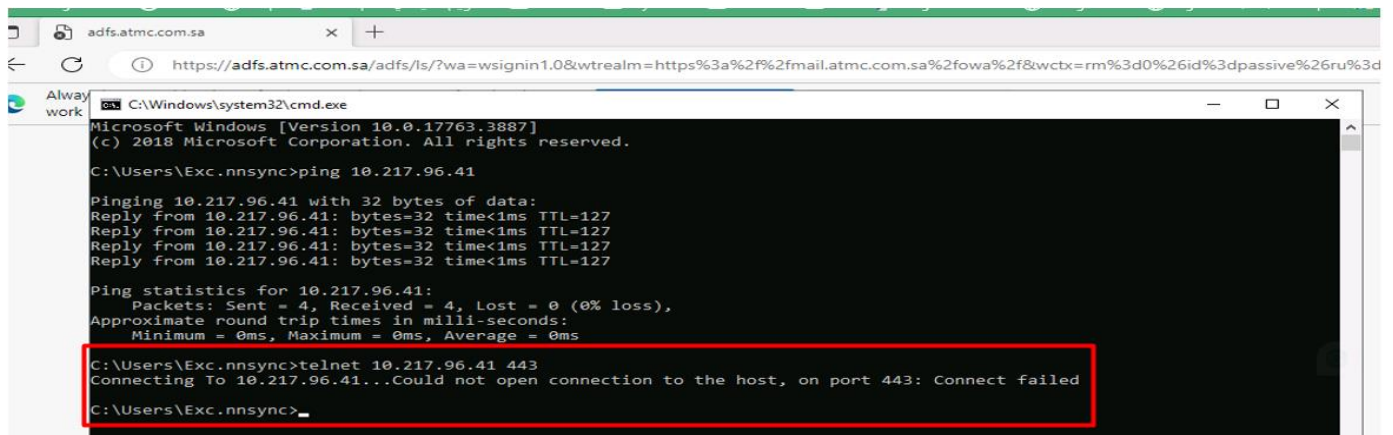

How to Disable AD FS Redirection (one for ECP and one for OWA)

Disable ADFS Redirection:

#For ECP:

Set-ECPVirtualDirectory -Identity "**JCD-RYPRD-EX01**\ecp (Default Web Site)" -BasicAuthentication \$true -DigestAuthentication \$false -FormsAuthentication \$true -WindowsAuthentication \$false

Set-ECPVirtualDirectory -Identity "**JCD-RYPRD-EX02**\ecp (Default Web Site)" -BasicAuthentication \$true -DigestAuthentication \$false -FormsAuthentication \$true -WindowsAuthentication \$false

#For OWA:

Set-OwaVirtualDirectory -Identity "**JCD-RYPRD-EX01**\owa (Default Web Site)" -AdfsAuthentication \$false -BasicAuthentication \$true -DigestAuthentication \$false -FormsAuthentication \$true -OAuthAuthentication \$false -WindowsAuthentication \$false

Set-OwaVirtualDirectory -Identity "**JCD-RYPRD-EX02**\owa (Default Web Site)" -AdfsAuthentication \$false -BasicAuthentication \$true -DigestAuthentication \$false -FormsAuthentication \$true -OAuthAuthentication \$false -WindowsAuthentication \$false

```
Machine: NDC-EX02-VS.atmc.com.sa
[PS] C:\Windows\system32>Set-ECPVirtualDirectory -Identity "NDC-EX01-VS\ecp (Default Web Site)" -BasicAuthentication $true -DigestAuthentication $false -FormsAuthentication $true -WindowsAuthentication $false
WARNING: For these configuration changes to take effect, you must restart Internet Information Services (IIS). To restart IIS, run "net stop was /y" command followed by "net start w3svc" command.
WARNING: You've changed the authentication method for the ECP virtual directory. Please make the same change to the OWA virtual directory in the same website.
[PS] C:\Windows\system32>Set-ECPVirtualDirectory -Identity "NDC-EX01-VS\ecp (Default Web Site)" -BasicAuthentication $true -DigestAuthentication $false -FormsAuthentication $true -WindowsAuthentication $false
WARNING: You've changed the authentication method for the ECP virtual directory. Please make the same change to the OWA virtual directory in the same website.
[PS] C:\Windows\system32>

[PS] C:\>Set-OwaVirtualDirectory -Identity "NDC-EX01-VS\owa (Default Web Site)" -AdfsAuthentication $false -BasicAuthentication $true -DigestAuthentication $false -FormsAuthentication $true -OAuthAuthentication $false -WindowsAuthentication $false
Creating a new session for implicit remoting of "Set-OwaVirtualDirectory" command...
WARNING: For these configuration changes to take effect, you must restart Internet Information Services (IIS). To restart IIS, run "net stop was /y" command followed by "net start w3svc" command.
[PS] C:\>Set-OwaVirtualDirectory -Identity "NDC-EX01-VS\owa (Default Web Site)" -AdfsAuthentication $false -BasicAuthentication $true -DigestAuthentication $false -FormsAuthentication $true -OAuthAuthentication $false -WindowsAuthentication $false
[PS] C:\>
```

Stop and start IIS on Both Exchange Servers with the below commands

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.17763.3887]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Windows\system32>net stop was /y
The following services are dependent on the Windows Process Activation Service service.
Stopping the Windows Process Activation Service service will also stop these services.

World Wide Web Publishing Service
Net.Tcp Listener Adapter
Net.Pipe Listener Adapter
Net.Msmq Listener Adapter

The World Wide Web Publishing Service service is stopping.....
The World Wide Web Publishing Service service was stopped successfully.

The Net.Tcp Listener Adapter service is stopping.
The Net.Tcp Listener Adapter service was stopped successfully.

The Net.Pipe Listener Adapter service is stopping.
The Net.Pipe Listener Adapter service was stopped successfully.

The Net.Msmq Listener Adapter service is stopping.
The Net.Msmq Listener Adapter service was stopped successfully.

The Windows Process Activation Service service is stopping.
The Windows Process Activation Service service was stopped successfully.

C:\Windows\system32>
```

```
C:\Windows\system32>net start w3svc
The World Wide Web Publishing Service service is starting.
The World Wide Web Publishing Service service was started successfully.
```

```
C:\Windows\system32>
```

Note:- if the AD FS not working we need to create a new Relying Part, follow the steps Run the command to enable IDP initiated sign on

https://adfs.atmc.com.sa/adfs/ls/idpinitiatedsignon.aspx

ATMC

An error occurred

The resource you are trying to access is not available.
Contact your administrator for more information.

Error details

- Activity ID: b8c6f245-82d9-4264-0900-0080030000e8
- Error details: MSIS7012: An error occurred while processing the request. Contact your administrator for details.
- Node name: 2bc9579d-b8d7-450f-9e7f-cd560533dc7d
- Error time: Wed, 15 Feb 2023 12:07:21 GMT
- Cookie: enabled
- User agent string: Mozilla/5.0 (Windows NT 10.0; WOW64; Trident/7.0; .NET4.0C; .NET4.0E; rv:11.0) like Gecko

1- Create new Relying and add name adfs.domainname.com.sa

AD FS

File Action View Window Help

AD FS

- Service
 - Attribute Stores
 - Authentication Methods
 - Certificates
 - Claim Descriptions
 - Device Registration
 - Endpoints
 - Scope Descriptions
 - Web Application Proxy
 - Access Control Policies
 - Relying Party Trusts**
 - Claims Provider Trusts
 - Application Groups

Add Relying Party Trust Wizard

Welcome

Steps

- Welcome
- Select Data Source
- Choose Access Control Policy
- Ready to Add Trust
- Finish

Welcome to the Add Relying Party Trust Wizard

Claims-aware applications consume claims in security tokens to make authentication and authorization decisions. Non-claims-aware applications are web-based and use Windows Integrated Authentication in the internal network and can be published through Web Application Proxy for extranet access. [Learn more](#)

☒ Claims aware

☐ Non claims aware

AD FS

File Action View Window Help

AD FS

- Service
 - Attribute Stores
 - Authentication Methods
 - Certificates
 - Claim Descriptions
 - Device Registration
 - Endpoints
 - Scope Descriptions
 - Web Application Proxy
 - Access Control Policies
 - Relying Party Trusts**
 - Claims Provider Trusts
 - Application Groups

Add Relying Party Trust Wizard

Select Data Source

Steps

- Welcome
- Select Data Source
- Choose Access Control Policy
- Ready to Add Trust
- Finish

Select an option that this wizard will use to obtain data about this relying party:

☒ Import data about the relying party published online or on a local network

Use this option to import the necessary data and certificates from a relying party organization that publishes its federation metadata online or on a local network.

Federation metadata address (host name or URL):

adfs.domainname.com.sa

Example: fs.contoso.com or https://www.contoso.com/app

☐ Import data about the relying party from a file

Use this option to import the necessary data and certificates from a relying party organization that has exported its federation metadata to a file. Ensure that this file is from a trusted source. This wizard will not validate the source of the file.

Federation metadata file location:

Browse...

☐ Enter data about the relying party manually

Use this option to manually input the necessary data about this relying party organization.

< Previous Next > Cancel

2- (Get-AdfsProperties).EnableIdpInitiatedSignonPage

Run the command to enable idp initiated signon

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Windows\system32> (Get-AdfsProperties).EnableIdpInitiatedSignonPage
False
```

3- Set-AdfsProperties -EnableIdpInitiatedSignonPage \$true

```
Administrator: Windows PowerShell
PS C:\Windows\system32> Set-AdfsProperties -EnableIdpInitiatedSignonPage $true
PS C:\Windows\system32>
PS C:\Windows\system32>
PS C:\Windows\system32> (Get-AdfsProperties).EnableIdpInitiatedSignonPage
True
PS C:\Windows\system32>
```

<https://adfs.customername.com/FederationMetadata/2007-06/FederationMetadata.xml>

<https://adfs.atmc.com.sa/FederationMetadata/2007-06/FederationMetadata.xml>

