EXPERIMENT No. Practical NO 6

Page No.
Date

- Aim: Session Impersonation with firefox & Tamper Data.
1. install & configure the Tamper data add on - firefox
2. intercept & modify. HTTP requests to impersonate user's session
3. understand impact of session impersonation & importance of session importance

1) Tamper Data :- a firefox tool used to intercept & modify HTTP requests.
2) Session impersonation :- using another user's active session to acess their account
3) Session Security :- Secure sessions Prevent unauthorized acess & Protect user information.

1. using tamper Data for FF Quantum.

Step 1 :- open firefox & click on extensions & features

Step 2 :- Search Tampering Data : following page will appea. click on the "Tamper Data for FF Quantam" & then click on Add to firefox.

Step 3 :- then alert box will appear click on Add then OK.

Step 4 :- Go to website "techpanda.org & ~~enter using p~~. Start tampering by click on extension sign & then click on Tamper Data for FF Quantum.


EcoNāma-

Teachers's Sign. :


Scanned with OKEN Scanner

1:


Step 1:-

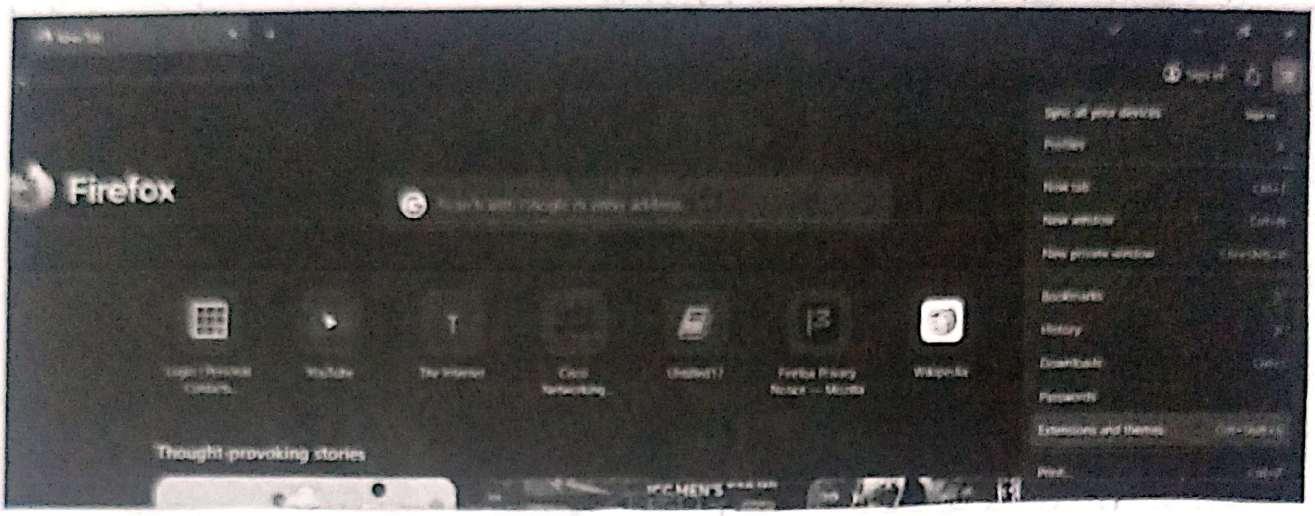

Step 2:-

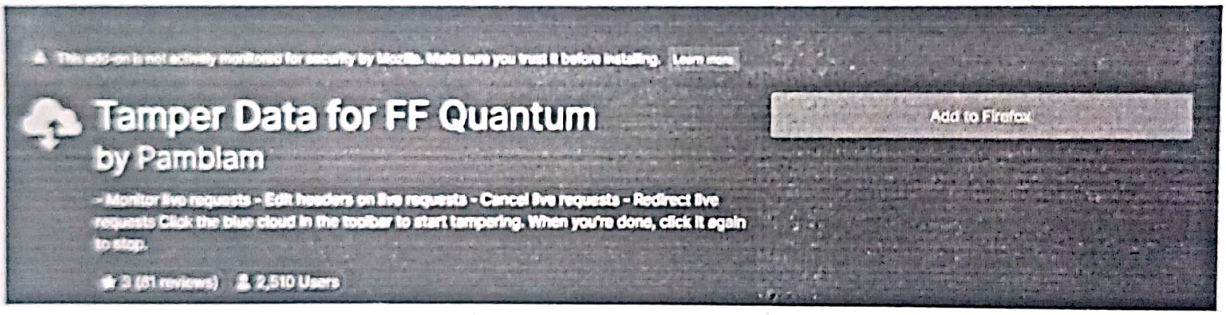

Step 4:-

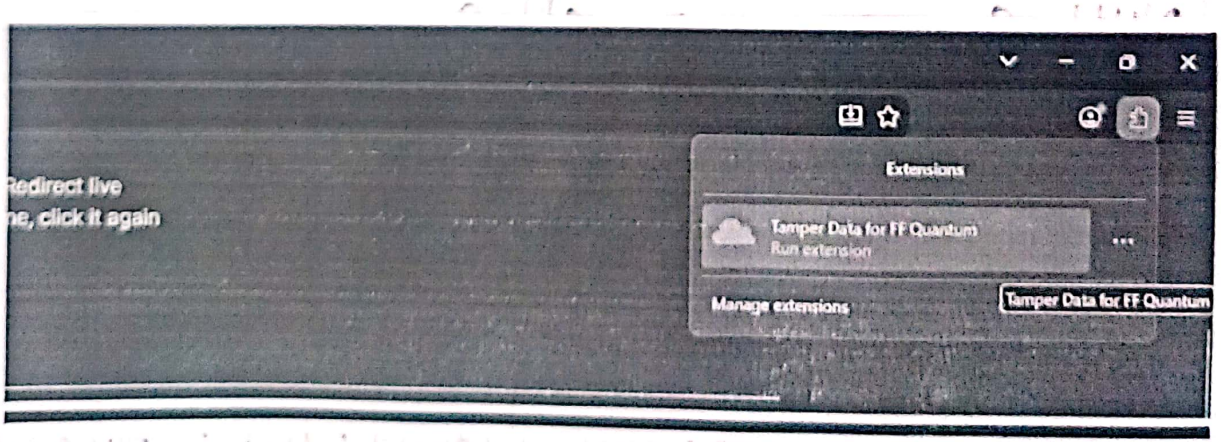

Scanned with OKEN Scanner

EXPERIMENT No.

Page No.
Date

Step 5:- Then the ekart tampering page will appear click yes.

Step 6:- Now enter username & password & login, ~~using~~ you're username & password. been captured.

EcoNāma-

Teachers's Sign. :

Scanned with OKEN Scanner

Step 5:-

Type	Description
beacon	Requests sent through the Beacon API.
csp_report	Requests sent to the report-uri given in the Content-Security-Policy header, when an attempt to violate the policy is detected.
font	Web fonts loaded for a @font-face CSS rule.
image	Resources loaded to be rendered as image, except for imageset on browsers that support that type.
imageset	Images loaded by a `<picture>` element or given in an `<img>` element's `srcset` attribute.
☑ main_frame	Top-level documents loaded into a tab.
media	Resources loaded by a `<video>` or `<audio>` element.
object	Resources loaded by an `<object>` or `<embed>` element.
object_subrequest	Requests sent by plugins.
ping	Requests sent to the URL given in a hyperlink's ping attribute, when the hypelink is followed.
script	Code that is loaded to be executed by a `<script>` element or running in a Worker.
speculative	A TCP TLS handshake made by the browser when it determines it will need the connection open soon.
stylesheet	CSS stylesheets loaded to describe the representation of a document.
sub_frame	Documents loaded into an `<iframe>` or `<frame>` element.
web_manifest	Web App Manifests loaded for websites that can be installed to the homescreen.
websocket	Requests initiating a connection to a server through the WebSocket API.
xbl	XBL bindings loaded to extend the behavior of elements in a document.
xml_dtd	DTDs loaded for an XML document.
☑ xmlhttprequest	Requests sent by an XMLHttpRequest object or through the Fetch API.
xslt	XSLT stylesheets loaded for transforming an XML document.
other	Resources that aren't covered by any other available type.


Tamper with requests who's URL matches: (.*?)


Tamper requests only from this tab: ☐

Start Tamper Data?

Yes | No, Cancel

Step 6:-

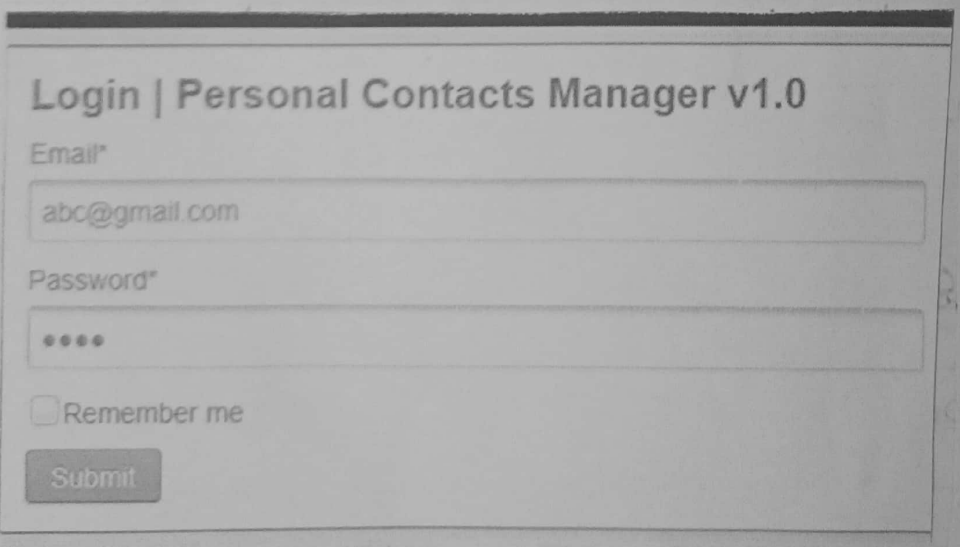

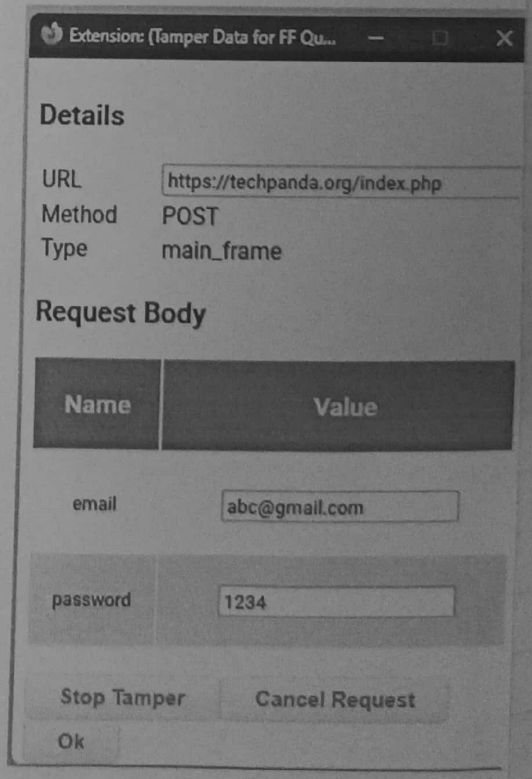

Scanned with OKEN Scanner

EXPERIMENT : No.

Page No.
Date

Step 7:- then click on OK

2. using cookie for Tampering the Data

Step 1:- open firefox & click on Extension & themes

Step 2:- The Search "cookie Editor. following page will appear. click on the "CookieManager – Cookie editor".


Step 3:- click on cookie editor then click on add to firefox.
the Add cookie editor msg will appear so, click on Add → OK.

Teacher's Sign. :

EcoNimar


Scanned with OKEN Scanner

Step 7 :-

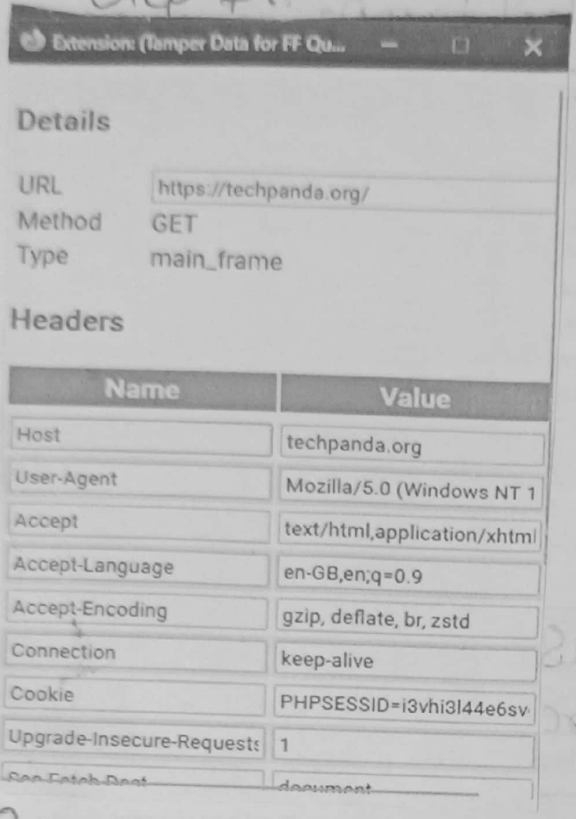


2 :-

Step 2 :-

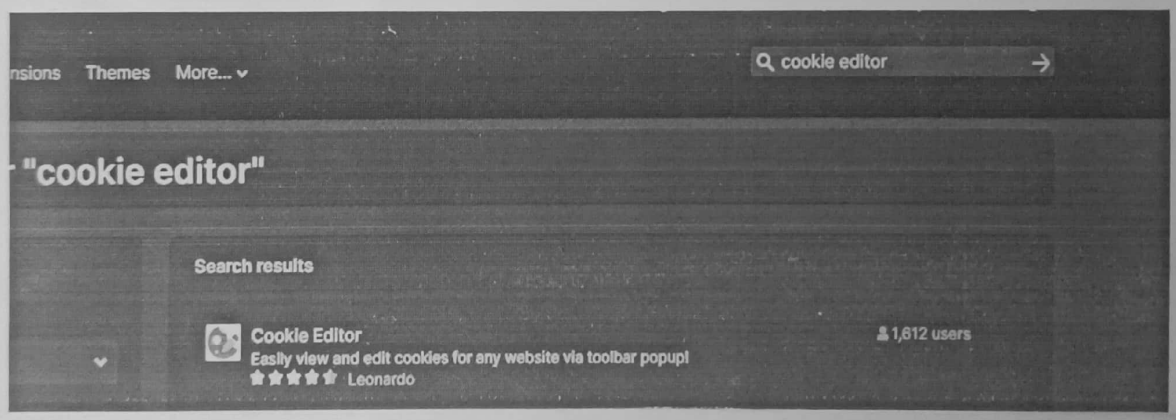

Step 3 :-

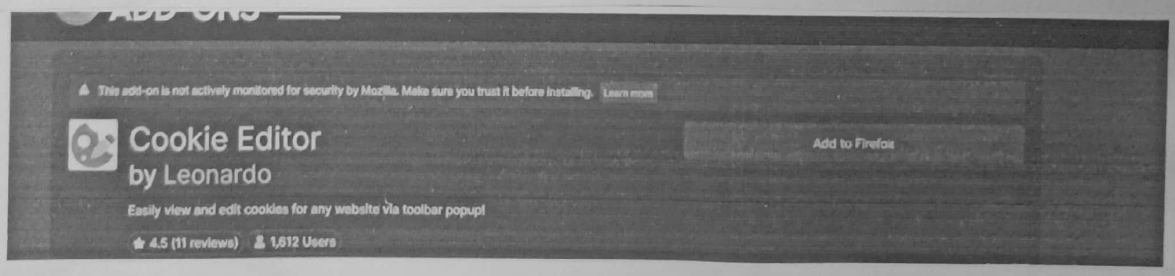

Scanned with OKEN Scanner

EXPERIMENT : No.

Page No.
Date

Step 4 :- Open website https://the-internet.herokuapp.com/login.
now enter username = tomsmith &
Password = SuperSecretPassword → click on login

Step 5 :- click on extension, then click on Cookie editor. Select the Cookie & then click on export


Teachers's Sign. :

EcoNāma-


Scanned with OKEN Scanner

Step 4:-

https://the-internet.herokuapp.com/login.

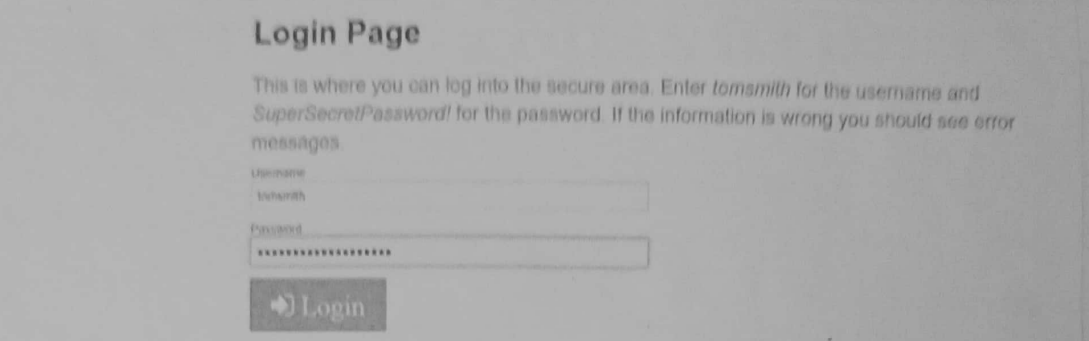

Step 5:-

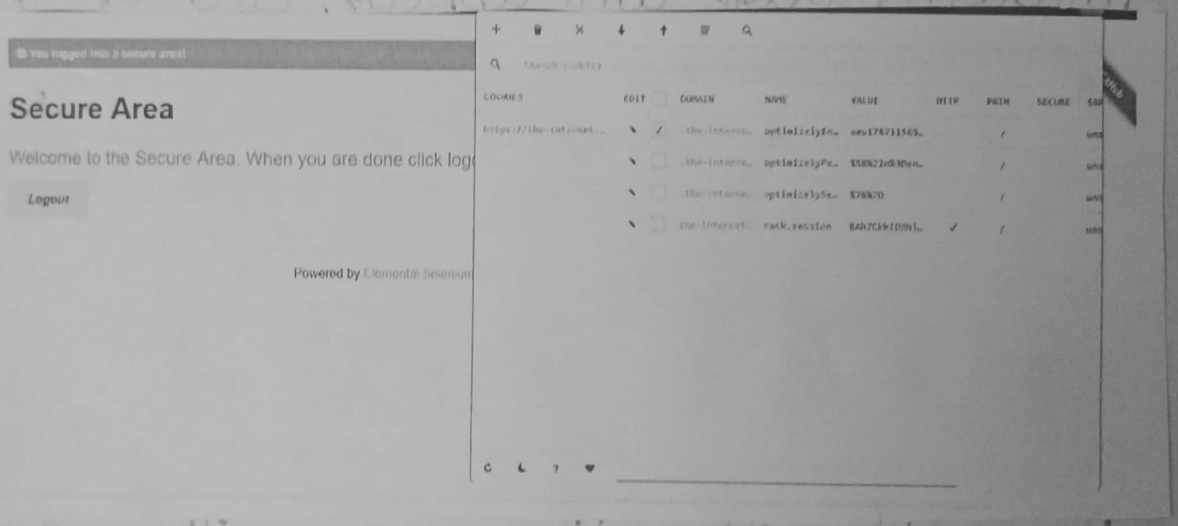

EXPERIMENT : No. Practical NO 7

Page No.
Date

- Aim: Network Traffic Capture with wireshark :Use wireshark to capture network traffic on specific network interface

- Wireshark- A network packet analyzer used to capture & analyze network traffic.
- network traffic:- is the flow of data bet" devices over a network.

Step 1:- Open wireshark & choose the active network interface (e.g., Ethernet).

Step 2 :- click on start capture.

Step 3:- Open a website http://zero.webappsecurity.com/ in a browser click on Signin button.


Step 4:- Enter the credential & click on sign in.
Step 5 :- Go to wireshark & stop capturing
Apply filter:- http.request.method == POST.
expand the HTML form URL Encoded & See the username & password.

EcoNāma-


Teachers's Sign. :

Scanned with OKEN Scanner


Step 1:-

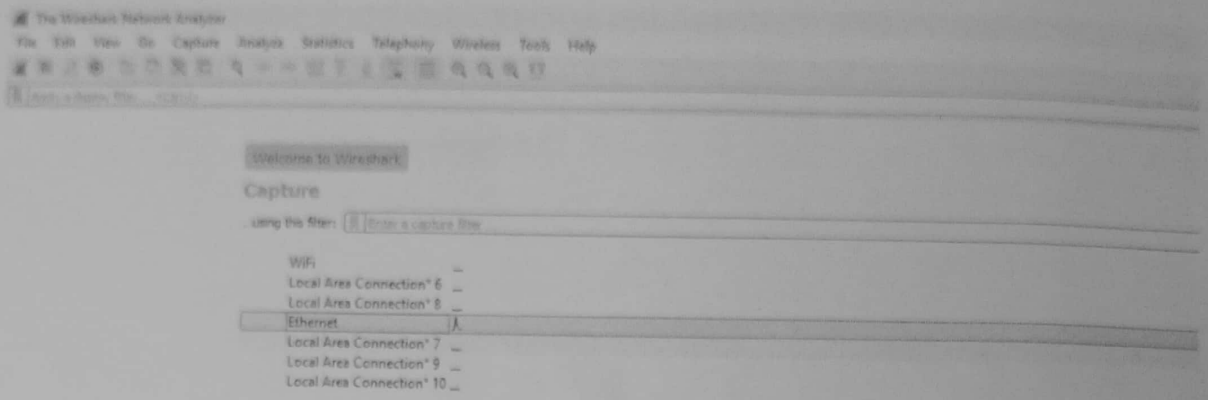

Step 4:-

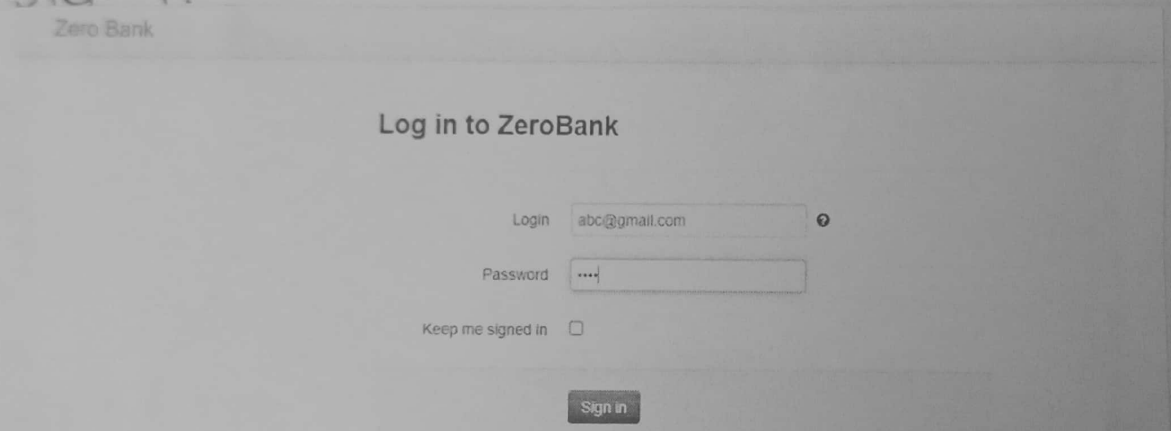

Step 5:-

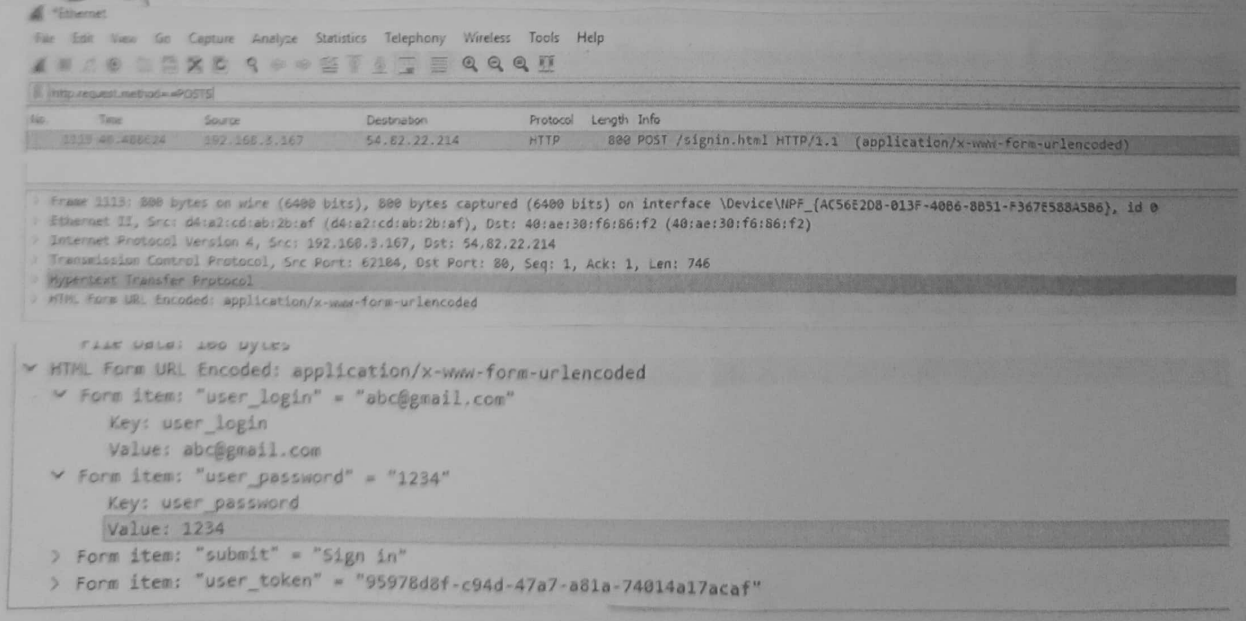

Scanned with OKEN Scanner