EXPERIMENT : No. Practical NO 2 Page No. Date

- Aim: Password encryption & decryption with cryptool.

- Cryptool :- a cryptographic tool used to demonstrate various encryption & decryption techniques. it helps to understand how plaintext is converted in ciphertext & vice versa.

Step 1 :- open cryptool & replace the written text with any othe text
.. like Ethical Hacking

Step 2 :- click on Encrypt/Decrypt → choose symmetric (modern) → RC4.


Step 3 :- Select Key length as 24 bits & click on encrypt

Step 4 :- encrypted text will appear & for decryption paste the encrypted text on window & repeat Step 2 & 3. but in three choose 24 bits & click on decrypt the decrypted text will appear.


Teachers's Sign. :

Scanned with OKEN Scanner


Step 1:-

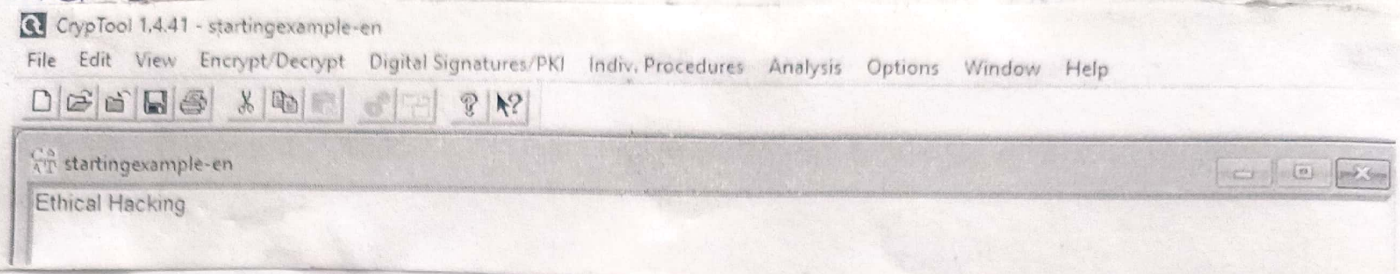


Step 2:-

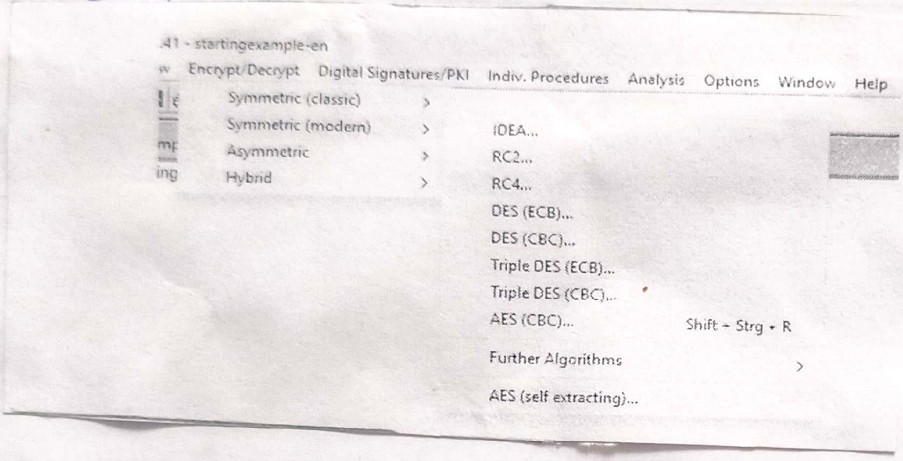

Step 3:-

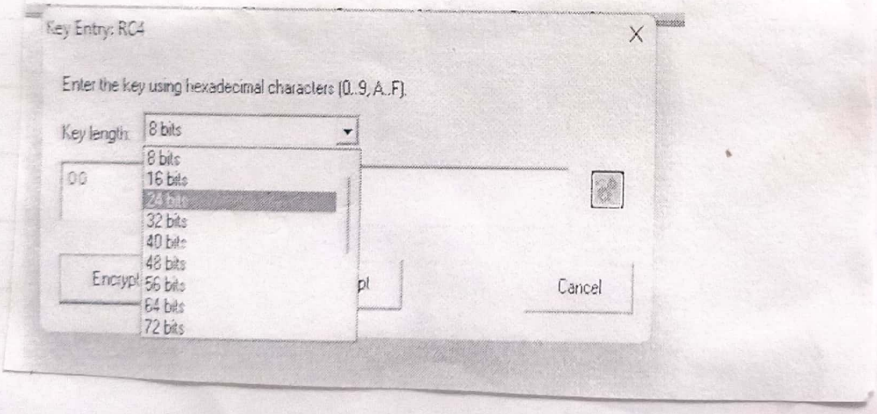

Step 4:-

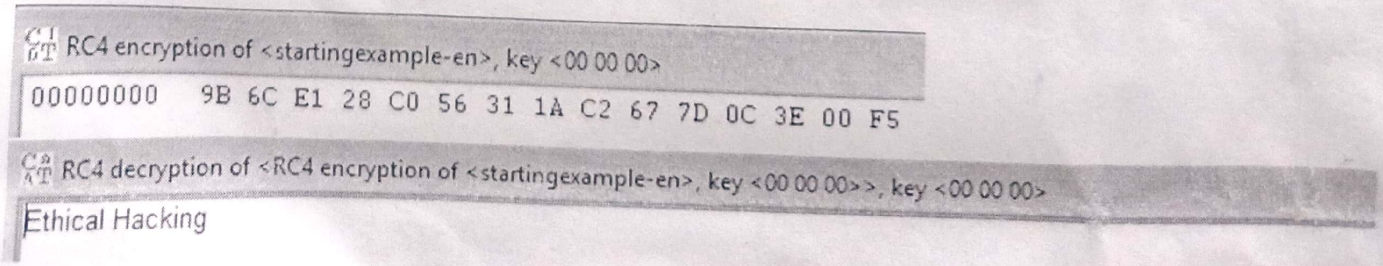

Scanned with OKEN Scanner

EXPERIMENT : No. Practical NO 8.

Page No.
Date

- Aim:- Password cracking & wireless network password decoding using Cain and Abel.

- Password cracking:- it is the process of recovering or finding a password by using diff. techniques to gain access to protected information
- Cain and abel:- A security tool used to demonstrate Password recovery & password-security concepts.

Step 1:- Turn of all firewall protection.
Step 2:- open Cain and Abel app.
Step 3:- Click on Hash Calculator

Step 4:- Type text in text to hash & click on Calculate and Copy the md5 value.


Step 5:- Click on Cracker.

Step 6:- Select the MD5 hashes. Then Right click on empty space → Add to list.


Teachers's Sign. :

Scanned with OKEN Scanner


Step 3:-

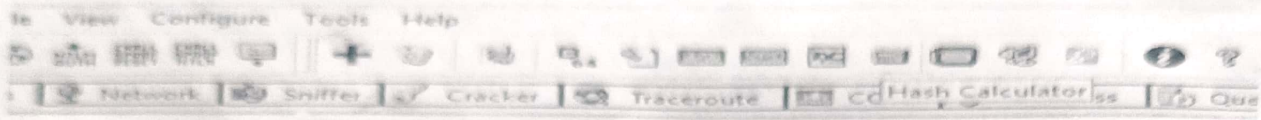


Step 4:-

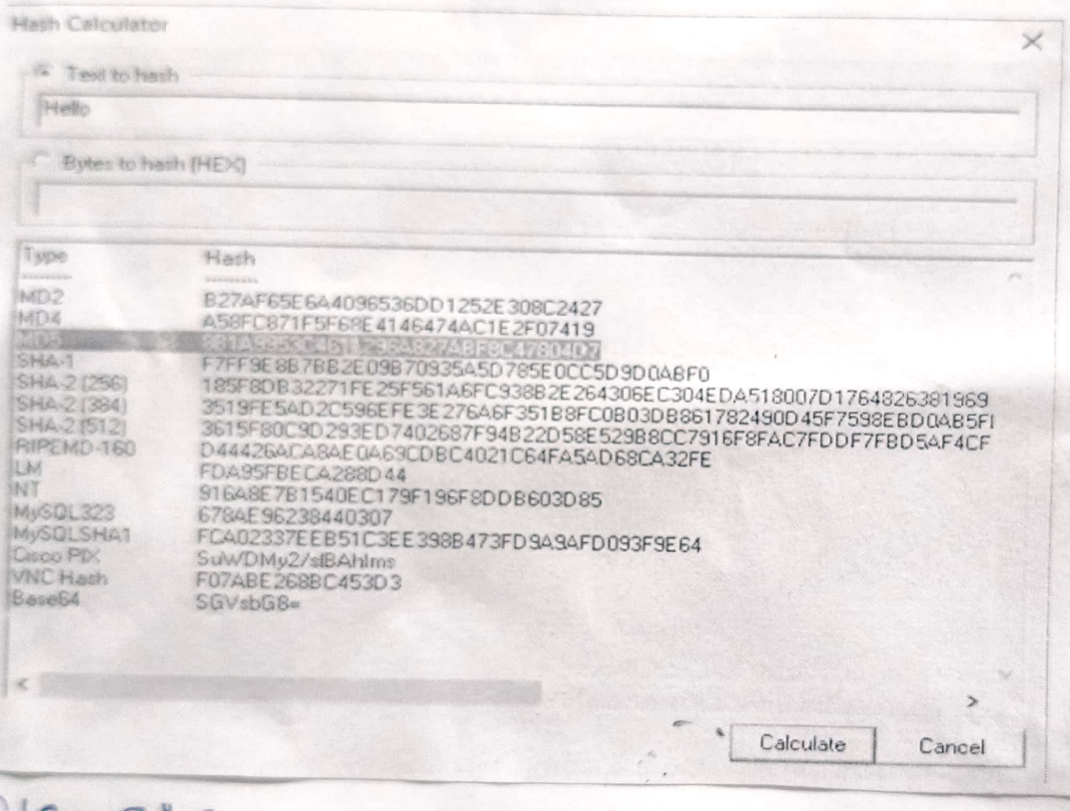

Step 5:-

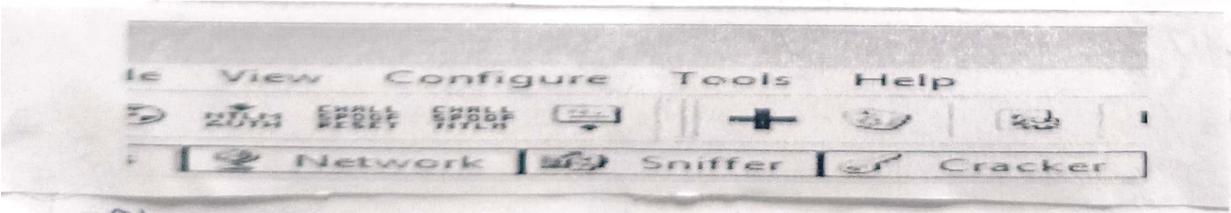

Step 6:-

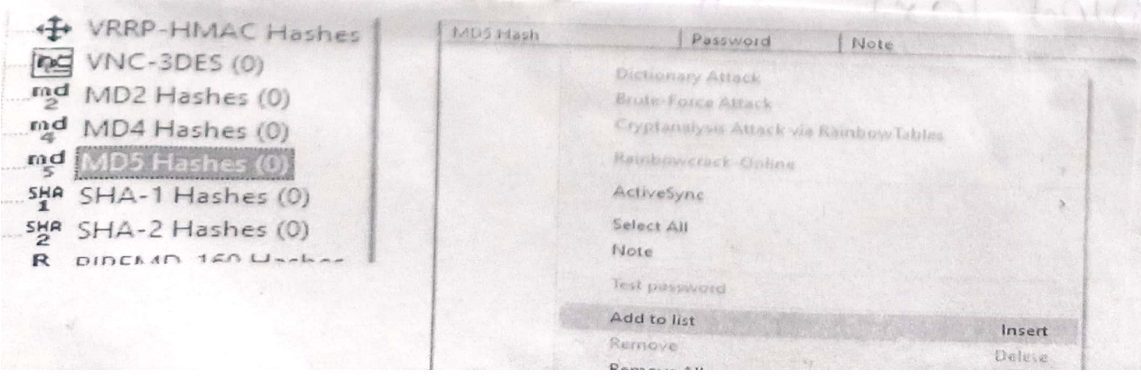

Scanned with OKEN Scanner

EXPERIMENT No. Page No. Date


Step 7:- Paste the copied MD5 hash value → OK.
Step 8:- right click on MD5 hash value → Dictionary attack.

Step 9:- Right click on the field & Add to list. Click & open word list.


Step 10:- if password is present in Word list, you will get following output, or you will get 0 of 1 hashes cracked if that password is not in word list.

Scanned with OKEN Scanner


Step 7 & 8 :-

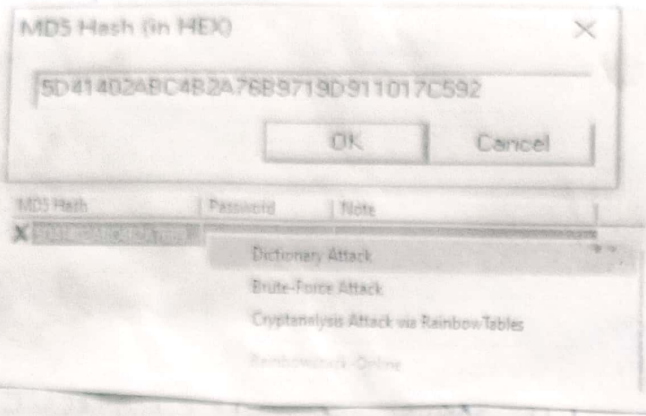

Step 9 :-

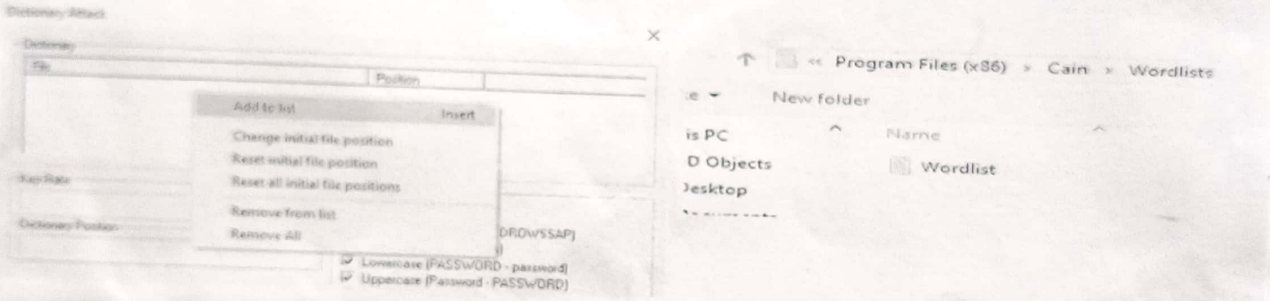

Step 10 :-

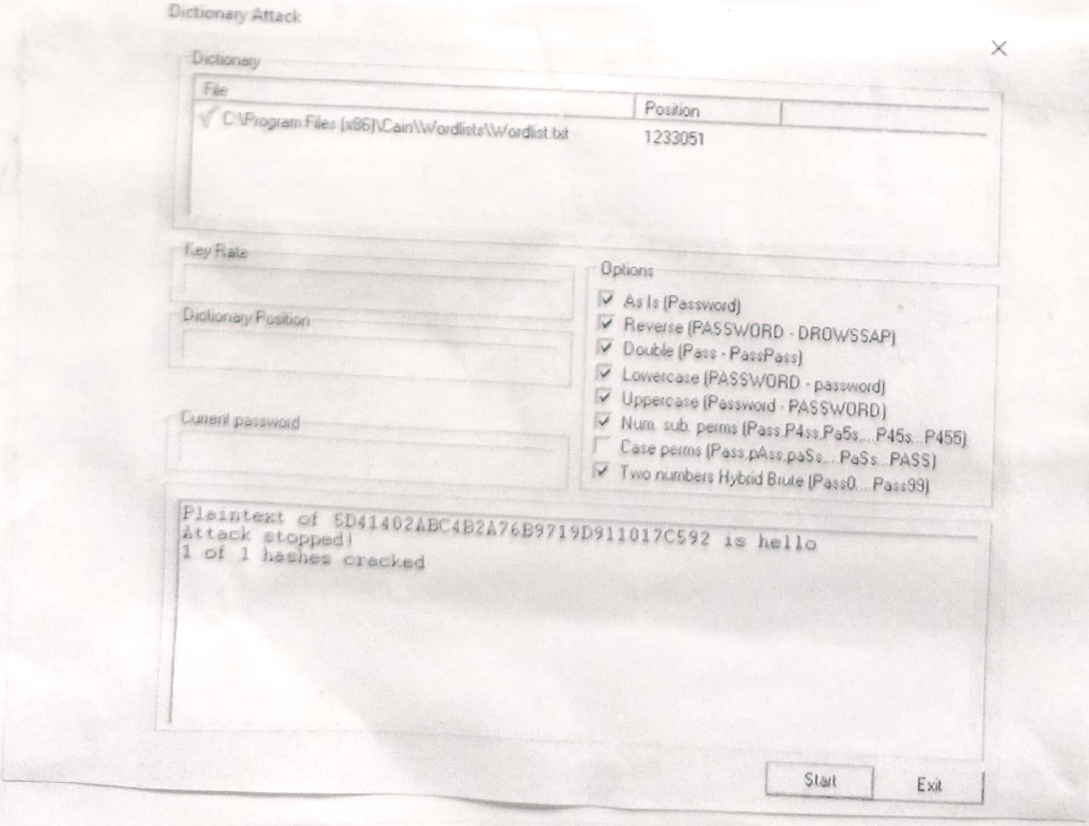

Scanned with OKEN Scanner

EXPERIMENT : No. Practical No 4. Page No. Date

- Aim :- understand & Perform ARP Poisoning in windows.

- ARP - Stands for (Address Resolution Protocol). it is a technique used in Cain & Abel.
- ARP Poisoning :- it is an attack in which false ARP msg are used to associate an incorrect MAC address with an IP address. It can redirect or intercept network traffic on local network

Step 1 :- Turn of all firewall and windows protection
Step 2 :- Go to local Disk C → program files (x86) → Cain → Driver → instan winPcap_4_1_3.
Step 3 :- Open Cain & Abel app.
Step 4 :- Select Sniffer on the top & then click on Start/Stop Sniffer → then click on + icon → Ok.
it will show all device select 1st device

Step 5 :- click on device & click on OK

Step 6 :- click on + icon on the top the a Mac address Scanner will open → OK.


Step 7 :- Shows the connected host

Step 8 :- then click on ARP at bottom → the click on blank page → then on + icon → Select 1st device of both side → OK


EcoNāma- Teachers's Sign. :

Scanned with OKEN Scanner


Step 4:-

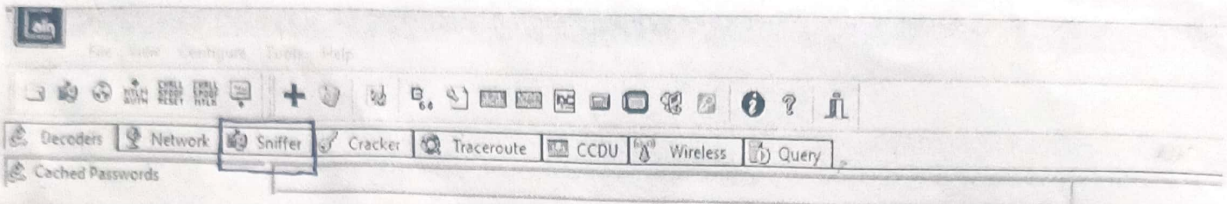


Step 5:-

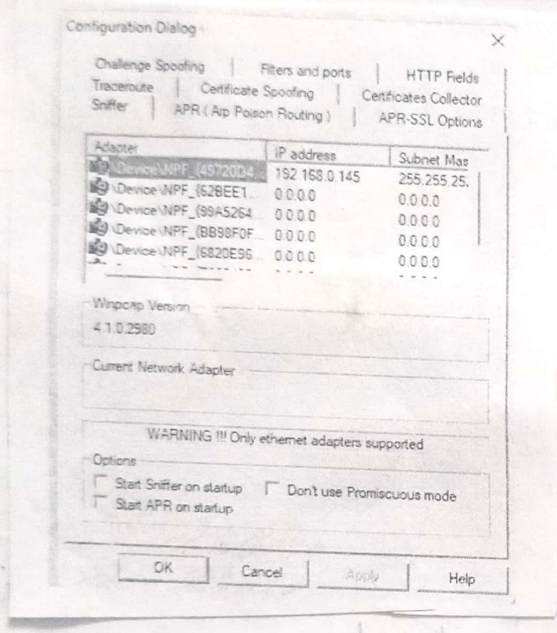

Step 6:-

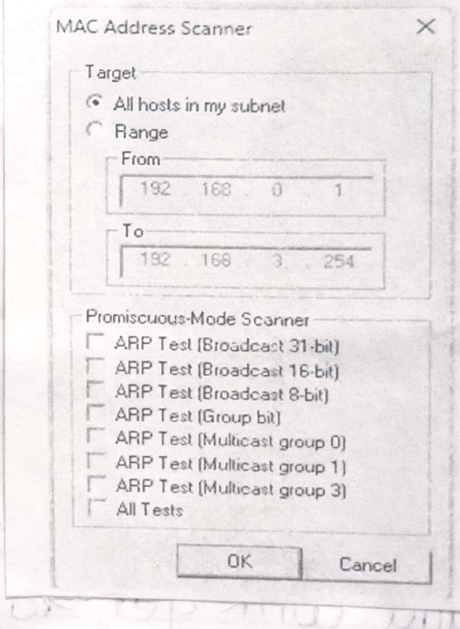

Step 8:-

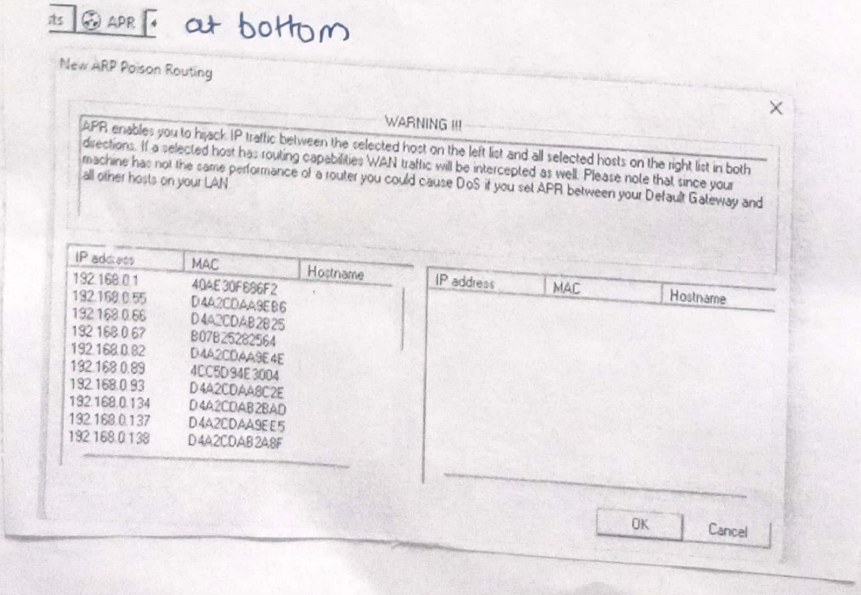

at bottom

EXPERIMENT : No.

Page No.
Date


Step 9:- Click on "+" icon at the top. Then select Ip address & OK. Then click on Start/Stop ARP icon on Top. it will poisoning the source

Step 10:- Go to website http://techpanda.org (website should start with http not with https) and login in that website.


Step 11:- open the cain & abel Go to password & see visited site password
password → http → see password.

Scanned with OKEN Scanner


Step 9:-

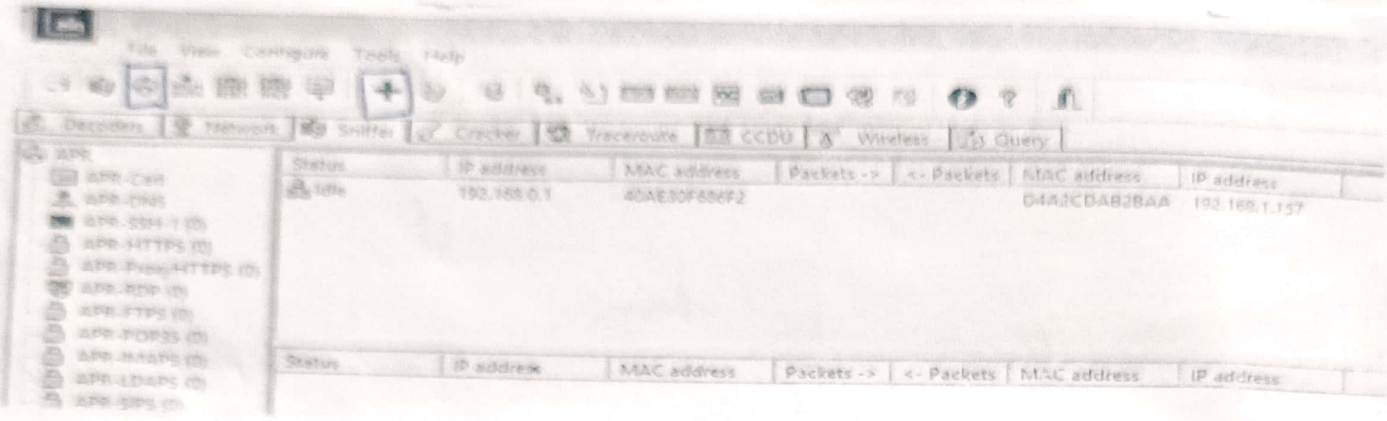

Step 10:-

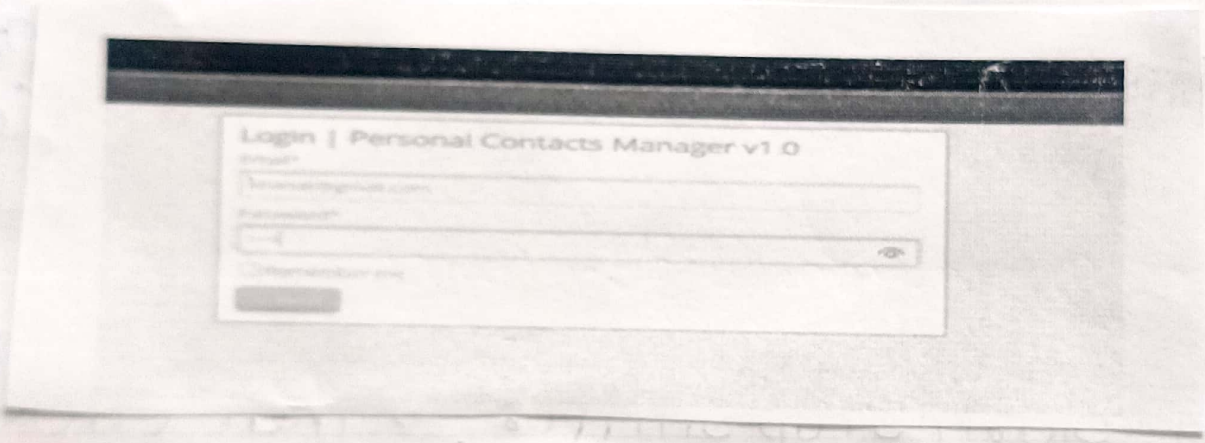

Step 11:-

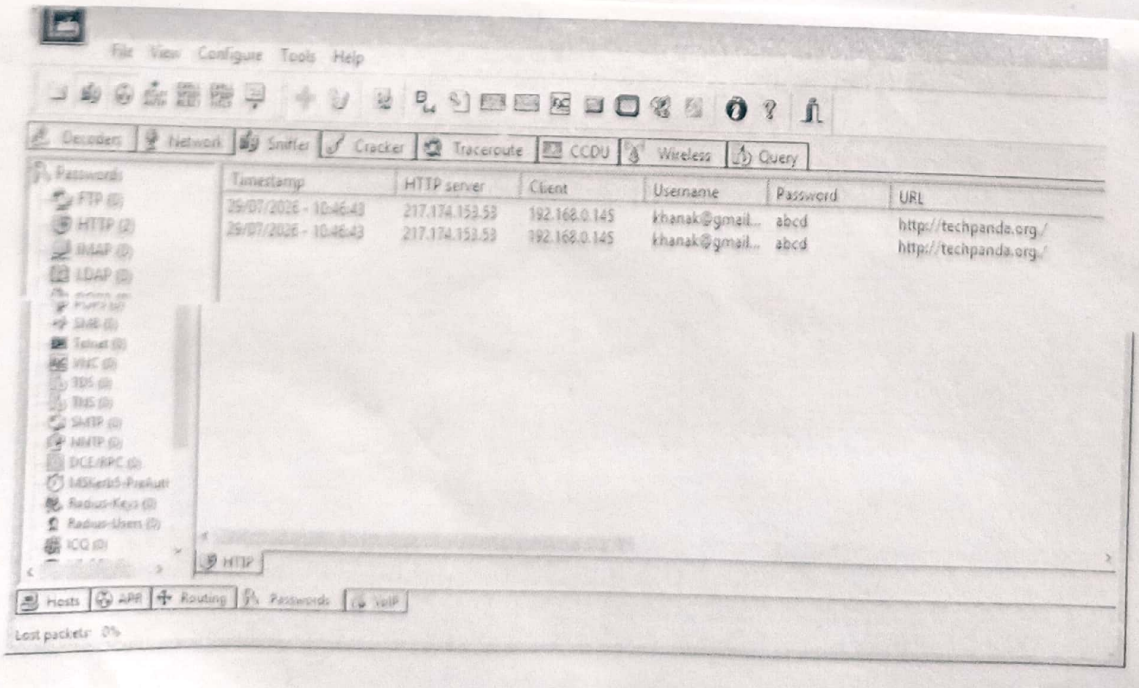

Scanned with OKEN Scanner

EXPERIMENT : No. Practical NO 5

Page No.
Date

- Port Scanning with NMap
1. Use NMap to perform Ack scan to determine if a port is filtered, unfiltered or open.
2. perform SYN, FIN, NULL & XMAS scans to identify open ports & their characteristics.

1) ACK Scan: nmap -sA Scanme.nmap.org.
ACK Scan is a Nmap Scanning technique used to analyze filtering rule. it sends TCP Ack Packets to determing whether ports are filtered or unfiltered.

2) SYN Scan :- nmap -sS Scanme.nmap.org
it's used to Scan open Ports. it sends a TCP SYN Packet & analyze the response without full connection. it also called half-Open scan

3) FIN Scan :- nmap -sF Scanme.nmap.org
it sends a tcp Packet with only the FIN flag set to target Port Closed Ports reply with RST, while open usually do not respond

4) NULL Scan :- nmap -sN Scanme.nmap.org
it sends TCP Packet with no flags set to target port in it also closed port reply with RST, & open ports ~~do not reply~~. give no response


5) XMAS Scan : nmap -sX Scanme.nmap.org
An XMAS Scan sends TCP Packet with FIN, PSH, & URG flags set. Closed port reply with RST. while open port usuall give no response.

EcoNāma-


Teachers's Sign. :

Scanned with OKEN Scanner


1) Ack. :- nmap -sA scanme.nmap.org

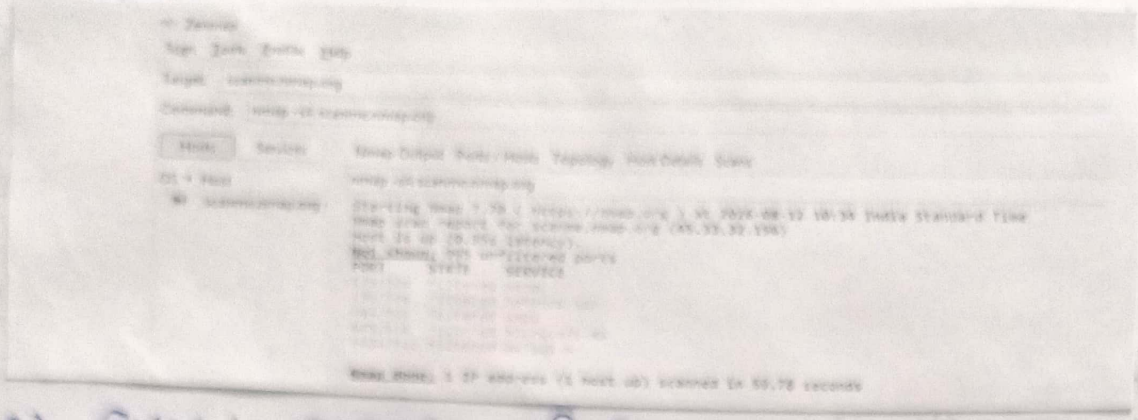


2) SYN :- nmap -sS scanme.nmap.org

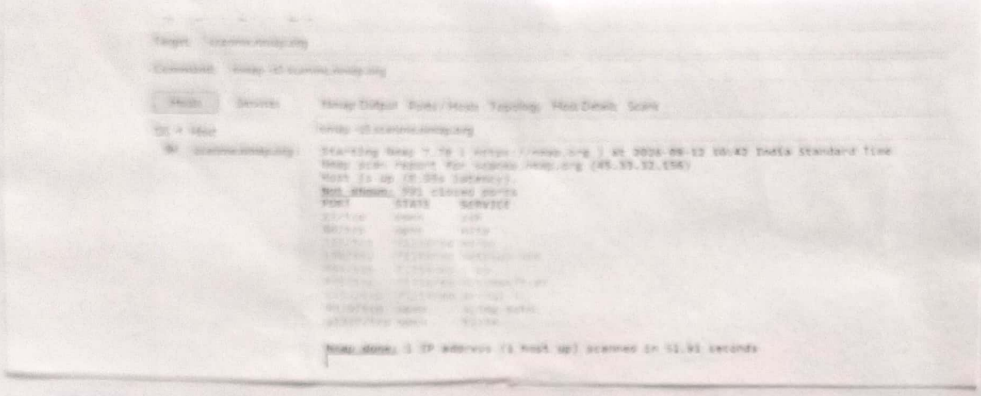


3) FIN Scan :- nmap -sF scanme.nmap.org

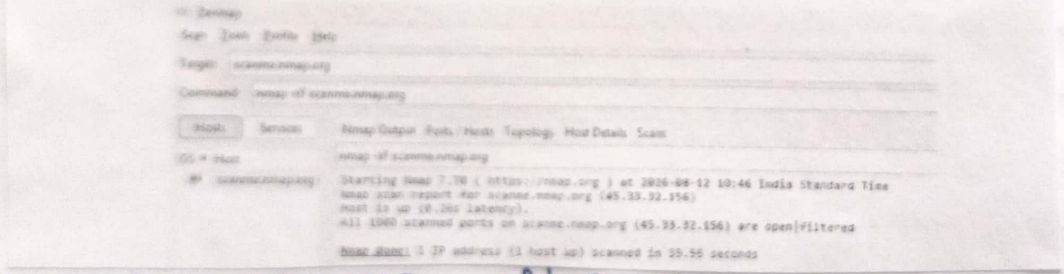

4) NULL :- nmap -sN scanme.nmap.org

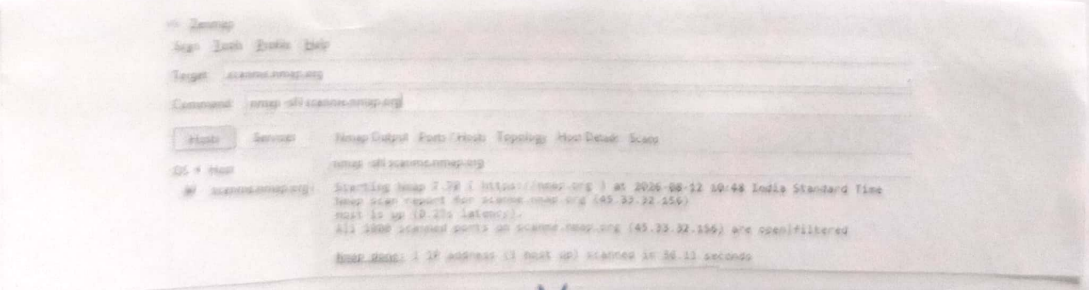

5) XMAS : nmap -sX scanme.nmap.org

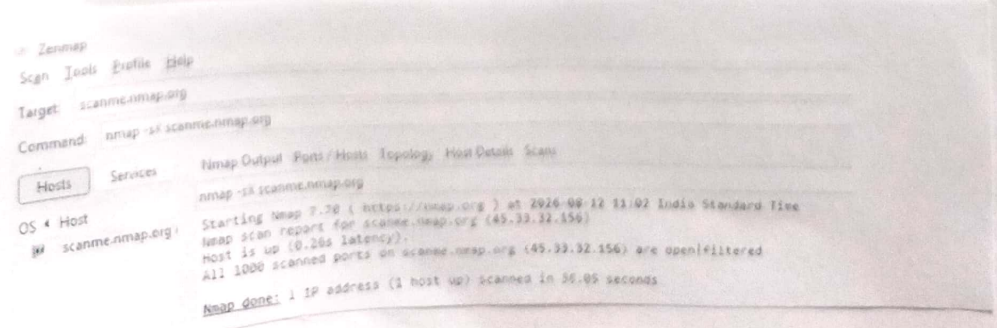

Scanned with OKEN Scanner