Software Reengineering Project

Mitchel Pyl & Randy Paredis

1 Introduction

This document is meant as additional information on the reengineering and refactoring of the JFreeChart project, which was the assignment of the Software Reengineering course of 2019, at the University of Antwerp.

During this paper and the process of reengineering the JFreeChart project, we lied heavily on [5], making sure we could complete our assignment as successful as possible.

JFreeChart is a Java library that can be used to add/show professional-looking graphs and charts in your Java applications. This inheritly implies that is it useful in a lot of different contexts and scenarios that require this kind of feature.

The ability for such a library for being flexible and expandable with a vast amount of new features would therefore be an incredible advantage for this.

1.1 Problem at Hand

At this point in time, JFreeChart [4] has a wide range of possible graphs, charts and plots it can generate for any kind of data you'd like. However, there is some functionality missing that we'd like to have. Namely, we'd like to be able to have a different shape or symbol for each datapoint. In order for us to introduce this feature, we'll first have to figure out the current way rendering of datapoints is handeled and afterwards we'll refactor the code so we can easily add this feature.

Additionally, when we take a closer look at the code in general, there are some symptoms indicating it should be refactored¹.

¹ Missing tests, Too much time for simple changes...; 1.1 from [5])

2 Project Management

2.1 Setting Direction

The most important aspect of managing a reengineering project is to find a strategy in which the reengineering will be the most useful and successful (Chapter 2 from [5]). This is why we first discussed a strategy to use in the actual reengineering, before jumping into the code like headless chickens.

Using some tools, we were able to Agree on Maxims (2.1 from [5]) and more specifically the Most Valuable First (2.4 from [5]). With these strategies in mind, we can give all refactoring targets a weight, so we can easily list the most important ones. As described in 2.4 from [5], such a weight technically has nothing to do with cyclic complexities, but with what's valuable to the customer. In our case, these luckily (or coincidentally) line up to a certain point.

Learning the most important rule in software reengineering, If It Ain't Broke, Don't Fix It. (2.6 from [5])², we know we'd best not touch any code that is "working" correctly and has nothing to do with any of the valuable targets. For instance, within the scope of the assignment, it is not useful to take a look at refactoring the ImageMapUtils.

While on the topic, although all strategies have their merit and are important in some way, we believe some of them are more important and/or practical to follow. *Keep It Simple* (2.7 from [5]) is one of them, which we will keep in mind during the refactoring process.

2.2 PERT Chart

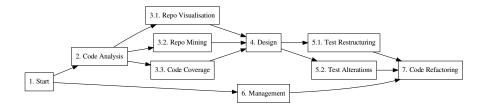


Figure 1: Simplified PERT-Chart for the Refactoring of JFreeChart

²Note: this is a rule, not a lifeline, nor an excuse. (as per [5])

In order for us to cleanly work on the reengineering of JFreeChart, we decided to make a PERT-chart [6], as you can see in figure 1. This is a simplified model, without annotations of any critical tasks, paths, or the latest end dates for each task.

As you can see, we will manage throughout the entire process of refactoring the project. Tasks 3.1. Repo Visualisation, 3.2 Repo Mining and 3.3 Code Coverage can be found later in this document, respectively in sections 3.1, 3.2 and 3.3.

2.3 First Contact

Seeing as we don't have any experience with the project, nor with its uses, we tried to get a good, general overview. When trying to Read all the Code in One Hour (3.2 from [5]) and to Skim the Documentation (3.3 from [5]), we found that is was quite the difficult task and although it certainly helped in getting a good understanding of how the system worked, it was far from ideal.

3 Project Analysis and Tool Usage

In order to solidly identify the issues with JFreeChart and find possible refactoring targets, we made use of a few helpful tools that allowed for clear identification of possible problem areas. This way we can clearly *Study the Exceptional Entities* (4.3 from [5]). Even though we know that what we find may be tedious or ambiguous to interpret, we will still make our conclusions based on what we know and expect.

3.1 Repository Visualization with Gource

The first tool we made use of was Gource [3]. It is a clean and fancy piece of software that can turn the history of a git repository into a visual representation. This is useful for a few reasons. First, it allows us to see clearly who the main contributers are. There was no surprise that this was *David Gilbert*.

A second thing we could deduce from this simulation is that the code was not made using TDD³. We can clearly see that there are first adaptations to the codebase, before changing the tests.

Thirdly, we can identify the possible points in time when a refactoring stage happened in this project. These are moments when a lot of files are

³Test Driven Development

added, removed, or modified; which is highlighted in Gource. Granted, it is possible that some of these changes are due to merging multiple branches together.

We've identified that possible refactorings happened in November 2008 (increase in functionality), March 2013 (update to almost all files), December 2014 (update to almost all files and removal of a lot of files), July 2017 (file tree restructuring) and July 2018 (general changes).

Finally, we can use the resulting visualization to *Learn from the Past* (5.5 from [5]). We can see which classes were changed a lot and which ones remained untouched for the main bulk of the development.

Classes that changed a lot most likely indicate that they are coupled to other classes in the system, marking these classes as important in understanding the general feel of the system.

Classes that remained mainly untouched could indicate abandoned code, but let's assume (for academic purposes) another possibility. Let's say that these classes indicate features or functionality that are complete. Usually these features cannot give a good enough representation of what's important in the system and whatnot. In either case of untouched code, we can remove our focus from these classes.

3.2 Repository Mining with CodeScene

Another tool we made use of was CodeScene [2], the powerful visualization tool using *Predictive Analytics* to find hidden risks and social patterns in your code.

CodeScene allowed us to get a general feel of the current state of JFreeChart. It gave us a clear representation of possible refactoring targets (see *attachment 4*) and hotspots (see *attachment 1*) within the code^4 .

When we take a deeper look into the code (or at least the graphical representation thereof), we can identify that we most probably will need to take a look at the org.jfree.chart.renderer package (see attachment 2) and the org.jfree.chart.plot package (see attachment 3), as far as the hotspots are concerned.

On the topic of refactoring targets, it is clear that the org.jfree.chart.plot package (see attachment 5) really inquires our attention. More specifically the XYPlot (attachment 7), CategoryPlot (attachment 8), PiePlot (attachment 9), AbstractXYItemRenderer (attachment 10) and AbstractCategoryItemRenderer (attachment 11) classes. In the attach-

⁴Please refer to the attachments at the end of this document.

ments, the most complex functions are listed (sorted from high to low complexity). These top functions⁵ are most likely to be refactoring targets.

3.3 Code Coverage with Cobertura

6.3 of [5] tells us to *Use a Testing Framework*. Not only is this a good idea in refactoring, but in all software projects in general. JUnit was already available in JFreeChart, so there is no need to change of alter this part of the project. Linked with JUnit was Cobertura [1], a maven plugin that allows us to check how much code was covered with the available tests.

The overview that is generated from this plugin gives us enough information in order to determine which classes and functions were not covered in the project, also yielding possible missing tests. These missing tests can be seen as a symptom for code requiring refactoring (1.1 from [5]). But as discussed above, we will Fix Problems, Not Symptoms (2.5 from [5]) and more specifically, we will mainly focus on the tests that concern our main refactoring targets.

In general, we can deduce that the code coverage of JFreeChart at this point in time is way below comfortable for us.

We also noticed that there is currently no mutation testing being done on this project. Even though we do realize this would give way too much situations and possibilities to cover, we currently have no idea of how good the tests currently are.

References

- [1] Cobertura homepage. https://cobertura.github.io/cobertura/. Accessed: 2019-04-24.
- [2] CodeScene homepage. https://codescene.io/. Accessed: 2019-04-24.
- [3] Gource homepage. https://gource.io/. Accessed: 2019-04-24.
- [4] JFreeChart homepage. http://www.jfree.org/jfreechart/. Accessed: 2019-04-24.
- [5] Serge Demeyer, Stéphane Ducasse, and Oscar Nierstrasz. *Object-oriented Reengineering Patterns*. Square Bracket Associates, 2009.

⁵The ones with a red cyclomatic complexity.


[6] U.S. Department of the Navy, Bureau of Naval Weapons, and Special Projects Office. PERT (Program Evaluation Research Task), July 1958.

4 Attachments


On the following pages, we've included a set of screenshots from CodeScene that are referred to in the previous sections. The attachment number is overlayed over the image.

Hotspots identify the modules with most development activity -- often technical debt. €

Defects Hotspots Refactoring Targets Code Age Programming Language System ■ jfreechart Hotspots identify the modules with most development activity -- often technical debt. €

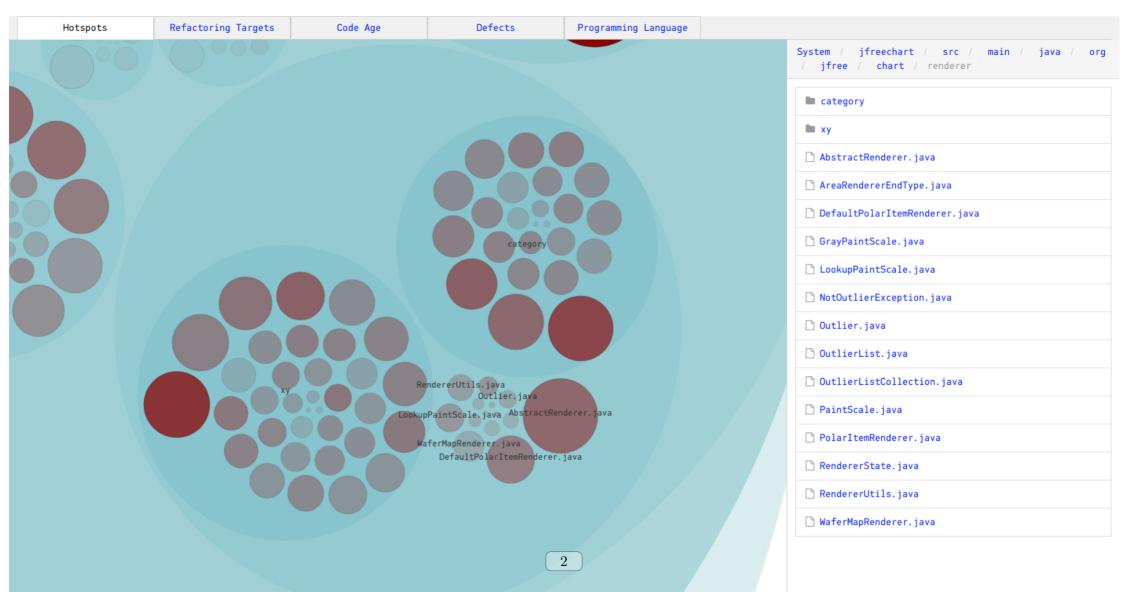


Hotspots identify the modules with most development activity -- often technical debt. lacktriangledown

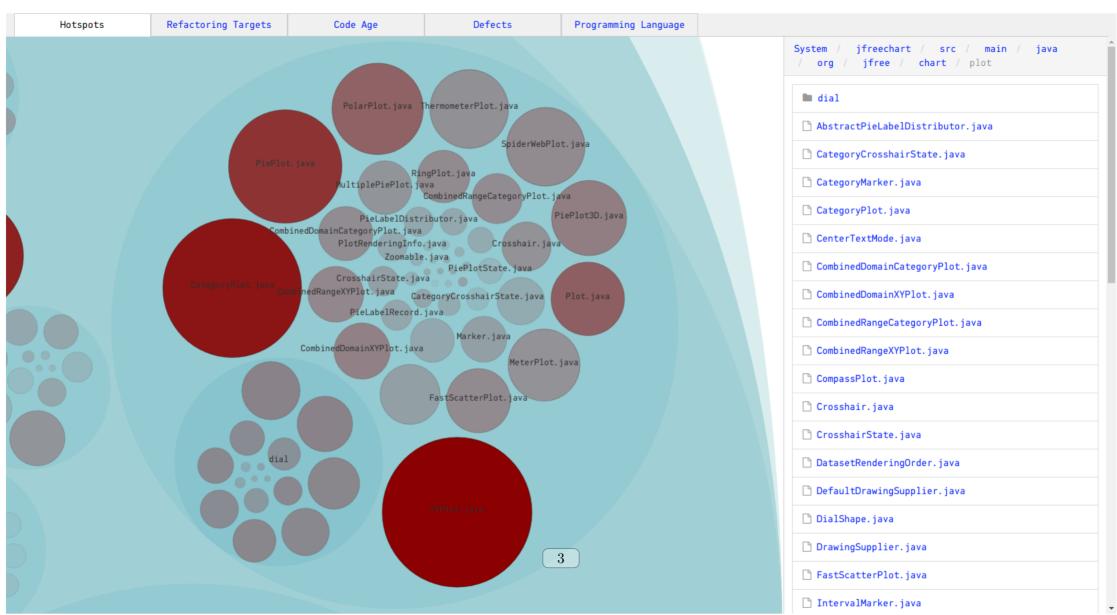

Prioritize improvements to the highlighted files. Red is most serious. 🛨



Prioritize improvements to the highlighted files. Red is most serious. lacktriangledown

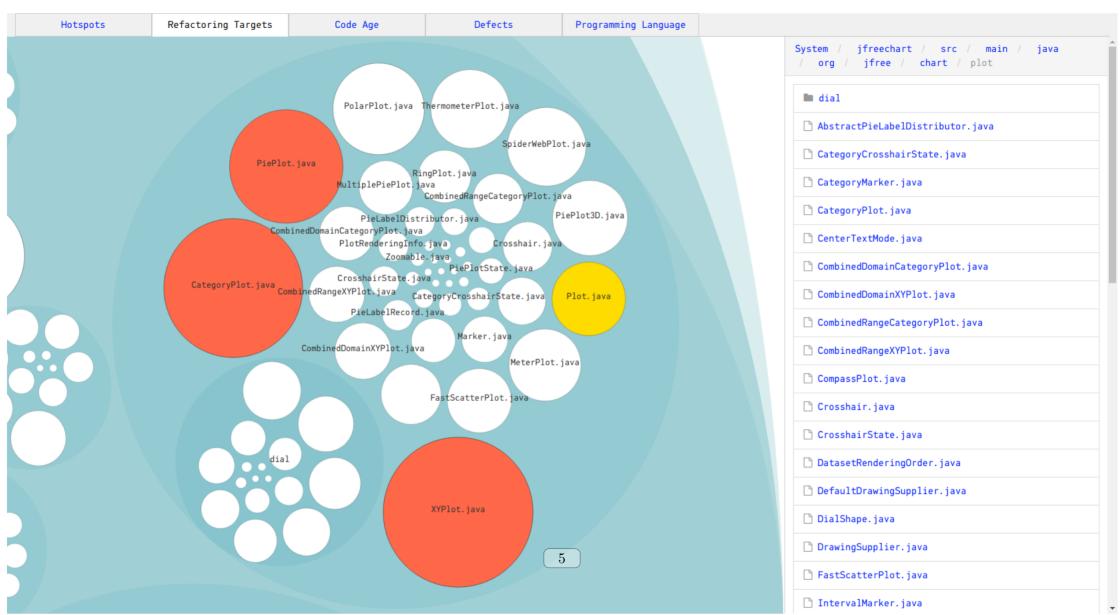

Refactoring Targets

Prioritize improvements to these files since they have the highest technical debt interest rate.

jfreechart/src/main/java/org/jfree/chart/plot/XYPlot.java	<u>Le^</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/plot/CategoryPlot.java	<u>∠</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/plot/PiePlot.java	<u>∠</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/renderer/xy/AbstractXYItemRenderer.java	<u>∠</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/renderer/category/AbstractCategoryItemRenderer.java	<u>∠</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/plot/Plot.java	<u>∠</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/plot/PolarPlot.java	<u>∠</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/renderer/xy/XYLineAndShapeRenderer.java	<u>∠</u> X-Ray
jfreechart/src/main/java/org/jfree/chart/axis/ValueAxis.java	<u>∠</u> X-Ray
jfreechart/src/test/java/org/jfree/chart/plot/XYPlotTest.java	<u>✓</u> X-Ray

6

jfreechart/src/main/java/org/jfree/chart/axis/CategoryAxis.java

jfreechart/src/main/java/org/jfree/chart/renderer/category/BarRenderer.java

X-Ray File Results					
Projects / jfreechart / Files / jfreechart/src/main/java/org/jfree/chart/plot/XYPlot.java					
Hotspots Internal Temporal Coupling Structural	Recommendations				
	Change Frequency	<pre></pre>			
equals	7	206	112	<u>✓</u>	
draw	6	245	45	<u>✓</u> ⟨/>	
drawQuadrants	2	106	24	<u>✓</u>	
getDataRange	3	95	20	<u>✓</u> ⟨/>	
render	5	83	18	<u>₩</u>	
drawRangeGridlines	3	39	13	<u> </u>	
clone	6	68	12	<u></u> ⟨/>	
drawDomainGridlines	2	37	11	<u>✓/></u>	
getLegendItems	1	30	11	<u>✓</u>	
clearDomainMarkers	2	45	10	<u>✓</u>	
clearRangeMarkers	2	45	10	<u>✓</u>	
removeRangeMarker	5	31	9	<u>₩</u>	
readObject	3	55	9	<u>✓</u>	
removeDomainMarker	3	29	9	<u>✓</u>	
drawAxes	1	73	9	∠	
addDomainMarker	4	38	8	∠ ⟨/>	
setRangeAxis	2	36	8	<u>✓</u>	
addRangeMarker	2	35	8	<u>✓</u>	
zoomDomainAxes	3	35	7	∠	
zoomRangeAxes	3	35	7	∠	
setRangeAxisLocation	2	23	7	∠	
setDomainAxisLocation calculateDomainAxisSnace	1	36	7	<u>₩</u>	
calculateDomainAxisSpace calculateRangeAxisSpace	1	36	7	<u>✓</u>	
calculateRangeAxisSpace checkAxisIndices	1	19	7	△ ⟨/>	
checkAxisIndices drawDomainMarkers	0	23	7		
drawDomainMarkers drawRangeMarkers	0	22	7		
setDomainAxis	2	23	6		
XYPlot	7	96	5	\(\langle \)	
getDatasetsMappedToDomainAxis	4	18	5		
getDatasetsMappedToRangeAxis	4	18	5		
panDomainAxes	3	15	5	✓	
setRenderer	2	23	5	✓/>	
panRangeAxes	2	15	5	✓/>	
getDomainMarkers	0	17	5	✓	
getRangeMarkers	0	17	5	<u>~</u> ⟨/>	
removeAnnotation	5	12	4		
getDomainAxis	1	14	4	<u>✓</u>	
getRangeAxis	1	14	4	<u>✓</u>	
getRendererForDataset	1	11	4	<u>✓</u>	
getIndexOf	1	9	4	<u>~</u> ⟨/>	
indexOf	1	87	4	<u>✓</u>	
getQuadrantPaint	1	7	4	<u>₩</u>	

Projects / jfreechart / Files / jfreechart/src/main/java/org/jfree/chart/plot/CategoryPlot.java Hotspots Internal Temporal Coupling Structural Recommendations

<pre>\$ Function</pre>	⇔ Change Frequency	<pre></pre>	Cyclomatic Complexity	
equals	6	180	101	<u>✓</u>
draw	9	211	34	<u>~</u>
drawRangeGridlines	4	43	15	<u>~</u>
render	2	60	13	<u>~</u>
drawAxes	1	82	13	<u>~</u>
clone	5	65	12	<u>~</u>
clearDomainMarkers	1	49	10	<u> </u>
clearRangeMarkers	1	49	10	<u>~</u>
removeRangeMarker	5	29	9	<u>~</u>
removeDomainMarker	3	28	9	<u>~</u>
checkAxisIndices	0	24	9	<u>✓</u>
readObject	4	41	8	<u>~</u>
addDomainMarker	4	36	8	<u>✓</u>
addRangeMarker	2	34	8	<u>~</u>
calculateDomainAxisSpace	1	43	8	<u>✓</u>
zoomRangeAxes	3	35	7	<u>~</u>
setDomainAxisLocation	2	23	7	<u> </u>
setRangeAxisLocation	2	21	7	<u>✓</u>
calculateRangeAxisSpace	1	33	7	<u> </u> ✓/>
drawDomainGridlines	1	24	7	<u></u> ⟨/>
datasetsMappedToDomainAxis	4	22	6	<u> </u> ✓/>
setRangeAxis	3	23	6	<u> </u> ✓/>
setRenderer	2	26	6	<u> </u> ✓/>
setDomainAxis	2	23	6	<u> </u> ✓/>
getLegendItems	2	17	6	<u> </u> ✓/>
CategoryPlot	9	93	5	<u>₩</u>
datasetsMappedToRangeAxis	3	19	5	<u>₩</u>
getDataRange	1	21	5	<u>₩</u>
panRangeAxes	1	18	5	<u>₩</u>
getRendererForDataset	1	11	5	<u> </u>
drawRangeMarkers	0	19	5	<u>₩</u>
drawDomainMarkers	0	19	5	<u>₩</u>
getDomainMarkers	0	17	5	<u></u> ⟨/>
getRangeMarkers	0	17	5	

17 ${\tt getRangeMarkers}$ <u></u> </> 13 removeAnnotation <u>₩</u> </> 4 9 4 <u>✓</u> </> ${\tt getDomainAxisIndex}$ getDomainAxis <u>✓</u> </> 148 4 1 getRangeAxis <u>✓</u> </> 14 ${\tt getCategoriesForAxis}$ <u>₩</u> ⟨/>

Projects / jfreechart / Files / jfreechart/src/main/java/org/jfree/chart/plot/PiePlot.java

Hotspots Internal Temporal Coupling Structural Recommendations

⇒ Function	Change Frequency	<pre>\$ Complexity/Size</pre>	▼ Cyclomatic Complexity	
equals	7	172	99	<u>₩</u>
drawItem	5	83	16	<u>✓</u>
drawPie	5	125	14	<u>~</u>
drawSimpleLabels	5	82	11	<u>₩</u>
getLegendItems	4	62	10	∠
lookupSectionPaint	5	42	8	∠
clone	3	35	7	∠
drawLabels	4	61	6	∠
draw	4	57	6	<u>₩</u> ⟨/>
lookupSectionOutlineStroke	3	29	6	<u></u>
lookupSectionOutlinePaint	3	29	6	<u></u> ⟨/>
getArcCenter	0	42	6	<u></u>
getMaximumExplodePercent	1	15	5	<u> </u>
getSectionKey	0	12	5	<u></u> >
drawLeftLabels	7	47	4	<u></u> >
drawRightLabels	6	49	4	<u></u> >
drawLeftLabel	3	43	4	<u>✓</u>
drawRightLabel	1	44	4	<u>₩</u>
setInteriorGap	1	13	4	∠
getArcBounds	1	20	3	<u>₩</u>
getExplodePercent	1	9 10	3	<u>₩</u> ⟨/>
PiePlot	8	59	2	<u>₩</u> ⟨/>

 ${\tt calculateRangeMarkerTextAnchorPoint}$

Projects / jfreechart / Files / jfreechart/src/main/java/org/jfree/chart/renderer/xy/AbstractXYItemRenderer.java

Hotspots Internal Temporal Coupling Structural Recom	mendations			
⇒ Function		<pre>\$ Complexity/Size</pre>	Cyclomatic Complexity	
equals	5	45	25	<u>~</u>
drawRangeMarker	3	157	22	<u>~</u>
drawDomainMarker	3	157	22	<u>~</u>
findRangeBounds	4	39	12	<u>~~</u> ⟨/>
getLegendItem	2	51	9	<u> </u>
findDomainBounds	3	21	8	<u> </u>
getLegendItems	0	21	7	<u> </u>
addEntity	3	28	5	<u>~~</u> ⟨/>
updateCrosshairValues	4	27	4	<u> </u>
addAnnotation	4	21	4	<u> ✓ /></u>
drawDomainLine	3	28	4	<u>✓</u>
drawAnnotations	2	22	4	<u>✓</u>
drawRangeLine	1	10 27	4	<u></u> ⟨/>

17

1

3

 ${\tt calculateDomainMarkerTextAnchorPoint}$

Projects / jfreechart / Files / jfreechart/src/main/java/org/jfree/chart/renderer/category/AbstractCategoryItemRenderer.java

Hotspots	Internal Temporal Coupling	Structural Recommendations			
<pre>\$ Function</pre>	1	≑ Change Frequen	cy	Cyclomatic Complexity	
equals		4	47	23	<u>₩</u>
drawRangeMark	ker	4	163	22	<u>₩</u> ⟨/>
clone		4	71	16	<u>₩</u>
getLegendItem	ns	2	33	12	<u>₩</u> ⟨/>
drawDomainMar	rker	3	72	9	<u>₩</u> ⟨/>
getLegendItem	n	1	44	9	<u>₩</u> ⟨/>
findRangeBour	nds	3	23	8	<u>₩</u> ⟨⟩
addEntity		1	31	6	<u>₩</u> ⟨/>
addItemEntity	у	3	20	4	<u>₩</u>
initialise		2	29	4	<u>₩</u> ⟨/>
drawDomainGri	idline	1	32	4	<u>₩</u> ⟨/>
drawRangeLine	е	1	27	4	<u>₩</u> ⟨/>
calculateRang	geMarkerTextAnchorPoint	1	11 16	3	<u>₩</u> ⟨/>

15

3