

HTML & CSS

Complete Web Development Notes

Basic to Advanced · All Tags · Real Projects · Job Ready

Prepared by	Ranjiit Sir
Organization	ForkInfosystems, Karad
Contact	9172135355 / 7757962804
Target	Graduation / PG — Job Preparation
Contents	10 Modules + Homework PDF
Year	2026

Table of Contents

Module 1 — Introduction to Web Development & HTML Basics

■ HTML structure, tags, attributes, comments, meta tags

Module 2 — Text Formatting, Lists, Links & Images

■ 23 text tags · ol/ul/dl lists · all anchor types · images · entities

Module 3 — HTML Tables & Forms — All Tags

■ table/thead/tbody/tfoot · colspan/rowspan · 21 input types · fieldset

Module 4 — HTML5 Semantic Elements & Page Structure

■ header/nav/main/section/article/aside/footer · audio/video/iframe

Module 5 — CSS Basics — Selectors, Box Model & Properties

■ 22 selectors · colours · fonts · box model · position · z-index

Module 6 — CSS Layout — Flexbox & Grid

■ all flex properties · grid template areas · responsive patterns

Module 7 — CSS Advanced — Animations, Transitions & Responsive

■ transitions · @keyframes · CSS variables · media queries · transform

Module 8 — Page Design Examples

■ Home page · Admission form · Photo gallery · Full page structure

Module 9 — Mini Project — Personal Portfolio Website

■ Hero · About · Skills · Projects · Contact · Responsive

Module 10 — Major Project — ShopZone E-Commerce Website

■ Homepage · Product listing · Shopping cart · Login / Register

Homework — Module-wise Homework & Interview Questions

■ Theory + Practical per module · Top 30 Interview Q&A;

Module 1 — Introduction to Web Development & HTML Basics

1.1 What is the Web?

The **World Wide Web (WWW)** is a system of interlinked web pages accessible via the Internet. A web page is an HTML document displayed by a browser. **Web Development** is the process of building and maintaining websites.

Term	Full Form	Meaning
HTML	HyperText Markup Language	Structure of a web page
CSS	Cascading Style Sheets	Visual style and layout
JavaScript	—	Interactivity and logic
Browser	—	Displays pages (Chrome, Firefox, Edge)
URL	Uniform Resource Locator	Web address e.g. https://example.com
Server	—	Computer that hosts websites
Client	—	Browser/device that requests pages

1.2 What is HTML?

HTML stands for **HyperText Markup Language**. It is **not** a programming language — it is a **markup language** that structures web content using **tags** (keywords inside angle brackets). HTML files are saved with the **.html** or **.htm** extension.

Note: HTML = WHAT the content is. CSS = HOW it looks. JavaScript = makes it interactive.

1.3 HTML Document Structure

Every HTML page must follow this exact skeleton. Save the file as **index.html** and open in any browser.

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>My First Web Page</title>
  </head>
  <body>

    <h1>Hello World!</h1>
    <p>This is my first HTML page.</p>

  </body>
</html>
```

Tag	Name	Purpose
<code><!DOCTYPE html></code>	Declaration	Tells browser this is HTML5. Always first line.
<code><html lang='en'></code>	Root element	Wraps entire page. lang= for accessibility.
<code><head></code>	Head section	Metadata — not shown on page.
<code><meta charset='UTF-8'></code>	Character set	Supports all characters including Hindi.
<code><meta name='viewport'></code>	Viewport	Makes page mobile-friendly. Always include.
<code><title></code>	Page title	Shown in browser tab and Google results.
<code><body></code>	Body section	All visible page content goes here.

1.4 Opening, Closing & Self-Closing Tags

Most elements have an **opening** and a **closing** tag. **Void / self-closing** tags have no content and need no closing tag.

```
<!-- Opening + Closing tag -->
<p>This is a paragraph.</p>
<h1>This is a heading.</h1>

<!-- Self-closing (void) tags – no closing tag needed -->
<br>           <!-- Line break -->
<hr>          <!-- Horizontal rule line -->

<input type="text" placeholder="Enter name">
<link rel="stylesheet" href="style.css">
<meta charset="UTF-8">
```

Tip: In HTML5 the trailing slash is optional. Both `<br>` and `<br/>` are valid.

1.5 HTML Attributes

Attributes give **extra information** about an element. Written in the **opening tag** as `name="value"` pairs.

```
<!-- href = link address, target="_blank" = open in new tab -->
<a href="https://www.google.com" target="_blank">Go to Google</a>

<!-- src = image path, alt = description for accessibility & SEO -->


<!-- type, placeholder, required are all attributes of <input> -->
<input type="email" placeholder="Enter your email" required>

<!-- id = unique identifier, class = reusable group -->
<div id="main-header" class="container">Content here</div>
```

1.6 Comments in HTML

```
<!-- This is a single-line comment – browser ignores it -->

<!--
  Multi-line comment.
  Use to explain code or temporarily hide a section.
-->
```

Note: Comments are visible in View Page Source. Never write passwords or sensitive data in comments!

1.7 Important Meta Tags

```
<head>
  <meta charset="UTF-8">
  <!-- Supports all languages and special characters -->

  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <!-- Makes the page responsive on mobile – ALWAYS include this -->

  <meta name="description" content="IT Training Institute in Karad – ForkInfosystems">
  <!-- Shown in Google search results under the page title -->

  <meta name="keywords" content="HTML, CSS, Web Development, ForkInfosystems">

  <meta name="author" content="Ranjiit Sir">

  <title>ForkInfosystems – Web Development Course</title>
</head>
```

Module 2 — Text Formatting, Lists, Links & Images

2.1 Headings h1 – h6

HTML provides **6 heading levels**. h1 is the largest and most important; h6 is the smallest. Use **only one h1 per page** for SEO. Use headings for structure — not just to make text bigger.

```
<h1>Main Page Title (Largest – One per page)</h1>
<h2>Section Heading</h2>
<h3>Sub-section Heading</h3>
<h4>Topic Heading</h4>
<h5>Sub-topic</h5>
<h6>Smallest Heading</h6>
```

2.2 Text Formatting Tags — Complete Reference

Tag	Name	Purpose & Notes
<code><p></code>	Paragraph	Block of text. Browser adds space above & below.
<code>
</code>	Line Break	Moves to next line. Self-closing. Inside paragraphs.
<code><hr></code>	Horizontal Rule	Draws a horizontal divider line.
<code></code>	Bold	Visual bold — no semantic meaning.
<code></code>	Strong	Bold + semantic importance (SEO, screen readers).
<code><i></code>	Italic	Visual italic — no semantic meaning.
<code></code>	Emphasis	Italic + semantic emphasis.
<code><u></code>	Underline	Underlines text. Avoid — looks like a link.
<code><s></code>	Strikethrough	Line through text. e.g. old price shown crossed out.
<code></code>	Deleted	Strikethrough + semantic 'content removed' meaning.
<code><ins></code>	Inserted	Underline + semantic 'content added' meaning.
<code><mark></code>	Highlight	Yellow highlight background on text.
<code><small></code>	Small text	Smaller than parent font size.
<code><sub></code>	Subscript	Below baseline. e.g. H ₂ O
<code><sup></code>	Superscript	Above baseline. e.g. x squared
<code><pre></code>	Preformatted	Preserves spaces & line breaks. Monospace font.
<code><code></code>	Inline Code	Inline code snippet. Monospace font.
<code><kbd></code>	Keyboard	Keyboard input style. e.g. Press Ctrl+C
<code><blockquote></code>	Block Quote	Indented block for long quotations.
<code><q></code>	Inline Quote	Short inline quote with auto quotation marks.
<code><abbr></code>	Abbreviation	Hover shows full form. Uses title= attribute.
<code></code>	Inline Container	No visual effect. Used to apply CSS to inline text.
<code><div></code>	Block Container	Groups block elements. Most-used layout element.

Text Formatting Code Examples

```
<p>Normal, <b>Bold</b>, <i>Italic</i>, <u>Underline</u>, <mark>Highlighted</mark></p>

<p>Price: <s>&#8377;5,000</s>  Sale Price: <strong>&#8377;3,500</strong></p>

<p>Water: H<sub>2</sub></sub>0  &nbsp;&nbsp;&nbsp;|&nbsp;&nbsp;&nbsp; Area: &pi;r<sup>2</sup></sup></p>

<blockquote>
  "Practice every day – that is the only way to learn web development."
</blockquote>

<p>Save with: <kbd>Ctrl</kbd> + <kbd>S</kbd></p>

<pre>
  Name  : Ranjit Sir
  Org   : ForkInfosystems, Karad
  Phone : 9172135355
</pre>
```

2.3 Lists

A) Unordered List (ul) — Bullet Points

```
<ul>
  <li>HTML</li>
  <li>CSS</li>
  <li>JavaScript</li>
</ul>

<!-- Nested unordered list -->
<ul>
  <li>Frontend
    <ul>
      <li>HTML</li>
      <li>CSS</li>
    </ul>
  </li>
  <li>Backend
    <ul>
      <li>PHP</li>
      <li>Node.js</li>
    </ul>
  </li>
</ul>
```

B) Ordered List (ol) — Numbered

```
<ol>
  <li>Open VS Code</li>
  <li>Create index.html</li>
  <li>Write HTML code</li>
  <li>Open in browser</li>
</ol>

<!-- Custom start number -->
<ol start="5">
  <li>Step 5</li>
  <li>Step 6</li>
</ol>

<!-- type: 1 (default) | A | a | I | i -->
<ol type="A">
  <li>Option A</li>
  <li>Option B</li>
</ol>
```

C) Description List (dl)

```
<dl>
  <dt>HTML</dt>
  <dd>HyperText Markup Language – structures web pages.</dd>

  <dt>CSS</dt>
  <dd>Cascading Style Sheets – styles web pages.</dd>

  <dt>JavaScript</dt>
  <dd>Programming language – adds interactivity to pages.</dd>
</dl>
```

2.4 Links — Anchor Tag

```
<!-- 1. External link -->
<a href="https://www.google.com">Visit Google</a>

<!-- 2. New tab -->
<a href="https://www.google.com" target="_blank" rel="noopener">
  Open in New Tab
</a>

<!-- 3. Internal page link -->
<a href="about.html">About Us</a>

<!-- 4. Same-page anchor navigation -->
<a href="#contact">Jump to Contact</a>
...
<section id="contact"><h2>Contact Us</h2></section>

<!-- 5. Email link -->
<a href="mailto:info@forksystems.com">Email Us</a>

<!-- 6. Phone link (tappable on mobile) -->
<a href="tel:+919172135355">Call: 9172135355</a>

<!-- 7. Download -->
<a href="brochure.pdf" download>Download Brochure</a>

<!-- 8. Image as link -->
<a href="index.html">
  
</a>
```

2.5 Images

```
<!-- Basic image -->


<!-- With fixed size -->


<!-- Image from internet -->


<!-- Figure with caption (HTML5 semantic) -->
<figure>
  
  <figcaption>The ForkInfosystems Team – Karad 2025</figcaption>
</figure>
```

Note: Always include the alt attribute. It is essential for screen readers (visually impaired users) and improves SEO ranking. Use alt="" for purely decorative images.

2.6 HTML Entities — Special Characters

Entity Code	Output
<code>&amp;</code>	& (Ampersand)
<code>&lt;</code>	< (Less-than sign)
<code>&gt;</code>	> (Greater-than sign)
<code>&nbsp;</code>	Non-breaking space
<code>&copy;</code>	© Copyright
<code>&reg;</code>	® Registered trademark
<code>&trade;</code>	™ Trademark
<code>&#8377;</code>	₹ Indian Rupee
<code>&euro;</code>	€ Euro
<code>&mdash;</code>	— Em dash

Module 3 — HTML Tables & Forms (All Tags)

3.1 HTML Tables

Tables display **tabular data** in rows and columns. Use tables only for data — never for page layout (use CSS Flexbox/Grid for that).

Tag	Name	Purpose
<code><table></code>	Table	Container for the entire table.
<code><tr></code>	Table Row	Defines one row.
<code><th></code>	Table Header	Header cell — bold & centred by default.
<code><td></code>	Table Data	Regular data cell.
<code><thead></code>	Table Head	Groups header rows — semantic.
<code><tbody></code>	Table Body	Groups body/data rows.
<code><tfoot></code>	Table Foot	Groups footer rows (totals/summaries).
<code><caption></code>	Caption	Table title — placed above the table.
<code>colspan</code>	Column Span	Attribute: merges cells horizontally.
<code>rowspan</code>	Row Span	Attribute: merges cells vertically.

3.2 Table with thead / tbody / tfoot

```
<table border="1" cellpadding="8" cellspacing="0">
  <caption>Student Marks – Semester 1</caption>

  <thead>
    <tr>
      <th>Sr.No.</th>
      <th>Student Name</th>
      <th>Subject</th>
      <th>Marks</th>
    </tr>
  </thead>

  <tbody>
    <tr>
      <td>1</td>
      <td>Aarav Sharma</td>
      <td>Web Development</td>
      <td>88</td>
    </tr>
    <tr>
      <td>2</td>
      <td>Priya Patil</td>
      <td>Web Development</td>
      <td>92</td>
    </tr>
  </tbody>

  <tfoot>
    <tr>
      <td colspan="3"><strong>Class Average</strong></td>
      <td><strong>90</strong></td>
    </tr>
  </tfoot>
</table>
```

3.3 Colspan & Rowspan

colspan merges cells across columns. **rowspan** merges cells across rows.

```

<table border="1" cellpadding="8">
  <tr>
    <th colspan="3">Student Information</th>
    <!-- This header spans 3 columns -->
  </tr>
  <tr>
    <td rowspan="2">Ranjit Sir</td>
    <!-- This cell spans 2 rows downward -->
    <td>HTML & CSS</td>
    <td>90</td>
  </tr>
  <tr>
    <!-- No first <td> here – rowspan above still active -->
    <td>JavaScript</td>
    <td>85</td>
  </tr>
</table>

```

3.4 HTML Forms — All Form Tags

Forms collect user input and send it to a server. The **<form>** wraps all inputs. Key attributes: **action** (URL to send data) and **method** (GET or POST).

Tag	Name	Purpose
<form>	Form	Container. Attrs: action, method, enctype.
<input>	Input	Most versatile field. 21 types (see next table).
<label>	Label	Text label. Link with for= and id= attributes.
<textarea>	Text Area	Multi-line text. Attrs: rows, cols, placeholder.
<select>	Dropdown	Drop-down list. Contains <option> elements.
<option>	Option	One item in a <select>. Attrs: value, selected.
<optgroup>	Option Group	Groups options with a label inside <select>.
<button>	Button	Clickable. Types: submit, reset, button.
<fieldset>	Fieldset	Groups related inputs with a border box.
<legend>	Legend	Caption for a <fieldset>.
<datalist>	Datalist	Autocomplete suggestions for <input>.
<output>	Output	Displays the result of a calculation.
<meter>	Meter	Visual gauge for a value in a known range.
<progress>	Progress Bar	Shows task completion. Attrs: value, max.

3.5 All Input Types — 21 Types

type=	Name	Description
<code>text</code>	Text	Single-line plain text.
<code>password</code>	Password	Text hidden as dots/asterisks.
<code>email</code>	Email	Validates email format.
<code>number</code>	Number	Numeric input with up/down arrows.
<code>tel</code>	Telephone	Phone number (no auto-validation).
<code>url</code>	URL	Validates URL format.
<code>date</code>	Date Picker	Calendar popup for date.
<code>time</code>	Time Picker	Hour:minute selection.
<code>datetime-local</code>	Date + Time	Combined date and time selection.
<code>month</code>	Month	Select month and year.
<code>week</code>	Week	Select week number.
<code>color</code>	Colour Picker	Opens OS colour palette.
<code>range</code>	Slider	Slider bar. Attrs: min, max, step.
<code>file</code>	File Upload	Browse button. Add multiple for multi-file.
<code>checkbox</code>	Checkbox	Tick box — multiple selections allowed.
<code>radio</code>	Radio Button	One selection per group (same name=).
<code>submit</code>	Submit	Submits the form to action URL.
<code>reset</code>	Reset	Clears all form fields to defaults.
<code>hidden</code>	Hidden	Not visible. Sends hidden data to server.
<code>image</code>	Image Button	Image that acts as a submit button.
<code>search</code>	Search Box	Text box styled for search queries.

3.6 Complete Form Example

A real-world contact form using many input types, fieldset grouping, and a datalist for autocomplete. Save as **contact.html**.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Contact – ForkInfosystems</title>
</head>
<body>

<h2>Contact Us – ForkInfosystems</h2>

<form action="submit.php" method="POST" enctype="multipart/form-data">

  <fieldset>
    <legend>Personal Information</legend>

    <label for="fname">First Name *</label><br>
    <input type="text" id="fname" name="fname"
      placeholder="Your first name" required><br><br>

    <label for="email">Email Address *</label><br>
    <input type="email" id="email" name="email"
      placeholder="you@example.com" required><br><br>

    <label for="phone">Phone Number</label><br>
    <input type="tel" id="phone" name="phone"
      placeholder="+91 XXXXX XXXXX"><br><br>

    <label for="dob">Date of Birth</label><br>
    <input type="date" id="dob" name="dob"><br><br>

    <label>Gender</label><br>
    <input type="radio" id="m" name="gender" value="male">
    <label for="m">Male</label>
    <input type="radio" id="f" name="gender" value="female">
    <label for="f">Female</label>
    <input type="radio" id="o" name="gender" value="other">
    <label for="o">Other</label><br><br>
  </fieldset>

  <fieldset>
    <legend>Enquiry Details</legend>

    <label for="subject">Subject</label><br>
    <input type="text" id="subject" name="subject" list="subjects">
    <datalist id="subjects">
      <option value="Course Inquiry">
      <option value="Fee Structure">
      <option value="Demo Class Request">
    </datalist><br><br>

    <label for="course">Preferred Course *</label><br>
    <select id="course" name="course" required>
```

```
<option value="">-- Select a Course --</option>
<optgroup label="Web Development">
  <option>HTML & CSS</option>
  <option>JavaScript</option>
</optgroup>
<optgroup label="Database">
  <option>SQL / MySQL</option>
</optgroup>
</select><br><br>

<label for="msg">Message</label><br>
<textarea id="msg" name="msg" rows="4" cols="50"
  placeholder="Write your message here..."></textarea><br><br>

<label for="resume">Upload Resume (PDF)</label><br>
<input type="file" id="resume" name="resume"
  accept=".pdf, .doc, .docx"><br><br>

<input type="checkbox" id="news" name="newsletter" value="yes">
<label for="news">Subscribe to Newsletter</label><br><br>
</fieldset>

<button type="submit">Send Message</button>
<button type="reset">Clear Form</button>

</form>

</body>
</html>
```

Module 4 — HTML5 Semantic Elements & Page Structure

4.1 What are Semantic Elements?

Semantic elements describe their **meaning and purpose** clearly. Before HTML5 developers used `<div id='header'>` everywhere. HTML5 introduced proper named tags.

Old Way (non-semantic)	HTML5 Semantic Way
<code><div id='header'></code>	<code><header></code>
<code><div id='nav'></code>	<code><nav></code>
<code><div id='main'></code>	<code><main></code>
<code><div class='post'></code>	<code><article></code>
<code><div id='sidebar'></code>	<code><aside></code>
<code><div id='footer'></code>	<code><footer></code>

4.2 HTML5 Semantic Tags — Reference

Tag	Name	Purpose & Usage
<code><header></code>	Page Header	Top area — logo, site title, navigation.
<code><nav></code>	Navigation	Main navigation links. Usually inside header.
<code><main></code>	Main Content	Central unique content. Only ONE per page.
<code><section></code>	Section	Thematic grouping with its own heading.
<code><article></code>	Article	Self-contained content: blog post, news item.
<code><aside></code>	Aside/Sidebar	Related but not essential: ads, tips, links.
<code><footer></code>	Page Footer	Bottom area — copyright, links, contact.
<code><figure></code>	Figure	Self-contained media: image, diagram, code.
<code><figcaption></code>	Fig Caption	Caption text for a <code><figure></code> element.
<code><details></code>	Details	Collapsible section. Opens/closes on click.
<code><summary></code>	Summary	Visible heading for a <code><details></code> element.
<code><dialog></code>	Dialog/Modal	Popup dialog. Use open attribute to show.
<code><mark></code>	Highlight	Highlights text (like yellow marker pen).
<code><time></code>	Time	Machine-readable date/time. Attr: datetime.
<code><address></code>	Address	Contact info for document author/owner.
<code><progress></code>	Progress Bar	Task completion. Attrs: value, max.
<code><meter></code>	Meter/Gauge	Value in a known range. Attrs: min, max, value.

4.3 Standard Page Structure

A complete page using HTML5 semantic structure. Save as **structure.html**.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>ForkInfosystems – IT Training, Karad</title>
</head>
<body>

  <!-- HEADER -->
  <header>
    
    <h1>ForkInfosystems</h1>
    <nav>
      <a href="index.html">Home</a>
      <a href="courses.html">Courses</a>
      <a href="about.html">About</a>
      <a href="contact.html">Contact</a>
    </nav>
  </header>

  <!-- MAIN CONTENT -->
  <main>

    <section id="hero">
      <h2>Welcome to Web Development Course</h2>
      <p>Learn HTML, CSS, JavaScript from scratch.</p>
      <a href="enroll.html">Enroll Now</a>
    </section>

    <section id="courses">
      <h2>Our Courses</h2>
      <article>
        <h3>HTML & CSS</h3>
        <p>Build beautiful, responsive web pages from scratch.</p>
      </article>
      <article>
        <h3>JavaScript</h3>
        <p>Make your web pages dynamic and interactive.</p>
      </article>
    </section>

    <!-- SIDEBAR -->
    <aside>
      <h3>Announcements</h3>
      <p>New batch starting 1st June 2025!</p>
      <details>
        <summary>Batch Timings (click to expand)</summary>
        <p>Morning Batch: 9 AM – 11 AM</p>
        <p>Evening Batch: 6 PM – 8 PM</p>
      </details>
    </aside>

  </main>
```

```
<!-- FOOTER -->
<footer>
  <address>
    ForkInfosystems, Karad, Maharashtra<br>
    Phone: <a href="tel:+919172135355">9172135355</a> /
          <a href="tel:+917757962804">7757962804</a>
  </address>
  <p><small>&copy; 2025 ForkInfosystems. All rights reserved.</small></p>
</footer>

</body>
</html>
```

4.4 Audio, Video & Embedding

```
<!-- AUDIO -->
<audio controls>
  <source src="song.mp3" type="audio/mpeg">
  <source src="song.ogg" type="audio/ogg">
  Your browser does not support the audio element.
</audio>
<!-- Attrs: controls autoplay loop muted preload -->

<!-- VIDEO -->
<video width="640" height="360" controls poster="thumb.jpg">
  <source src="intro.mp4" type="video/mp4">
  <source src="intro.webm" type="video/webm">
  Your browser does not support the video element.
</video>
<!-- Attrs: controls autoplay loop muted width height poster -->

<!-- YOUTUBE EMBED via iframe -->
<iframe
  width="560" height="315"
  src="https://www.youtube.com/embed/VIDEO_ID"
  title="YouTube video player"
  allowfullscreen>
</iframe>

<!-- GOOGLE MAPS EMBED -->
<iframe
  src="https://www.google.com/maps/embed?pb=!1m18..."
  width="600" height="400"
  allowfullscreen loading="lazy">
</iframe>
```

Module 5 — CSS Basics: Selectors, Box Model & Properties

5.1 What is CSS & How to Add It

CSS (**Cascading Style Sheets**) controls the visual presentation — colours, fonts, spacing and layout. Without CSS a page looks plain.

```
/* 1. INLINE CSS — inside the tag (avoid for large projects) */
<p style="color: red; font-size: 18px;">Red paragraph.</p>

/* 2. INTERNAL CSS — inside <style> in <head> */
<head>
  <style>
    p { color: blue; font-size: 16px; }
    h1 { color: navy; text-align: center; }
  </style>
</head>

/* 3. EXTERNAL CSS — separate .css file (BEST PRACTICE) */
<head>
  <link rel="stylesheet" href="style.css">
</head>

/* In style.css: */
body { font-family: Arial, sans-serif; }
h1 { color: navy; }
```

Tip: Always use external CSS in real projects. It keeps HTML clean and lets you reuse styles across all pages.

5.2 CSS Syntax

```
selector {  
  property: value; /* declaration */  
  property: value;  
}  
  
/* Examples */  
h1 {  
  color:      navy;  
  font-size:  32px;  
  text-align: center;  
}  
  
p {  
  font-family: Arial, sans-serif;  
  line-height: 1.6;  
  color:      #333;  
}  
  
/* CSS comment – browser ignores this */
```

5.3 CSS Selectors — Complete Reference (22 Types)

Selector	Type	Example & Usage
*	Universal	<code>* { margin:0; }</code> — selects ALL elements
element	Type / Tag	<code>p { color:gray; }</code> — all <code><p></code> tags
.class	Class	<code>.btn { background:blue; }</code>
#id	ID (unique)	<code>#header { height:60px; }</code>
A, B	Group	<code>h1,h2,h3 { color:navy; }</code>
A B	Descendant	<code>div p { }</code> — any <code><p></code> inside <code><div></code>
A > B	Direct Child	<code>ul > li { }</code> — <code></code> directly inside <code></code>
A + B	Adjacent Sibling	<code>h1 + p { }</code> — first <code><p></code> right after <code><h1></code>
A ~ B	General Sibling	<code>h1 ~ p { }</code> — all <code><p></code> siblings after <code><h1></code>
[attr]	Has Attribute	<code>input[required] { border:red; }</code>
[attr=val]	Exact Attribute	<code>input[type='email'] { }</code>
:hover	Mouse Over	<code>a:hover { color:orange; }</code>
:focus	Focused	<code>input:focus { border:navy; }</code>
:active	Being Clicked	<code>button:active { transform:scale(0.98); }</code>
:first-child	First Child	<code>li:first-child { font-weight:bold; }</code>
:last-child	Last Child	<code>li:last-child { border:none; }</code>
:nth-child(n)	nth Child	<code>tr:nth-child(odd) { background:#f5f5f5; }</code>
:not(selector)	Negation	<code>p:not(.special) { color:gray; }</code>
::before	Before (pseudo-el)	<code>.btn::before { content:'→'; }</code>
::after	After (pseudo-el)	<code>.btn::after { content:' ✓'; }</code>
::placeholder	Placeholder	<code>input::placeholder { color:#aaa; }</code>
::selection	Selected Text	<code>::selection { background:navy; color:white; }</code>

5.4 CSS Colours

```

/* Named colours */
color: red;    color: navy;    color: tomato;    color: dodgerblue;

/* Hexadecimal - #RRGGBB */
color: #ff0000;    /* Red */
color: #1a237e;    /* Navy */
color: #ffffff;    /* White */
color: #333;       /* Dark grey (shorthand for #333333) */

/* RGB */
color: rgb(255, 0, 0);    /* Red */
color: rgb(26, 35, 126); /* Navy */

/* RGBA - 4th value is opacity: 0 = transparent, 1 = opaque */
color: rgba(0, 0, 0, 0.5); /* 50% transparent black */
background-color: rgba(26, 35, 126, 0.9);

/* HSL - Hue(0-360) Saturation Lightness */
color: hsl(240, 100%, 25%); /* Dark blue */

/* Background shorthand */
background-color: #f5f7ff;

```

5.5 CSS Fonts & Text Properties

```

body {
  /* Font stack: browser tries first, falls back to next */
  font-family: 'Poppins', 'Segoe UI', Arial, sans-serif;
}

h1 {
  font-size: 36px;    /* Fixed pixels */
  font-size: 2.25rem; /* Relative to root font (1rem = 16px) */
  font-weight: bold;  /* normal | bold | 100-900 */
  font-style: italic; /* normal | italic | oblique */

  text-align: center; /* left | right | center | justify */
  text-decoration: underline; /* none | underline | line-through */
  text-transform: uppercase; /* uppercase | lowercase | capitalize */
  text-shadow: 2px 2px 5px rgba(0,0,0,0.3);


  letter-spacing: 2px;
  word-spacing: 5px;
  line-height: 1.6; /* Unitless value recommended */
}

/* Google Font - paste inside <head> */
/* <link href="https://fonts.googleapis.com/css2?
    family=Poppins:wght@400;700&display=swap" rel="stylesheet"> */
body { font-family: 'Poppins', sans-serif; }

```

5.6 The CSS Box Model

Every HTML element is a rectangular box. Layers from inside out: **Content** → **Padding** → **Border** → **Margin**.

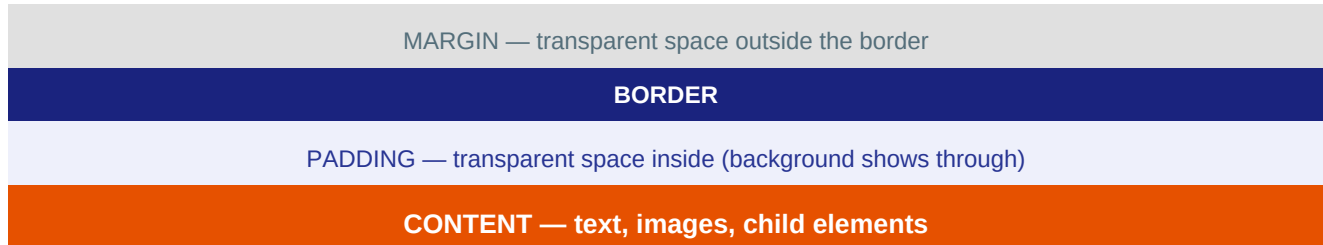

```
div {
  /* Content */
  width: 300px;
  height: 150px;

  /* Padding — space inside (background extends through padding) */
  padding: 20px;           /* all four sides */
  padding: 10px 20px;      /* top-bottom | left-right */
  padding: 5px 10px 15px 20px; /* top right bottom left */

  /* Border */
  border: 2px solid navy;
  border-radius: 8px;      /* rounded corners */
  border-top: 3px dashed #e65100;

  /* Margin — space outside (always transparent) */
  margin: 16px;
  margin: 0 auto;          /* centres the element horizontally */

  /* Background */
  background-color: #eef0fb;
  background-image: url('bg.jpg');
  background-size: cover;
  background-position: center;
  background-repeat: no-repeat;

  /* IMPORTANT — always add this globally */
  box-sizing: border-box;
  /* Width now includes padding + border — no unexpected overflow */
}

/* Global CSS reset — add at the top of every stylesheet */
* {
  margin: 0;
  padding: 0;
  box-sizing: border-box;
}
```

5.7 CSS Position Property

Controls how an element is placed in the document. Combined with **top**, **right**, **bottom**, **left** to set offsets.

Value	Behaviour	Common Use Case
static	Normal flow	Default. top/left have no effect.
relative	Offset from self	Nudge element without affecting others.
absolute	Removed from flow	Position relative to nearest non-static ancestor.
fixed	Fixed to viewport	Sticky navbar — stays while user scrolls.
sticky	Hybrid	Relative until scroll threshold, then fixed.

```
/* relative */
.nudge {
  position: relative;
  top: 10px; /* moves DOWN 10px from its natural position */
  left: 20px; /* moves RIGHT 20px */
}

/* absolute inside relative parent – classic badge pattern */
.card { position: relative; }
.badge {
  position: absolute;
  top: 8px; right: 8px; /* 8px from top-right corner of .card */
}

/* fixed sticky navbar */
nav {
  position: fixed;
  top: 0; left: 0; width: 100%;
  z-index: 1000;
  background: navy;
}
body { padding-top: 64px; } /* prevent content hiding under nav */

/* sticky section heading */
.sticky-head {
  position: sticky;
  top: 0;
  background: white;
  z-index: 10;
}
```

Note: z-index controls stacking order of overlapping elements. Higher value = on top. Only works on non-static elements.

Module 6 — CSS Layout: Flexbox & Grid

6.1 CSS Flexbox — Container Properties

Flexbox is a **one-dimensional** layout method — items flow in a row **or** a column. It is the most-used layout method in modern web development.

```
/* FLEX CONTAINER (parent element) */
.container {
  display: flex;

  /* Direction */
  flex-direction: row;          /* row | column | row-reverse | column-reverse */

  /* Wrapping */
  flex-wrap: wrap;              /* nowrap (default) | wrap | wrap-reverse */

  /* Direction + wrap together */
  flex-flow: row wrap;

  /* Alignment on main axis (horizontal when row) */
  justify-content: center;
  /* flex-start | flex-end | center |
     space-between | space-around | space-evenly */

  /* Alignment on cross axis (vertical when row) */
  align-items: center;
  /* flex-start | flex-end | center | stretch | baseline */

  /* Multi-line cross-axis alignment */
  align-content: flex-start;

  gap:          20px;  /* both row + column gap */
  row-gap:      10px;
  column-gap:   20px;
}
```

6.2 CSS Flexbox — Item Properties

```

/* FLEX ITEM (child element) */
.item {
  flex-grow: 1;      /* How much to grow. 0 = don't grow. */
  flex-shrink: 1;    /* How much to shrink. 0 = don't shrink. */
  flex-basis: 200px; /* Initial size before flex distributes space. */

  /* Shorthand */
  flex: 1;           /* grow=1, shrink=1, basis=0 */
  flex: 0 0 300px;   /* fixed 300px – won't grow or shrink */
  flex: 1 1 auto;     /* flexible – grows and shrinks */

  align-self: flex-end; /* Override container's align-items for this item */
  order: 2;             /* Change visual order (default 0, lower = first) */
}

```

6.3 Flexbox Practical Patterns

```

/* 1. Horizontal navbar */
nav {
  display: flex;
  align-items: center;
  justify-content: space-between;
  gap: 20px;
  padding: 0 30px;
}

/* 2. Centre content vertically + horizontally (hero section) */
.hero {
  display: flex;
  justify-content: center;
  align-items: center;
  min-height: 100vh;
}

/* 3. Responsive card row – wraps on small screens */
.cards { display: flex; flex-wrap: wrap; gap: 20px; }
.card { flex: 1 1 280px; } /* min 280px, grows to fill space */

/* 4. Fixed sidebar + flexible main content */
.page { display: flex; }
.sidebar { flex: 0 0 240px; } /* fixed width */
.main-content { flex: 1; } /* fills remaining space */

/* 5. Sticky footer – always at the bottom */
body { display: flex; flex-direction: column; min-height: 100vh; }
main { flex: 1; } /* grows to push footer down */
footer { /* normal height */ }

```

6.4 CSS Grid — Layout System

CSS Grid is a **two-dimensional** system — it controls both rows AND columns simultaneously. Best for overall page structure.

```
/* GRID CONTAINER */
.grid {
  display: grid;

  /* Define columns */
  grid-template-columns: 200px 1fr 1fr;
  /* 3 cols: fixed | flexible | flexible */

  grid-template-columns: repeat(3, 1fr);
  /* 3 equal columns */

  grid-template-columns: repeat(auto-fit, minmax(250px, 1fr));
  /* Auto responsive: as many 250px+ columns as fit */

  /* Define rows */
  grid-template-rows: 80px 1fr 60px; /* header | main | footer */

  /* Named template areas */
  grid-template-areas:
    "header header header"
    "sidebar content content"
    "footer footer footer";

  gap: 20px;
  row-gap: 10px;
  column-gap: 20px;
}

/* Assign items to named areas */
header { grid-area: header; }
.sidebar { grid-area: sidebar; }
main { grid-area: content; }
footer { grid-area: footer; }

/* GRID ITEM — manual placement */
.item {
  grid-column: 1 / 3; /* from column line 1 to line 3 */
  grid-row: 2 / 4;
  grid-column: span 2; /* span 2 columns from current position */
}
```

6.5 Complete Page Layout — Grid Template Areas

```
/* HTML:
  <div class="page">
    <header>Header</header>
    <nav>Navigation</nav>
    <aside>Sidebar</aside>
    <main>Main Content</main>
    <footer>Footer</footer>
  </div>
*/

.page {
  display: grid;
  grid-template-columns: 220px 1fr;
  grid-template-rows: 64px 50px 1fr 56px;
  grid-template-areas:
    "header header"
    "nav nav"
    "sidebar main"
    "footer footer";
  min-height: 100vh;
}

header {
  grid-area: header;
  background: #1a237e; color: white;
  padding: 0 30px;
  display: flex; align-items: center;
}

nav {
  grid-area: nav;
  background: #283593; color: white;
  padding: 0 30px;
  display: flex; align-items: center; gap: 25px;
}

.sidebar{
  grid-area: sidebar;
  background: #f5f7ff;
  padding: 20px;
  border-right: 1px solid #e0e0e0;
}

main { grid-area: main; padding: 30px; }
footer {
  grid-area: footer;
  background: #263238; color: #aaa;
  display: flex; align-items: center; justify-content: center;
}
```

Module 7 — CSS Advanced: Animations, Transitions & Responsive

7.1 CSS Transitions

Transitions smoothly animate a CSS property change — for example on hover. No JavaScript needed.

```
/* Syntax: transition: property duration timing-function delay; */

.button {
  background-color: #1a237e;
  color:           white;
  padding:         12px 28px;
  border:          none;
  border-radius:   6px;
  cursor:          pointer;
  transition: background-color 0.3s ease,
              transform      0.2s ease;
}

.button:hover {
  background-color: #e65100; /* smoothly changes colour */
  transform:        translateY(-3px); /* lifts up */
  box-shadow:       0 6px 18px rgba(0,0,0,0.2);
}

/* Transition all properties at once */
.card { transition: all 0.3s ease-in-out; }
.card:hover {
  transform: scale(1.03);
  box-shadow: 0 12px 30px rgba(0,0,0,0.1);
}

/* Timing functions */
/* ease (default) | linear | ease-in | ease-out | ease-in-out */
```

7.2 CSS Animations — @keyframes

```
/* Step 1 – Define the keyframes */
@keyframes fadeIn {
  from { opacity: 0; transform: translateY(20px); }
  to   { opacity: 1; transform: translateY(0); }
}

@keyframes bounce {
  0%, 100% { transform: translateY(0); }
  50%      { transform: translateY(-25px); }
}

@keyframes spin {
  from { transform: rotate(0deg); }
  to   { transform: rotate(360deg); }
}

@keyframes pulse {
  0%, 100% { transform: scale(1); }
  50%      { transform: scale(1.08); }
}

/* Step 2 – Apply to element */
/* animation: name duration timing delay iterations direction fill-mode; */
.hero-text { animation: fadeIn 1s ease forwards; }
.loader    { animation: spin 1s linear infinite; }
.cta-button { animation: pulse 2s ease-in-out infinite; }

/* Multiple animations */
.banner {
  animation: fadeIn 1s ease,
            pulse 3s ease 1s infinite;
}
```

7.3 CSS Custom Properties (Variables)

```
/* Define globally in :root */
:root {
  --primary:    #1a237e;
  --accent:     #e65100;
  --font-main:  'Poppins', Arial, sans-serif;
  --radius:     8px;
  --shadow:     0 4px 15px rgba(0, 0, 0, 0.1);
  --transition: all 0.3s ease;
}

/* Use with var() */
header {
  background-color: var(--primary);
  border-radius:    var(--radius);
  box-shadow:       var(--shadow);
  font-family:      var(--font-main);
}

.btn-accent { background-color: var(--accent); }

/* Override for a section */
.dark-section {
  --primary: #0d1117;
  --accent:  #f78166;
}

/* Change the entire site colour theme by editing ONE variable! */
```

7.4 CSS Transform

```
.element {
  /* Translate – move without affecting document layout */
  transform: translateX(50px);
  transform: translateY(-20px);
  transform: translate(50px, -20px);

  /* Rotate */
  transform: rotate(45deg);
  transform: rotate(-90deg);

  /* Scale */
  transform: scale(1.5);          /* 150% bigger */
  transform: scaleX(0.5);        /* half width only */

  /* Skew */
  transform: skewX(15deg);

  /* Multiple transforms – space separated */
  transform: translate(-50%, -50%) rotate(10deg) scale(1.1);
}

/* Classic centring trick for absolute element */
.centred {
  position: absolute;
  top: 50%;
  left: 50%;
  transform: translate(-50%, -50%);
  /* Moves element back by half its own width+height */
}
```

7.5 Media Queries & Responsive Design

Media queries apply CSS based on screen size. **Mobile-first**: write base styles for phones, then use @media to enhance for larger screens.

```
/* BASE STYLES — Mobile (0px - 575px) */
body      { font-size: 14px; }
.container { padding: 10px; }
nav       { flex-direction: column; }
.card     { width: 100%; }

/* Small Tablet: 576px and wider */
@media (min-width: 576px) {
  body { font-size: 15px; }
  .card { width: 48%; }
}

/* Tablet: 768px and wider */
@media (min-width: 768px) {
  body { font-size: 16px; }
  nav   { flex-direction: row; }
  .card { width: 31%; }
  .sidebar { display: block; }
}

/* Desktop: 992px and wider */
@media (min-width: 992px) {
  .container { max-width: 960px; margin: 0 auto; }
  .card      { width: 23%; }
}

/* Large Desktop: 1200px and wider */
@media (min-width: 1200px) {
  .container { max-width: 1140px; }
}

/* Print */
@media print {
  nav, footer, .ads { display: none; }
  body { color: black; font-size: 12pt; }
}

/* Dark mode (OS setting) */
@media (prefers-color-scheme: dark) {
  body { background: #121212; color: #e0e0e0; }
}
```

Module 8 — Page Design Examples

8.1 Home Page Design

A complete home page — sticky header, gradient hero banner, feature cards, and footer. Save as **index.html**.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>ForkInfosystems – IT Training, Karad</title>
  <style>
    * { margin:0; padding:0; box-sizing:border-box; }
    body { font-family:Arial, sans-serif; color:#333; }
    a { text-decoration:none; color:inherit; }

    /* ■■ Header ■■ */
    header {
      background:#1a237e; color:white;
      display:flex; justify-content:space-between; align-items:center;
      padding:15px 40px;
      position:sticky; top:0; z-index:100;
    }
    .logo { font-size:22px; font-weight:800; }
    .logo span { color:#e65100; }
    nav a {
      color:rgba(255,255,255,0.85);
      margin-left:25px; font-size:14px;
      transition:color 0.3s;
    }
    nav a:hover { color:#e65100; }

    /* ■■ Hero ■■ */
    .hero {
      background:linear-gradient(135deg,#1a237e 0%,#283593 55%,#e65100 100%);
      color:white; text-align:center; padding:100px 20px;
    }
    .hero h1 { font-size:46px; margin-bottom:15px; }
    .hero p { font-size:20px; opacity:0.9; margin-bottom:30px; }
    .btn {
      display:inline-block; padding:14px 38px;
      background:#e65100; color:white;
      border-radius:30px; font-size:16px; font-weight:bold;
      transition:transform 0.3s;
    }
    .btn:hover { transform:translateY(-3px); }

    /* ■■ Feature Cards ■■ */
    .features { padding:60px 40px; background:#f5f7ff; }
    .features h2 {
      text-align:center; font-size:30px;
      color:#1a237e; margin-bottom:40px;
    }
    .cards {
      display:flex; flex-wrap:wrap;
      gap:25px; justify-content:center;
    }
    .card {
```

```

        background:white; border-radius:10px; padding:30px;
        flex:1 1 250px; max-width:280px; text-align:center;
        box-shadow:0 4px 15px rgba(0,0,0,0.08);
        transition:transform 0.3s;
    }
    .card:hover { transform:translateY(-5px); }
    .card .icon { font-size:40px; margin-bottom:15px; }
    .card h3 { color:#1a237e; margin-bottom:10px; }
    .card p { color:#666; line-height:1.6; }

    /* ■■■ Footer ■■■ */
    footer {
        background:#263238; color:#ccc;
        text-align:center; padding:25px;
    }
    footer a { color:#e65100; }

    @media (max-width:768px) {
        header { padding:12px 18px; flex-wrap:wrap; gap:10px; }
        .hero h1 { font-size:30px; }
        .features { padding:40px 18px; }
    }
</style>
</head>
<body>

<header>
    <div class="logo">Fork<span>Info</span>systems</div>
    <nav>
        <a href="#">Home</a>
        <a href="#">Courses</a>
        <a href="#">About</a>
        <a href="#">Contact</a>
    </nav>
</header>

<section class="hero">
    <h1>Learn Web Development</h1>
    <p>HTML & middot; CSS & middot; JavaScript – Job-ready courses in Karad</p>
    <a href="#" class="btn">Enroll Now &rarr;</a>
</section>

<section class="features">
    <h2>Why ForkInfosystems?</h2>
    <div class="cards">
        <div class="card">
            <div class="icon">&#128187;</div>
            <h3>Hands-On Training</h3>
            <p>100% practical learning with real-world projects.</p>
        </div>
        <div class="card">
            <div class="icon">&#127919;</div>

```

```
<h3>Job Ready</h3>
  <p>Curriculum designed for industry requirements.</p>
</div>
<div class="card">
  <div class="icon">&#128104;&#8205;&#127979;</div>
  <h3>Expert Faculty</h3>
  <p>Learn from experienced IT professionals.</p>
</div>
</div>
</section>

<footer>
  <p>
    ForkInfosystems, Karad &nbsp;|&nbsp;
    Ranjiit Sir: 9172135355 / 7757962804 &nbsp;|&nbsp;
    <a href="mailto:info@forksystems.com">info@forksystems.com</a>
  </p>
  <p style="margin-top:8px;">
    &copy; 2025 ForkInfosystems. All rights reserved.
  </p>
</footer>

</body>
</html>
```

8.2 Admission Form

Professionally styled admission form. Save as **admission.html**.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Admission Form – ForkInfosystems</title>
  <style>
    * { margin:0; padding:0; box-sizing:border-box; }
    body { font-family:Arial,sans-serif; background:#f0f4ff; padding:30px; }

    .form-card {
      max-width:700px; margin:0 auto;
      background:white; border-radius:12px;
      box-shadow:0 5px 25px rgba(0,0,0,0.1); overflow:hidden;
    }
    .form-head {
      background:#1a237e; color:white; padding:25px 30px;
    }
    .form-head h2 { font-size:22px; }
    .form-head p { opacity:0.8; font-size:13px; margin-top:5px; }

    form { padding:30px; }

    .row { display:flex; gap:15px; }
    .row .group { flex:1; }

    .group { margin-bottom:18px; }
    label {
      display:block; font-weight:bold;
      color:#1a237e; font-size:13px; margin-bottom:5px;
    }
    input, select, textarea {
      width:100%; padding:10px 14px; font-size:14px;
      border:1.5px solid #c5cae9; border-radius:6px;
      transition:border-color 0.3s;
    }
    input:focus, select:focus, textarea:focus {
      outline:none; border-color:#1a237e;
      box-shadow:0 0 3px rgba(26,35,126,0.1);
    }
    .submit-btn {
      width:100%; padding:13px; background:#1a237e; color:white;
      border:none; border-radius:8px; font-size:15px; font-weight:bold;
      cursor:pointer; transition:background 0.3s;
    }
    .submit-btn:hover { background:#e65100; }

    @media (max-width:600px) {
      .row { flex-direction:column; gap:0; }
      form { padding:20px; }
    }
  </style>
</head>
```

```
<body>
<div class="form-card">
  <div class="form-head">
    <h2>&#128203; Admission Form</h2>
    <p>ForkInfosystems – IT Training Institute, Karad</p>
  </div>
  <form action="#" method="POST">
    <div class="row">
      <div class="group">
        <label for="fn">First Name *</label>
        <input type="text" id="fn" placeholder="Aarav" required>
      </div>
      <div class="group">
        <label for="ln">Last Name *</label>
        <input type="text" id="ln" placeholder="Sharma" required>
      </div>
    </div>
    <div class="group">
      <label for="em">Email Address *</label>
      <input type="email" id="em" placeholder="student@email.com" required>
    </div>
    <div class="row">
      <div class="group">
        <label for="ph">Phone *</label>
        <input type="tel" id="ph" placeholder="+91 XXXXX XXXXX" required>
      </div>
      <div class="group">
        <label for="db">Date of Birth</label>
        <input type="date" id="db">
      </div>
    </div>
    <div class="group">
      <label for="co">Select Course *</label>
      <select id="co" required>
        <option value="">-- Choose a Course --</option>
        <option>HTML & CSS</option>
        <option>JavaScript</option>
        <option>SQL & MySQL</option>
        <option>Full Stack Web Development</option>
        <option>Python Programming</option>
      </select>
    </div>
    <div class="group">
      <label for="qu">Qualification</label>
      <input type="text" id="qu" placeholder="e.g. B.Sc. Computer Science">
    </div>
    <div class="group">
      <label for="ad">Address</label>
      <textarea id="ad" rows="3" placeholder="Your full address"></textarea>
    </div>
    <button type="submit" class="submit-btn">Submit Application &arr;</button>
  </form>
</div>
```

```
</div>  
</body>  
</html>
```

8.3 Photo Gallery Page

Responsive CSS Grid gallery with hover overlay effect. Save as **gallery.html**.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Gallery – ForkInfosystems</title>
  <style>
    * { margin:0; padding:0; box-sizing:border-box; }
    body { font-family:Arial,sans-serif; background:#f5f5f5; }

    header {
      background:#1a237e; color:white;
      text-align:center; padding:30px;
    }
    header h1 { font-size:28px; }
    header p { opacity:0.8; margin-top:5px; }

    /* Filter bar */
    .filter-bar { background:white; text-align:center; padding:20px; }
    .filter-btn {
      display:inline-block;
      padding:8px 22px; margin:4px;
      border:2px solid #1a237e; border-radius:25px;
      cursor:pointer; color:#1a237e; font-weight:bold;
      transition:all 0.3s;
    }
    .filter-btn:hover,
    .filter-btn.active { background:#1a237e; color:white; }

    /* Gallery grid */
    .gallery {
      display:grid;
      grid-template-columns: repeat(auto-fit, minmax(260px, 1fr));
      gap:15px; padding:30px;
      max-width:1200px; margin:0 auto;
    }

    /* Gallery item */
    .gallery-item {
      position:relative; border-radius:10px;
      overflow:hidden;
      box-shadow:0 3px 10px rgba(0,0,0,0.12);
      cursor:pointer;
    }
    .gallery-item img {
      width:100%; height:220px; object-fit:cover;
      display:block; transition:transform 0.4s ease;
    }
    .gallery-item:hover img { transform:scale(1.08); }

    /* Hover overlay */
    .overlay {
      position:absolute; bottom:0; left:0; right:0;
```

```
        background:rgba(26,35,126,0.88); color:white;
        padding:12px 15px;
        transform:translateY(100%);
        transition:transform 0.3s ease;
    }
    .gallery-item:hover .overlay { transform:translateY(0); }
    .overlay h4 { font-size:14px; }
    .overlay p { font-size:12px; opacity:0.8; margin-top:3px; }

    footer {
        background:#263238; color:#aaa;
        text-align:center; padding:20px;
    }
</style>
</head>
<body>

    <header>
        <h1>&#128247; Photo Gallery</h1>
        <p>ForkInfosystems – Events & Activities</p>
    </header>

    <div class="filter-bar">
        <span class="filter-btn active">All</span>
        <span class="filter-btn">Events</span>
        <span class="filter-btn">Classes</span>
        <span class="filter-btn">Certificates</span>
    </div>

    <div class="gallery">
        <div class="gallery-item">
            
            <div class="overlay">
                <h4>Web Dev Batch 2024</h4>
                <p>January 2024</p>
            </div>
        </div>
        <div class="gallery-item">
            
            <div class="overlay">
                <h4>HTML Workshop</h4>
                <p>March 2024</p>
            </div>
        </div>
        <div class="gallery-item">
            
            <div class="overlay">
                <h4>Certificate Distribution</h4>
                <p>May 2024</p>
```


Module 9 — Mini Project: Personal Portfolio Website

Project Name	Personal Portfolio Website
Type	Single-page — all sections scroll on one page
Sections	Navbar · Hero · About · Skills · Projects · Contact · Footer
Technologies	HTML5 + CSS3 only (no JavaScript required)
Skills Used	Flexbox · Grid · Animations · Media Queries · Forms
Purpose	Job application portfolio — show to potential employers

Complete Portfolio Code — save as portfolio.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Aarav Sharma – Web Developer</title>
  <style>
    /* ■■ Reset & Variables ■■ */
    * { margin:0; padding:0; box-sizing:border-box; }
    :root {
      --p: #1a237e; /* primary navy */
      --a: #e65100; /* accent orange */
      --d: #263238; /* dark */
      --l: #f5f7ff; /* light bg */
    }
    html { scroll-behavior:smooth; }
    body { font-family:'Segoe UI',Arial,sans-serif; color:#333; }
    a { text-decoration:none; }

    /* ■■ Navigation ■■ */
    nav {
      position:fixed; top:0; width:100%; z-index:999;
      background:rgba(26,35,126,0.96);
      backdrop-filter:blur(8px);
      display:flex; justify-content:space-between; align-items:center;
      padding:14px 50px;
    }
    .nav-logo { color:white; font-size:20px; font-weight:700; }
    .nav-logo span { color:var(--a); }
    .nav-links a {
      color:rgba(255,255,255,0.85);
      margin-left:28px; font-size:14px;
      transition:color 0.3s;
    }
    .nav-links a:hover { color:var(--a); }

    /* ■■ Hero ■■ */
    #hero {
      min-height:100vh;
      background:linear-gradient(135deg,var(--p) 0%,#303f9f 55%,var(--d) 100%);
      display:flex; align-items:center; justify-content:center;
      text-align:center; color:white; padding:20px;
    }
    .hero-text h1 {
      font-size:50px; font-weight:700;
      animation:fadeDown 1s ease forwards;
    }
    .hero-text h1 span { color:var(--a); }
    .hero-text p {
      font-size:20px; opacity:0.85;
      margin:14px 0 30px;
      animation:fadeUp 1s ease 0.3s both;
    }
  </style>
</head>
<body>
  <nav>
    <div>
      <div>
        <img alt="Logo" data-bbox="115 103 145 118" />
        <span>Aarav Sharma</span>
      </div>
      <div>
        <a href="#home">Home</a>
        <a href="#about">About</a>
        <a href="#services">Services</a>
        <a href="#portfolio">Portfolio</a>
        <a href="#contact">Contact</a>
      </div>
    </div>
  </nav>
  <div>
    <div>
      <h1>Hi, I'm Aarav</h1>
      <h1>Sharma</h1>
    </div>
    <div>
      <p>I'm a Web Developer</p>
      <p>I'm a Web Developer</p>
      <p>I'm a Web Developer</p>
    </div>
  </div>
</body>
</html>
```

```
.hero-btns {
  display:flex; gap:15px; justify-content:center;
  animation:fadeUp 1s ease 0.5s both;
}
.btn-p {
  padding:13px 35px; background:var(--a); color:white;
  border-radius:30px; font-weight:bold; transition:all 0.3s;
}
.btn-o {
  padding:12px 35px; border:2px solid white; color:white;
  border-radius:30px; font-weight:bold; transition:all 0.3s;
}
.btn-p:hover,.btn-o:hover {
  transform:translateY(-3px);
  box-shadow:0 8px 25px rgba(0,0,0,0.3);
}

/* ■■ Section commons ■■ */
section { padding:80px 40px; }
.sec-title { text-align:center; font-size:32px; color:var(--p); }
.sec-line {
  width:55px; height:4px;
  background:var(--a); margin:8px auto 45px; border-radius:2px;
}
#about,#contact { background:var(--l); }

/* ■■ About ■■ */
.about-grid {
  display:grid; grid-template-columns:1fr 2fr;
  gap:50px; max-width:880px; margin:0 auto; align-items:center;
}
.avatar {
  width:200px; height:200px; border-radius:50%;
  background:var(--p);
  display:flex; align-items:center; justify-content:center;
  font-size:80px; margin:0 auto;
  box-shadow:0 8px 30px rgba(26,35,126,0.3);
}
.about-text h3 { font-size:22px; color:var(--p); margin-bottom:12px; }
.about-text p { line-height:1.8; color:#555; }

/* ■■ Skills ■■ */
#skills { background:white; }
.skills-grid {
  display:grid;
  grid-template-columns:repeat(auto-fit,minmax(200px,1fr));
  gap:20px; max-width:880px; margin:0 auto;
}
.skill-card {
  background:var(--l); border-radius:10px; padding:22px;
  text-align:center; border-bottom:4px solid var(--a);
  transition:transform 0.3s;
```

```

}
.skill-card:hover { transform:translateY(-5px); }
.s-icon { font-size:34px; margin-bottom:10px; }
.skill-card h4 { color:var(--p); margin-bottom:10px; }
.bar-bg { background:#ddd; border-radius:5px; height:8px; }
.bar { background:var(--a); border-radius:5px; height:8px; }

/* ■■ Projects ■■ */
.proj-grid {
  display:grid;
  grid-template-columns:repeat(auto-fit,minmax(270px,1fr));
  gap:25px; max-width:980px; margin:0 auto;
}
.proj-card {
  background:white; border-radius:12px; overflow:hidden;
  box-shadow:0 5px 20px rgba(0,0,0,0.08);
  transition:transform 0.3s;
}
.proj-card:hover { transform:translateY(-5px); }
.proj-img {
  height:160px; background:var(--p);
  display:flex; align-items:center; justify-content:center;
  font-size:50px;
}
.proj-info { padding:18px; }
.proj-info h4{ color:var(--p); font-size:17px; margin-bottom:8px; }
.proj-info p { color:#666; font-size:13px; line-height:1.6; }
.tags { margin-top:12px; display:flex; gap:7px; flex-wrap:wrap; }
.tag {
  background:#e8eaf6; color:var(--p);
  padding:3px 10px; border-radius:12px;
  font-size:11px; font-weight:bold;
}

/* ■■ Contact ■■ */
.contact-grid {
  display:grid; grid-template-columns:1fr 1fr;
  gap:40px; max-width:880px; margin:0 auto;
}
.c-info h3 { color:var(--p); font-size:20px; margin-bottom:18px; }
.c-item { display:flex; gap:12px; margin-bottom:14px; font-size:14px; }
.c-item span { color:var(--a); font-size:20px; }
.c-form input,
.c-form textarea {
  width:100%; padding:11px 14px;
  border:1.5px solid #c5cae9; border-radius:8px;
  margin-bottom:14px; font-size:14px;
  transition:border-color 0.3s;
}
.c-form input:focus,
.c-form textarea:focus { outline:none; border-color:var(--p); }
.c-form button {

```

```

width:100%; padding:13px; background:var(--p); color:white;
border:none; border-radius:8px;
font-size:15px; font-weight:bold;
cursor:pointer; transition:background 0.3s;
}
.c-form button:hover { background:var(--a); }

/* ■■ Footer ■■ */
footer { background:var(--d); color:#aaa; text-align:center; padding:24px; }
footer span { color:var(--a); }

/* ■■ Animations ■■ */
@keyframes fadeDown {
  from { opacity:0; transform:translateY(-30px); }
  to { opacity:1; transform:translateY(0); }
}
@keyframes fadeUp {
  from { opacity:0; transform:translateY(30px); }
  to { opacity:1; transform:translateY(0); }
}

/* ■■ Responsive ■■ */
@media (max-width:768px) {
  nav { padding:14px 18px; }
  .nav-links a { margin-left:14px; font-size:12px; }
  .hero-text h1 { font-size:32px; }
  .about-grid, .contact-grid { grid-template-columns:1fr; }
  section { padding:50px 18px; }
}
</style>
</head>
<body>

<nav>
  <div class="nav-logo">Aarav<span>.dev</span></div>
  <div class="nav-links">
    <a href="#hero">Home</a>
    <a href="#about">About</a>
    <a href="#skills">Skills</a>
    <a href="#projects">Projects</a>
    <a href="#contact">Contact</a>
  </div>
</nav>

<!-- HERO -->
<section id="hero">
  <div class="hero-text">
    <h1>Hi, I'm <span>Aarav Sharma</span></h1>
    <p>Web Developer &middot; HTML &middot; CSS &middot; JavaScript</p>
    <div class="hero-btns">
      <a href="#projects" class="btn-p">View My Work</a>
      <a href="#contact" class="btn-o">Hire Me</a>
    </div>
  </div>

```

```
    </div>
  </div>
</section>

<!-- ABOUT -->
<section id="about">
  <h2 class="sec-title">About Me</h2>
  <div class="sec-line"></div>
  <div class="about-grid">
    <div class="avatar">&#128104;&#8205;&#128187;</div>
    <div class="about-text">
      <h3>Aarav Sharma – BCA Graduate</h3>
      <p>
        Passionate web developer trained at ForkInfosystems, Karad.
        I specialise in building responsive, user-friendly websites
        using HTML5, CSS3, and JavaScript.
        Currently seeking frontend development roles.
      </p>
      <br>
      <p>
        &#128205; Karad &nbsp;|&nbsp;
        &#127891; BCA 2024 &nbsp;|&nbsp;
        &#128231; aarav@email.com
      </p>
    </div>
  </div>
</section>

<!-- SKILLS -->
<section id="skills">
  <h2 class="sec-title">My Skills</h2>
  <div class="sec-line"></div>
  <div class="skills-grid">
    <div class="skill-card">
      <div class="s-icon">&#127760;</div><h4>HTML5</h4>
      <div class="bar-bg"><div class="bar" style="width:90%"></div></div>
    </div>
    <div class="skill-card">
      <div class="s-icon">&#127912;</div><h4>CSS3</h4>
      <div class="bar-bg"><div class="bar" style="width:85%"></div></div>
    </div>
    <div class="skill-card">
      <div class="s-icon">&#9881;</div><h4>JavaScript</h4>
      <div class="bar-bg"><div class="bar" style="width:70%"></div></div>
    </div>
    <div class="skill-card">
      <div class="s-icon">&#128451;</div><h4>SQL</h4>
      <div class="bar-bg"><div class="bar" style="width:80%"></div></div>
    </div>
  </div>
</section>
```

```
<!-- PROJECTS -->
<section id="projects">
  <h2 class="sec-title">Projects</h2>
  <div class="sec-line"></div>
  <div class="proj-grid">
    <div class="proj-card">
      <div class="proj-img">&#128722;</div>
      <div class="proj-info">
        <h4>E-Commerce Website</h4>
        <p>Responsive UI – product grid, cart, checkout pages.</p>
        <div class="tags">
          <span class="tag">HTML</span>
          <span class="tag">CSS</span>
          <span class="tag">Flexbox</span>
        </div>
      </div>
    </div>
    <div class="proj-card">
      <div class="proj-img">&#128203;</div>
      <div class="proj-info">
        <h4>Admission Portal</h4>
        <p>Styled multi-section form with field validation.</p>
        <div class="tags">
          <span class="tag">HTML Forms</span>
          <span class="tag">CSS Grid</span>
        </div>
      </div>
    </div>
    <div class="proj-card">
      <div class="proj-img">&#128247;</div>
      <div class="proj-info">
        <h4>Photo Gallery</h4>
        <p>Responsive gallery with hover overlay effects.</p>
        <div class="tags">
          <span class="tag">Grid</span>
          <span class="tag">Animations</span>
        </div>
      </div>
    </div>
  </div>
</section>

<!-- CONTACT -->
<section id="contact">
  <h2 class="sec-title">Contact Me</h2>
  <div class="sec-line"></div>
  <div class="contact-grid">
    <div class="c-info">
      <h3>Let's Connect!</h3>
      <div class="c-item"><span>&#128205;</span> Karad, Maharashtra</div>
      <div class="c-item"><span>&#128231;</span> aarav.sharma@email.com</div>
      <div class="c-item"><span>&#128241;</span> +91 98765 43210</div>
    </div>
  </div>
</section>
```

```
<div class="c-item"><span>#128188;</span> linkedin.com/in/aaravsharma</div>
</div>
<div class="c-form">
  <input type="text" placeholder="Your Name">
  <input type="email" placeholder="Your Email">
  <textarea rows="4" placeholder="Your Message"></textarea>
  <button type="submit">Send Message &rarr;</button>
</div>
</div>
</section>

<footer>
  <p>
    Designed by <span>Aarav Sharma</span> &nbsp;|&nbsp;
    Trained at <span>ForkInfosystems, Karad</span>
  </p>
</footer>

</body>
</html>
```

Module 10 — Major Project: ShopZone E-Commerce Website

Project Name	ShopZone — Online Shopping Website
Pages	Homepage · Product Listing · Cart · Login/Register
Technologies	HTML5 + CSS3
Key Features	Responsive grid · Filter sidebar · Product cards · Cart · Auth forms
Level	Major Project — suitable for job portfolio

10.1 Homepage — index.html

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>ShopZone – Online Shopping</title>
  <style>
    * { margin:0; padding:0; box-sizing:border-box; }
    :root { --p:#1a237e; --a:#e65100; --dk:#212121; --lt:#f9f9f9; }
    body { font-family:Arial,sans-serif; color:var(--dk); }
    a { text-decoration:none; color:inherit; }

    /* Top bar */
    .top-bar {
      background:var(--dk); color:#aaa; font-size:12px;
      padding:6px 40px;
      display:flex; justify-content:space-between;
    }
    .top-bar a { color:#aaa; margin-left:15px; }
    .top-bar a:hover { color:white; }

    /* Header */
    header {
      background:white; padding:14px 40px;
      display:flex; align-items:center; gap:20px;
      box-shadow:0 2px 10px rgba(0,0,0,0.08);
      position:sticky; top:0; z-index:100;
    }
    .logo { font-size:26px; font-weight:800; color:var(--p); white-space:nowrap; }
    .logo span { color:var(--a); }
    .search {
      flex:1; display:flex;
      border:2px solid var(--p); border-radius:6px; overflow:hidden;
    }
    .search input { flex:1; padding:9px 14px; border:none; outline:none; font-size:14px; }
    .search select { border:none; border-left:1px solid #ddd; padding:0 10px; background:#f5f5f5; }
    .search button { background:var(--p); color:white; border:none; padding:0 20px; font-size:16px; cursor:pointer; }
    .hdr-icons { display:flex; gap:20px; align-items:center; }
    .icon-btn { display:flex; flex-direction:column; align-items:center; font-size:11px; cursor:pointer; transition:color 0.2s; }
    .icon-btn:hover { color:var(--a); }
    .icon-btn .ico { font-size:22px; }
    .cart-badge {
      background:var(--a); color:white; font-size:10px; font-weight:bold;
      width:18px; height:18px; border-radius:50%;
      display:flex; align-items:center; justify-content:center;
      margin-top:-20px; margin-left:14px;
    }

    /* Category nav */

```

```
.cat-nav { background:var(--p); display:flex; padding:0 40px; overflow-x:auto; }
.cat-nav a {
  color:rgba(255,255,255,0.85); padding:11px 18px;
  font-size:13px; white-space:nowrap; transition:background 0.2s;
}
.cat-nav a:hover { background:rgba(255,255,255,0.15); }

/* Hero banner */
.hero-banner {
  background:linear-gradient(135deg,var(--p) 0%,#303f9f 55%,var(--a) 100%);
  color:white; padding:65px 80px;
  display:flex; align-items:center; justify-content:space-between;
}
.hero-text h1 { font-size:42px; line-height:1.2; margin-bottom:12px; }
.hero-text p { font-size:17px; opacity:0.88; margin-bottom:24px; }
.shop-btn {
  display:inline-block; padding:13px 38px;
  background:white; color:var(--p); border-radius:30px;
  font-weight:bold; font-size:15px; transition:all 0.3s;
}
.shop-btn:hover { background:var(--a); color:white; transform:translateY(-3px); }
.hero-gfx { font-size:110px; }

/* Sections */
.sec { padding:50px 40px; }
.sec-bg { background:#f5f5f5; }
.sec-hd { display:flex; justify-content:space-between; align-items:flex-end; margin-bottom:25px; }
.sec-title { font-size:24px; color:var(--p); margin-bottom:5px; }
.underline { width:45px; height:3px; background:var(--a); }
.view-all { color:var(--a); font-weight:bold; font-size:13px; }

/* Category cards */
.cat-grid {
  display:grid; grid-template-columns:repeat(auto-fit,minmax(130px,1fr)); gap:14px;
}
.cat-card {
  background:white; border-radius:10px; padding:18px 12px; text-align:center;
  box-shadow:0 2px 8px rgba(0,0,0,0.07); cursor:pointer; transition:all 0.3s;
}
.cat-card:hover { transform:translateY(-4px); border-bottom:3px solid var(--a); }
.c-ico { font-size:34px; margin-bottom:8px; }
.cat-card h4 { font-size:12px; }

/* Product cards */
.prod-grid {
  display:grid; grid-template-columns:repeat(auto-fill,minmax(210px,1fr)); gap:18px;
}
.prod-card {
  background:white; border-radius:10px; overflow:hidden;
  box-shadow:0 2px 8px rgba(0,0,0,0.07);
  transition:all 0.3s; position:relative;
```

```

    }
    .prod-card:hover { transform:translateY(-5px); box-shadow:0 10px 25px rgba(0,0,0,0.12)
; }
    .p-badge {
        position:absolute; top:8px; left:8px;
        background:var(--a); color:white;
        font-size:10px; font-weight:bold; padding:3px 9px; border-radius:12px;
    }
    .p-wish {
        position:absolute; top:8px; right:8px;
        background:white; width:28px; height:28px; border-radius:50%;
        display:flex; align-items:center; justify-content:center;
        font-size:15px; box-shadow:0 2px 5px rgba(0,0,0,0.12);
    }
    .p-img { height:190px; background:#f0f4ff; display:flex; align-items:center; justify
-content:center; font-size:65px; }
    .p-info { padding:13px; }
    .p-brand { font-size:11px; color:#888; margin-bottom:3px; }
    .p-name { font-size:13px; font-weight:bold; margin-bottom:5px; line-height:1.3; }
    .rating { color:#ffa000; font-size:12px; margin-bottom:6px; }
    .rating span { color:#888; font-size:11px; }
    .p-price { font-size:17px; font-weight:bold; color:var(--p); }
    .p-orig { font-size:11px; color:#999; text-decoration:line-through; margin-left:5px;
}
    .p-off { font-size:11px; color:green; font-weight:bold; display:block; margin-bottom
:10px; }
    .add-btn {
        width:100%; padding:9px; background:var(--p); color:white;
        border:none; border-radius:6px; font-size:13px; cursor:pointer;
        transition:background 0.3s;
    }
    .add-btn:hover { background:var(--a); }

/* Promo banners */
    .promo { display:grid; grid-template-columns:1fr 1fr; gap:18px; padding:0 40px 40px; }
    .promo-card { border-radius:12px; padding:28px; color:white; }
    .promo-card.blue { background:var(--p); }
    .promo-card.orange { background:var(--a); }
    .promo-card h3 { font-size:20px; margin-bottom:7px; }
    .promo-card p { opacity:0.85; margin-bottom:14px; font-size:14px; }
    .p-btn { display:inline-block; padding:9px 22px; background:white; border-radius:22px;
font-weight:bold; font-size:13px; }
    .promo-card.blue .p-btn { color:var(--p); }
    .promo-card.orange .p-btn { color:var(--a); }

/* Footer */
    footer { background:var(--dk); color:#aaa; padding:45px 40px 18px; }
    .f-grid { display:grid; grid-template-columns:repeat(auto-fit,minmax(170px,1fr)); gap:
28px; margin-bottom:28px; }
    .f-col h4 { color:white; font-size:14px; margin-bottom:13px; border-bottom:2px solid v
ar(--a); padding-bottom:7px; }
    .f-col a { display:block; color:#aaa; font-size:12px; margin-bottom:7px; transition:c

```

```

color 0.2s; }
.f-col a:hover { color:var(--a); }
.f-btm { border-top:1px solid #333; padding-top:18px; text-align:center; font-size:12px; }
.f-btm span { color:var(--a); }

@media (max-width:768px) {
  header { flex-wrap:wrap; padding:10px 15px; }
  .search { order:3; width:100%; }
  .hero-banner { flex-direction:column; text-align:center; padding:40px 20px; }
  .hero-gfx { display:none; }
  .promo { grid-template-columns:1fr; }
  .cat-nav,.sec,.footer { padding-left:15px; padding-right:15px; }
}
</style>
</head>
<body>

<div class="top-bar">
  <span>#128230; Free shipping on orders over #8377;499</span>
  <div>
    <a href="#">Track Order</a>
    <a href="#">Help</a>
    <a href="#">Sell on ShopZone</a>
  </div>
</div>

<header>
  <div class="logo">Shop<span>Zone</span></div>
  <div class="search">
    <input type="text" placeholder="Search products, brands...">
    <select><option>All</option><option>Electronics</option><option>Fashion</option></select>
    <button>#128269;</button>
  </div>
  <div class="hdr-icons">
    <div class="icon-btn"><span class="ico">#128100;</span><span>Account</span></div>
    <div class="icon-btn">
      <span class="ico">#128722;</span>
      <div class="cart-badge">3</div>
      <span>Cart</span>
    </div>
  </div>
</header>

<div class="cat-nav">
  <a href="#">Electronics</a><a href="#">Fashion</a>
  <a href="#">Home & Kitchen</a><a href="#">Books</a>
  <a href="#">Sports</a><a href="#">Beauty</a>
  <a href="#">Mobiles</a><a href="#">Grocery</a>
</div>

<div class="hero-banner">

```

```
<div class="hero-text">
  <h1>Discover Amazing<br>Products</h1>
  <p>Up to 70% off &mdash; Shop the latest trends</p>
  <a href="products.html" class="shop-btn">Shop Now &rarr;</a>
</div>
<div class="hero-gfx">&#128717;</div>
</div>

<section class="sec sec-bg">
  <div class="sec-hd">
    <div><div class="sec-title">Shop by Category</div><div class="underline"></div></div>
  </div>
  <div class="cat-grid">
    <div class="cat-card"><div class="c-ico">&#128241;</div><h4>Mobiles</h4></div>
    <div class="cat-card"><div class="c-ico">&#128507;</div><h4>Fashion</h4></div>
    <div class="cat-card"><div class="c-ico">&#127968;</div><h4>Home</h4></div>
    <div class="cat-card"><div class="c-ico">&#128187;</div><h4>Electronics</h4></div>
    <div class="cat-card"><div class="c-ico">&#128218;</div><h4>Books</h4></div>
    <div class="cat-card"><div class="c-ico">&#9917;</div><h4>Sports</h4></div>
    <div class="cat-card"><div class="c-ico">&#127859;</div><h4>Kitchen</h4></div>
    <div class="cat-card"><div class="c-ico">&#127918;</div><h4>Gaming</h4></div>
  </div>
</section>

<section class="sec">
  <div class="sec-hd">
    <div><div class="sec-title">Featured Products</div><div class="underline"></div></div>
    <a href="products.html" class="view-all">View All &rarr;</a>
  </div>
  <div class="prod-grid">
    <div class="prod-card">
      <div class="p-badge">SALE</div><div class="p-wish">&#9825;</div>
      <div class="p-img">&#128241;</div>
      <div class="p-info">
        <div class="p-brand">Samsung</div>
        <div class="p-name">Galaxy S24 Ultra 256GB</div>
        <div class="rating">&#9733;&#9733;&#9733;&#9733;&#9733; <span>(312)</span></div>
        <span class="p-price">&#8377;79,999</span>
        <span class="p-orig">&#8377;1,09,999</span>
        <span class="p-off">27% off</span>
        <button class="add-btn">&#128722; Add to Cart</button>
      </div>
    </div>
    <div class="prod-card">
      <div class="p-badge">NEW</div><div class="p-wish">&#9825;</div>
      <div class="p-img">&#127911;</div>
      <div class="p-info">
        <div class="p-brand">Sony</div>
        <div class="p-name">Wireless Headphones ANC</div>
        <div class="rating">&#9733;&#9733;&#9733;&#9733;&#9733; <span>(521)</span></div>
        <span class="p-price">&#8377;3,999</span>
        <span class="p-orig">&#8377;7,000</span>
      </div>
    </div>
  </div>
</section>
```

```

        <span class="p-off">43% off</span>
        <button class="add-btn">Add to Cart</button>
    </div>
</div>
<div class="prod-card">
    <div class="p-wish"></div>
    <div class="p-img"></div>
    <div class="p-info">
        <div class="p-brand">Dell</div>
        <div class="p-name">Laptop Inspiron 15 8GB</div>
        <div class="rating"></div> <span>(189)</span></div>
        <span class="p-price"></span>
        <span class="p-orig"></span>
        <span class="p-off">24% off</span>
        <button class="add-btn">Add to Cart</button>
    </div>
</div>
<div class="prod-card">
    <div class="p-badge">HOT</div><div class="p-wish"></div>
    <div class="p-img"></div>
    <div class="p-info">
        <div class="p-brand">boAt</div>
        <div class="p-name">Smart Watch Xtend Pro</div>
        <div class="rating"></div> <span>(95)</span></div>
        <span class="p-price"></span>
        <span class="p-orig"></span>
        <span class="p-off">50% off</span>
        <button class="add-btn">Add to Cart</button>
    </div>
</div>
</div>
</section>

<div class="promo">
    <div class="promo-card blue">
        <h3>Electronics Sale</h3>
        <p>Up to 60% off. Limited time!</p>
        <a href="products.html" class="p-btn">Shop Now &rarr;</a>
    </div>
    <div class="promo-card orange">
        <h3>Fashion Fiesta </h3>
        <p>New arrivals. Free shipping above </p>
        <a href="products.html" class="p-btn">Explore &rarr;</a>
    </div>
</div>

<footer>
    <div class="f-grid">
        <div class="f-col">
            <h4>ShopZone</h4>
            <p style="font-size:12px;line-height:1.7;">
                India's trusted online shopping destination.
            </p>
        </div>
    </div>
</footer>

```

```
        </p>
    </div>
    <div class="f-col">
        <h4>Quick Links</h4>
        <a href="#">About Us</a><a href="#">Careers</a><a href="#">Blog</a>
    </div>
    <div class="f-col">
        <h4>Customer Help</h4>
        <a href="#">Track Order</a><a href="#">Returns</a><a href="#">FAQs</a>
    </div>
    <div class="f-col">
        <h4>Contact</h4>
        <a href="#">&#128231; support@shopzone.in</a>
        <a href="#">&#128241; 1800-XXX-XXXX</a>
    </div>
</div>
<div class="f-btm">
    <p>&copy; 2025 <span>ShopZone</span>. All rights reserved.</p>
</div>
</footer>

</body>
</html>
```