

# Capstone Project- 4

## Netflix Movies And TV Shows Clustering

By

Ranjit Ghadge

## POINT OF DISCUSSION:

- Problem Statement
- Introduction
- Data Cleaning
- Data Pre-processing
- Exploratory Data Analysis
- Data Pre-processing for Clustering
- K-Means Clustering
- Recommender System
- Conclusion

## 1. Problem Statement:

1. Exploratory Data Analysis
2. Understanding what type content is available in different countries
3. Is Netflix has increasingly focusing on TV rather than movies in recent years.
4. Clustering similar content by matching text-based features



## 2. Introduction:

- **show\_id:** Unique ID for every Movie and TV Show.
- **type:** Identifier: A Movie or TV Show.
- **title:** Title of the Movie or TV Show
- **director:** Director of the Movie or TV show.
- **cast:** Actors involved in the movie or TV show
- **country:** Country where the movie or TV show was produced.
- **date\_added:** Date on which it was added on Netflix

## 2. Introduction:

- **release\_year:** Actual release year of the movie or TV show.
- **rating:** Content Ratings of the movie and TV shows.
- **duration:** Total Duration of movie in minutes or total number of seasons of TV show.
- **listed\_in:** Genres of movies and TV shows.
- **description:** The Summary of the movies or TV show.

## 3. Data Cleaning

### 1. Duplicate Values Treatment:

- Duplicate values dose not contribute anything to accuracy of results.
- Our dataset dose not contains any duplicate values.

### 2. Null Values Treatment:

- Director feature have more than 30% of null values. So, dropping feature director.
- Country feature have 6.51% of null values. Filling null values by mode of feature.
- Cast feature have 9.22% of null values. Filling null values by 'missing'.
- Rating feature have 0.09% of null values. Filling null values by mode of feature.
- Date\_added feature have 0.12% of null values. Dropping rows corresponding to null values

## 4. Data Pre-processing


### 1. Data Type Change:

- Features in their appropriate data type provides better understanding and workability on that data.
- Date\_added feature have object datatype. Converting to datetime.
- Duration is in combination of integer values and text. Removing text part so as to get integer datatype.

### 2. New Features:

- From the feature date\_ added; extracted year, month and day to form new columns by name of year, month and day respectively.

## 5. Exploratory Data Analysis

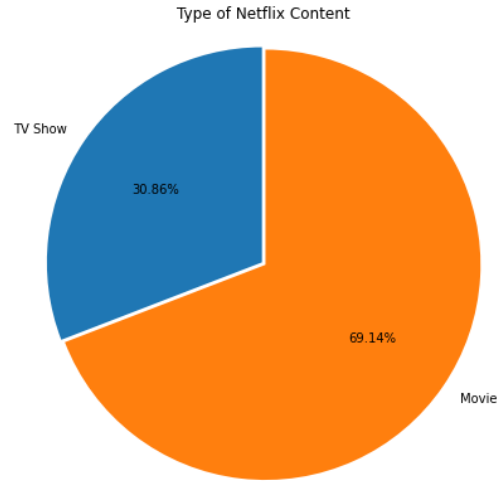


### **Movies vs. TV Shows:**

- TV shows are around 30.86% & Movies around 69.14%
- Movies uploaded on Netflix are more than twice the TV Shows uploaded.




## On Year Basis

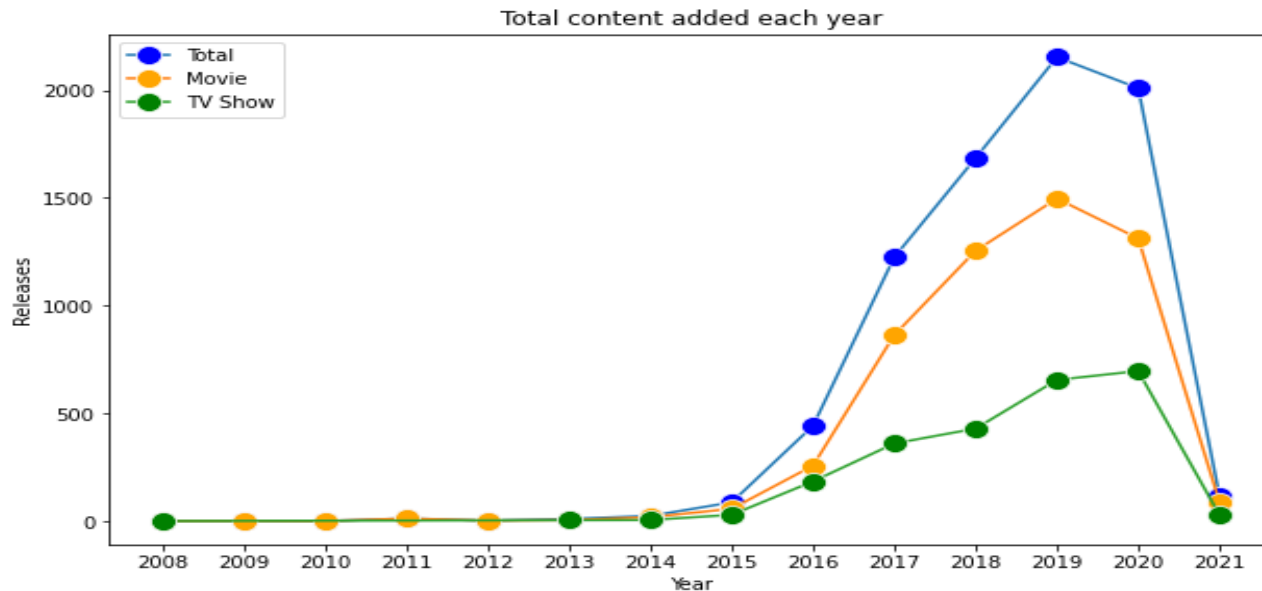


- TV shows are increasing continuously From 2015
- Movies were increasing continuously but after 2020 there is fall.

## On Month Basis:

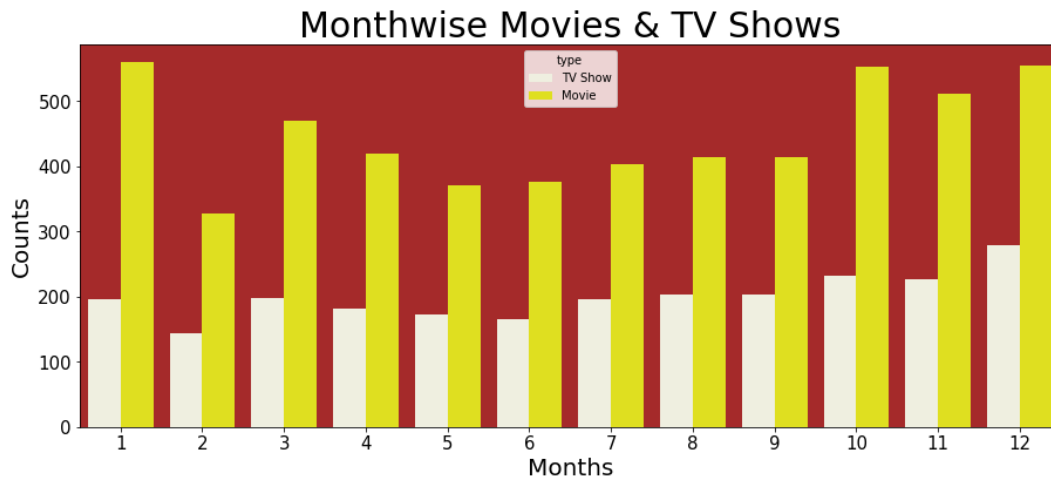


- From October to January, maximum number of movies and TV shows were added.
- Possible reason for that is, during this period of time events such as Christmas, New Year and several holidays takes place.

## On Day Basis:

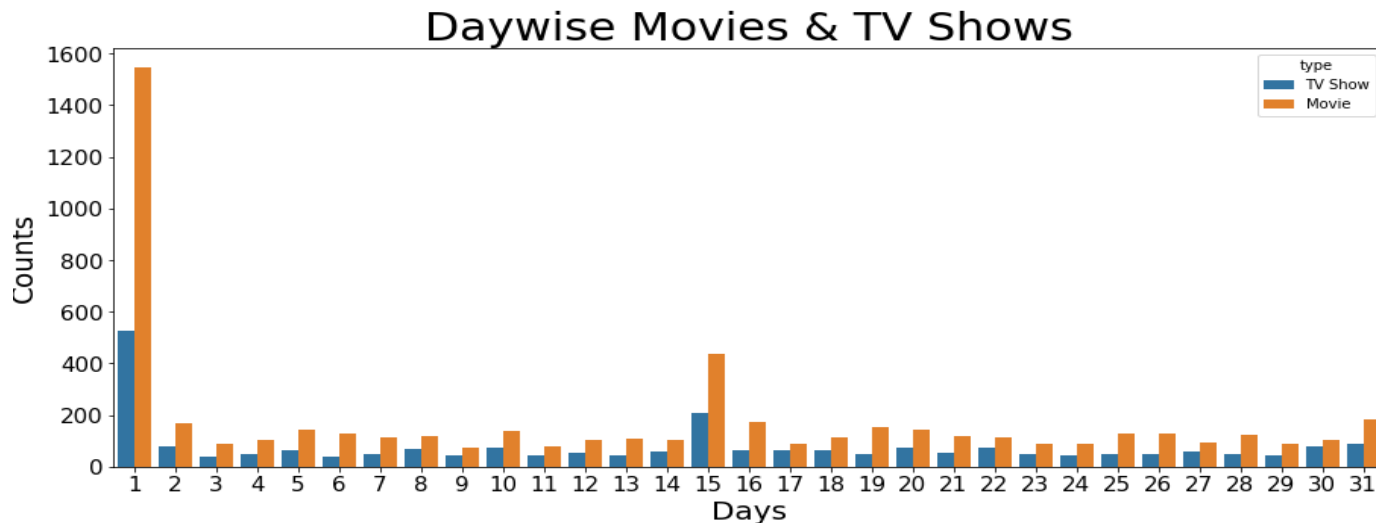


- Maximum number of movies and TV shows added on start of the month followed by mid of the month.

## Worldwide Presence:

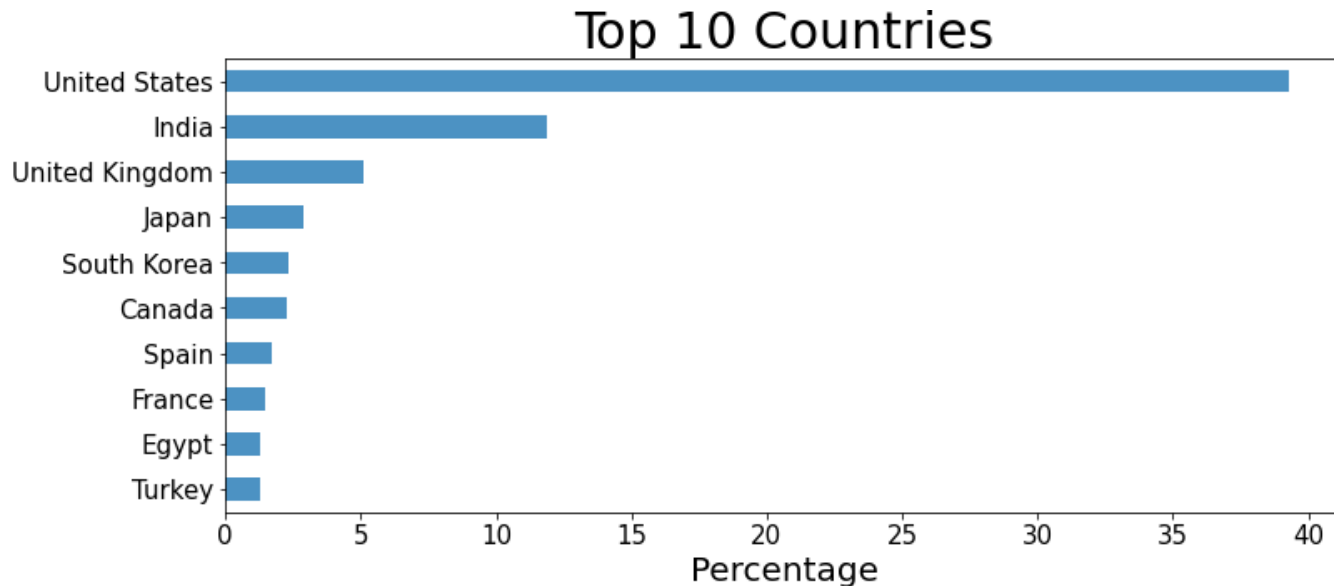


- United State tops in the list of maximum number of movies and TV shows, followed by India, UK and Japan.

## Cast:

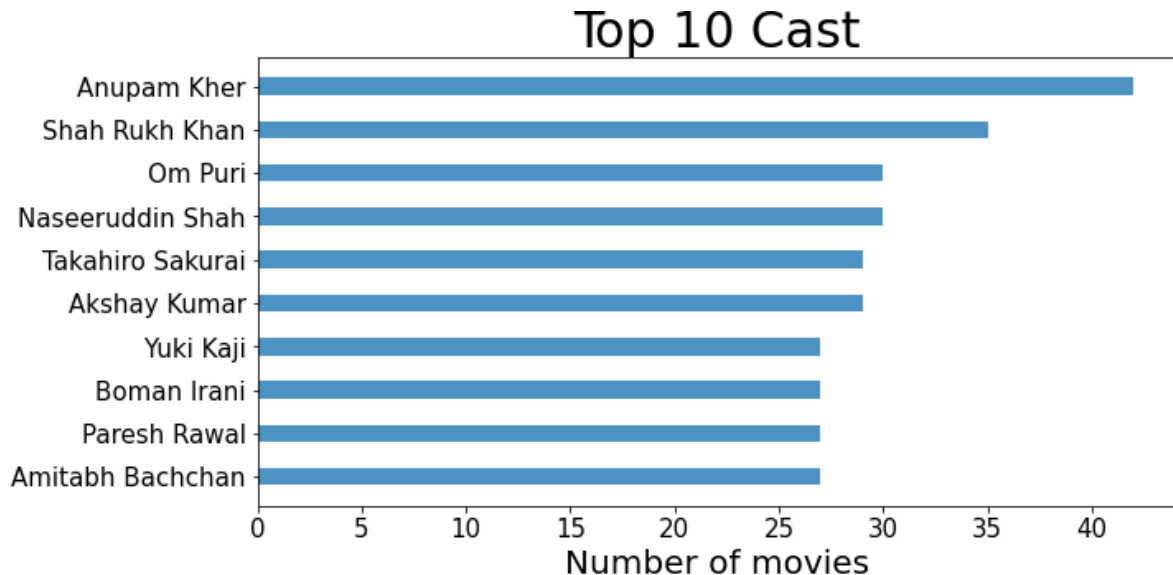


- Anupam Kher having maximum number of movies and TV shows.

## Running Time of Movies:

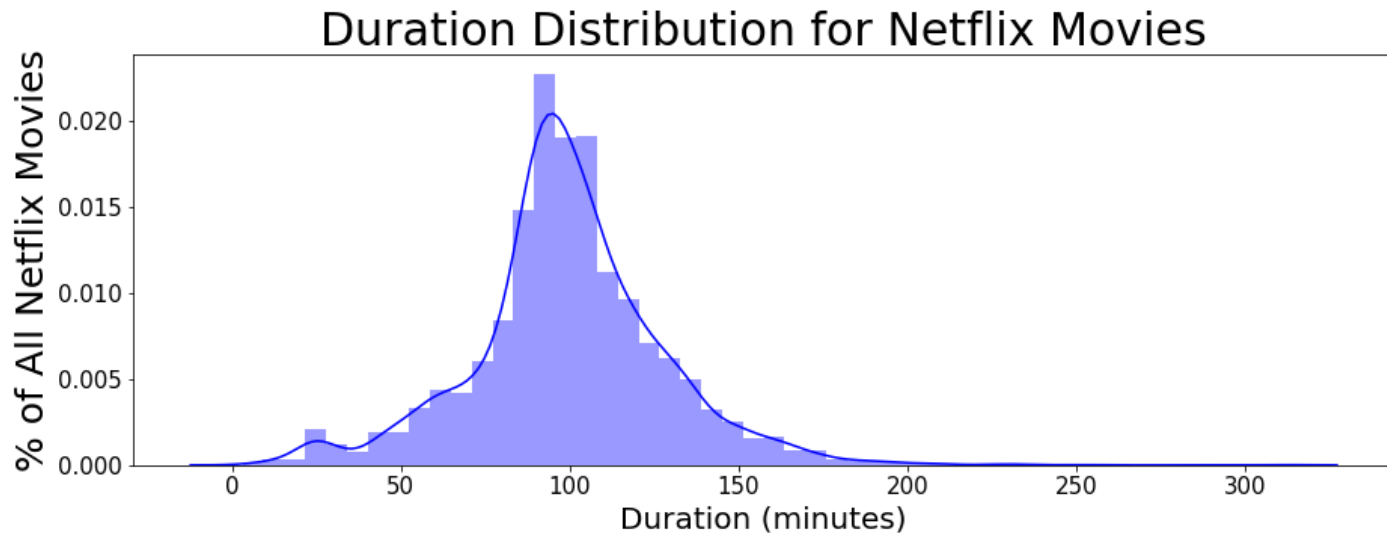



- Majority of movies have running time in between 50 to 150 min.

## Seasons of TV Shows :

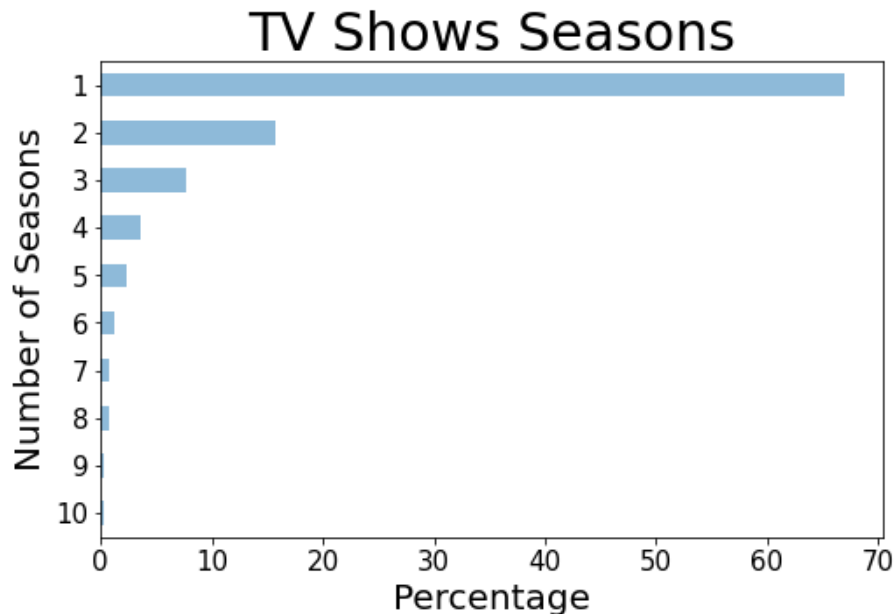

- Almost 68% of TV shows consist of single season only.



## Genres:

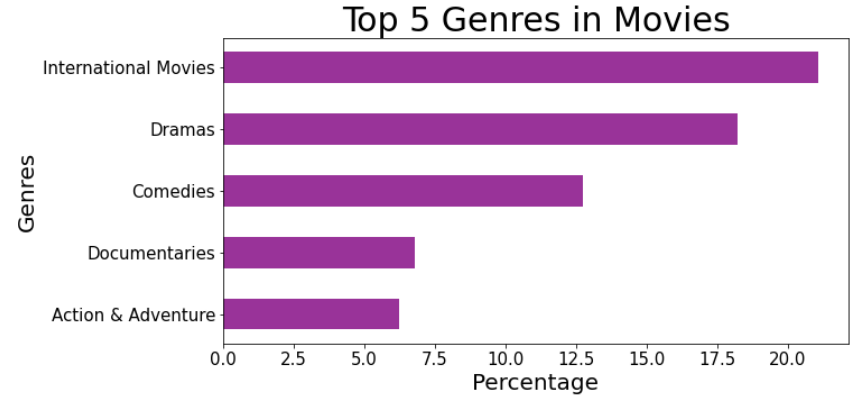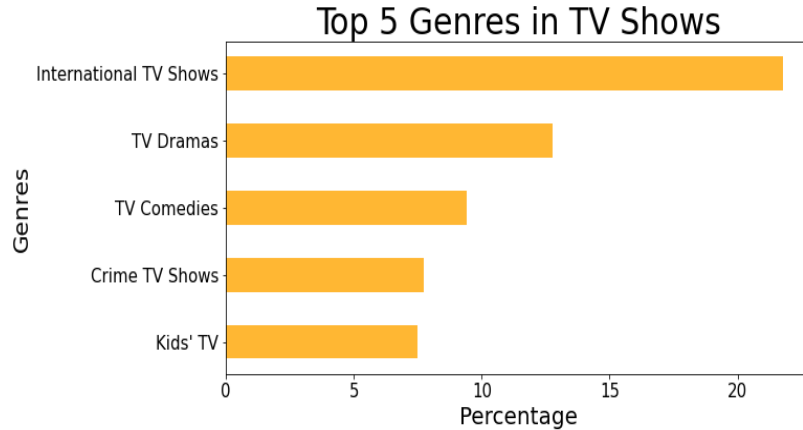

- Top 3 genres are exactly same for movies and TV shows.
- Dramas genres hit all over the world.



## Netflix Original:

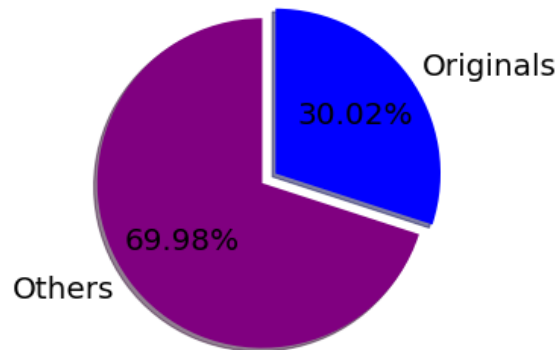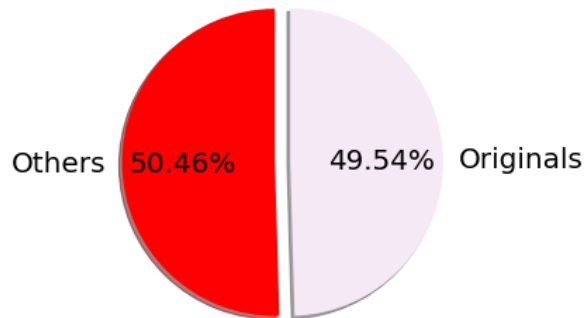

- 30% movies released on Netflix as Netflix originals.
- 50% TV shows originally from Netflix.

## 6. Data Pre-processing for Clustering:

### 1. Removing Punctuation:

- Punctuations does not carry any meaning clustering.
- So, removing punctuations helps to get rid of unhelpful parts of the data, or noise.

### 2. Removing Stop words:

- Stop words are basically a set of commonly used words in any language, not just English.
- If we remove the words that are very commonly used in a given language, we can focus on the important words instead.

### 3. Stemming:

- Stemming is the process of removing a part of a word, or reducing a word to its stem or root.
- Applying stemming to reduce words to their basic form or stem, which may or may not be a legitimate word in the language.

## 7. K-Means Clustering

K-means algorithm is an iterative algorithm that tries to partition the dataset into K pre-defined distinct non-overlapping subgroups where each data point belongs to only one group.

### **Vectorization:**

- Here we have textual data.
- Clustering algorithms cannot understand textual data.
- So, we use vectorization technique to convert textual data to numerical vectors.

## Elbow Curve:

- The Elbow Curve is one of the most popular methods to determine this optimal value of  $k$ .
- The elbow curve uses the sum of squared distance (SSE) to choose an ideal value of  $k$  based on the distance between the data points and their assigned clusters.

## Silhouette Score:

- Silhouette score is used to evaluate the quality of clusters created using clustering algorithms such as K-Means in terms of how well samples are clustered with other samples that are similar to each other.

## 8. Recommender System:

- Recommender systems are the systems that are designed to recommend things to the user based on many different factors.
- It finds out the match between user and item and imputes the similarities between users and items for recommendation.

### Cosine Similarity:

- Cosine similarity is a metric that measures the cosine of the angle between two vectors projected in a multi-dimensional space.

## 9. Conclusion

1. Movies uploaded on Netflix are more than twice the TV Shows uploaded.
2. TV shows and movies are increasing continuously but in 2020 there is drop in number of movies.
3. From October to January, maximum number of movies and TV shows were added.
4. Maximum number of movies and TV shows were either on start of the month or mid of the month.
5. United State tops in the list of maximum number of movies and TV shows followed by India, UK and Japan.
6. Maximum of the movies as well as TV shows are for matures only.

7. Anupam Kher top from the list of casts having maximum number of movies and TV shows.
8. Majority of movies have running time of between 50 to 150 min.
9. Almost 68% of TV shows consist of single season only.
10. Top 3 genres are exactly same for movies and TV shows.
11. Dramas genres hit all over the world.
12. 30% movies and 50% TV shows are Netflix Originals.
13. Clustering done by K-Means Clustering, found optimal number of clusters equal to 25 with highest Silhouette Score.
14. Recommender system using cosine similarity performs well on data.



