

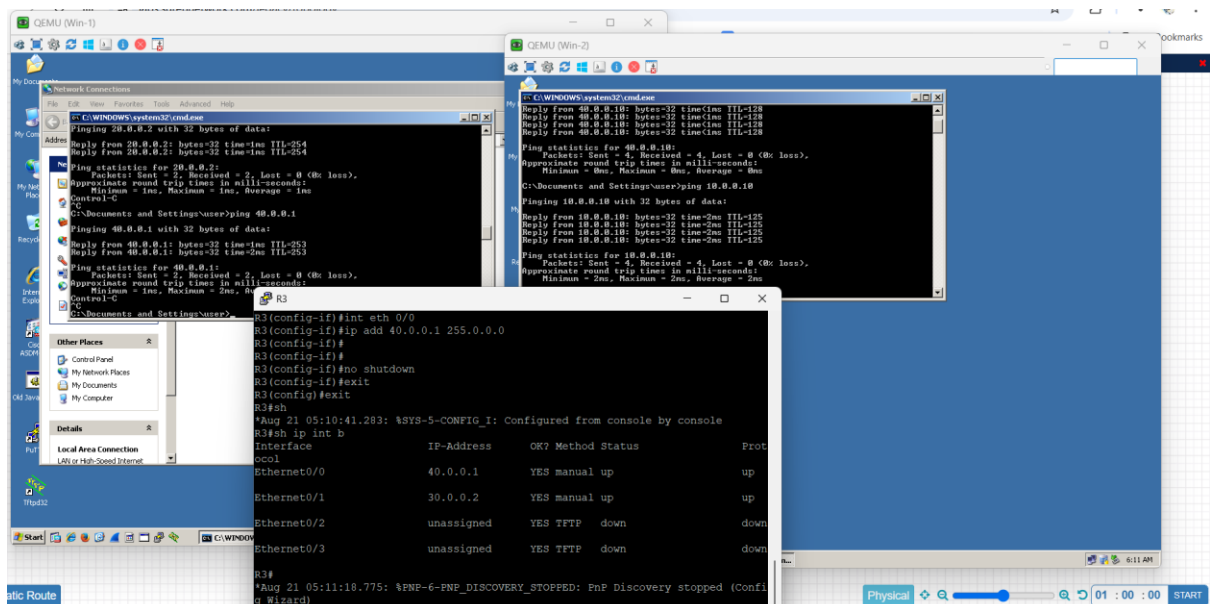
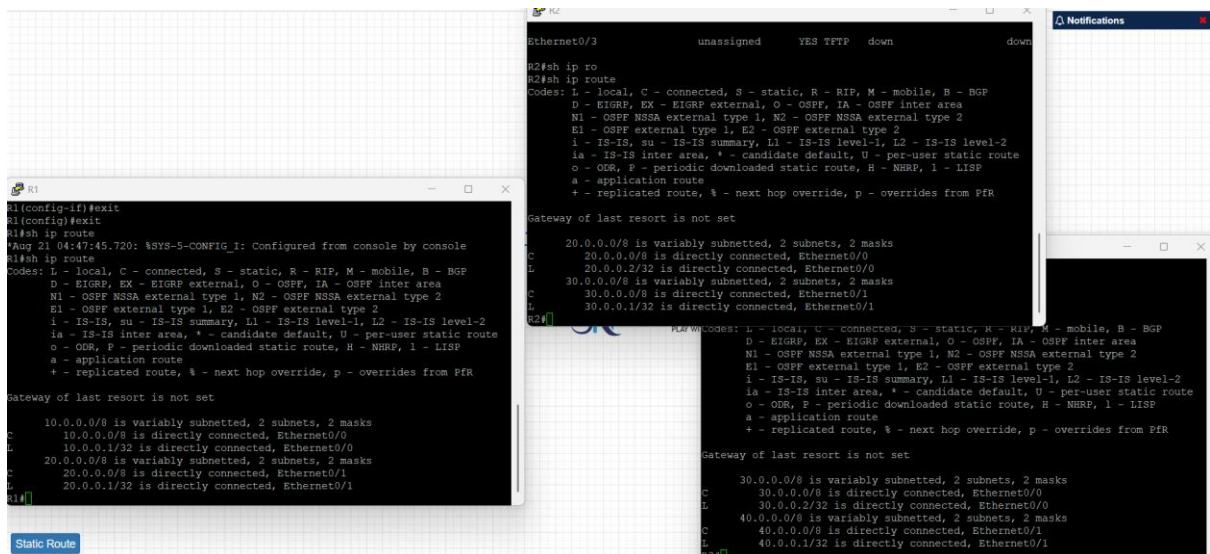


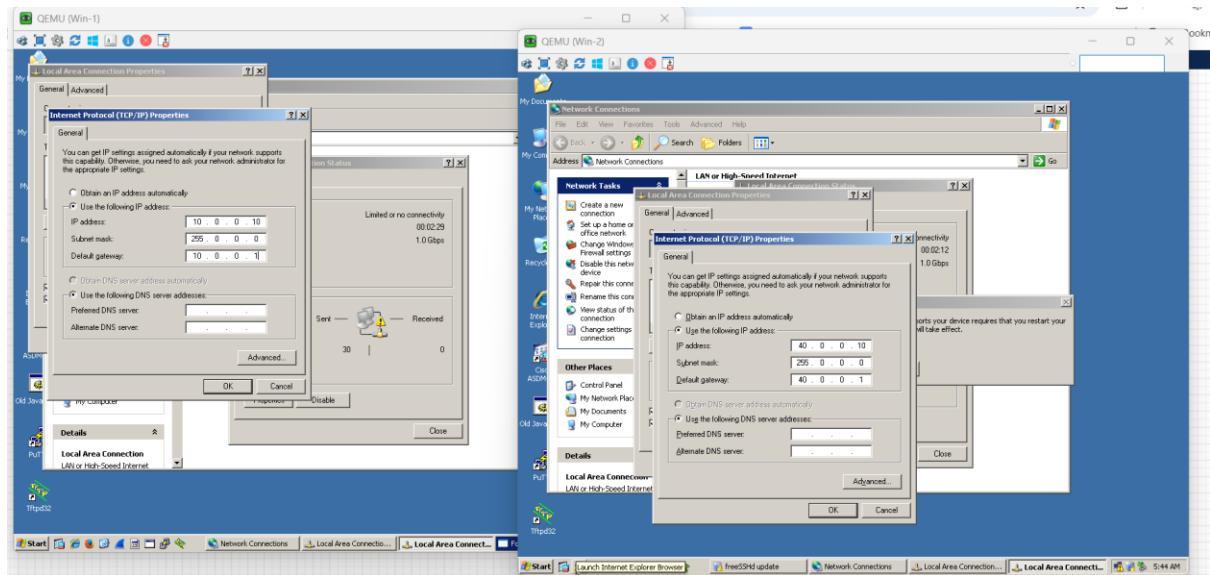


Home work

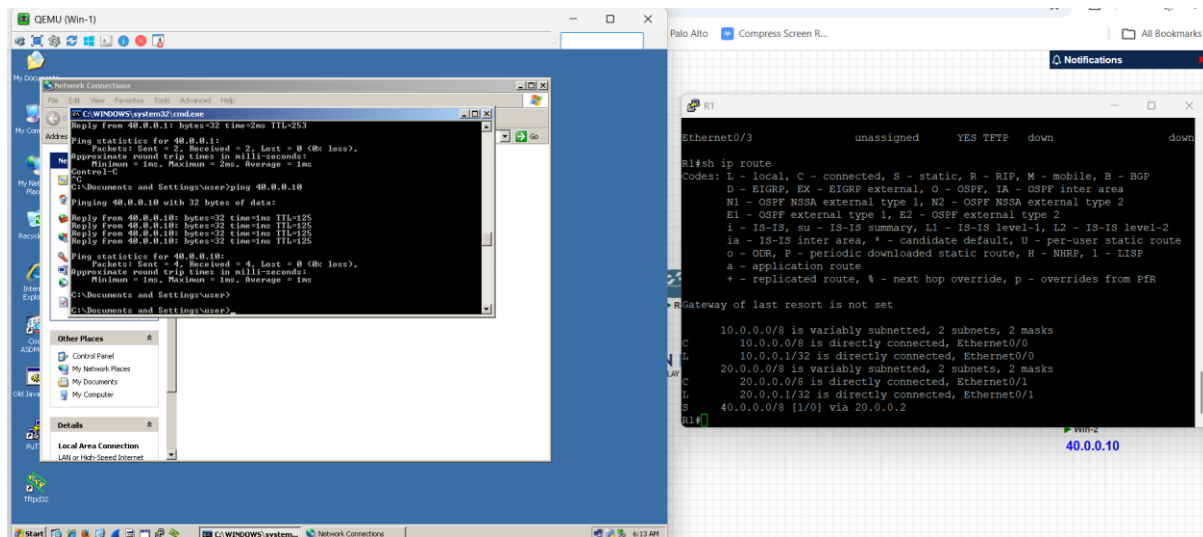


After removing 30.0.0.0 route from R1 still destination is reachable .

Reason : Our destination is 40.0.0.10 only not 30.0.0.0/8 network so the destination is reachable via r2 directly connected route 20.0.0.0/8 network.

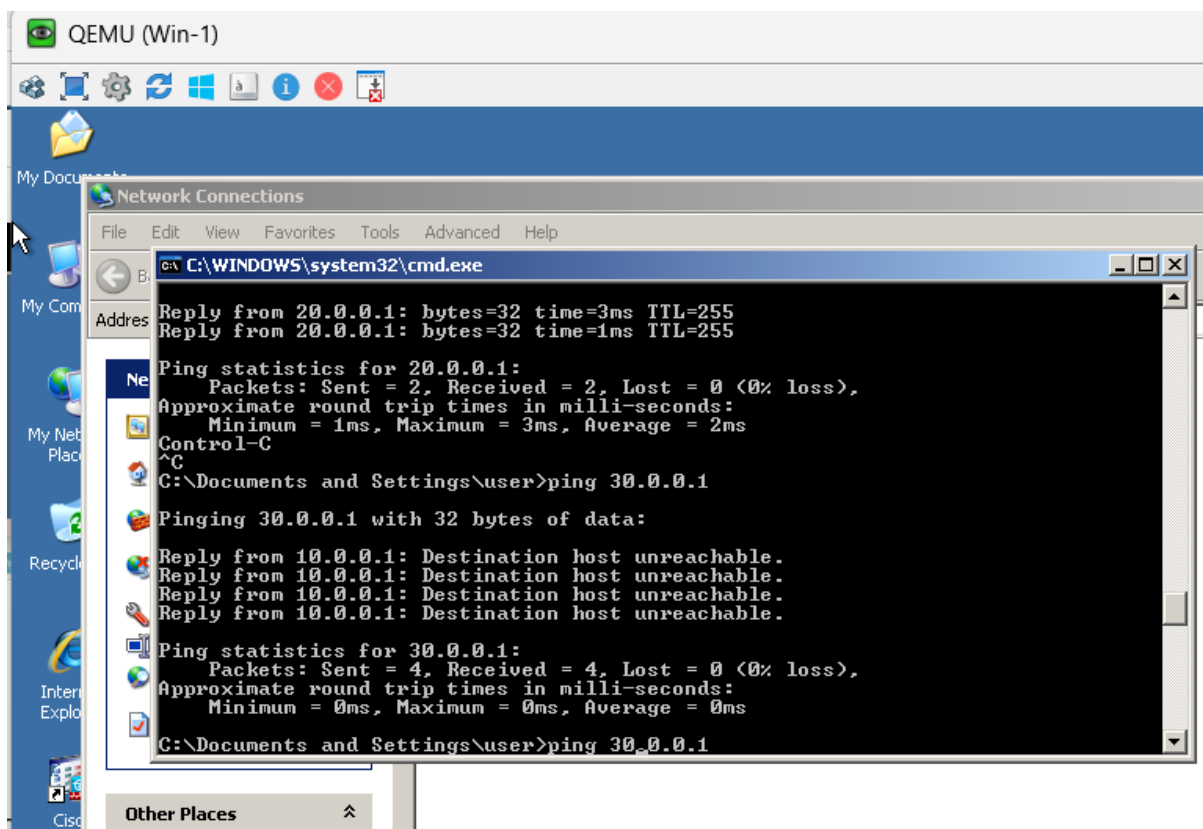

After removing 20.0.0.0 route from R3 still destination is reachable .

Reason : Our destination is 10.0.0.10 only not 20.0.0.0/8 network so the destination is reachable via r2 directly connected route 30.0.0.0/8 network.

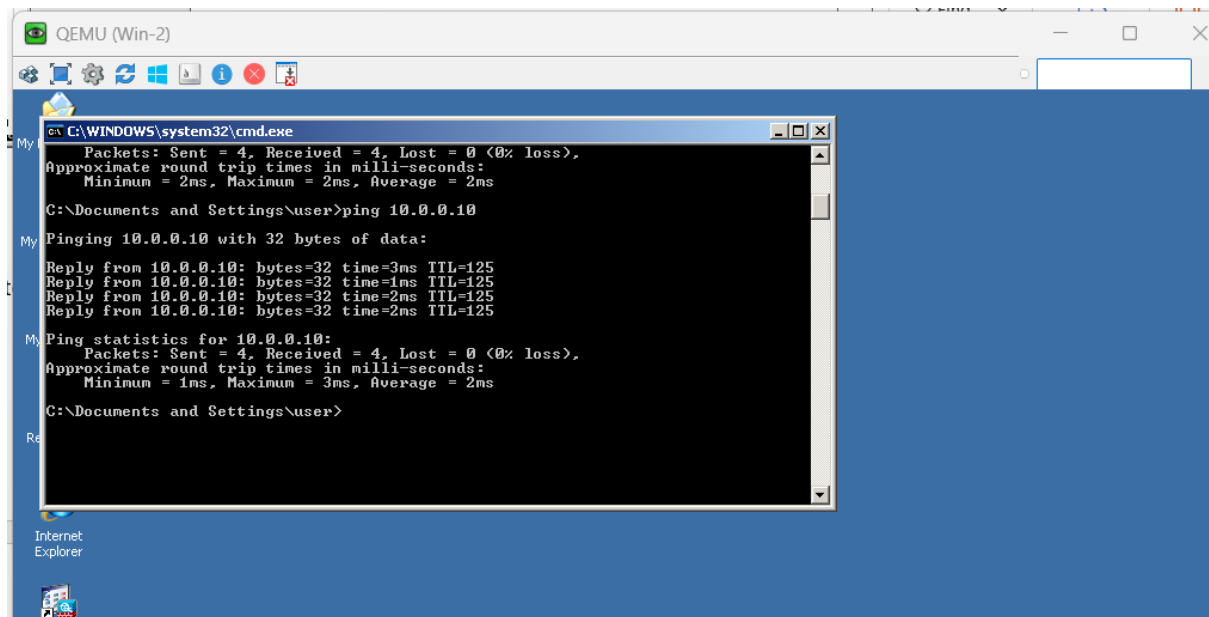

```
C:\WINDOWS\system32\cmd.exe
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=3ms TTL=125
Reply from 10.0.0.10: bytes=32 time=1ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
      Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>
```