VerifiAgent: a Unified Verification Agent in Language Model Reasoning

Jiuzhou Han[♮] **Wray Buntine**[♭] **Ehsan Shareghi**[♮]
[♮] Department of Data Science & AI, Monash University
[♭] College of Engineering and Computer Science, VinUniversity
jiuzhou.han@monash.edu wray.b@vinuni.edu.vn
ehsan.shareghi@monash.edu

arXiv:2504.00406v2 [cs.CL] 21 Aug 2025

Abstract

Large language models demonstrate remarkable reasoning capabilities but often produce unreliable or incorrect responses. Existing verification methods are typically model-specific or domain-restricted, requiring significant computational resources and lacking scalability across diverse reasoning tasks. To address these limitations, we propose VerifiAgent, a unified verification agent that integrates two levels of verification: meta-verification, which assesses completeness and consistency in model responses, and tool-based adaptive verification, where VerifiAgent autonomously selects appropriate verification tools based on the reasoning type, including mathematical, logical, or commonsense reasoning. This adaptive approach ensures both efficiency and robustness across different verification scenarios. Experimental results show that VerifiAgent outperforms baseline verification methods (e.g., deductive verifier, backward verifier) among all reasoning tasks. Additionally, it can further enhance reasoning accuracy by leveraging feedback from verification results. VerifiAgent can also be effectively applied to inference scaling, achieving better results with fewer generated samples and costs compared to existing process reward models in the mathematical reasoning domain.[1]

1 Introduction

Large language models (LLMs) have demonstrated significant capabilities in natural language reasoning tasks, exhibiting potential to solve complex problems across diverse domains (Yang et al., 2024a; DeepSeek-AI et al., 2025; Dubey et al., 2024; OpenAI, 2023). However, despite their advanced reasoning abilities, these models often produce responses that are unreliable or incorrect, which poses substantial challenges for practical applications that require high precision and trustworthiness (Augenstein et al., 2024; Huang et al., 2024). To address this critical issue, several verification methods have been proposed, ranging from task-specific verifiers to generalised verification methods leveraging prompting techniques.

Training a task-specific verifier to verify the output of LLM requires specific training data. For instance, Ni et al. (2023) train a verification model that judges language-to-code outputs based on both program text and execution results. Liang et al. (2024) design verifiers trained on outputs from multiple reasoning paradigms, using correctness signals for improvement. Han et al. (2024b) train a lightweight verifier for improving semantic graph generation in text-to-graph tasks. Similarly, Thatikonda et al. (2024) train a verifier that corrects potential syntactic and semantic first-order logic translation errors. Nevertheless, these existing solutions typically face limitations such as domain restriction, computational inefficiency, and lack of scalability when handling varied reasoning tasks. Table 1 demonstrates a feature comparison of various verification methods.

In this paper, we propose VerifiAgent, a unified verification agent designed specifically to overcome these limitations by offering a generalisable and efficient verification framework. Unlike prior methods, VerifiAgent adopts a two-layer verification mechanism, comprising meta-verification and tool-based adaptive verification. The meta-verification layer ensures completeness and logical consistency of responses, while the tool-based adaptive verification autonomously selects appropriate external tools (e.g., Python interpreters, symbolic solvers, search engines) to deal with different reasoning types, including mathematical, logical, commonsense, and hybrid reasoning tasks.

Our approach not only achieves superior verification accuracy compared to existing baseline methods, such as deductive verifier (Ling et al., 2023), backward verifier (Weng et al., 2023), but also enhances reasoning accuracy by integrating

[1] Code is available at https://github.com/Jiuzhouh/VerifiAgent.

Method	Training-free	Generalised	Tool-based	Fine-grained Feedback
DIVERSE (Li et al., 2023)	×	×	×	×
PiVe (Han et al., 2024b)	×	×	×	✓
Math/Code-Rev (Liang et al., 2024)	×	×	✓	×
LEVER (Ni et al., 2023)	×	×	✓	×
CoVe (Dhuliawala et al., 2024)	✓	×	×	✓
CSV(Zhou et al., 2024)	✓	×	✓	✓
Deductive Verifier (Ling et al., 2023)	✓	✓	×	×
Backward Verifier (Weng et al., 2023)	✓	✓	×	×
VerifiAgent (ours)	✓	✓	✓	✓

Table 1: Comparison of various verification methods.

detailed feedback derived from the verification process. Furthermore, VerifiAgent can be effectively applied to inference scaling, requiring significantly fewer computational resources compared to standard Process Reward Models (PRMs), thereby providing a practical approach to improve LLM performance during inference. Through extensive experiments across three types of reasoning tasks, we summarise two key empirical findings: 1) An LLM reasoner can improve via inference scaling methods like Majority Vote, PRMs, or VerifiAgent, but VerifiAgent achieves higher accuracy at lower cost. 2) VerifiAgent's capabilities scale alongside improvements in its backbone LLM, enabling consistent performance gains on the same reasoner.

2 Related Work

2.1 LLMs as Verifiers

Leveraging the prompting and in-contenxt learning ability of LLMs to verify the outputs of LLMs provides a generalised approach of verification. Wu et al. (2024); Weng et al. (2023) show that LLMs can refine reasoning chains via backward verification or masked condition checking, while Ling et al. (2023) decompose solutions into verifiable steps using a Natural Program format. Dhuliawala et al. (2024) propose Chain-of-Verification, which decomposes the verification into a sequence of questions, improving factual consistency through multi-step prompting. Hong et al. (2024) evaluate LLMs' ability to detect logical errors, finding that while models can catch some flaws, their verification is often shallow. Stechly et al. (2024) further investigate the reliability of self-critique, demonstrating that performance often degrades when doing self-verification without external grounding.

To enhance the verification quality of LLMs, some methods integrate external tools. Zhou et al. (2024) introduce code-based self-verification, which prompts GPT-4 Code Interpreter to evaluate and fix its answers by executing code and interpreting the output. Similarly, Gou et al. (2024) propose CRITIC, a framework where LLMs interact with tools (e.g., calculators, search engines) to critique and revise their own outputs, leading to improved factuality and reasoning. Different from these works, our VerifiAgent provides a generalised verification agentic framework adaptable to diverse reasoning tasks with fine-grained feedback.

A broader concept of verification by LLMs is referred to LLM-as-a-Judge, where LLMs are used as general evaluators for tasks like response scoring, pairwise comparison, and content moderation. As surveyed by Gu et al. (2024); Li et al. (2024), LLM-as-a-Judge systems perform holistic evaluations, as a scalable and consistent alternative to human evaluation, applicable in model benchmarking, safety assessment, and alignment data labelling. VerifiAgent can be viewed as a specialised type of LLM-as-a-Judge system, specifically designed to evaluate the correctness of certain reasoning tasks through tool-based verification mechanisms.

2.2 Scaling Test-Time Compute

Scaling test-time compute refers to allocating more computational budget during inference via sampling, deeper reasoning, or adaptive search to boost model accuracy. Brown et al. (2024) present a comprehensive study of inference-time scaling through repeated sampling, demonstrating that coverage—the probability of generating at least one correct answer—scales log-linearly with the number of samples. Stroebl et al. (2024) theoretically analyse the limits of resampling, showing that imperfect verifiers lead to diminishing returns, especially when false positives dominate. Similarly, Setlur et al. (2025a) argue that verifier-based strategies scale more robustly than verifier-free ones, particularly when base models exhibit anti-concentrated output distributions.

The growing use of Process Reward Models (PRMs) suggests that fine-grained supervision over intermediate reasoning steps can improve model reliability (Lightman et al., 2024; Wang et al., 2024; Zhang et al., 2025). PRMs offer another strategy for scaling test-time compute by enhancing Best-of-N sampling (Snell et al., 2024). As a verifier, VerifiAgent does not require any training process, eliminating the need for collecting task-specific training data. By leveraging frozen LLMs, it can be integrated into test-time compute scaling strategies, enhancing the accuracy of LLM outputs.

3 VerfiAgent

VerifiAgent is a plug-and-play verification framework that empowers frozen LLMs to utilise external mechanisms to verify the correctness of solutions of diverse reasoning tasks. As illustrated in Figure 1, VerifiAgent adopts a two-layer verification mechanism, which contains two levels of verification. The first level is to do a Meta Verification, and the second level is to do a Tool-based Adaptive Verification. The solution will be evaluated sequentially through the two layers. The second-level verification can further validate the results from meta-verification, enhancing the accuracy of the verification results. With this two-layer verification mechanism, the VerifiAgent can provide fine-grained feedback of the verification process.

3.1 Meta Verification

The Meta Verification aims to verify two aspects of the solution: completeness and consistency. The completeness refers to a solution that is self-contained, fully addresses every part of the question, and contains a clear result or conclusion. The consistency refers to reasoning that follows a logical structure with no jumps, gaps, or inconsistencies. This initial layer acts as a foundational check, preventing incomplete or inconsistent solutions from progressing further. Through meta verification, VerifiAgent ensures that only solutions with structural integrity and coherent reasoning proceed to the next tool-based adaptive verification.

Since the solutions of different types of reasoning tasks may have different structures, to make VerifiAgent adaptable to diverse solutions, we leverage a unified way to rewrite the solutions in the meta verification phase. Specifically, the agent will first list all the known conditions and the final objective provided in the problem, then divide the solution into individual and explicit logical steps. This will be beneficial for the meta verification and the following tool-based adaptive verification. See Appendix E for examples.

3.2 Tool-based Adaptive Verification

After the meta verification stage, the solution enters the Tool-based Adaptive Verification phase. This level leverages external tools, such as Python program interpreter, search engine and symbolic solver, to cross-check the correctness of the solution. The agent will first solve the question using appropriate tools, and then verify the results by comparing them with the original solution. Unlike the meta verification stage, which evaluates general reasoning quality, this phase evaluates factual and computational accuracy.

VerifiAgent dynamically selects the most suitable verification tool based on the nature of the task and instructions. For instance, in mathematical reasoning, it may utilise a Python interpreter to verify calculations, while for knowledge-based commonsense reasoning, it may query a search engine to gather relevant information. For hybrid reasoning tasks, it can combine multiple tools to ensure comprehensive verification. Additionally, VerifiAgent autonomously determines the required number of external tool calls, continuing until it gathers sufficient information to validate the answer.

When VerifiAgent selects a tool for verification, the environment returns the corresponding execution result. Based on this observation, the agent iteratively determines its next action until the verification process is complete. The VerifiAgent not only ensures the accuracy of solutions but also provides a transparent and interpretable verification process for natural language reasoning tasks. See Appendix E for examples.

3.3 Fine-grained Feedback

Based on the two levels of verification, VerifiAgent provides a final evaluation result (i.e., $Correct/Incorrect$) to indicate the correctness of the solution. In addition to the verification result, VerifiAgent also generate a V_{score} as a confidence score of the verification. V_{score} is calculated by applying the softmax function to the log probability of the token $(Correct/Incorrect)$ and the log probabilities of the top 5 alternative tokens. Specifically:

$$V_{score} = \frac{\exp\left(p\left(t\right)\right)}{\sum_{k=1}^{5} \exp\left(p\left(t_k\right)\right)}$$

where V_{score} represents the confidence score for the verification result token t. the term $p\left(t\right)$ denotes the log probability of the token t generated by the LLM. $p\left(t_k\right)$ is for $k = 1$ to 5 represents the log probabilities of the top five predicted tokens at the verification result token position. This equation ensures that the confidence score reflects the relative likelihood of the chosen token compared to the top alternatives, effectively normalising the scores within the range of 0 to 1.

Furthermore, when a solution is deemed incorrect, VerifiAgent provides fine-grained feedback

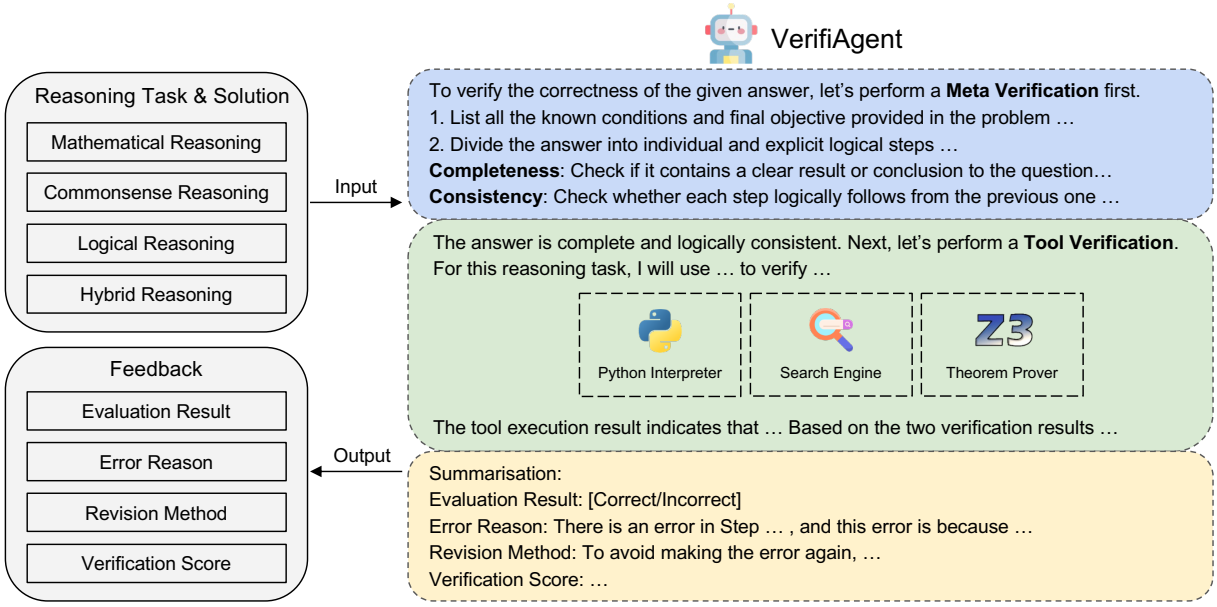


Figure 1: An overview of VerifiAgent. Given a reasoning task and a candidate solution, VerifiAgent leverages two levels of verification: (1) meta verification – verifying the completeness and consistency of the solution and (2) tool-based adaptive verification – autonomously selecting appropriate tools to do the correctness verification. The VerifiAgent can provide fine-grained feedback about the verification process based on the instruction in the prompt.

about the verification process based on the instruction in the prompt. This feedback includes the identified error reason, derived from the two levels of verification, and a potential revision method that incorporates observations from tool execution results (See Appendix E for examples). Such feedback can be leveraged to refine and enhance the solution, improving the accuracy of reasoning tasks.

4 Experiment

4.1 Baseline and Experimental Setup

Datasets. We evaluate VerifiAgent on three natural language reasoning tasks, including mathematical reasoning, logical reasoning, commonsense reasoning, and hybrid reasoning. Specifically, for mathematical reasoning we use GSM8K (Cobbe et al., 2021) and MATH (Hendrycks et al., 2021), for logical reasoning we use FOLIO (Han et al., 2024c) and ProverQA (Qi et al., 2025), for commonsense reasoning we use HotpotQA (Yang et al., 2018) and StrategyQA (Geva et al., 2021), for hybrid reasoning we use ReWild (Yang et al., 2024c). The statistics of the datasets are shown in Appendix A.

Baselines. Since VerifiAgent is a training-free and generalised approach, we compare it against baseline methods that are similarly prompting-based and generalised. Specifically:

- **Vanilla Verifier.** Vanilla Verifier employs a structured prompt to instruct the LLM to verify a solution given a problem, without relying on specialised mechanisms (Kamoi et al., 2024).
- **Deductive Verifier.** Deductive Verifier (Ling et al., 2023) enables the LLM to carry out explicit and rigorous deductive reasoning to evaluate the correctness of a solution. It decomposes the verification process into a sequence of step-by-step subprocesses using Natural Program, a natural language-based deductive reasoning format, to facilitate the breakdown of logical steps in a step-by-step manner.
- **Backward Verifier.** Backward Verifier (Weng et al., 2023) appends the predicted answer to the question while masking the original condition, then prompts the LLM to predict the masked condition. Verification is conducted by comparing the predicted condition with the original one. If the two conditions align, the solution is deemed correct; otherwise, inconsistencies indicate errors in the provided solution.

Models. We explored various combinations of backbone LLMs for both the Reasoner and VerifiAgent. For the Reasoner, we utilise GPT-4o, o3-mini, and Llama-3.3-70B-Instruct-Turbo, while for the VerifiAgent, we employ GPT-4o and o1-mini. In our experiments, unless explicitly stated otherwise, both the Reasoner and VerifiAgent default to GPT-4o as their backbone LLMs.

4.2 Main Result

Table 2 shows the performance of VerifiAgent compared to baseline methods (Vanilla, Deductive, and Backward Verifiers) across different reasoning tasks. Overall, VerifiAgent consistently out-

Type	Dataset	Baselines									VerifiAgent		
		Vanilla Verifier			Deductive Verifier			Backward Verifier					
		Acc	Pre	Rec	Acc	Pre	Rec	Acc	Pre	Rec	Acc	Pre	Rec
Mathematical	GSM8K	0.93	0.96	0.96	0.95	0.96	0.99	0.95	0.96	0.98	**0.96**	**0.96**	**1.00**
	MATH	0.75	0.73	0.86	0.80	0.76	0.86	0.82	0.80	0.88	**0.85**	**0.86**	**0.92**
Logical	FOLIO	0.75	0.78	0.96	0.73	0.73	0.95	0.74	0.76	0.96	**0.76**	**0.78**	**0.97**
	ProverQA	0.75	0.77	0.97	0.74	0.75	**0.98**	0.75	0.78	0.96	**0.77**	**0.82**	0.95
Commonsense	StrategyQA	0.78	0.79	0.92	0.75	0.82	0.92	0.79	0.80	0.94	**0.84**	**0.85**	**0.95**
	HotpotQA	0.56	0.53	0.91	0.56	0.53	**0.96**	0.57	0.54	0.90	**0.61**	**0.56**	0.92
Hybrid	ReWild	0.76	0.88	0.82	0.61	**0.91**	0.60	0.74	0.87	0.84	**0.78**	0.88	**0.89**

Table 2: Main results of VerifiAgent on different reasoning tasks. The evaluation metrics are accuracy (Acc), precision (Pre), and recall (Rec). **Bold** shows the best result for each row.

performs baselines, excelling in accuracy while maintaining competitive precision and recall across mathematical, logical, commonsense, and hybrid reasoning tasks. Specifically, for mathematical reasoning tasks, VerifiAgent attains the highest accuracy (0.96 and 0.85) and recall scores (1.00 and 0.92) on GSM8K and MATH datasets, respectively. In logical reasoning, VerifiAgent demonstrates improvements, particularly on FOLIO (accuracy 0.76, recall 0.97) and ProverQA (precision 0.82). For commonsense reasoning tasks, VerifiAgent significantly outperforms baselines on StrategyQA with accuracy and precision of 0.84 and 0.85, respectively, while remaining competitive on HotpotQA. Finally, on the hybrid reasoning dataset ReWild, VerifiAgent achieves the best accuracy (0.78) and recall (0.89), highlighting its verification capabilities in handling complex reasoning tasks. To investigate the impact of different backbone LLMs on VerifiAgent's performance, we further evaluate VerifiAgent using o1-mini as an alternative backbone model. The results indicate that the verification capability of VerifiAgent scales effectively with the underlying backbone model's capacity. Due to the page limit, we put the detailed results in Appendix C.

4.3 Inference Scaling with VerifiAgent

Inference scaling aims at enhancing reasoning performance by utilising increased computational resources during the inference stage. However, this approach inherently requires effective verification to ensure the accuracy and reliability of generated answers (Setlur et al., 2025b). Due to the verification ability of VerifiAgent, it naturally complements inference scaling approaches by serving as an effective verifier during the inference process. Specifically, we first sample an output from the LLM. If this output passes verification by the VerifiAgent, the process terminates; otherwise, we continue sampling additional candidate outputs until one passes verification or the maximum number of samples is reached. For cases reaching the maximum number of samples, we select the final answer using a majority vote approach. We compare our VerifiAgent-based inference scaling method with the standard Majority Vote approach that does not employ a verifier. Majority Vote aggregates multiple sampled responses directly from reasoners without any verification. Table 3 demonstrates the performance across three reasoning datasets (MATH, ProverQA, and StrategyQA) using various combinations of reasoners (GPT-4o, o3-mini, and Llama-3.3-70B-Instruct-Turbo) and VerifiAgent variants (GPT-4o and o1-mini).

Across all datasets and reasoners, inference scaling with VerifiAgent consistently outperforms Majority Voting, achieving higher accuracy with fewer samples and less cost (See Appendix D). Notably, o3-mini reasoner achieves the highest performance on MATH and ProverQA but the lowest on StrategyQA among all reasoners, suggesting that o3-mini is more proficient in mathematical and logical reasoning than in knowledge-intensive commonsense reasoning tasks. We identify two key findings: (1) When the reasoner and VerifiAgent are the same model (e.g., GPT-4o) or have comparable capacities (e.g., Llama-3.3-70B-Instruct-Turbo paired with GPT-4o), integrating VerifiAgent significantly enhances performance, with further improvement achievable by employing a stronger VerifiAgent (e.g., o1-mini). (2) When the reasoner (o3-mini) surpasses the VerifiAgent (GPT-4o) in capability, the performance gain is limited. However, pairing a strong reasoner with a stronger VerifiAgent (o1-mini) substantially enhances performance.

PRMs provide another approach to inference scaling. We investigated two open-source PRMs

Method	MATH	ProverQA	StrategyQA
GPT-4o Reasoner	69.4(1)	75.3(1)	84.2(1)
- IS w/ Majority Vote @10	73.5(10)	77.0(10)	85.6(10)
- IS w/ VerifiAgent (GPT-4o)	74.0(1.5)	77.3(1.6)	86.0(1.3)
- IS w/ VerifiAgent (o1-mini)	78.0(1.8)	77.7(1.3)	87.3(1.2)
o3-mini Reasoner	87.9(1)	78.3(1)	76.4(1)
- IS w/ Majority Vote @8	91.1(10)	80.0(10)	78.2(10)
- IS w/ VerifiAgent (GPT-4o)	88.3(1.3)	79.1(1.1)	78.6(1.3)
- IS w/ VerifiAgent (o1-mini)	91.4(1.1)	80.7(1.1)	79.0(1.6)
Llama-3.3-70B-Instruct-Turbo Reasoner	62.3(1)	70.6(1)	83.8(1)
- IS w/ with Majority Vote @10	68.3(10)	71.7(10)	84.7(10)
- IS w/ VerifiAgent (GPT-4o)	69.7(2.0)	72.0(1.3)	85.1(1.3)
- IS w/ VerifiAgent (o1-mini)	71.1(2.2)	74.0(1.3)	85.1(1.4)

Table 3: Results of different Reasoners with Inference Scaling (IS) methods on three datasets. The number in the bracket denotes the average number of samples for each question.

specifically designed for the MATH dataset: Qwen2.5-Math-PRM-7B and Qwen2.5-Math-7B-PRM800K, which fine-tune Qwen2.5-Math-7B-Instruct using synthetic data from Qwen models (Zhang et al., 2025) and PRM800K (Lightman et al., 2024), respectively. These PRMs assign scores to each reasoning step, and we use the last step score as the final response score. Following previous studies (Zhang et al., 2025; Lightman et al., 2024; Yang et al., 2024b; Wang et al., 2024), we evaluate the PRMs using the Best-of-N sampling strategy, selecting the highest-scored response from N candidates according to a PRM. The evaluation results for the GPT-4o and Qwen2.5-Math-7B-Instruct reasoners are shown in Figure 2. As the number of samples increases, both Majority Vote and Best-of-N sampling strategies consistently improve in accuracy. When sampling 10 responses, the Best-of-N method's accuracy approaches that of VerifiAgent, which notably achieves comparable performance with significantly fewer average samples (1.5 and 1.6 on GPT-4o reasoner and Qwen2.5-Math-7B-Instruct reasoner, respectively).

Interestingly, the two PRMs exhibit distinct behaviours depending on the reasoner. For the GPT-4o reasoner, Qwen2.5-Math-7B-PRM800K significantly outperforms Qwen2.5-Math-PRM-7B, which even underperforms relative to the Majority Vote baseline. However, for the Qwen2.5-Math-7B-Instruct reasoner, Qwen2.5-Math-PRM-7B outperforms Qwen2.5-Math-7B-PRM800K at 10 samples. These results indicate that GPT-4o benefits more from Qwen2.5-Math-7B-PRM800K, whereas Qwen2.5-Math-7B-Instruct gains greater improvements from Qwen2.5-Math-PRM-7B. We hypothesise that the linguistic discrepancies may affect the performance of PRMs. Specifically, Qwen2.5-Math-7B-PRM800K utilises synthetic data from GPT-style LLMs for training, while Qwen2.5-Math-PRM-7B employs data generated by Qwen-style LLMs for training.

	MATH	ProverQA	StrategyQA
Init. Reasoning Acc.	69.4	75.3	84.3
Feedback Type	**Precaution-Based Feedback**		
Verification Result	69.7	76.0	84.3
+ Error Reason	74.9	77.0	85.6
+ Mitigation Method	73.4	77.6	86.0
Feedback Type	**Post-Editing-Based Feedback**		
Verification Result	71.7	77.3	84.7
+ Error Reason	72.3	74.7	84.3
+ Mitigation Method	72.6	74.3	83.8

Table 4: Results of feedback utilisation on GPT-4o.

4.4 Exploration on Feedback Utilisation

VerifiAgent provides fine-grained feedback during verification, which includes an explicit error reason and a suggested revision method for enhancing solutions. To evaluate the effectiveness of this feedback, we conducted experiments using two distinct methods: precaution-based and post-editing-based feedback. In the precaution-based method, the LLM leverages feedback from previous verification attempts to proactively generate a new solution. Conversely, the post-editing-based method allows