




Currently built app screens

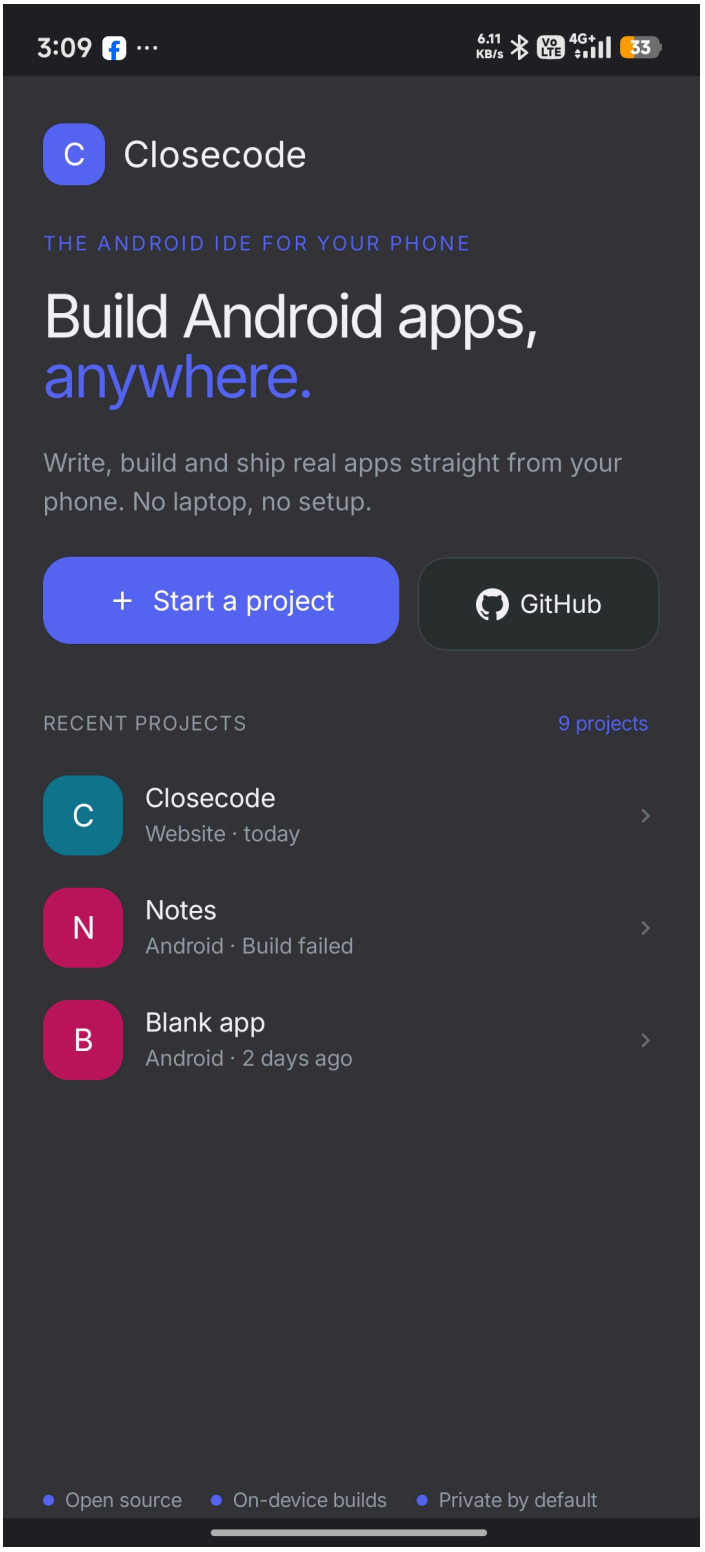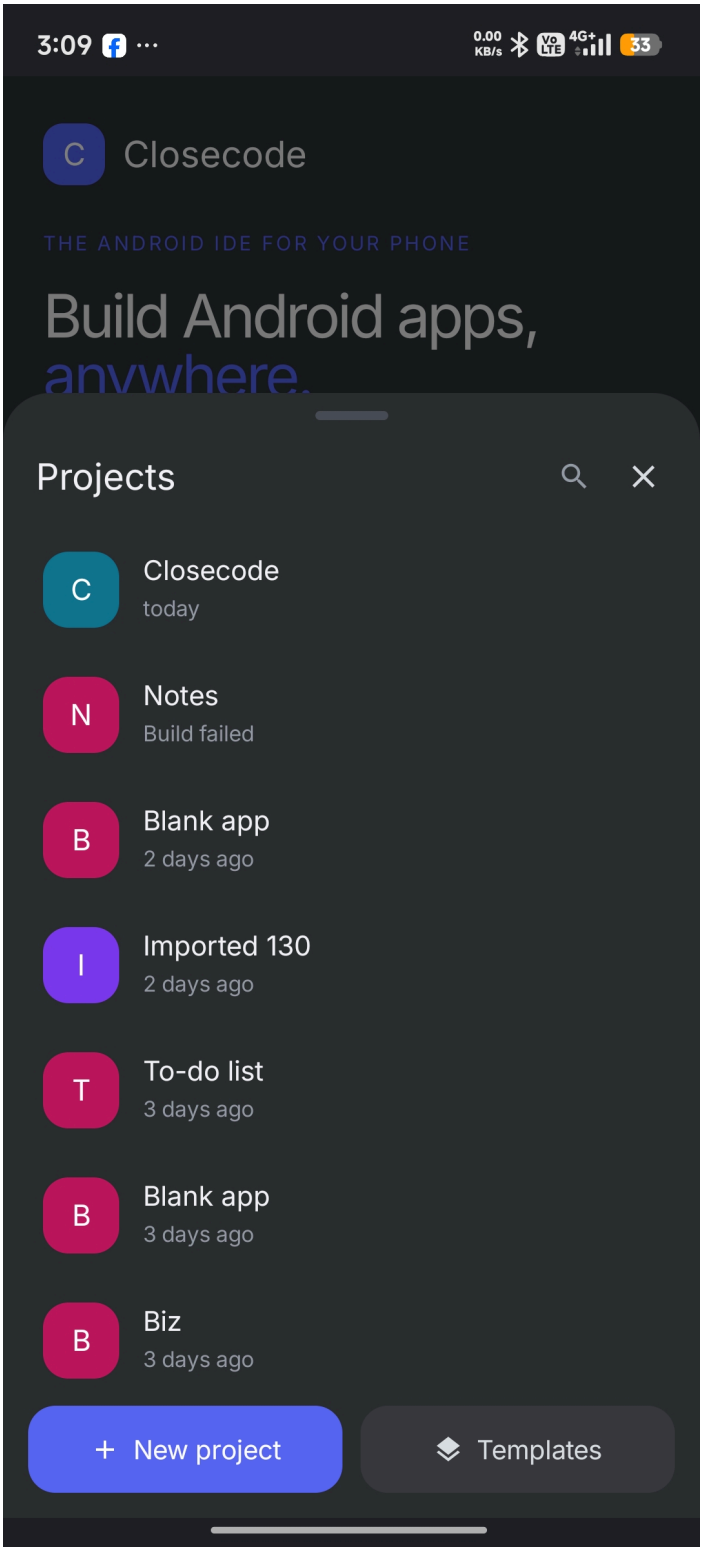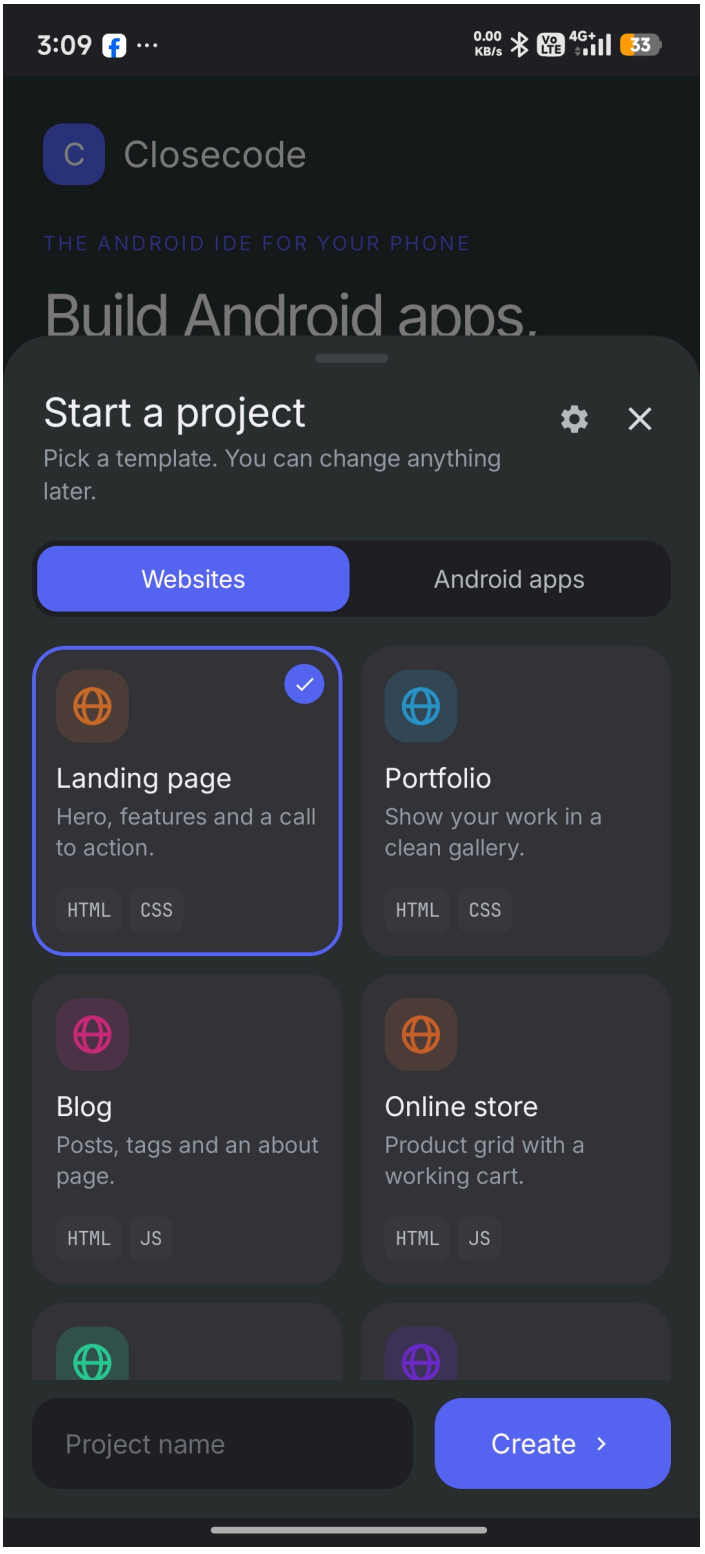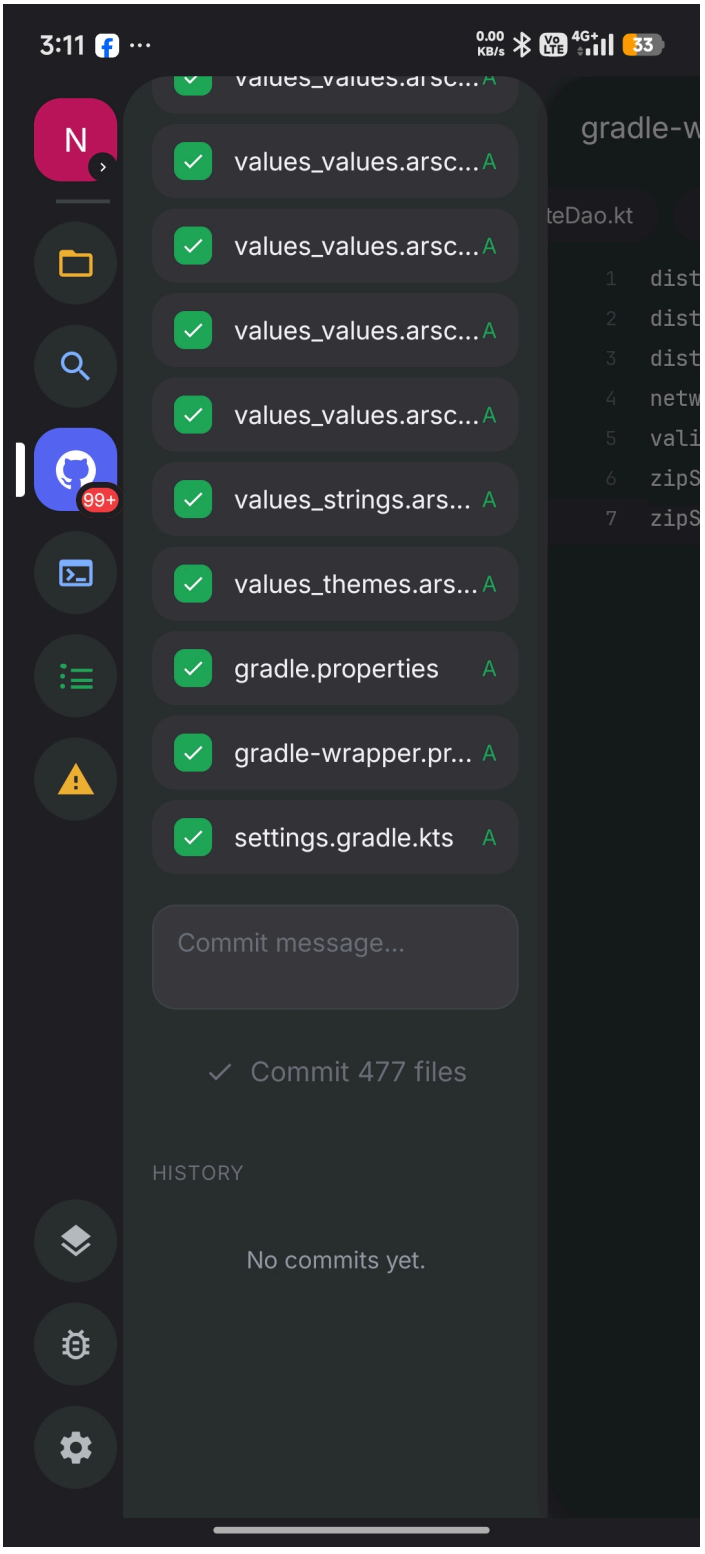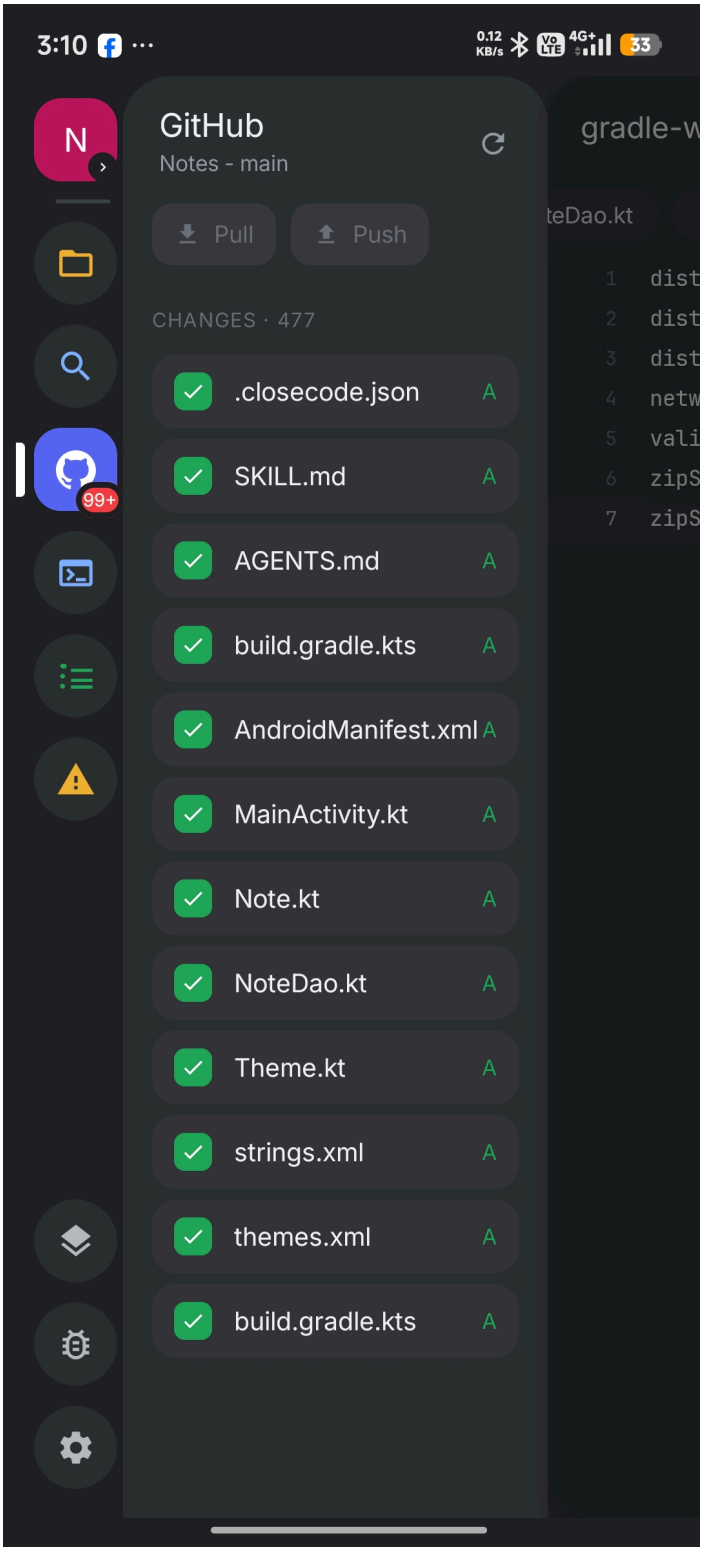




3:09
C
Closecode
THE ANDROID IDE FOR YOUR PHONE
Build Android apps,
anywhere.
Projects
C
Closecode
today
N
Notes
Build failed
B
Blank app
2 days ago
I
Imported 130
2 days ago
T
To-do list
3 days ago
B
Blank app
3 days ago
B
Biz
3 days ago
New project
Templates



3:09
Closecode
THE ANDROID IDE FOR YOUR PHONE
Build Android apps.
Start a project
Pick a template. You can change anything later.
Websites
Android apps
Landing page
Hero, features and a call to action.
HTML
CSS
Portfolio
Show your work in a clean gallery.
HTML
CSS
Blog
Posts, tags and an about page.
HTML
JS
Online store
Product grid with a working cart.
HTML
JS
Project name
Create



3:11
values_values.arsc... A
values_values.arsc... A
values_values.arsc... A
values_values.arsc... A
values_strings.ars... A
values_themes.ars... A
gradle.properties A
gradle-wrapper.pr... A
settings.gradle.kts A
Commit message...
Commit 477 files
HISTORY
No commits yet.
gradle-w
teDao.kt



3:10
GitHub
Notes - main
Pull
Push
CHANGES · 477
.closecode.json A
SKILL.md A
AGENTS.md A
build.gradle.kts A
AndroidManifest.xml A
MainActivity.kt A
Note.kt A
NoteDao.kt A
Theme.kt A
strings.xml A
themes.xml A
build.gradle.kts A

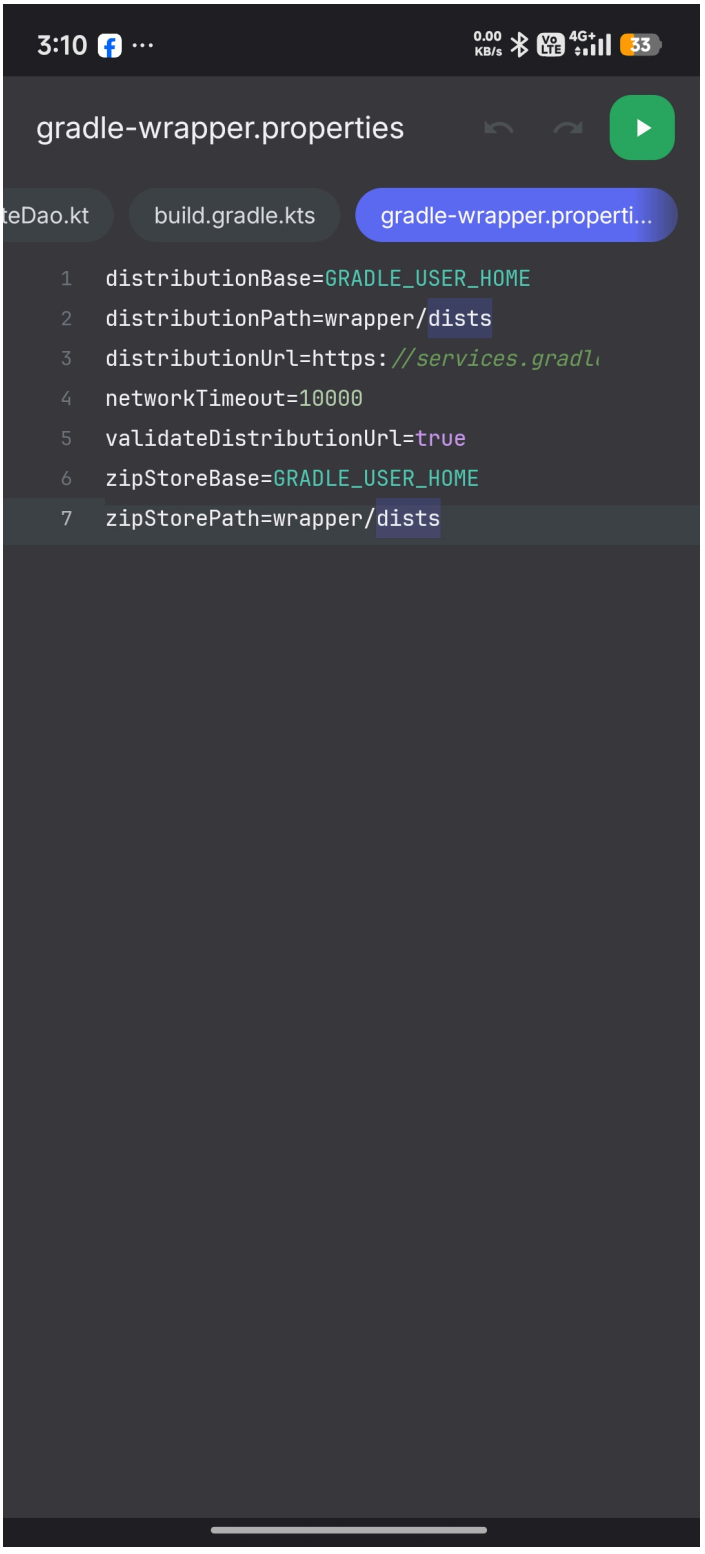

3:10
0.00 KB/s
33
gradle-wrapper.properties
teDao.kt
build.gradle.kts
gradle-wrapper.properti...
1 distributionBase=GRADLE_USER_HOME
2 distributionPath=wrapper/dists
3 distributionUrl=https://services.gradl
4 networkTimeout=10000
5 validateDistributionUrl=true
6 zipStoreBase=GRADLE_USER_HOME
7 zipStorePath=wrapper/dists

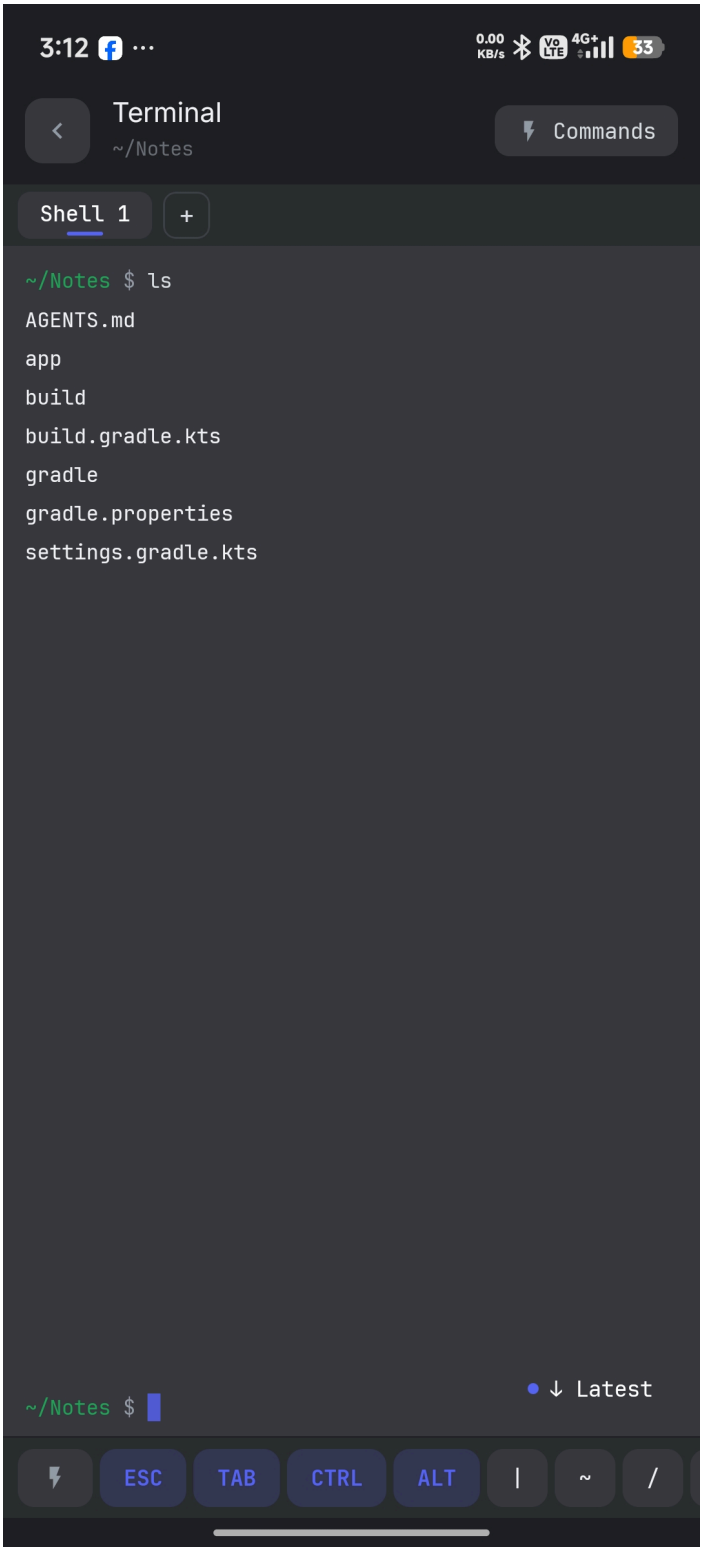

3:12
0.00 KB/s
Terminal
~/Notes
Commands
Shell 1
+
~/Notes $ ls
AGENTS.md
app
build
build.gradle.kts
gradle
gradle.properties
settings.gradle.kts
~/Notes $
Latest
ESC
TAB
CTRL
ALT
|
~
/

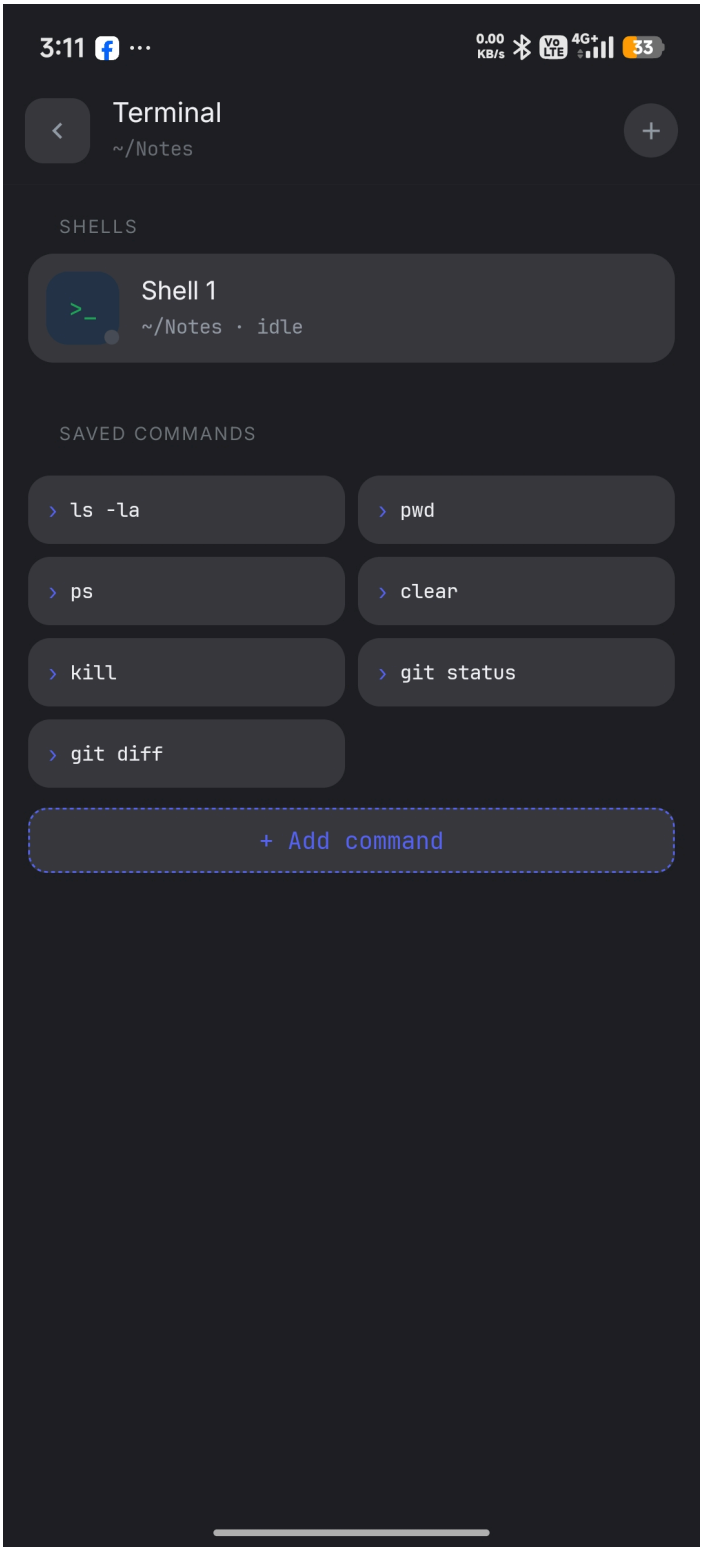

3:11
0.00 KB/s
Terminal
~/Notes
SHELLS
Shell 1
~/Notes · idle
SAVED COMMANDS
ls -la
pwd
ps
clear
kill
git status
git diff
+ Add command

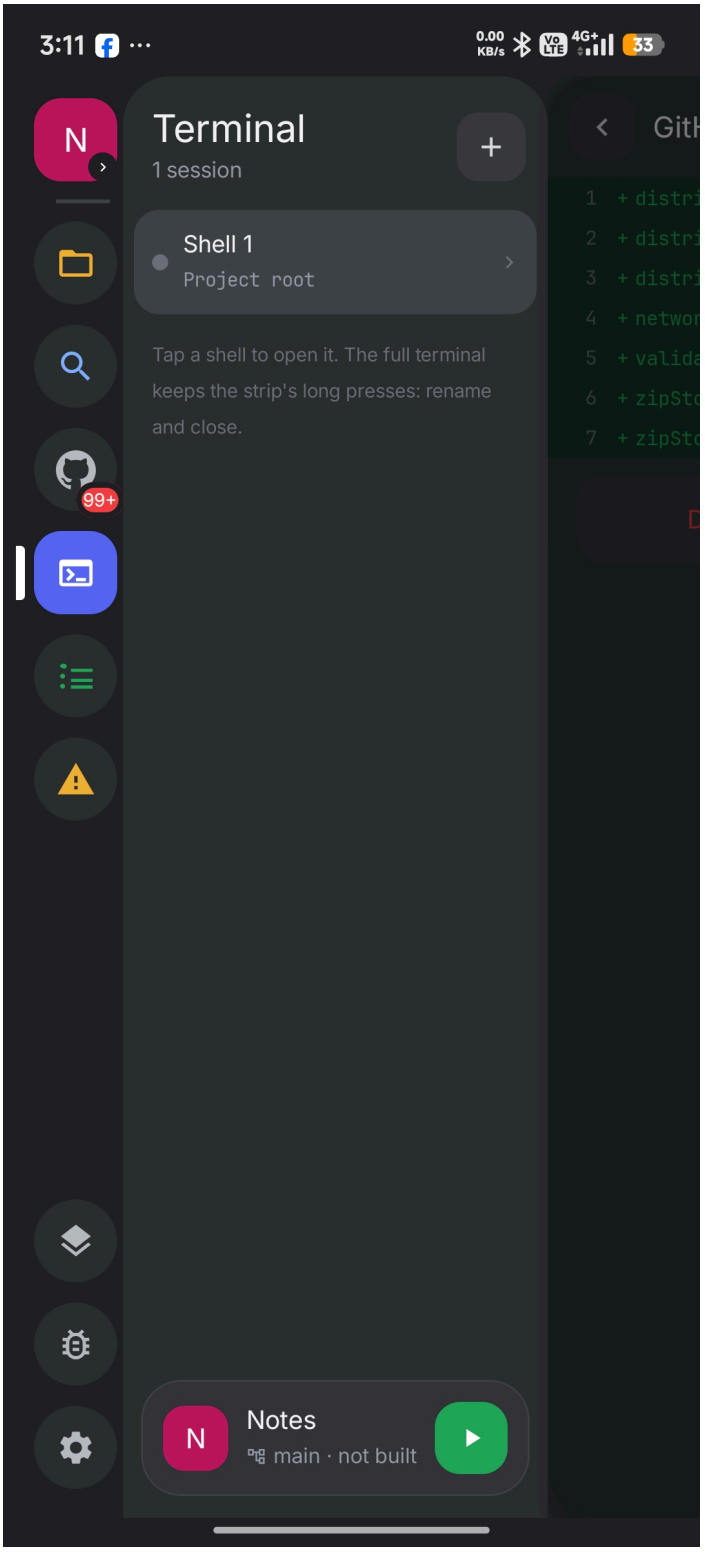

3:11
0.00 KB/s
33
N
Terminal
1 session
Shell 1
Project root
Tap a shell to open it. The full terminal keeps the strip's long presses: rename and close.
99+
Notes
main · not built

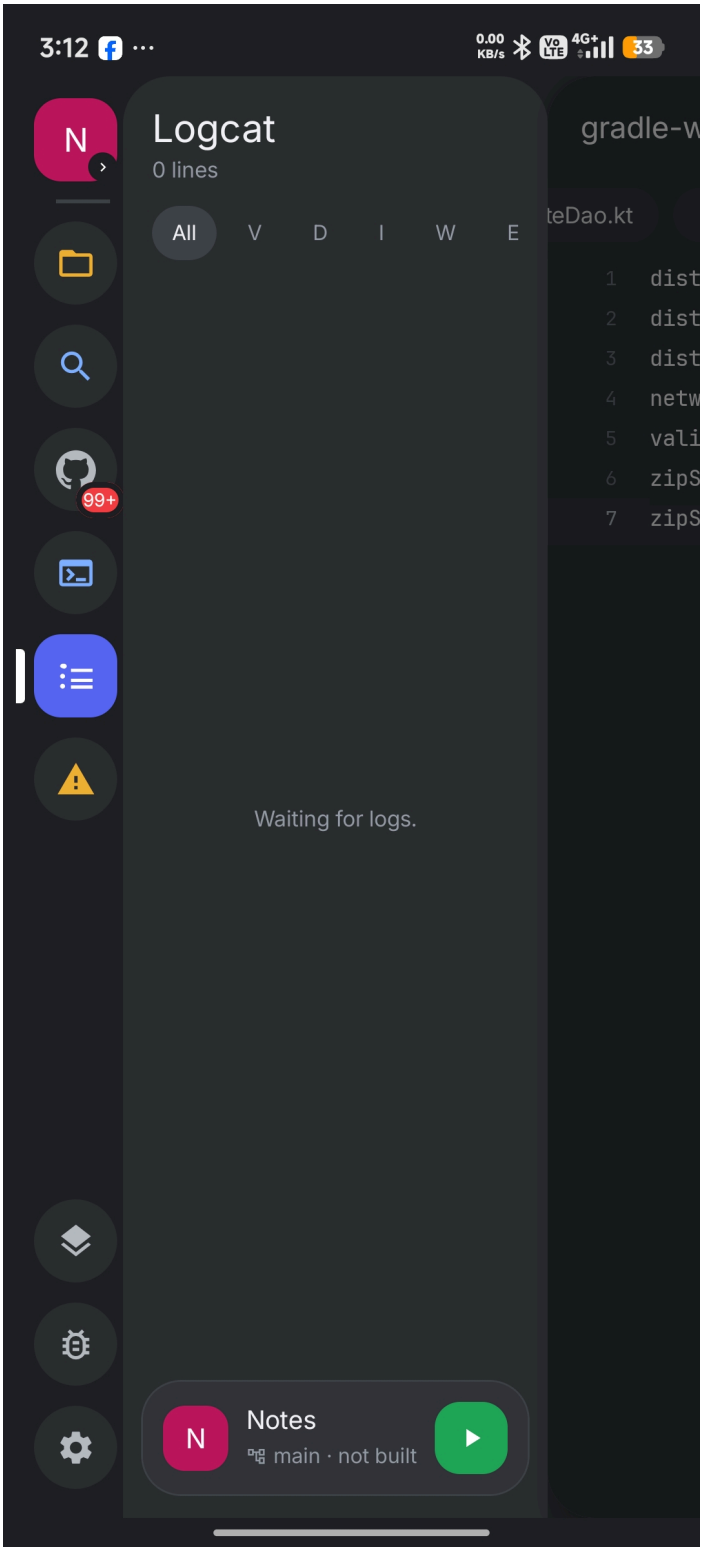

3:12
0.00 KB/s
33
N
Logcat
0 lines
All
V
D
I
W
E
gradle-w
teDao.kt
1 dist
2 dist
3 dist
4 netw
5 vali
6 zipS
7 zipS
99+
Waiting for logs.
N
Notes
main · not built

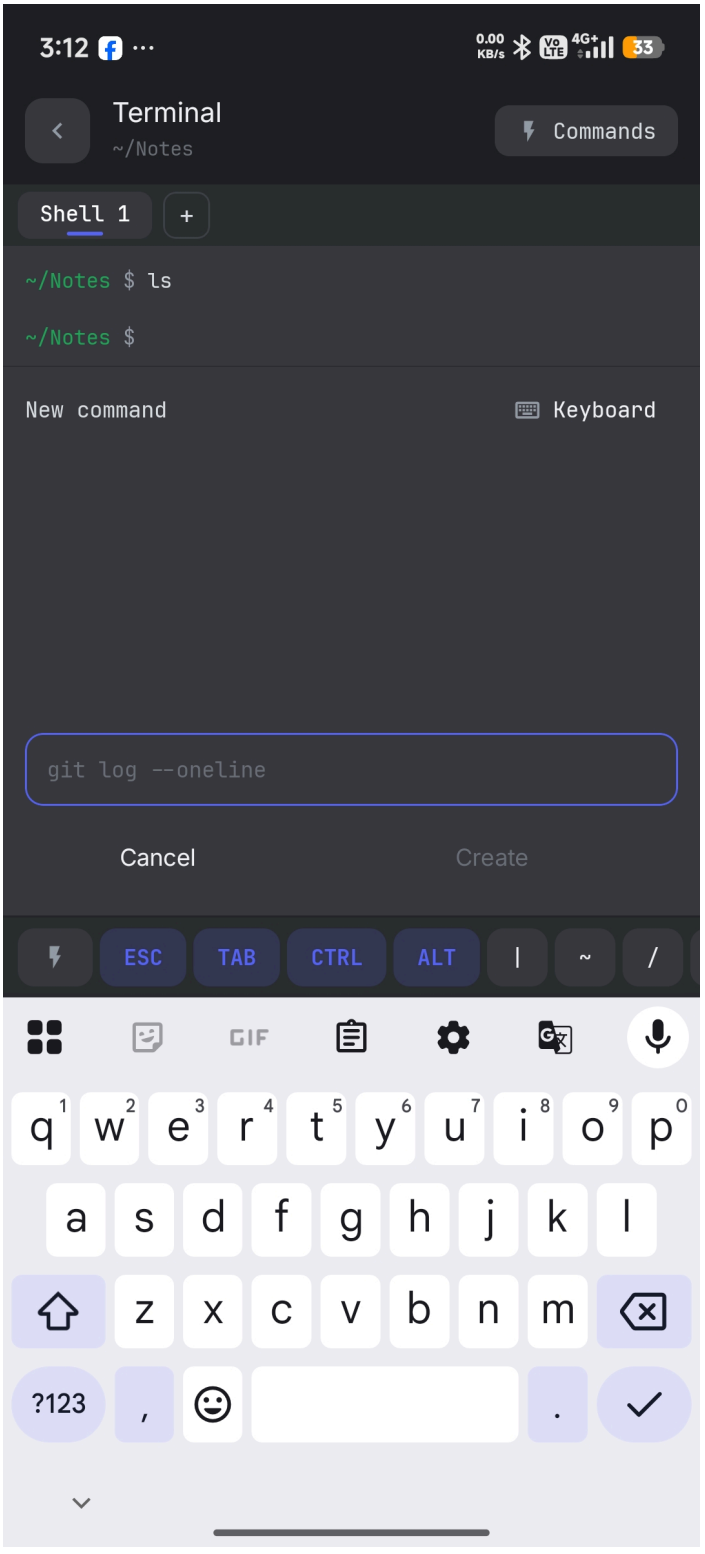

3:12
Terminal
~/Notes
Commands
Shell 1
+
~/Notes $ ls
~/Notes $
New command
Keyboard
git log --oneline
Cancel
Create
ESC
TAB
CTRL
ALT
|
~
/
GIF

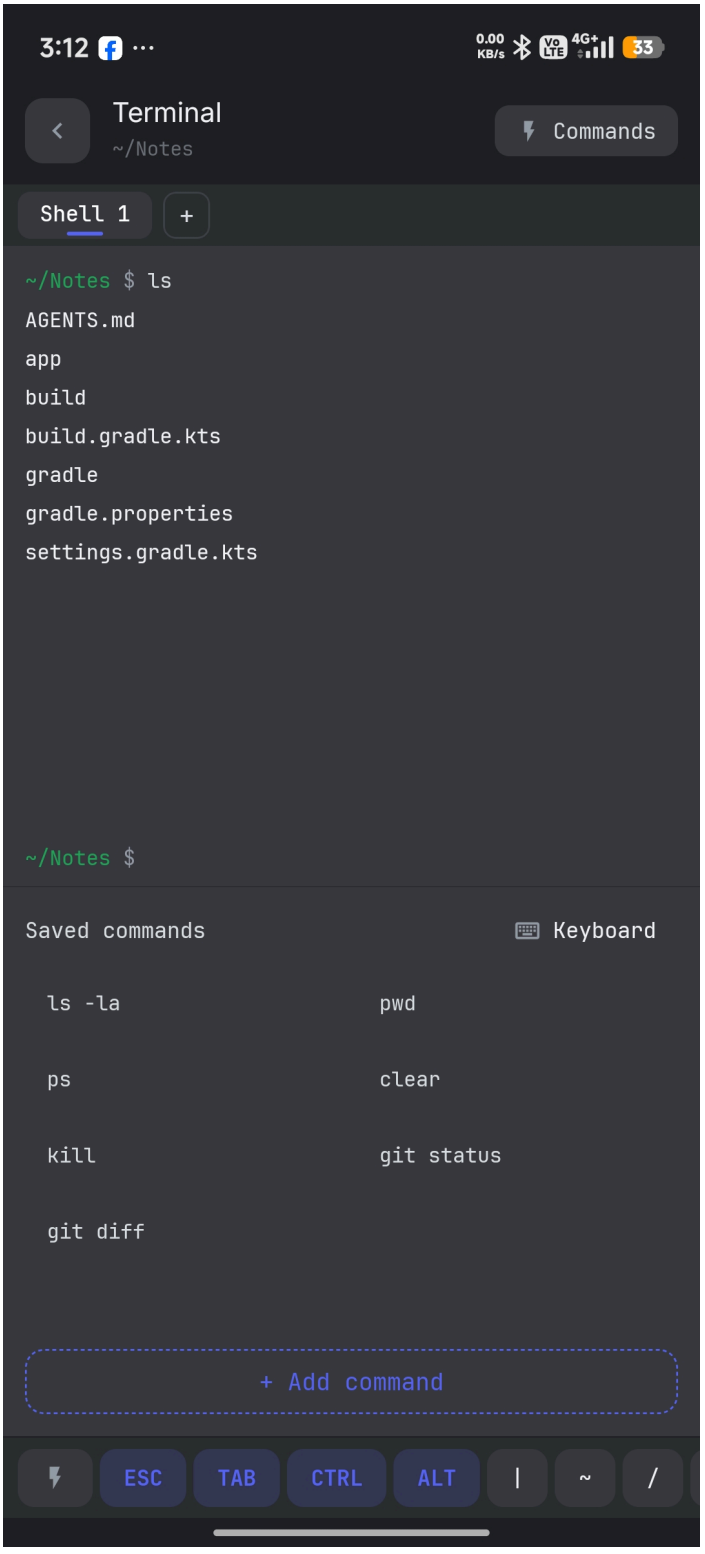

3:12
0.00 KB/s
33
Terminal
~/Notes
Commands
Shell 1
+
~/Notes $ ls
AGENTS.md
app
build
build.gradle.kts
gradle
gradle.properties
settings.gradle.kts
~/Notes $
Saved commands
Keyboard
ls -la
pwd
ps
clear
kill
git status
git diff
+ Add command
ESC
TAB
CTRL
ALT
|
~
/

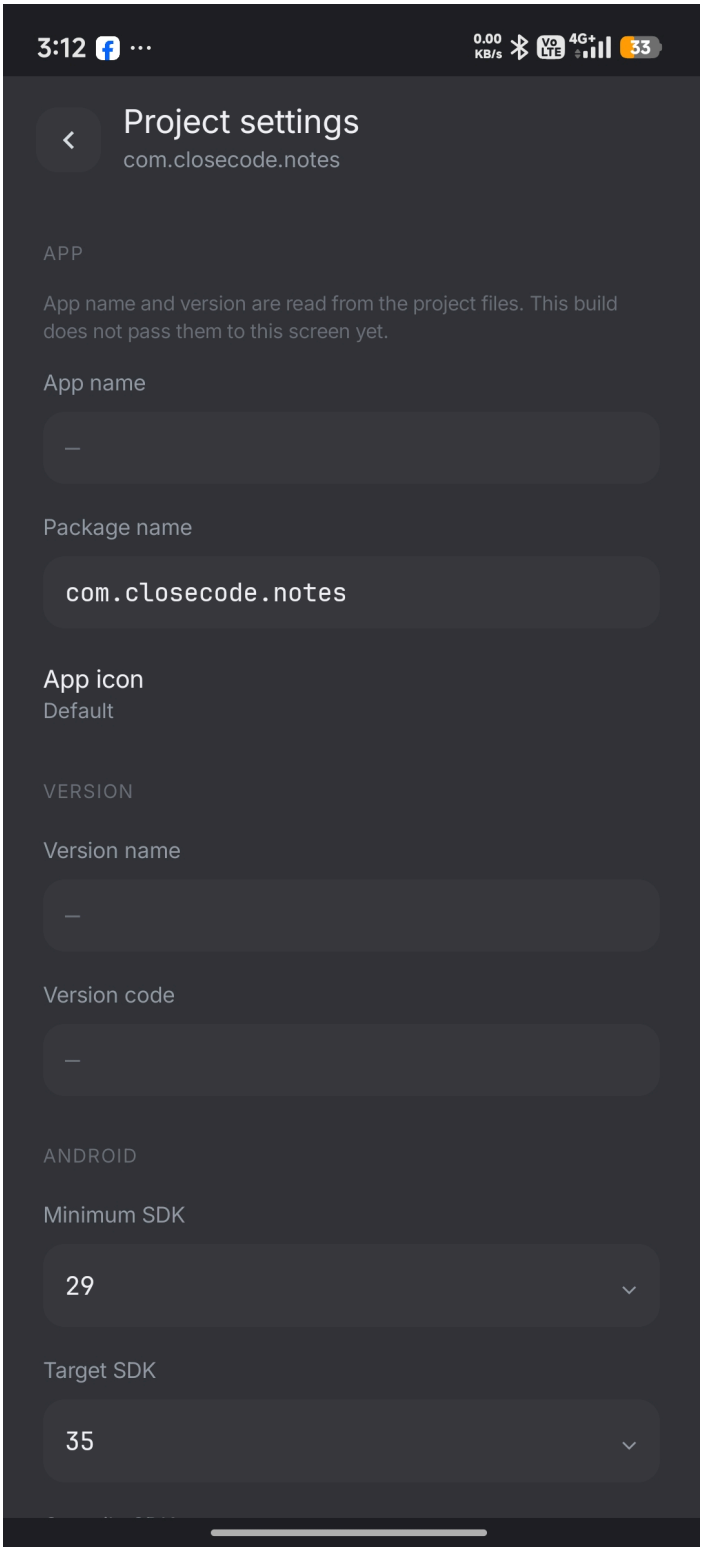

3:12
0.00 KB/s
33
Project settings
com.closecode.notes
APP
App name and version are read from the project files. This build does not pass them to this screen yet.
App name
—
Package name
com.closecode.notes
App icon
Default
VERSION
Version name
—
Version code
—
ANDROID
Minimum SDK
29
Target SDK
35

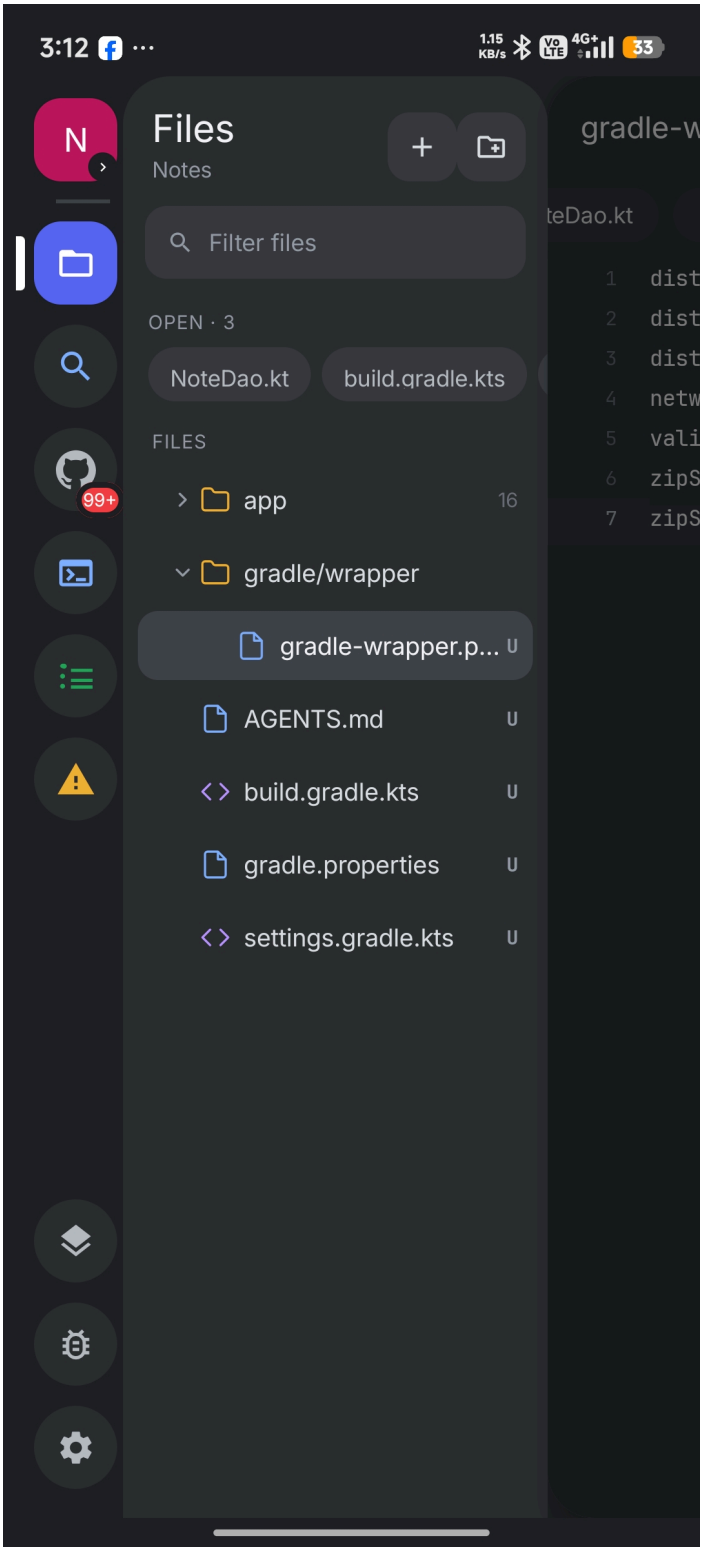

3:12
Files
Notes
Filter files
OPEN · 3
NoteDao.kt
build.gradle.kts
FILES
app
16
gradle/wrapper
gradle-wrapper.p...
U
AGENTS.md
U
build.gradle.kts
U
gradle.properties
U
settings.gradle.kts
U
99+

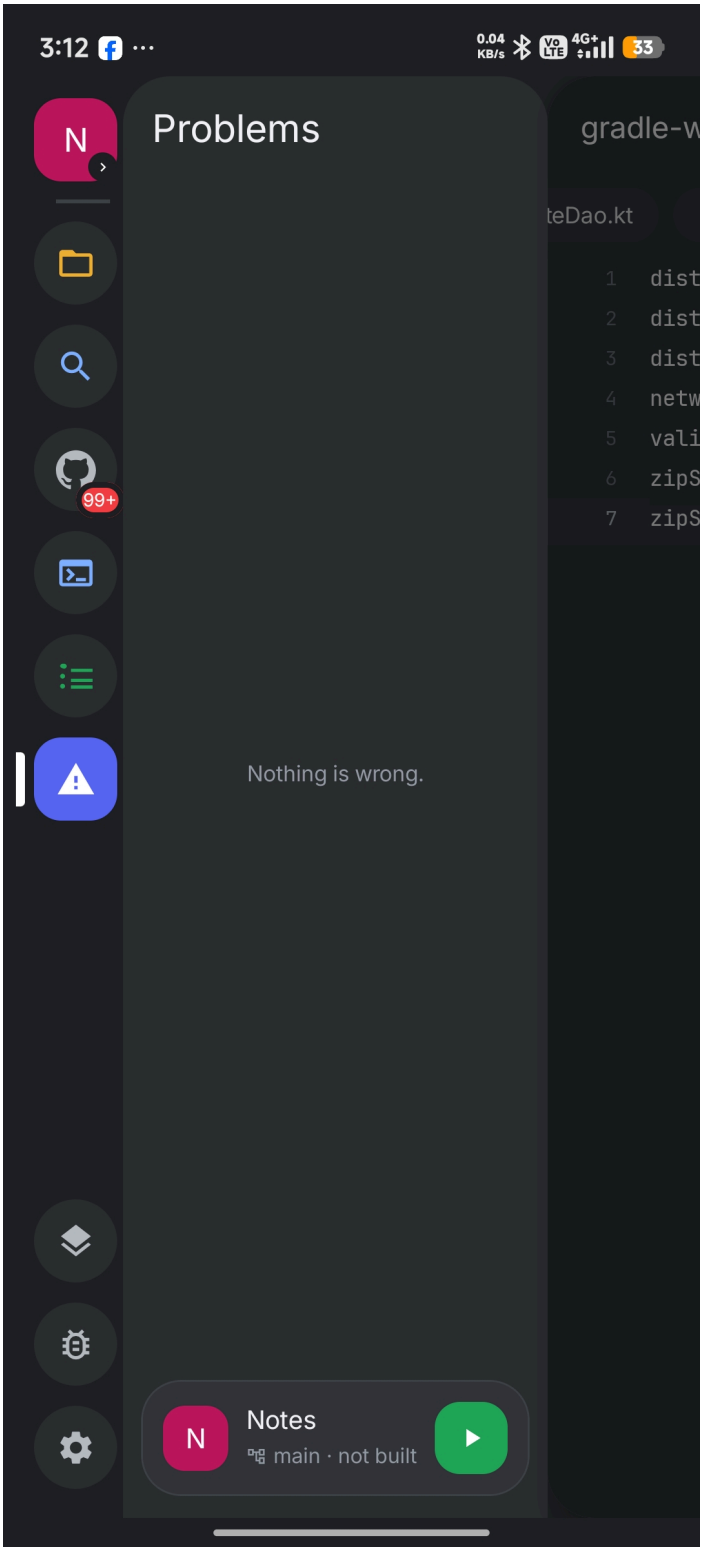

3:12
0.04 KB/s
33
Problems
gradle-w
teDao.kt
1 dist
2 dist
3 dist
4 netw
5 vali
6 zipS
7 zipS
99+
Nothing is wrong.
N
Notes
main · not built

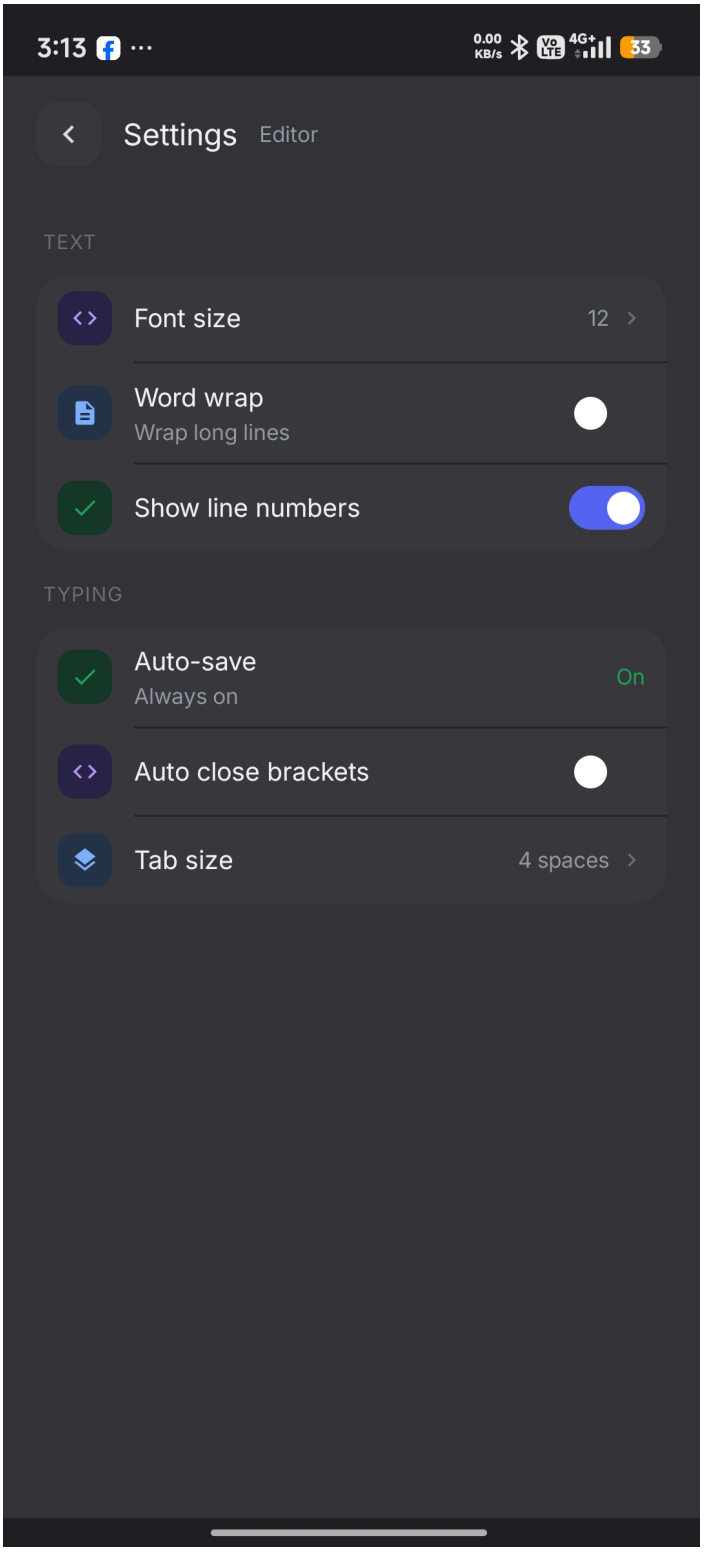

3:13
Settings
Editor
TEXT
Font size
12
Word wrap
Wrap long lines
Show line numbers
TYPING
Auto-save
Always on
On
Auto close brackets
Tab size
4 spaces

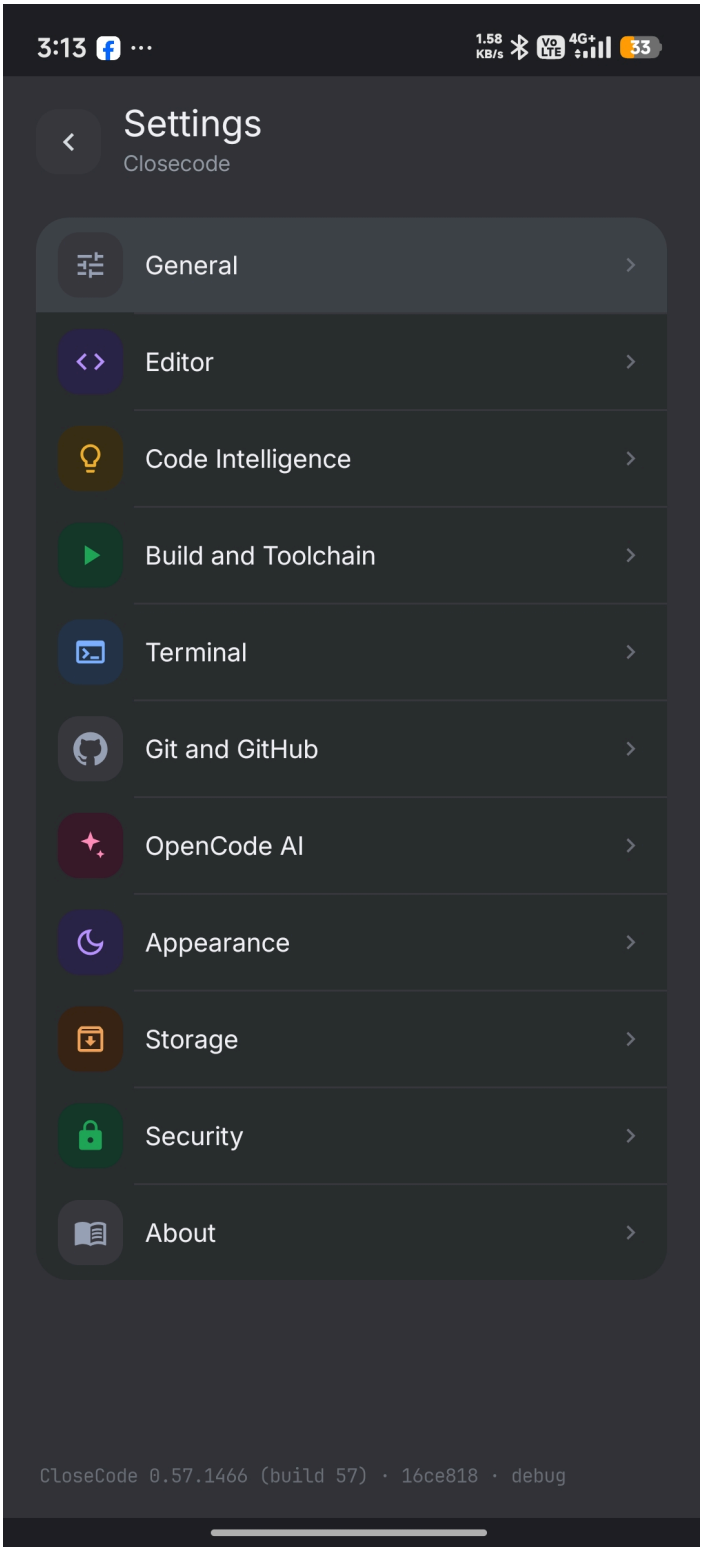

3:13
1.58 KB/s
33
Settings
Closecode
General
Editor
Code Intelligence
Build and Toolchain
Terminal
Git and GitHub
OpenCode AI
Appearance
Storage
Security
About
CloseCode 0.57.1466 (build 57) · 16ce818 · debug

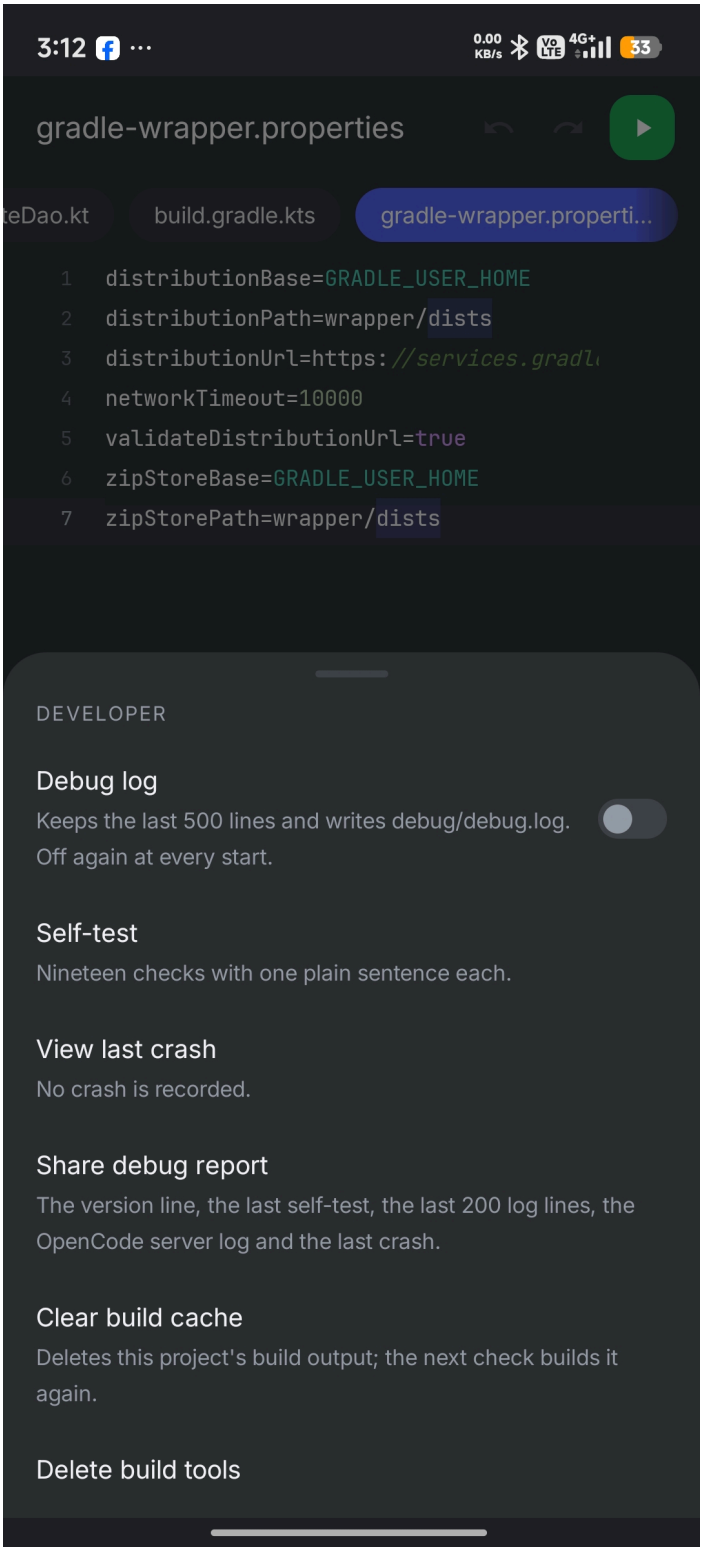

3:12
gradle-wrapper.properties
teDao.kt
build.gradle.kts
gradle-wrapper.properti...
1 distributionBase=GRADLE_USER_HOME
2 distributionPath=wrapper/dists
3 distributionUrl=https://services.gradl
4 networkTimeout=10000
5 validateDistributionUrl=true
6 zipStoreBase=GRADLE_USER_HOME
7 zipStorePath=wrapper/dists
DEVELOPER
Debug log
Keeps the last 500 lines and writes debug/debug.log. Off again at every start.
Self-test
Nineteen checks with one plain sentence each.
View last crash
No crash is recorded.
Share debug report
The version line, the last self-test, the last 200 log lines, the OpenCode server log and the last crash.
Clear build cache
Deletes this project's build output; the next check builds it again.
Delete build tools

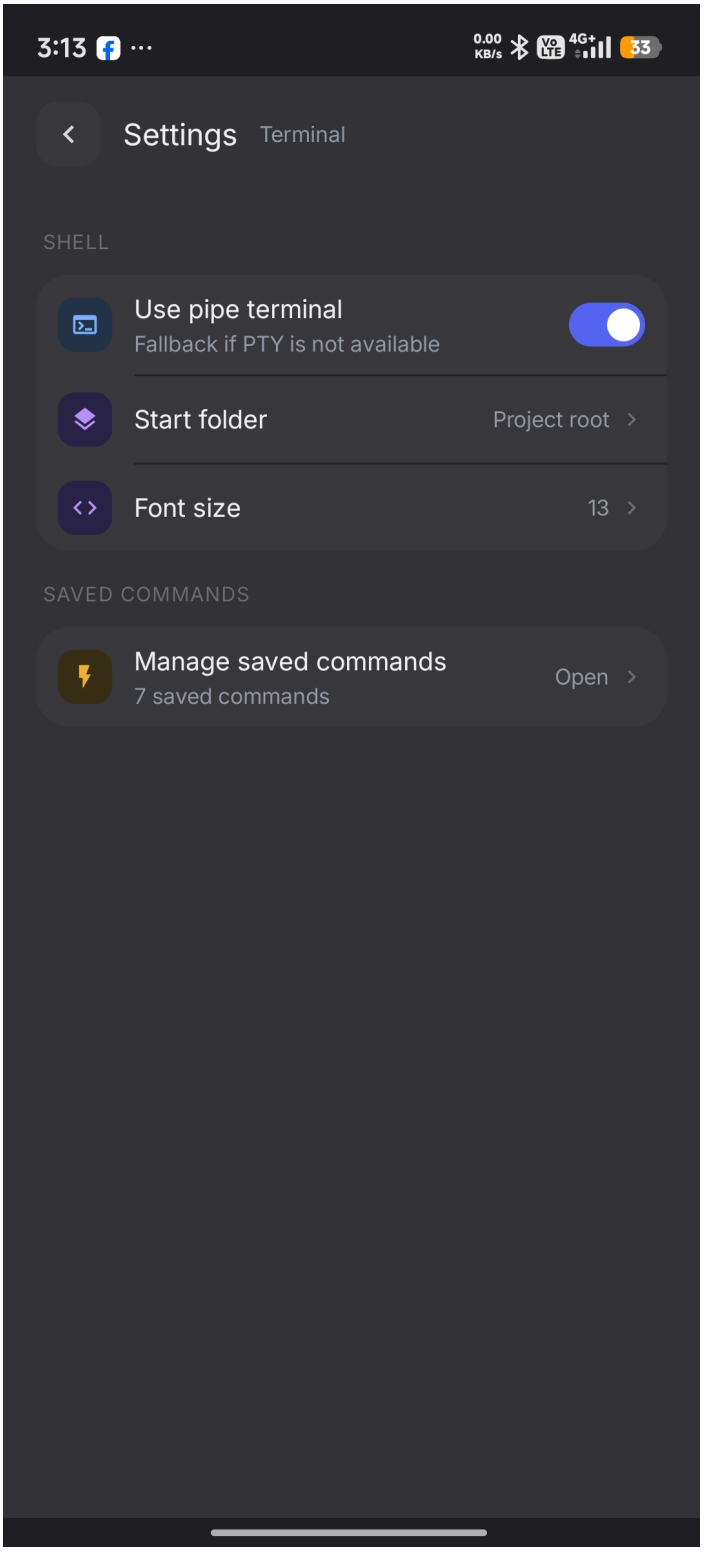

3:13
0.00 KB/s
33
Settings
Terminal
SHELL
Use pipe terminal
Fallback if PTY is not available
Start folder
Project root
Font size
13
SAVED COMMANDS
Manage saved commands
7 saved commands
Open

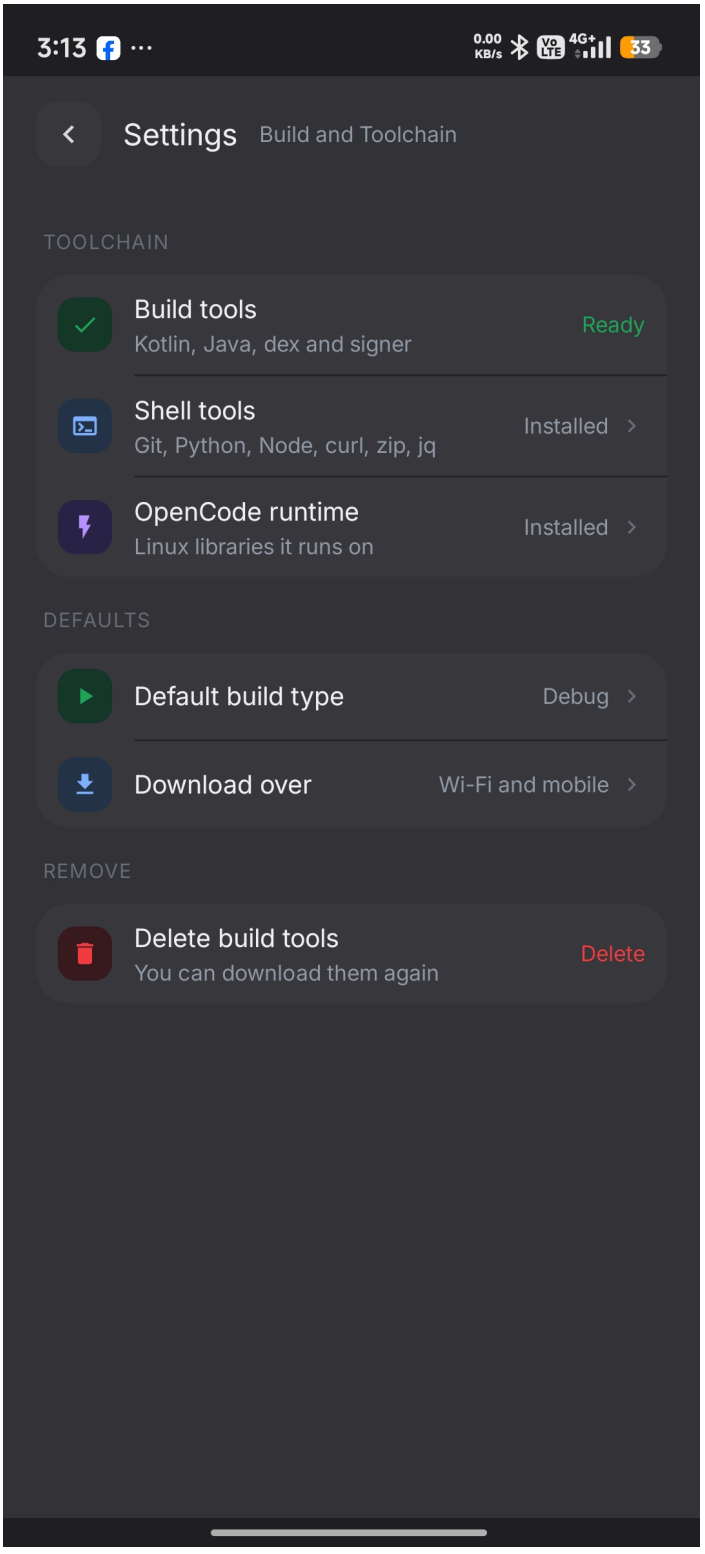

3:13
Settings
Build and Toolchain
TOOLCHAIN
Build tools
Kotlin, Java, dex and signer
Ready
Shell tools
Git, Python, Node, curl, zip, jq
Installed
OpenCode runtime
Linux libraries it runs on
Installed
DEFAULTS
Default build type
Debug
Download over
Wi-Fi and mobile
REMOVE
Delete build tools
You can download them again
Delete

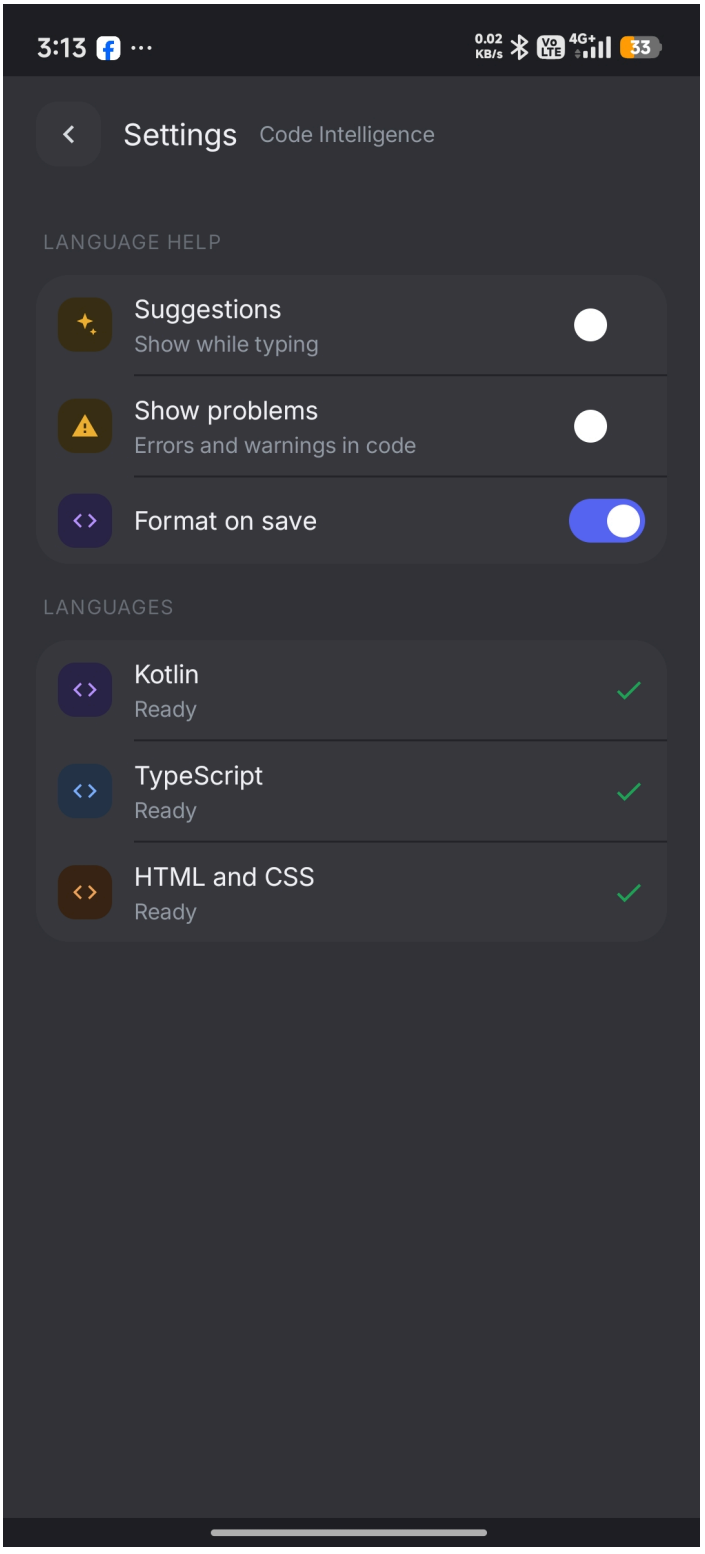

3:13
Settings
Code Intelligence
LANGUAGE HELP
Suggestions
Show while typing
Show problems
Errors and warnings in code
Format on save
LANGUAGES
Kotlin
Ready
TypeScript
Ready
HTML and CSS
Ready

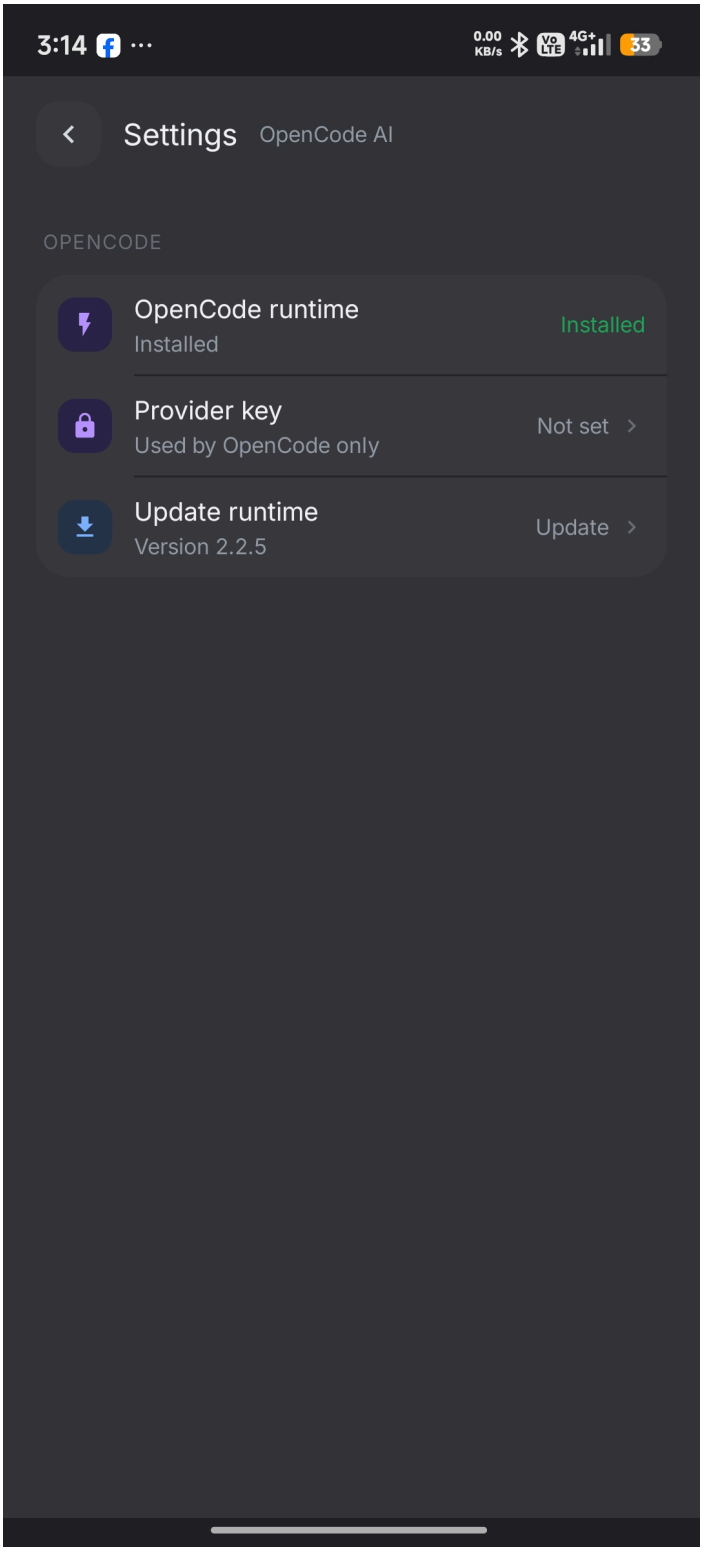

3:14
0.00 KB/s
33
Settings
OpenCode AI
OPENCODE
OpenCode runtime
Installed
Installed
Provider key
Used by OpenCode only
Not set
Update runtime
Version 2.2.5
Update

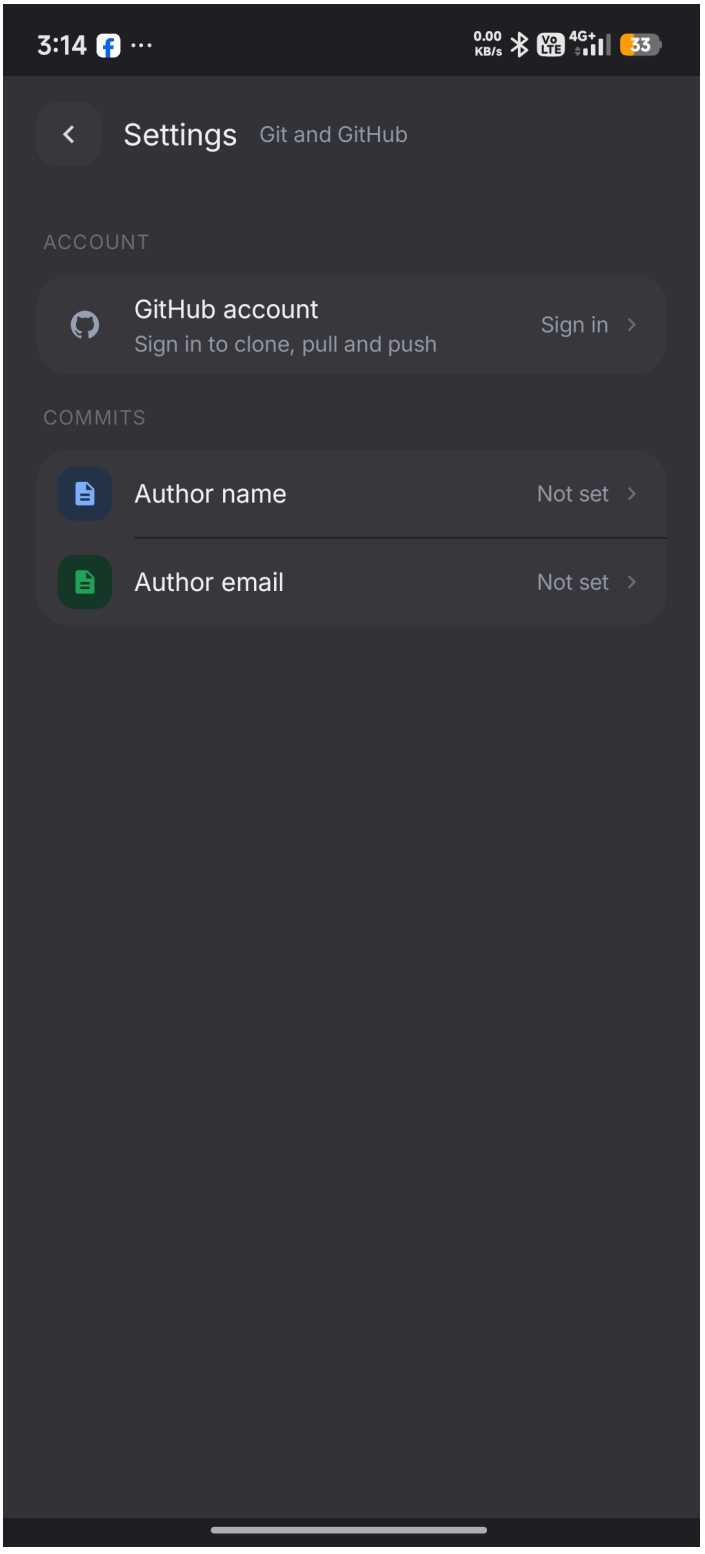

3:14
0.00 KB/s
33
Settings
Git and GitHub
ACCOUNT
GitHub account
Sign in to clone, pull and push
Sign in
COMMITS
Author name
Not set
Author email
Not set

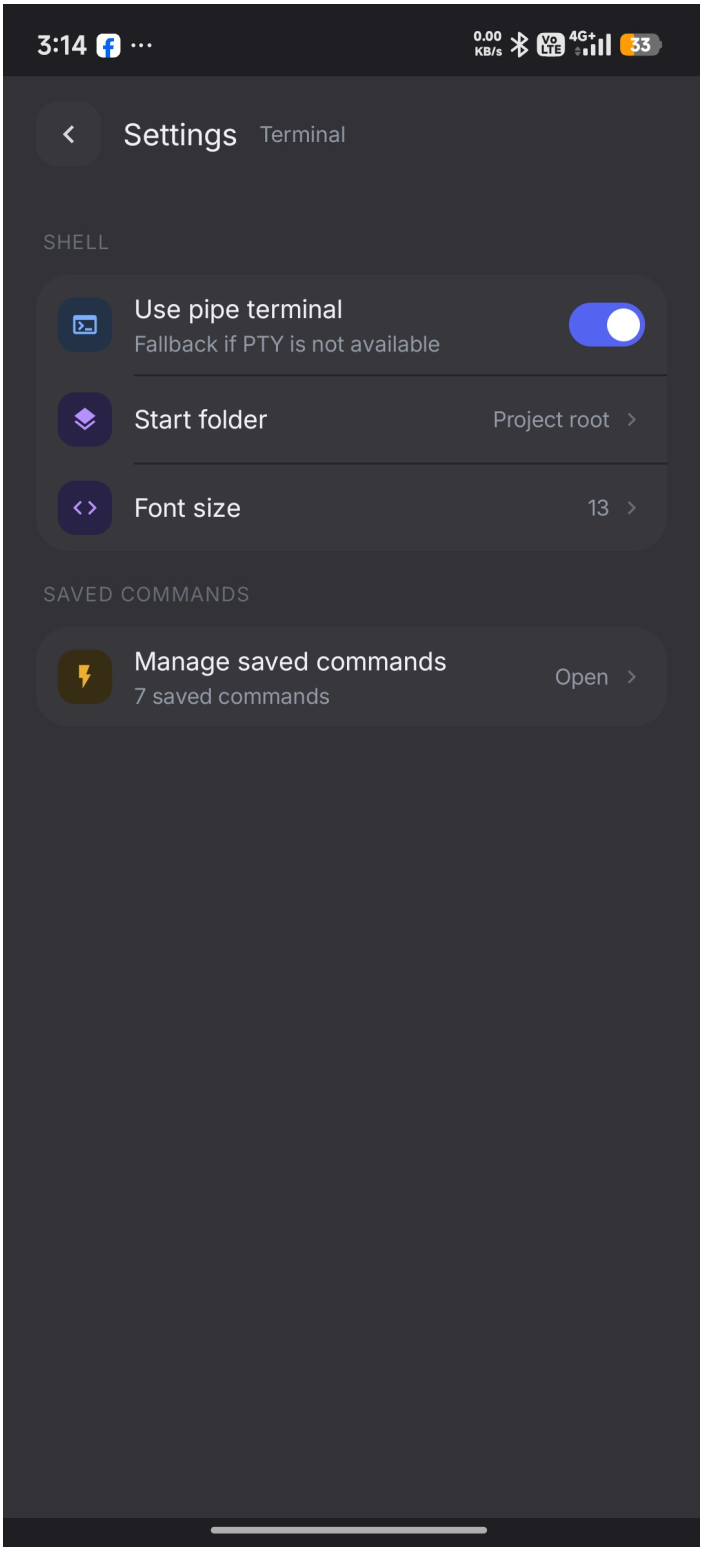

3:14
0.00 KB/s
33
Settings
Terminal
SHELL
Use pipe terminal
Fallback if PTY is not available
Start folder
Project root
Font size
13
SAVED COMMANDS
Manage saved commands
7 saved commands
Open

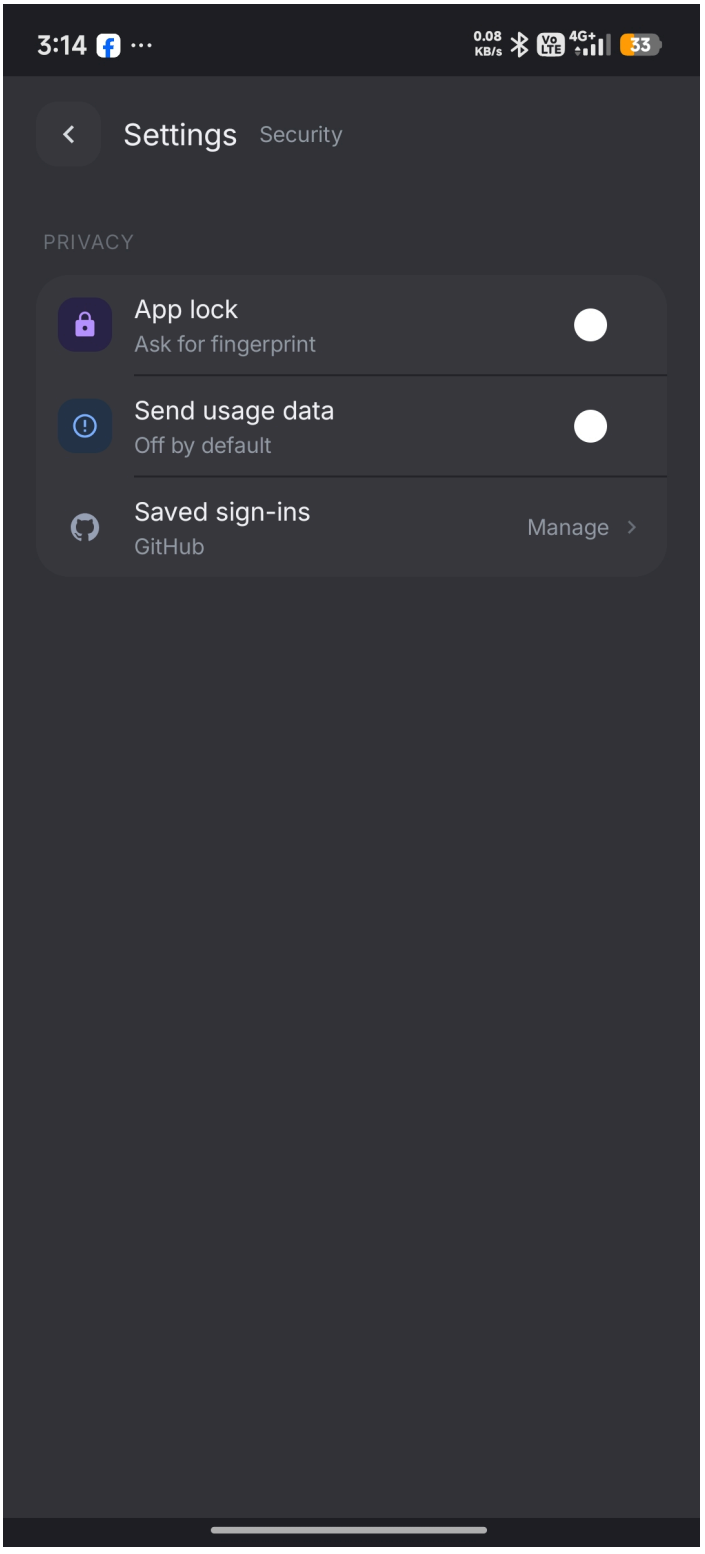

3:14
0.08 KB/s
33
Settings
Security
PRIVACY
App lock
Ask for fingerprint
Send usage data
Off by default
Saved sign-ins
GitHub
Manage

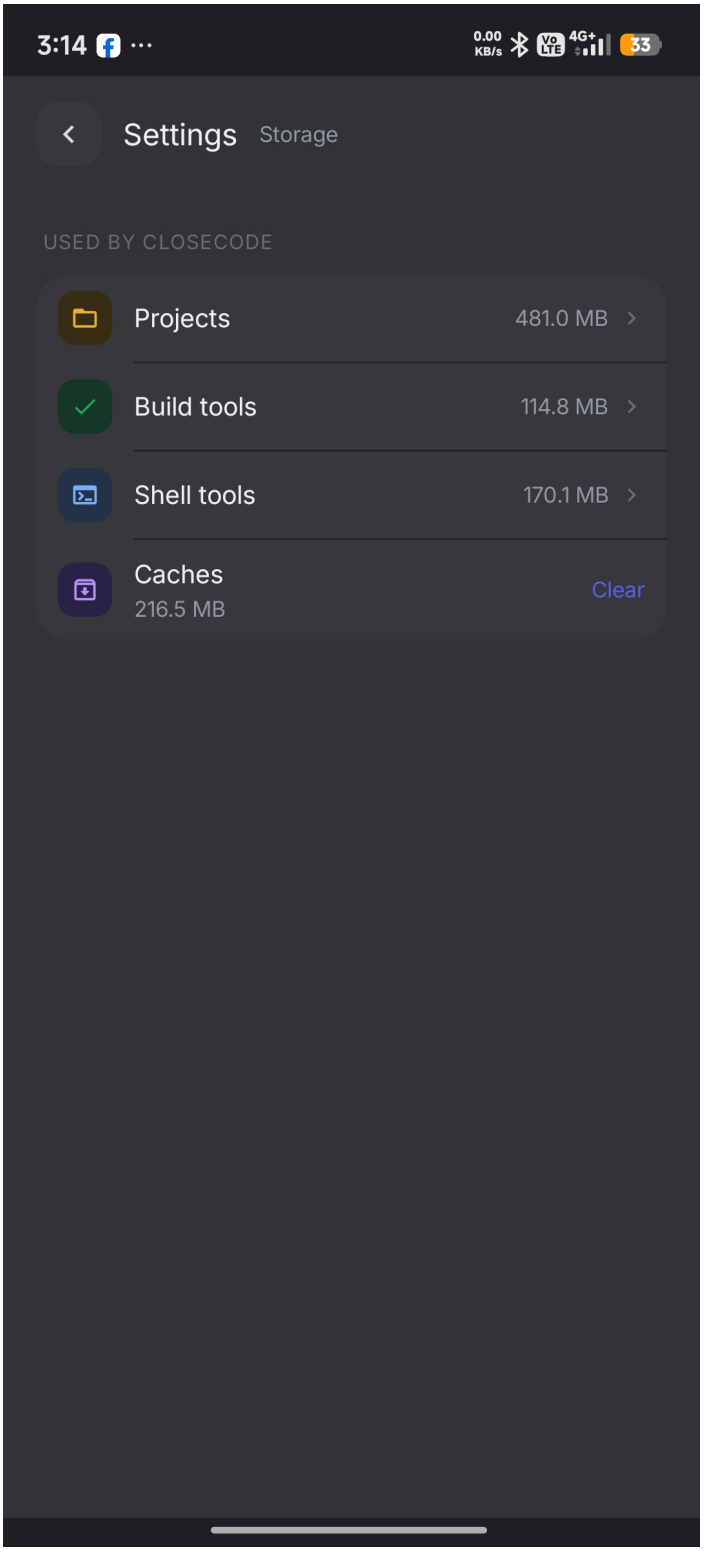

3:14
0.00 KB/s
33
Settings
Storage
USED BY CLOSECODE
Projects
481.0 MB
Build tools
114.8 MB
Shell tools
170.1 MB
Caches
216.5 MB
Clear

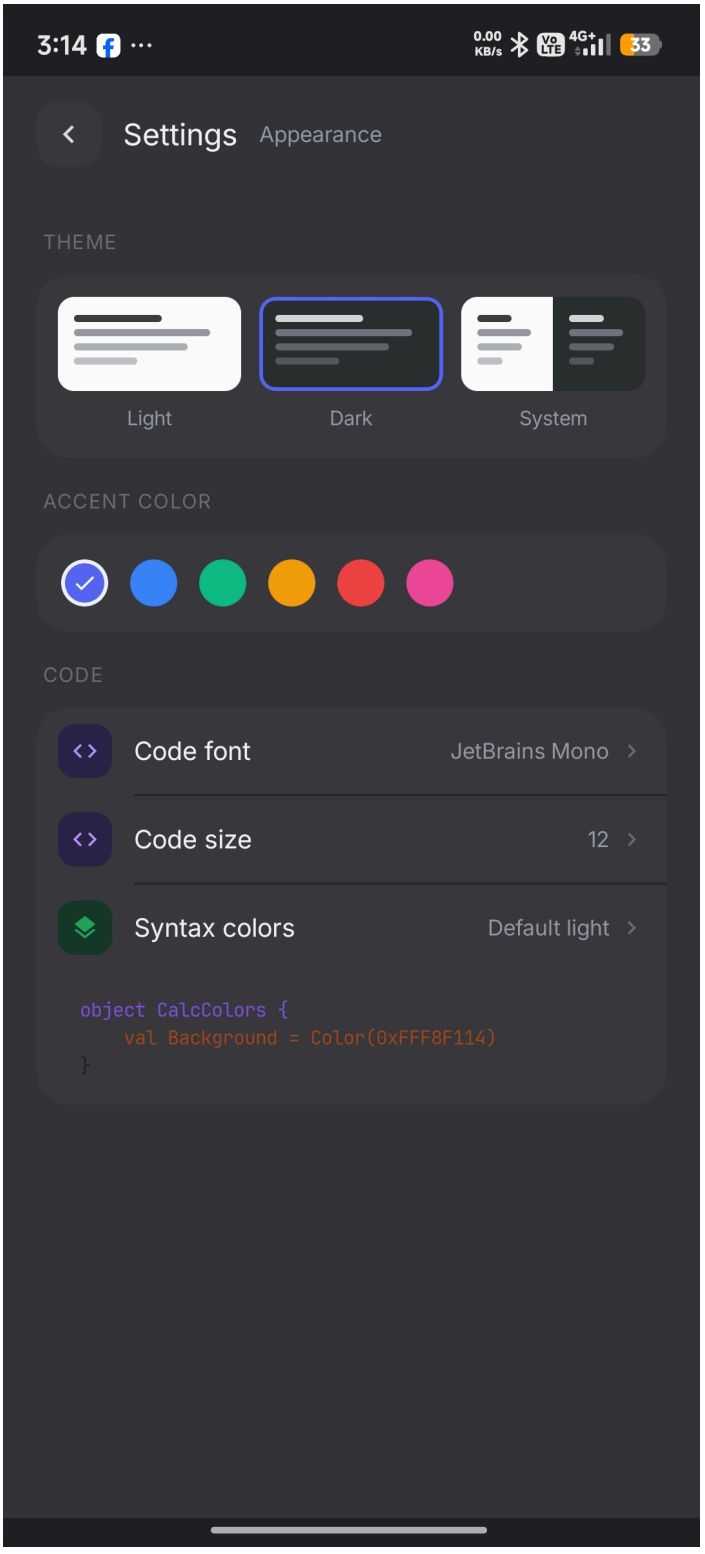

3:14
0.00 KB/s
33
Settings
Appearance
THEME
Light
Dark
System
ACCENT COLOR
CODE
Code font
JetBrains Mono
Code size
12
Syntax colors
Default light
object CalcColors {
val Background = Color(0xFFF8F114)
}

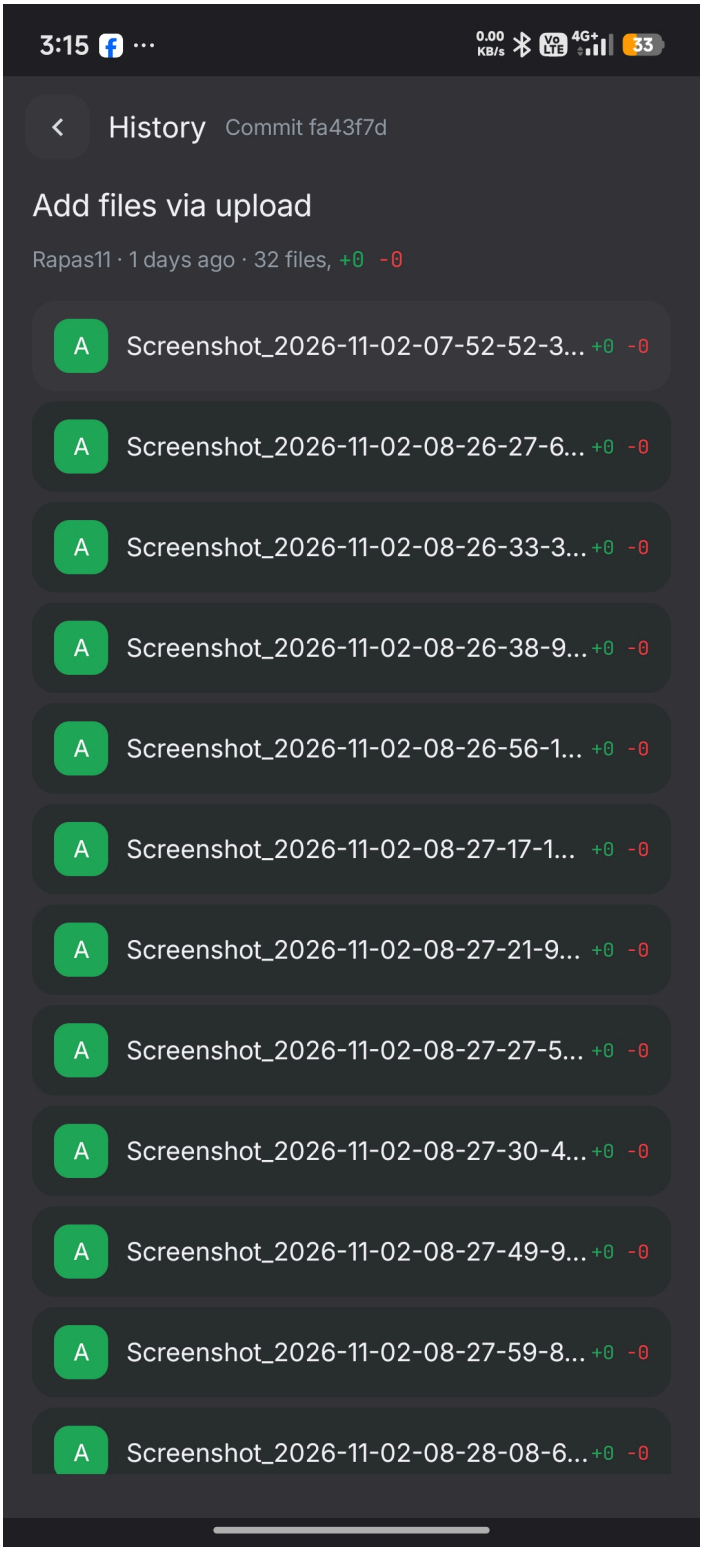

3:15
0.00 KB/s
History
Commit fa43f7d
Add files via upload
Rapas11 · 1 days ago · 32 files, +0 -0
A Screenshot_2026-11-02-07-52-52-3... +0 -0
A Screenshot_2026-11-02-08-26-27-6... +0 -0
A Screenshot_2026-11-02-08-26-33-3... +0 -0
A Screenshot_2026-11-02-08-26-38-9... +0 -0
A Screenshot_2026-11-02-08-26-56-1... +0 -0
A Screenshot_2026-11-02-08-27-17-1... +0 -0
A Screenshot_2026-11-02-08-27-21-9... +0 -0
A Screenshot_2026-11-02-08-27-27-5... +0 -0
A Screenshot_2026-11-02-08-27-30-4... +0 -0
A Screenshot_2026-11-02-08-27-49-9... +0 -0
A Screenshot_2026-11-02-08-27-59-8... +0 -0
A Screenshot_2026-11-02-08-28-08-6... +0 -0

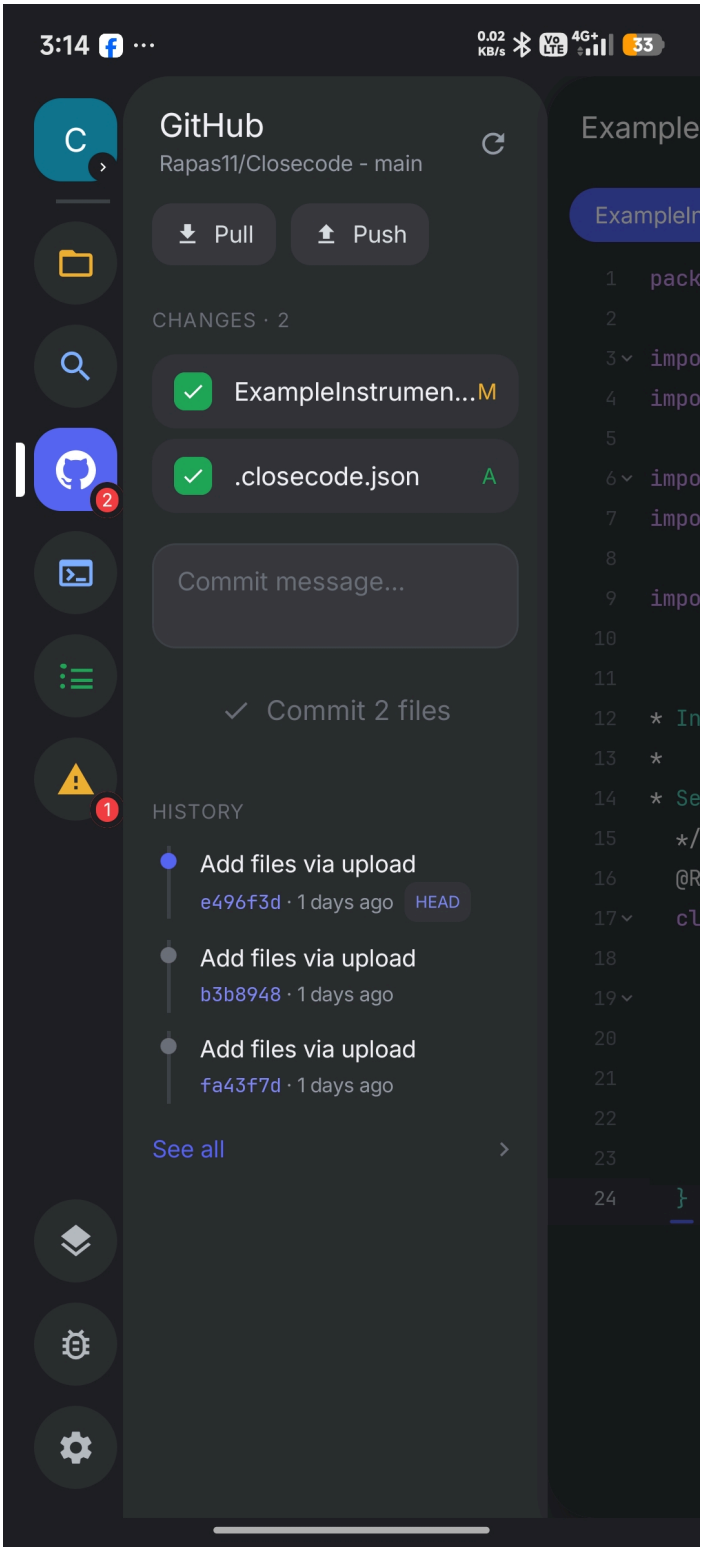
3:14
GitHub
Rapas11/Closecode - main
Pull
Push
CHANGES · 2
ExampleInstrumen...M
.closecode.json
A
Commit message...
Commit 2 files
HISTORY
Add files via upload
e496f3d · 1 days ago
HEAD
Add files via upload
b3b8948 · 1 days ago
Add files via upload
fa43f7d · 1 days ago
See all

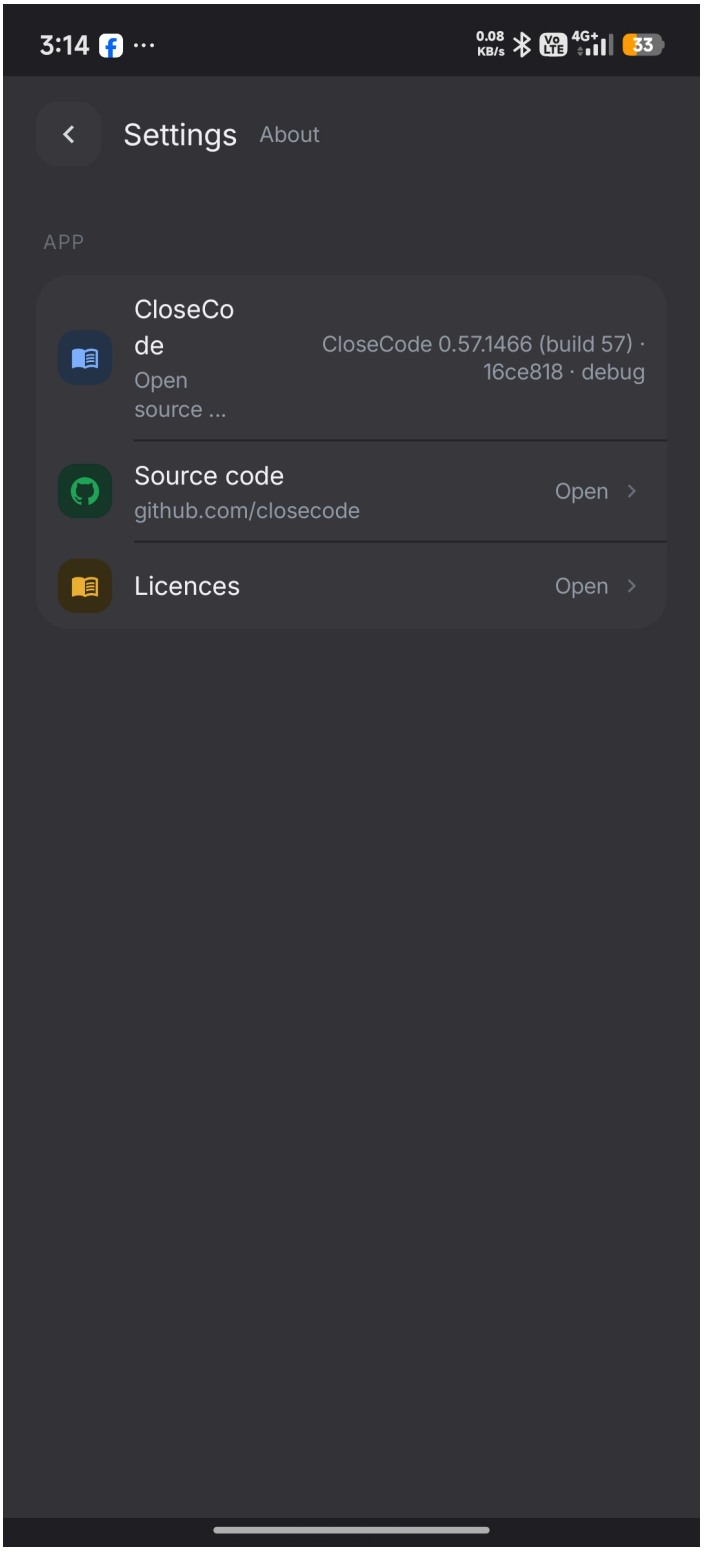

3:14
0.08 KB/s
Settings
About
APP
CloseCode
Open source ...
CloseCode 0.57.1466 (build 57) · 16ce818 · debug
Source code
github.com/closecode
Open
Licences
Open

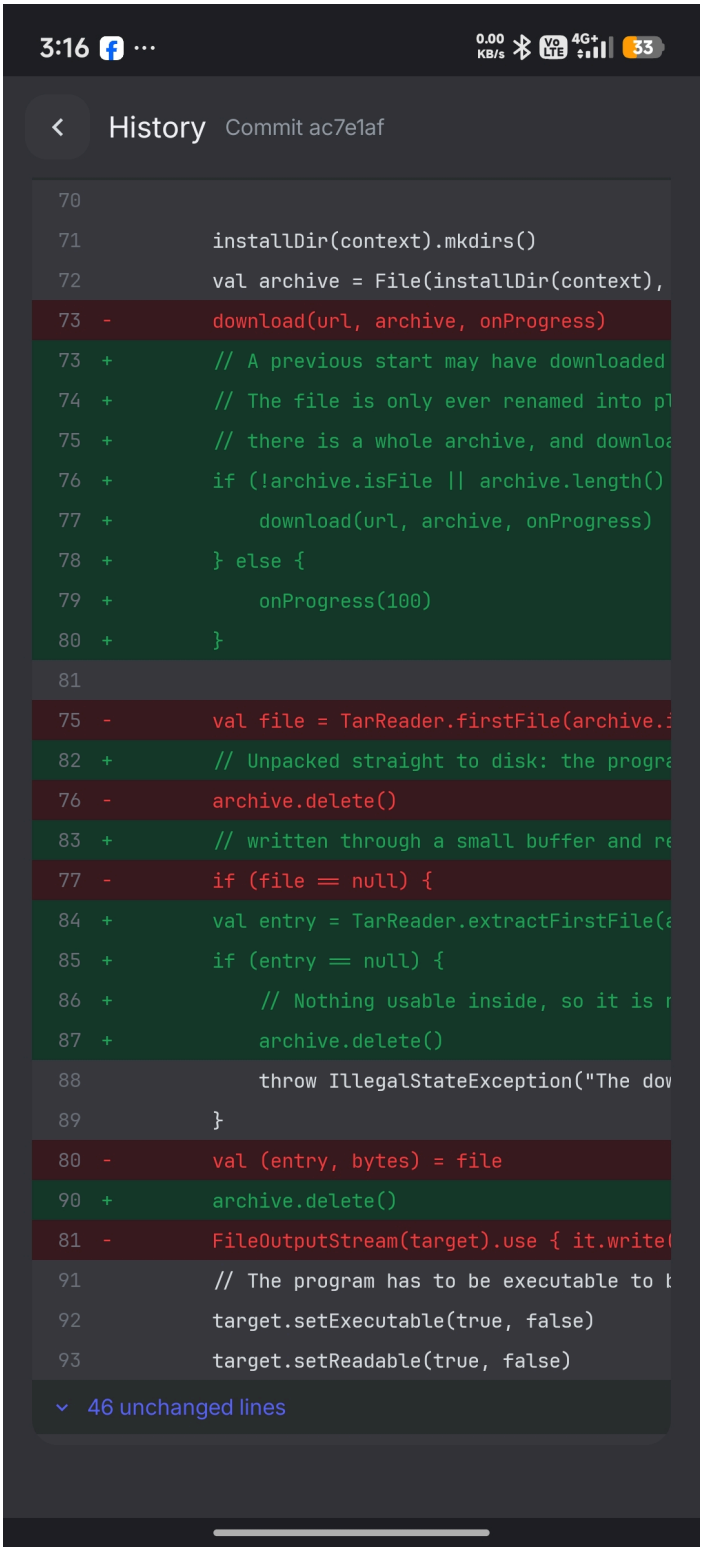
3:16
0.00 KB/s
History
Commit ac7e1af
70
71 installDir(context).mkdirs()
72 val archive = File(installDir(context),
73 - download(url, archive, onProgress)
73 + // A previous start may have downloaded
74 + // The file is only ever renamed into pl
75 + // there is a whole archive, and downloa
76 + if (!archive.isFile || archive.length()
77 + download(url, archive, onProgress)
78 + } else {
79 + onProgress(100)
80 + }
81
75 - val file = TarReader.firstFile(archive.i
82 + // Unpacked straight to disk: the progra
76 - archive.delete()
83 + // written through a small buffer and re
77 - if (file == null) {
84 + val entry = TarReader.extractFirstFile(a
85 + if (entry == null) {
86 + // Nothing usable inside, so it is n
87 + archive.delete()
88 throw IllegalStateException("The dow
89 }
80 - val (entry, bytes) = file
90 + archive.delete()
81 - FileOutputStream(target).use { it.write(
91 // The program has to be executable to b
92 target.setExecutable(true, false)
93 target.setReadable(true, false)
46 unchanged lines

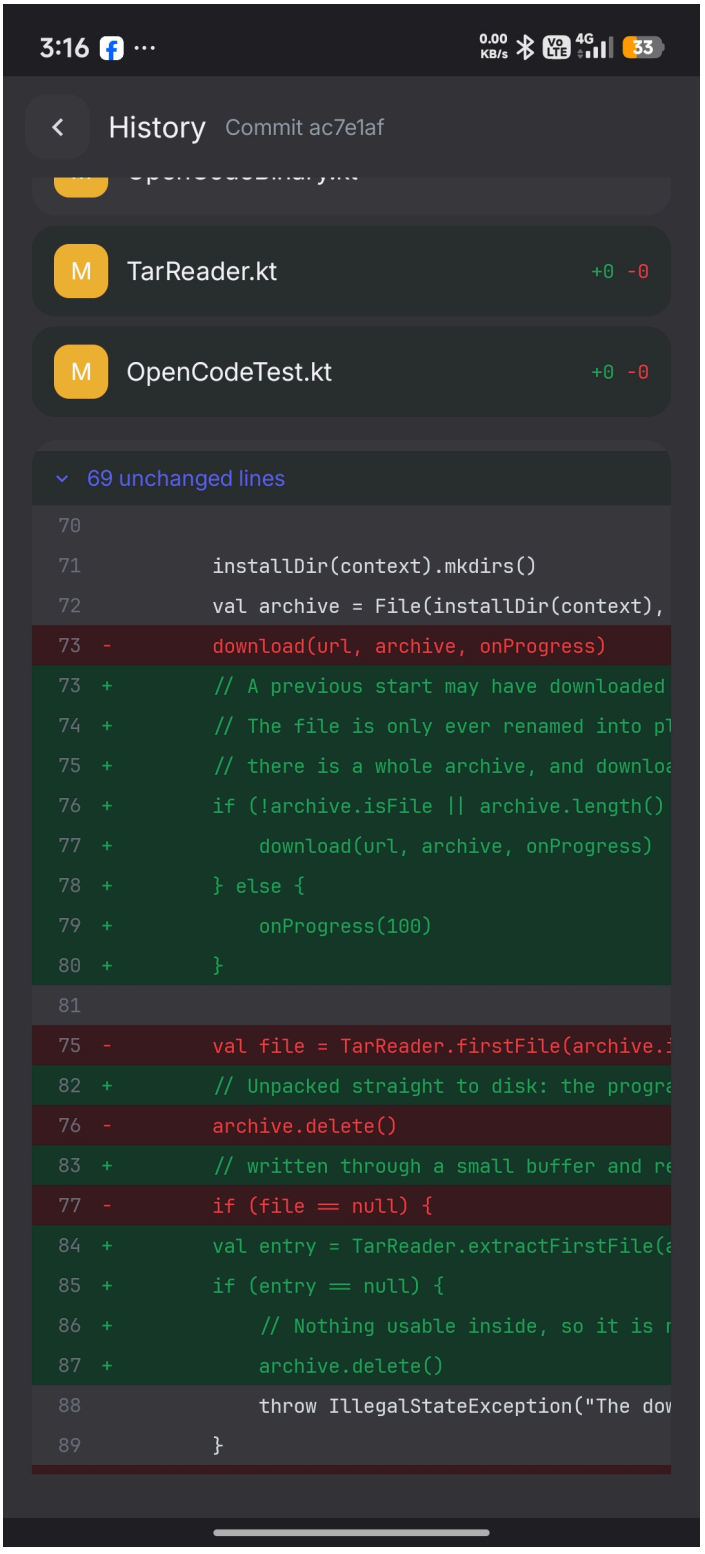

3:16
History
Commit ac7e1af
TarReader.kt
+0 -0
OpenCodeTest.kt
+0 -0
69 unchanged lines
installDir(context).mkdirs()
val archive = File(installDir(context),
download(url, archive, onProgress)
// A previous start may have downloaded
// The file is only ever renamed into pl
// there is a whole archive, and downloa
if (!archive.isFile || archive.length()
download(url, archive, onProgress)
} else {
onProgress(100)
}
val file = TarReader.firstFile(archive.
// Unpacked straight to disk: the progra
archive.delete()
// written through a small buffer and re
if (file == null) {
val entry = TarReader.extractFirstFile(a
if (entry == null) {
// Nothing usable inside, so it is r
archive.delete()
throw IllegalStateException("The dow
}

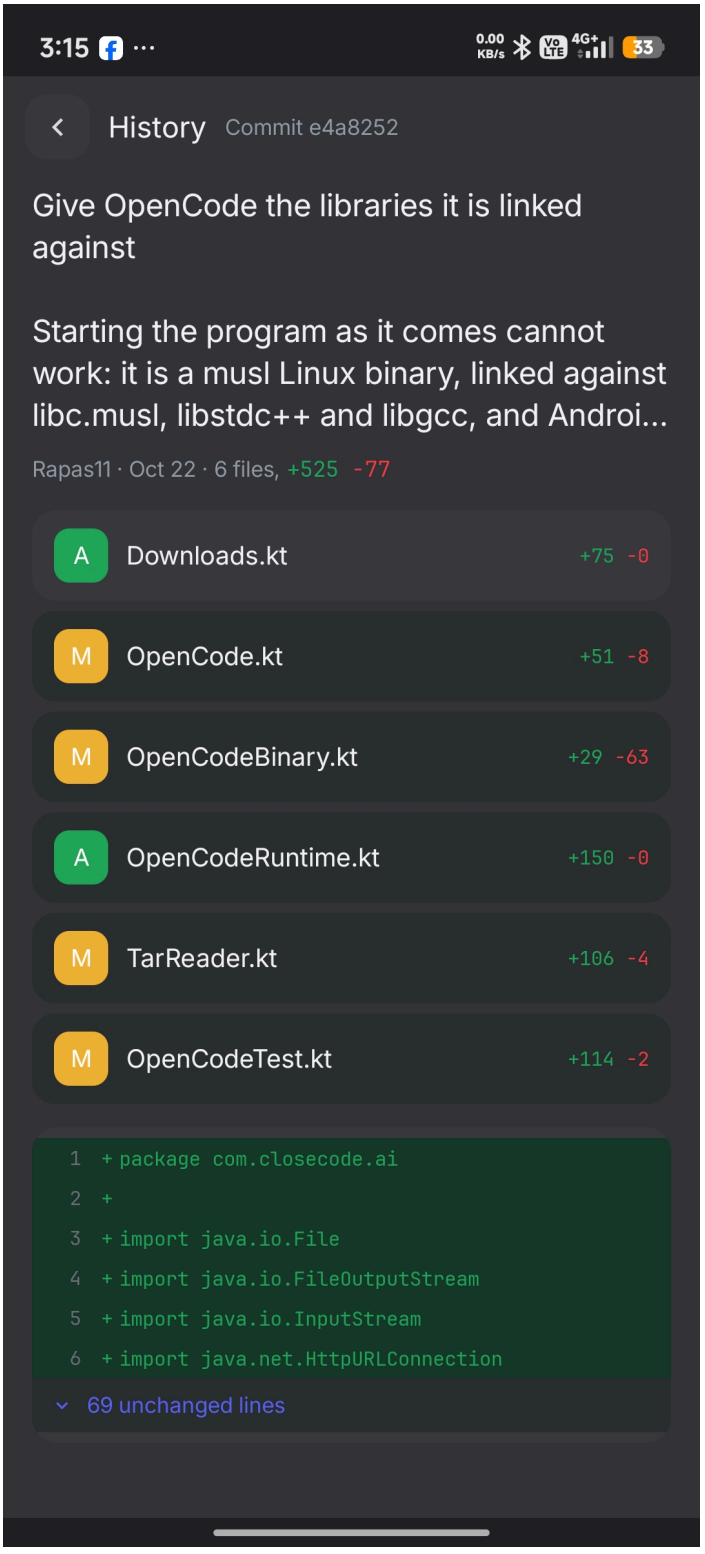


The PDF target screens

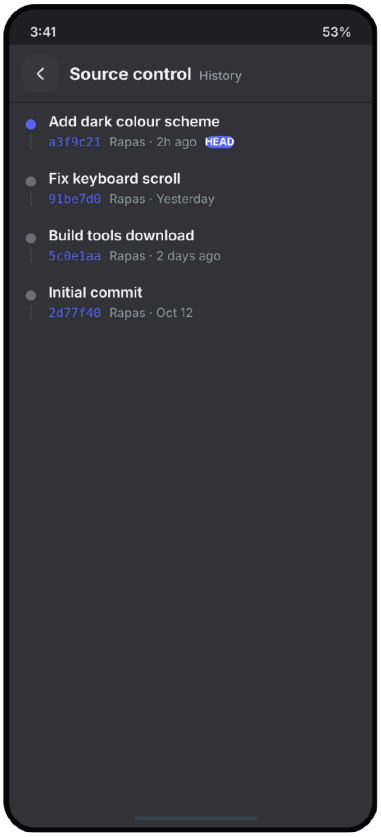


19 history (dark, example data)

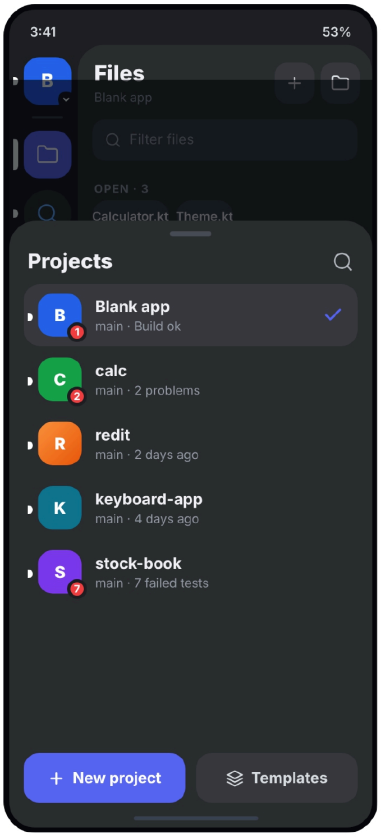


03 switch project (dark, example data)

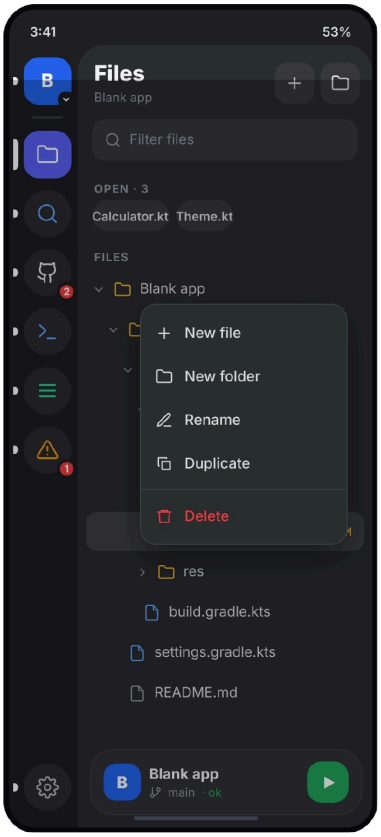

11 files menu (dark, example data)

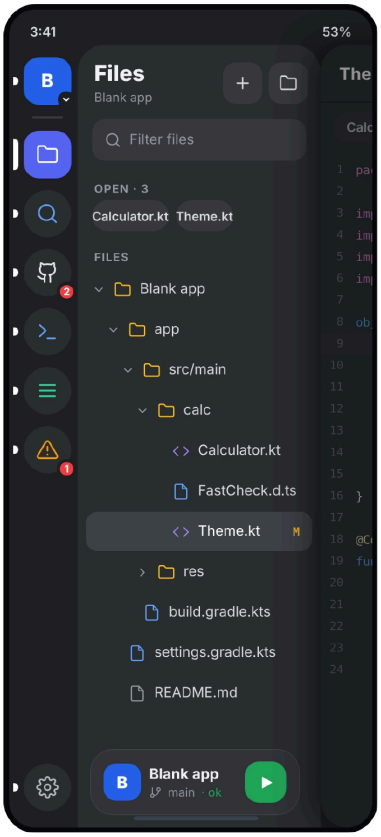


10 files (dark, example data)

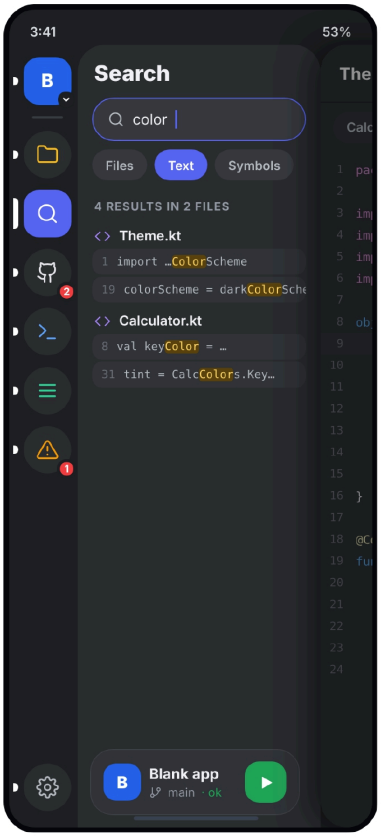

12 search (dark, example data)




07 editor (dark, example data)

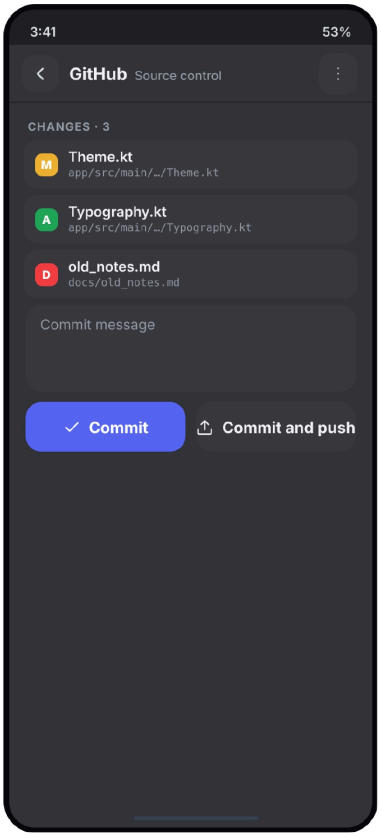


17 source control (dark, example data)




08 editor keyboard (dark, example data)

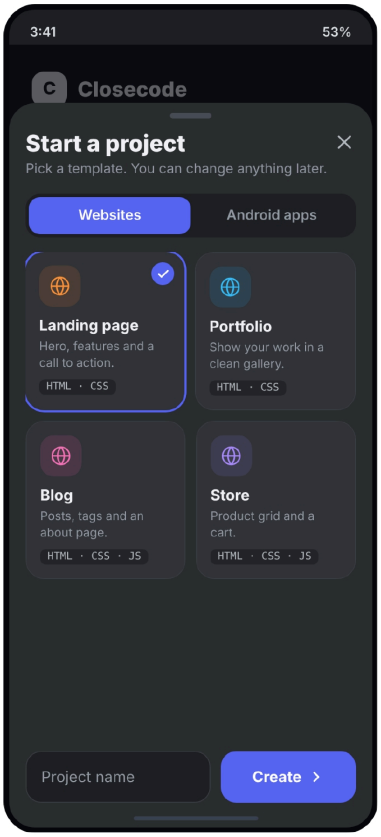


02 start project (dark, example data)

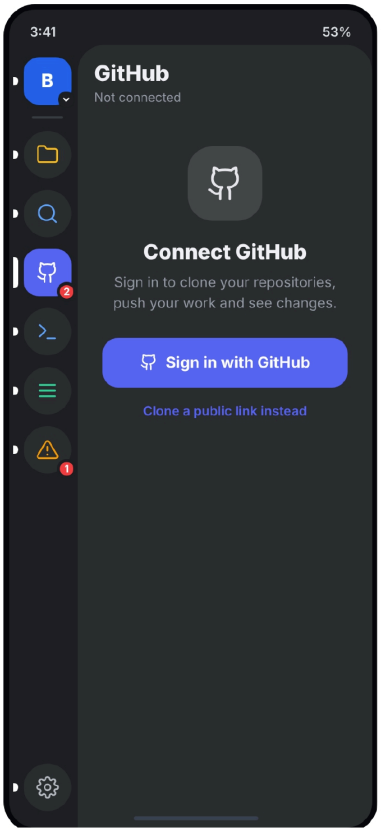


15 github not connected (dark, example data)

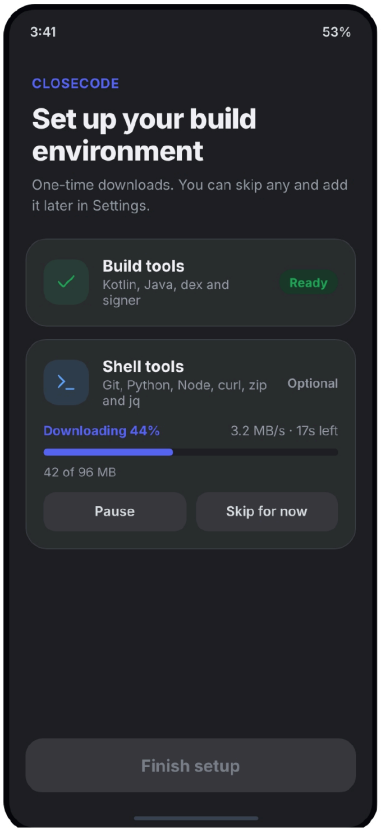


06 first time setup (dark, example data)

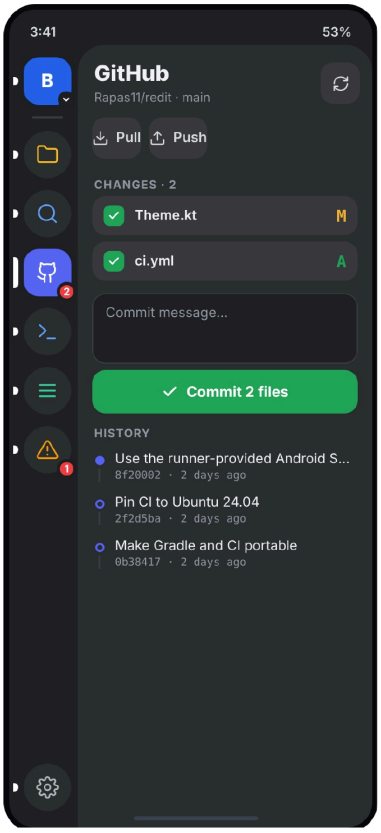


14 github (dark, example data)

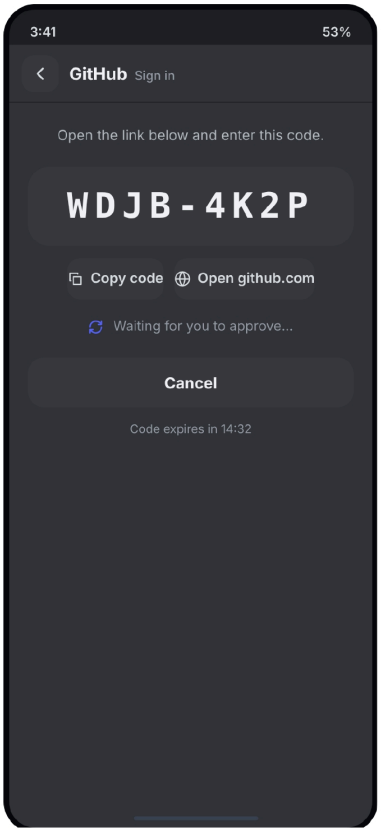


16 github sign in (dark, example data)

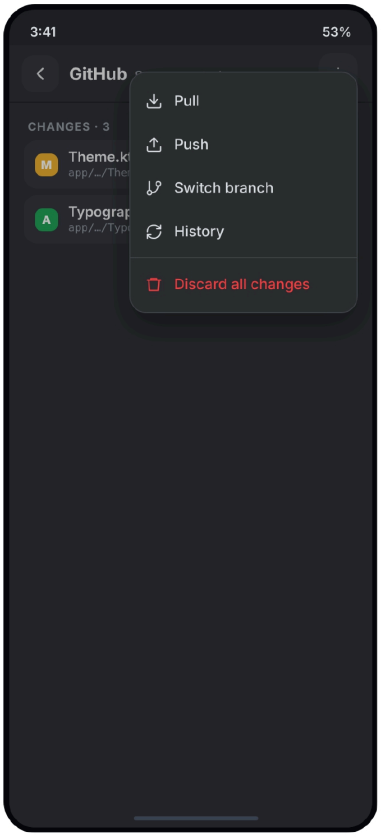


18 source control more (dark, example data)

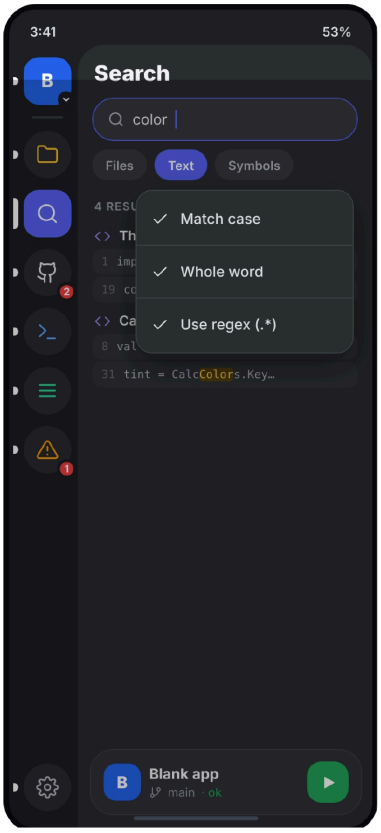


13 search options (dark, example data)

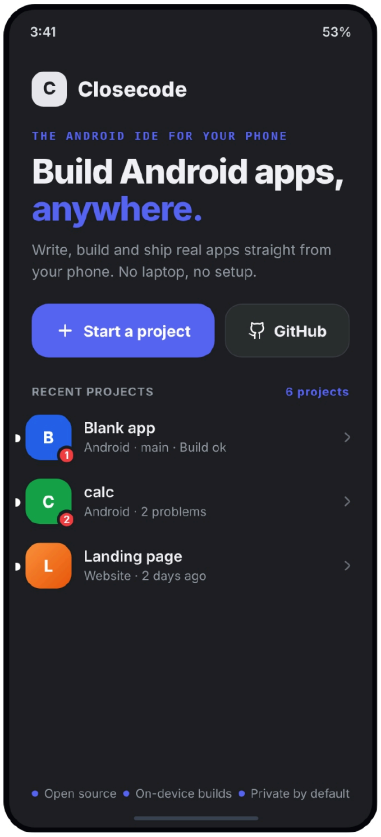


01 welcome (dark, example data)

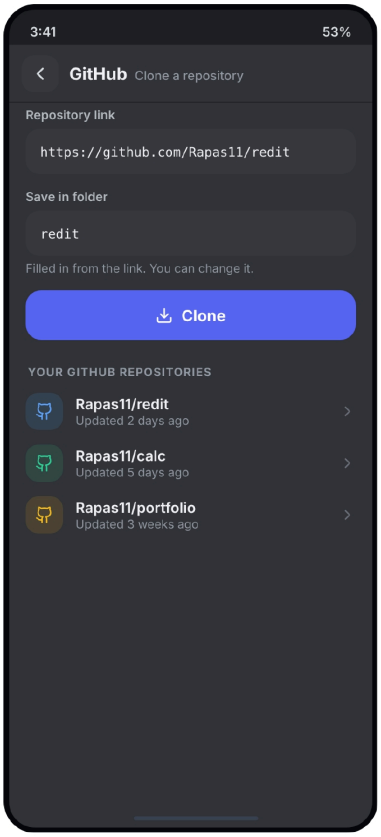


04 clone repository (dark, example data)

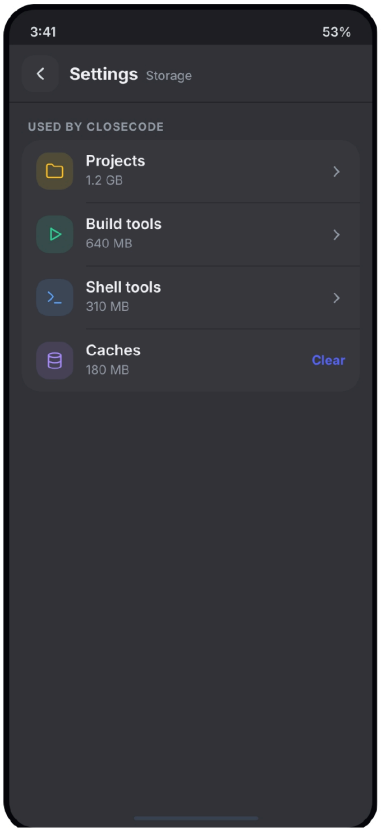


41 settings storage (dark, example data)

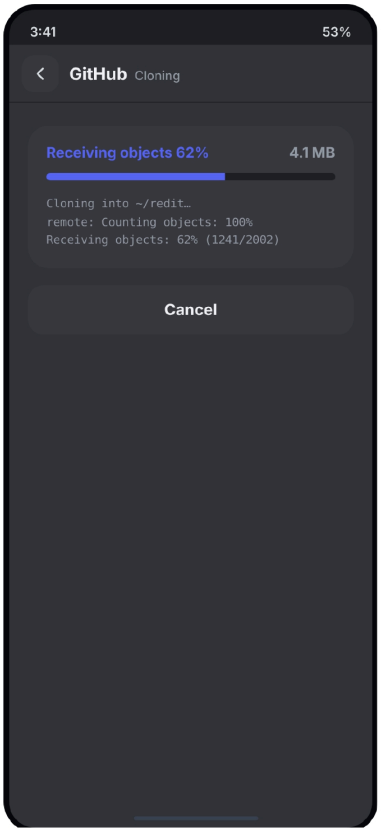


05 cloning progress (dark, example data)

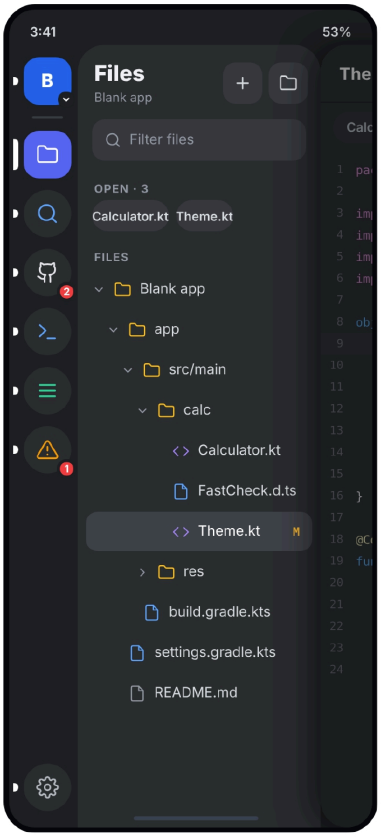


09 swipe sidebar (dark, example data)

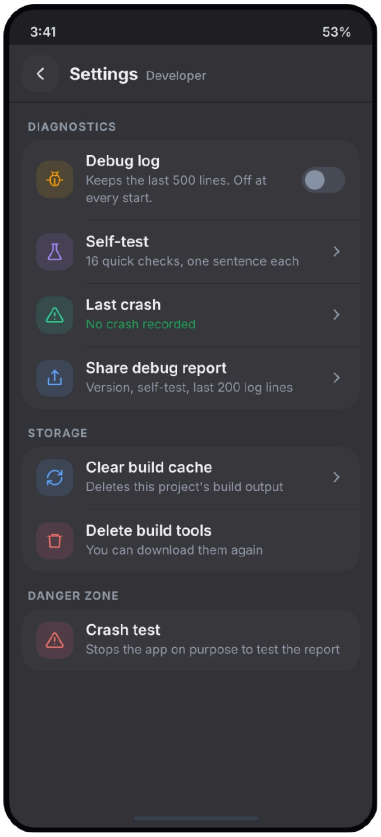


44 settings developer (dark, example data)

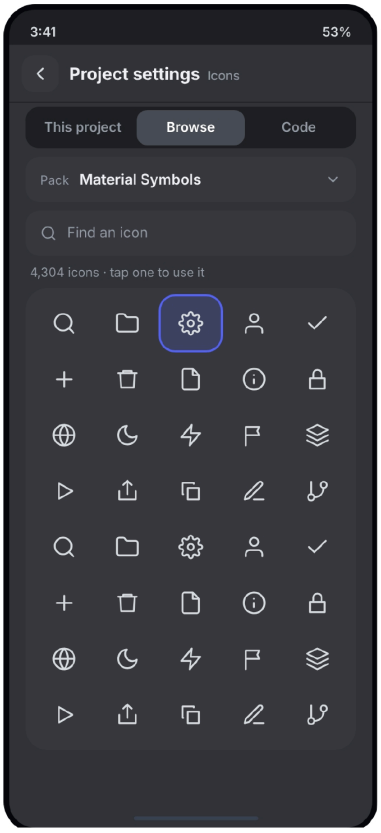


55 icon manager library (dark, example data)

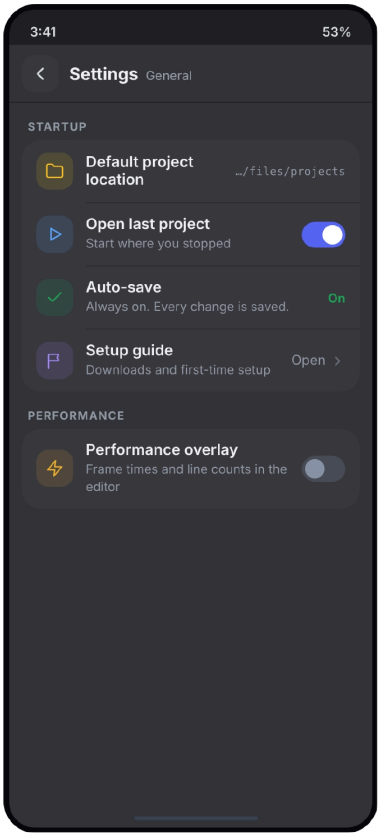


33 settings general (dark, example data)

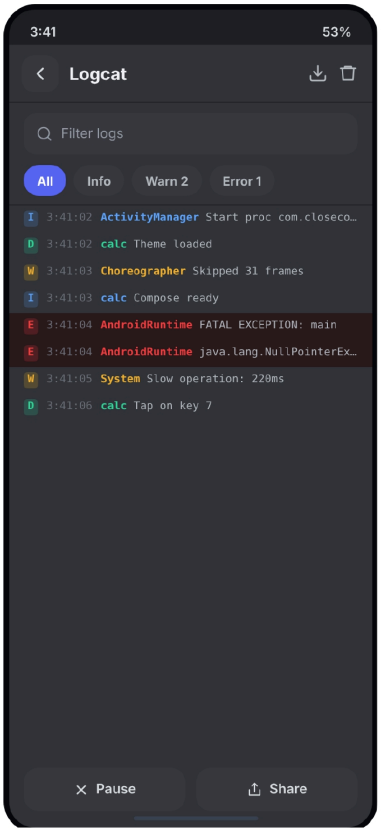


30 logcat (dark, example data)

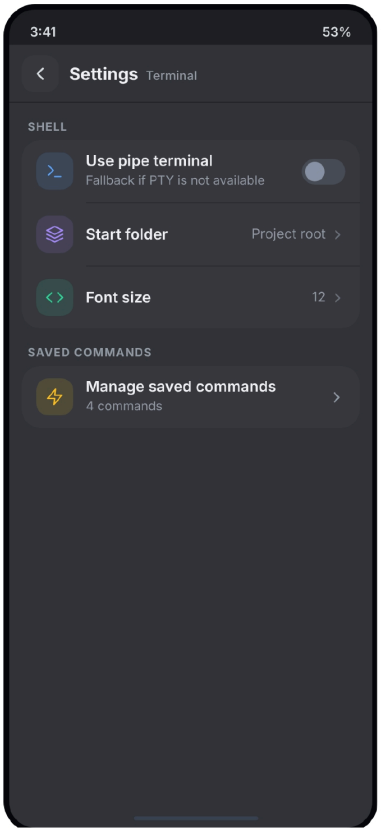


37 settings terminal (dark, example data)

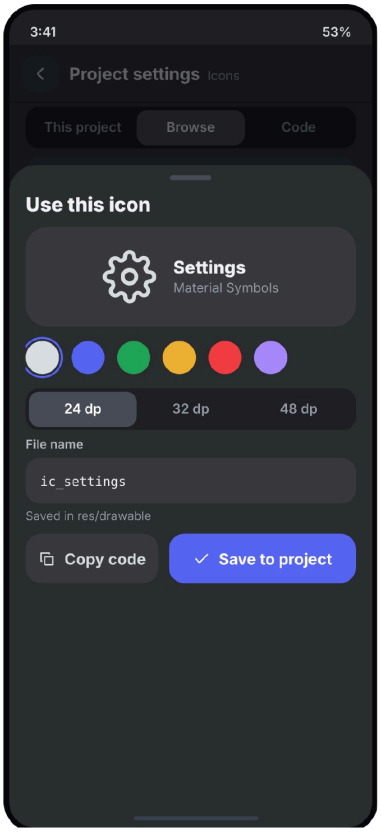


56 icon manager add (dark, example data)

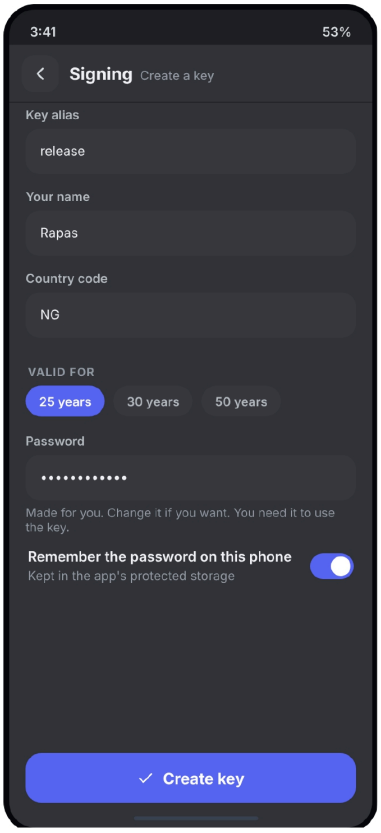


49 create key (dark, example data)

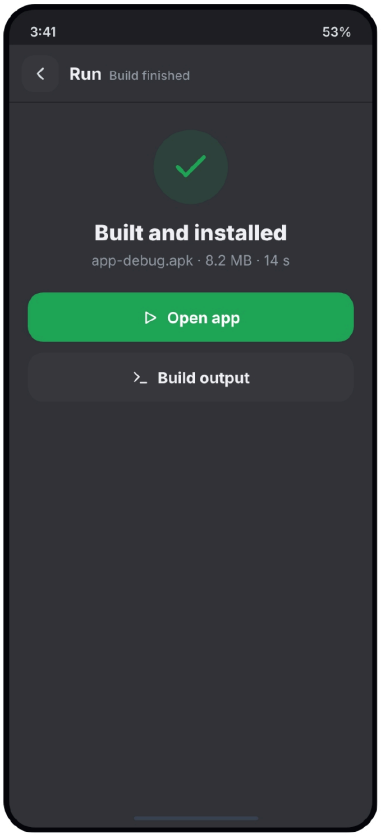


26 build finished (dark, example data)

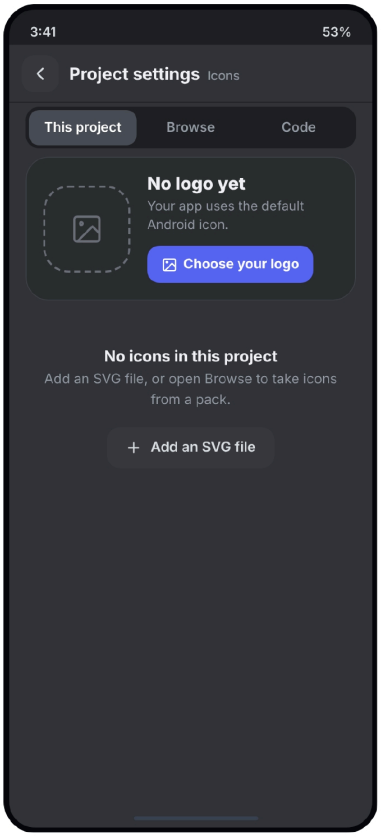


53 icon manager empty (dark, example data)

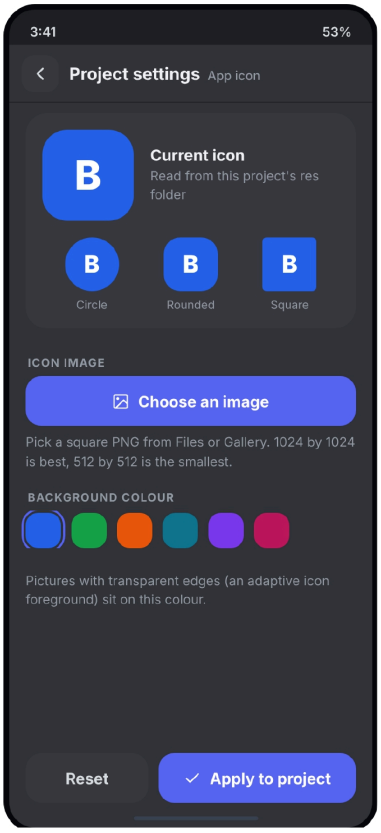


46 app icon (dark, example data)

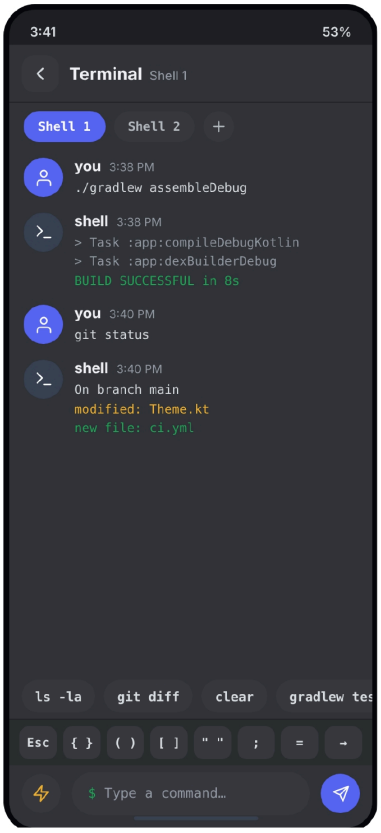


23 terminal session (dark, example data)

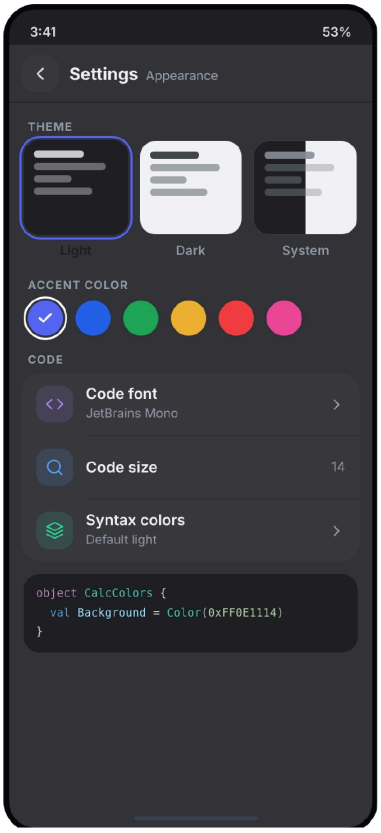


40 settings appearance (dark, example data)

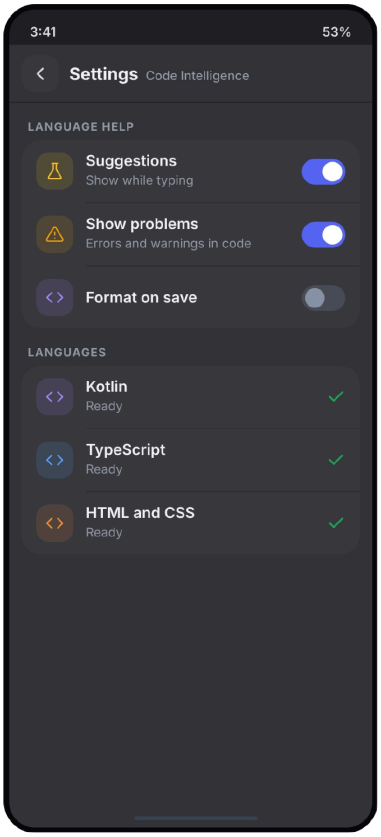


35 settings code intelligence (dark, example data)

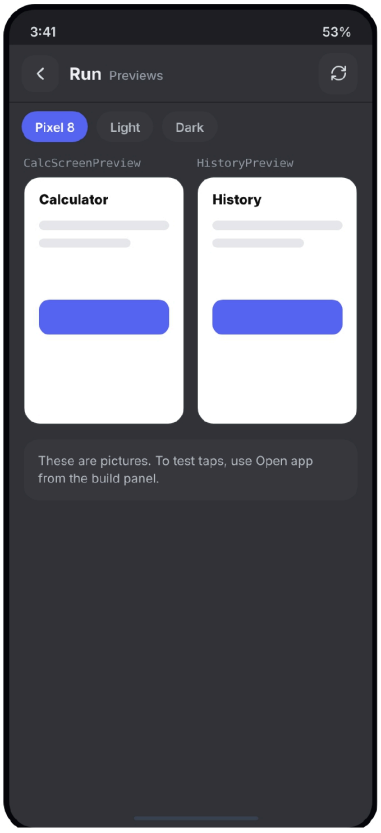


29 compose previews (dark, example data)

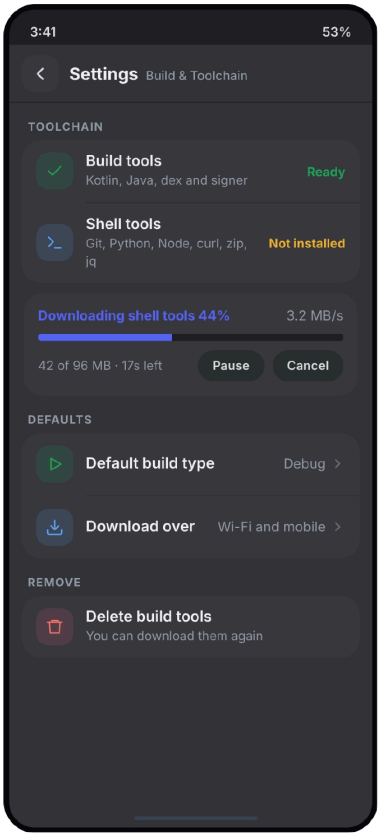


36 settings build (dark, example data)

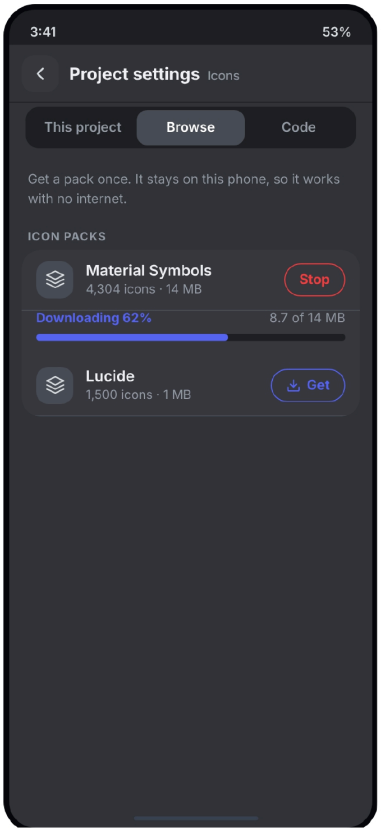


54 icon manager download (dark, example data)

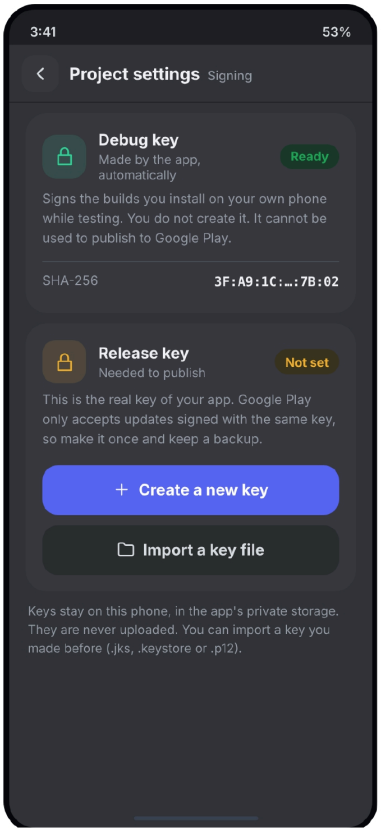


47 signing keys (dark, example data)

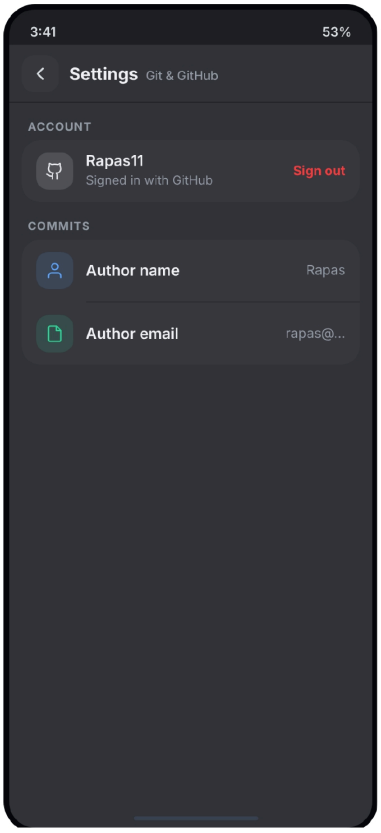


38 settings github (dark, example data)

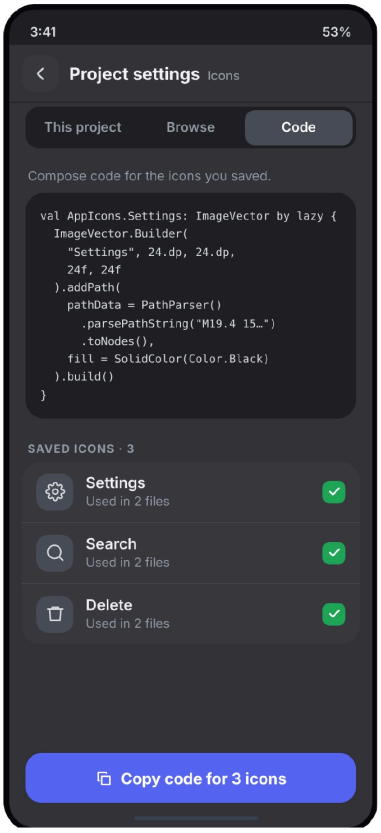


57 icon manager compose (dark, example data)

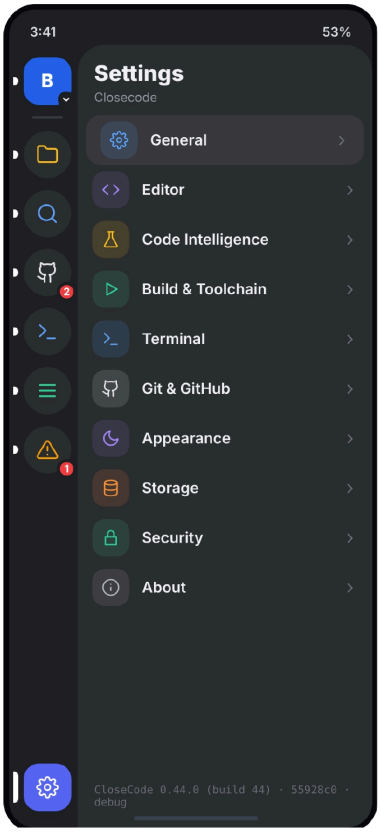


32 settings (dark, example data)

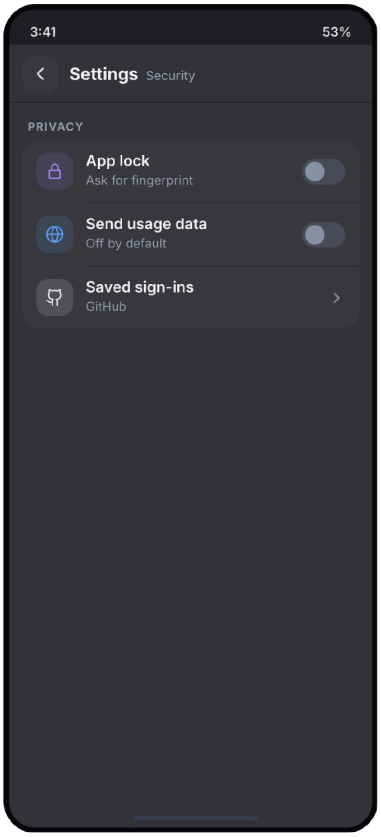


42 settings security (dark, example data)

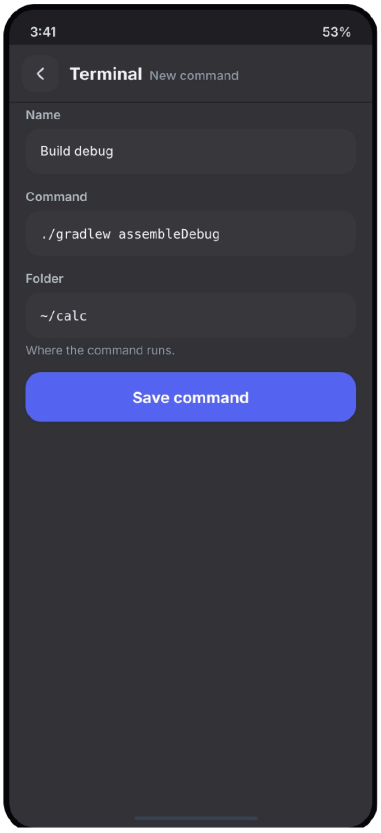


24 terminal new command (dark, example data)

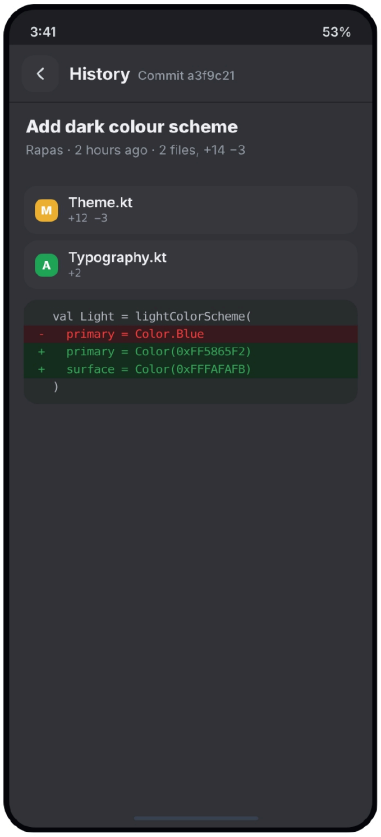


20 commit detail (dark, example data)

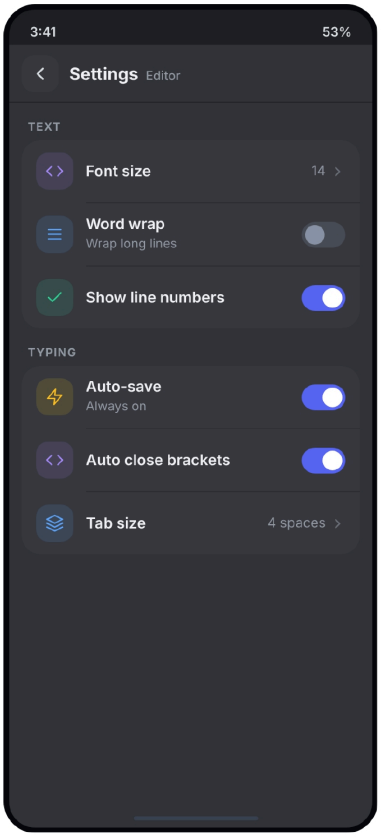


34 settings editor (dark, example data)

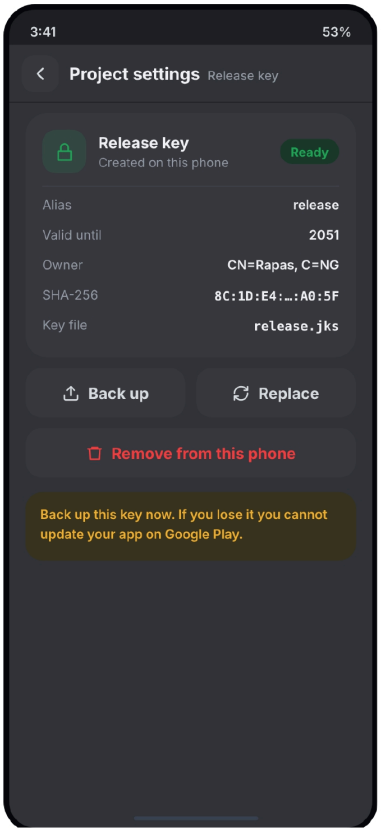


48 release key ready (dark, example data)

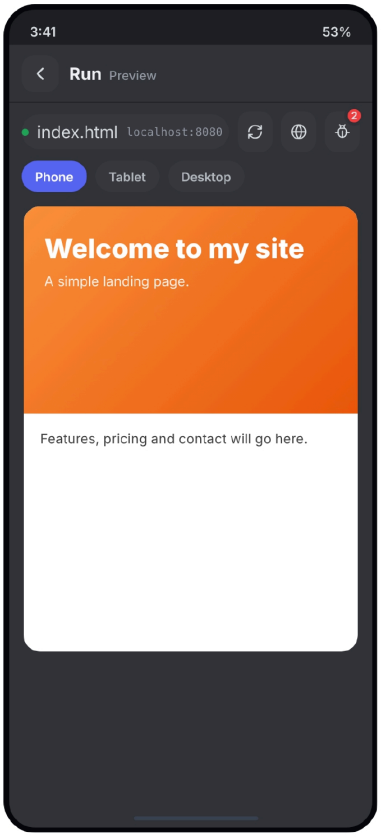


27 website preview (dark, example data)

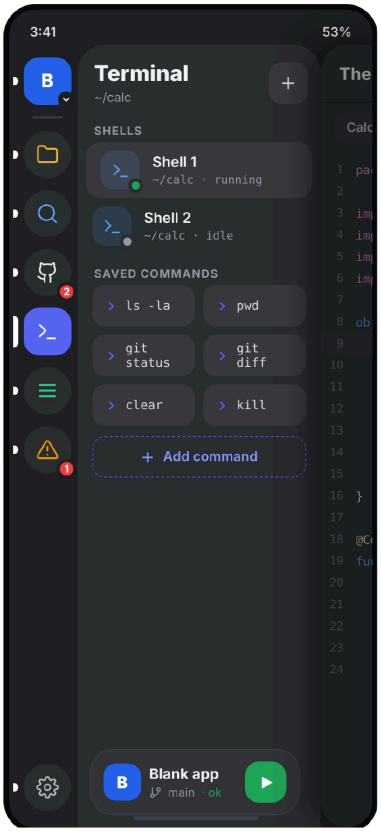


22 terminal (dark, example data)

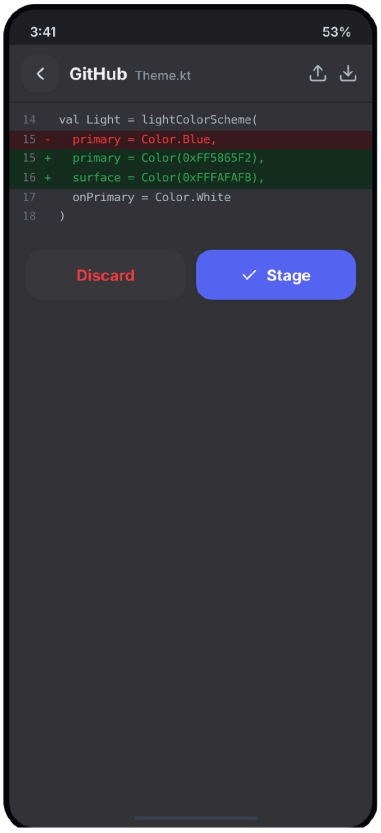


21 diff (dark, example data)

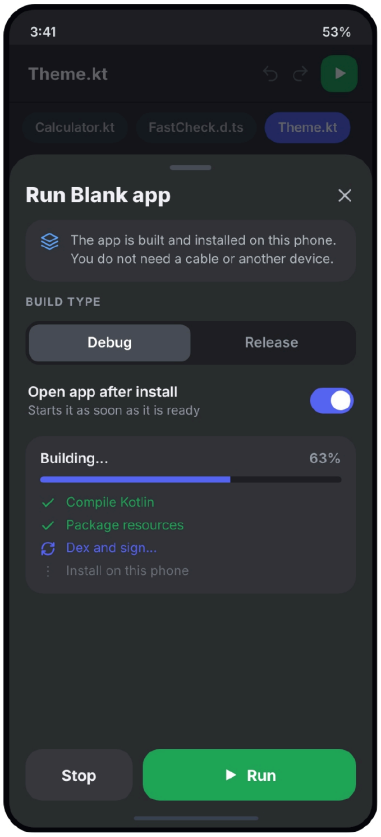


25 run build (dark, example data)

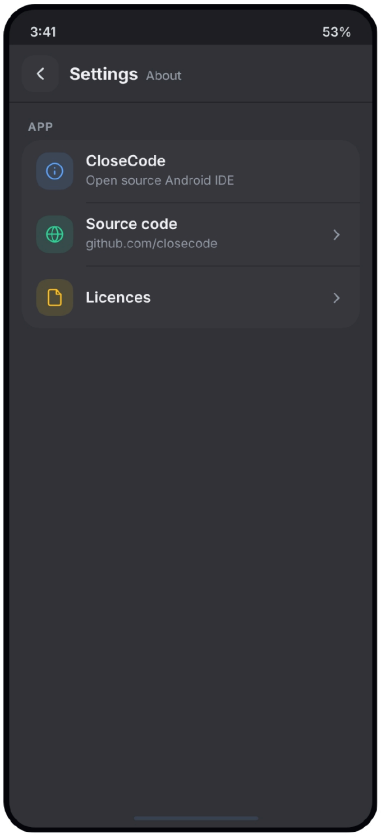


43 settings about (dark, example data)

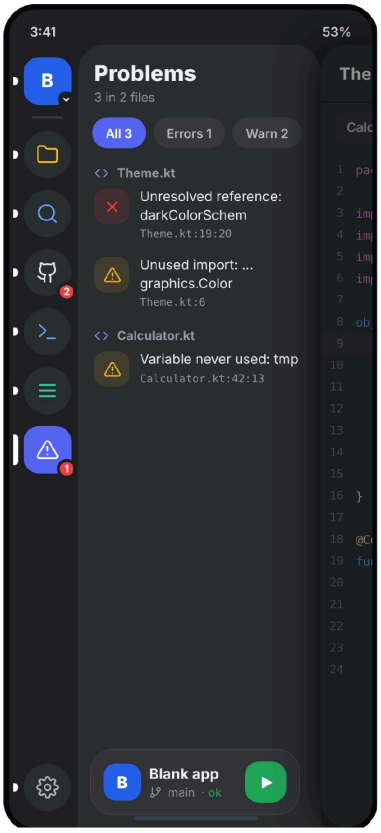


31 problems (dark, example data)

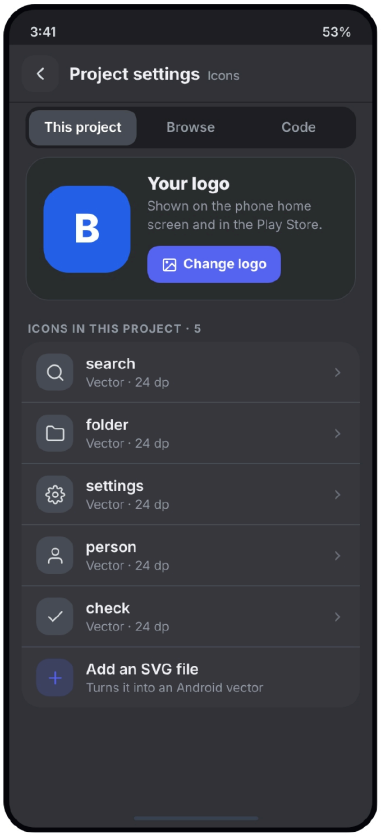


52 icon manager project (dark, example data)

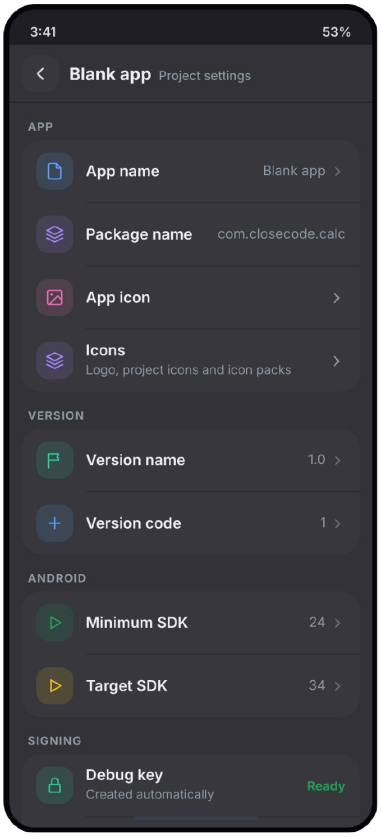


45 project settings (dark, example data)

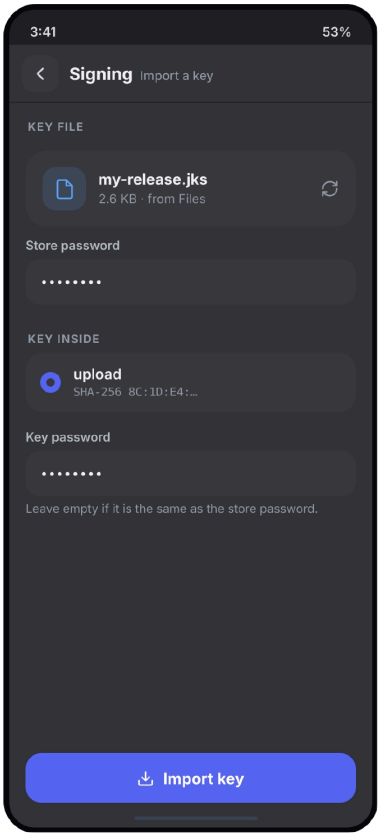

50 import key (dark, example data)

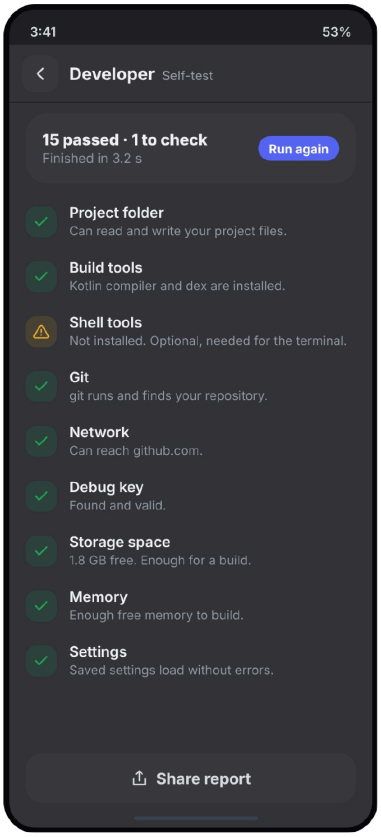

51 self test (dark, example data)

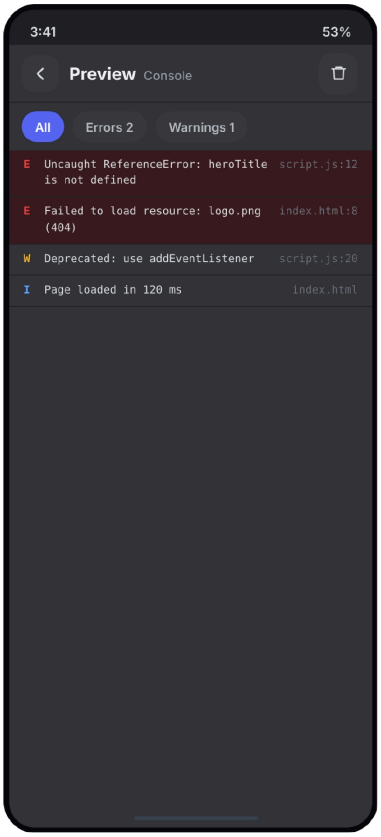

28 console (dark, example data)

Closecode guide V10

CloseCode-developer-guide-with-code-v10.txt