


CONTROLE DE VERSÕES

ATIVIDADE: CRIAR E CONFIGURAR UM REPOSITÓRIO REMOTO

1. Crie um repositório remoto no GitHub chamado **meu_remoto**.

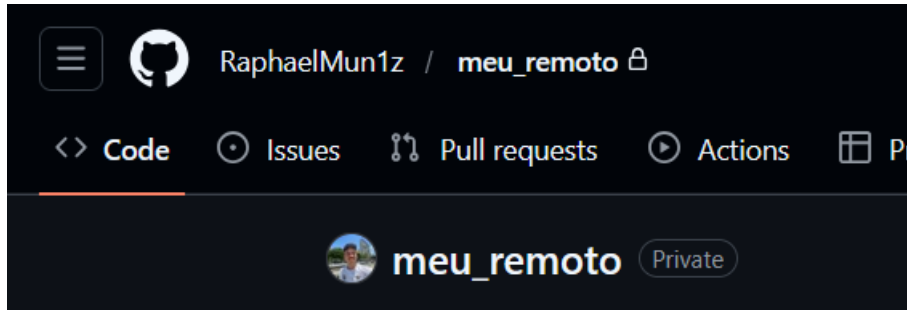


2. Clone o repositório localmente.

```
C:\Users\rapha\Documents\WS_TMS>git clone https://github.com/RaphaelMun1z/meu_remoto.git
Cloning into 'meu_remoto'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 6 (delta 0), reused 6 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (6/6), done.
```

3. Liste o estado deste repositório criado.

```
C:\Users\rapha\Documents\WS_TMS>git status
fatal: not a git repository (or any of the parent directories): .git
```

4. No GitHub, crie um arquivo "**readme.md**" com o texto "**Como utilizar este repositório:**"

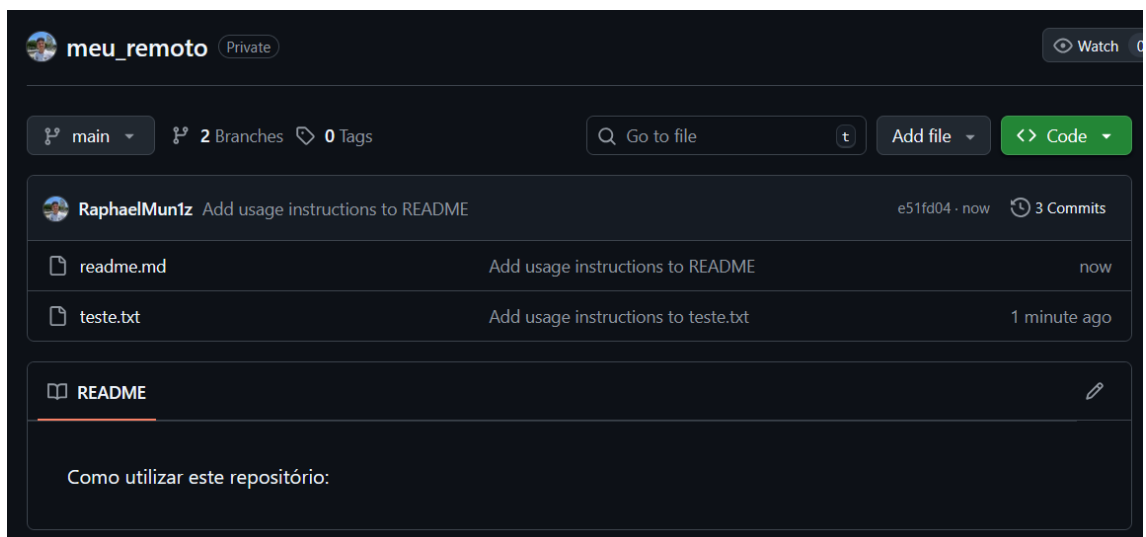

5. Verifique a partir da linha comando as alterações feitas no repositório.

```
C:\Users\rapha\Documents\WS_TMS\meu_remoto>git pull origin main
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.86 KiB | 112.00 KiB/s, done.
From https://github.com/RaphaelMun1z/meu_remoto
  * branch            main          -> FETCH_HEAD
    9789c18..e51fd04  main          -> origin/main
Updating 9789c18..e51fd04
Fast-forward
 README.md | 1 +
 teste.txt | 1 +
 2 files changed, 2 insertions(+)
 create mode 100644 README.md
```

6. Altere o nome da referência ao repositório para "r1".

```
C:\Users\rapha\Documents\WS_TMS\meu_remoto>git remote rename origin r1

C:\Users\rapha\Documents\WS_TMS\meu_remoto>git remote -v
r1      https://github.com/RaphaelMun1z/meu_remoto.git (fetch)
r1      https://github.com/RaphaelMun1z/meu_remoto.git (push)
```