


Connect to AKS nodes – using helper pod

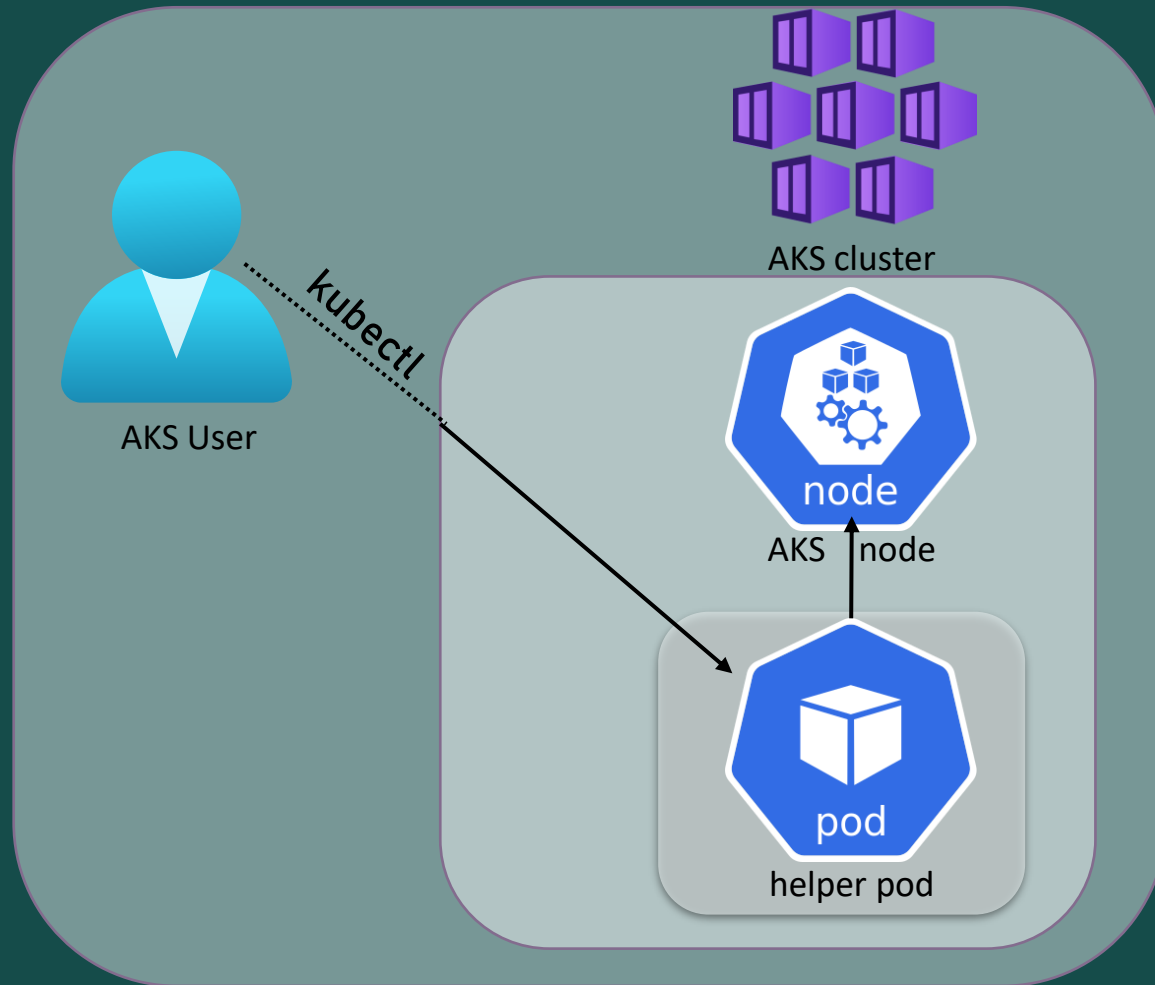

Connect to AKS nodes - using helper pod

- **Main properties of the “kubectl debug” resulting pod:**
 - **nodeName** - specifies the name of the node in the AKS cluster where the pod will be scheduled, so the node that will be accessed via that pod
 - **hostIPC: true** - the pod will access same IPC (Inter-Process Communication) as the host node, allowing it to communicate with other processes running on the same node. Use this caution as it allows the pod to interfere with other processes on the same node
 - **hostNetwork: true** - the pod will share the network namespace of the node it is running on. This allows the pod to directly access the network resources of the node
 - **hostPID: true** - the pod will share the process namespace of the node it's running on. This allows the pod to directly interact with processes running on the node
 - **volumeMounts** - This property specifies the volumes that will be mounted into the pod's file system. The most relevant for our use case is the **host-root** volume which is a **hostPath** volume that mounts the **root (/)** directory of the node's file system into the pod, allowing the pod to access and modify files on the node
- **Main properties of nsenter pod:**
 - **nodeName, hostNetwork: true, hostPID: true**
 - **privileged: true** - gives the container the ability to run with elevated privileges
 - **command: nsenter [...]** - allows you to access the namespace of a running process and execute commands as if you were running inside the namespace, **targeting mount, uts, ipc, net** and **pid** namespaces; **bash -l** is to make the shell a login shell

```
containers:
- command:
  - nsenter
  - --target
  - "1"
  - --mount
  - --uts
  - --ipc
  - --net
  - --pid
  - --
  - bash
  - -l
```