

CH-231-A

Algorithms and Data Structures

ADS

Lecture 9

Dr. Kinga Lipskoch

Spring 2024

Solving Recurrences

- ▶ Merge Sort analysis required us to solve the recurrence:

$$T(n) = \begin{cases} \Theta(1) & \text{if } n = 1, \\ 2T(n/2) + \Theta(n) & \text{if } n > 1. \end{cases}$$

- ▶ A recurrence (or recurrence relation) is an equation that recursively defines a sequence (given an initial term).
- ▶ How can we generally solve recurrences?

Three Recurrence Solving Methods

- ▶ Substitution method
- ▶ Recursion tree
- ▶ Master method

Substitution Method

- ▶ The substitution method is based on some intuition.
- ▶ It executes the following steps:
 - ▶ Guess the form of the solution.
 - ▶ Verify by induction.
 - ▶ Solve for constants.


Example (1)

- ▶ Consider the recurrence $T(n) = 4T(n/2) + n$ with the base case $T(1) = \Theta(1)$.
- ▶ Prove O and Ω separately.
- ▶ Guess that $T(n) = O(n^3)$.
- ▶ Verify by induction:
 - ▶ Check the base case $n = 1$.
 - ▶ Assuming $T(k) \leq ck^3$ for $k < n$ show $T(n) \leq cn^3$.

Example (2)

Induction step:

$$\begin{aligned}T(n) &= 4T(n/2) + n \\&\leq 4c(n/2)^3 + n \\&= (c/2)n^3 + n \\&= cn^3 - ((c/2)n^3 - n) \leftarrow \textit{desired} - \textit{residual} \\&\leq cn^3 \leftarrow \textit{desired}\end{aligned}$$

whenever $(c/2)n^3 - n \geq 0$, for example,
if $c \geq 2$ and $n \geq 1$. 

residual

Example (3)

- ▶ Was our guess a good one?
- ▶ Was it tight enough?
- ▶ Make a new guess: $T(n) = O(n^2)$.
- ▶ Try to prove by induction.
 - ▶ Base step: as before
 - ▶ Induction step:
Assuming $T(k) \leq ck^2$ for $k < n$, show $T(n) \leq cn^2$.

$$\begin{aligned}T(n) &= 4T(n/2) + n \\&\leq 4c(n/2)^2 + n \\&= cn^2 + n \\&= cn^2 - (-n) \quad [\text{desired} - \text{residual}] \\&\leq cn^2 \quad \text{for } \textbf{no} \text{ choice of } c > 0. \text{ Lose!}\end{aligned}$$

Example (4)

- ▶ Idea: Adjust hypothesis by subtracting a lower-order term.
- ▶ Induction step:
Assuming $T(k) \leq c_1 k^2 - c_2 k$ for $k < n$
show $T(n) \leq c_1 n^2 - c_2 n$.

$$\begin{aligned}T(n) &= 4T(n/2) + n \\&= 4(c_1(n/2)^2 - c_2(n/2)) + n \\&= c_1 n^2 - 2c_2 n + n \\&= c_1 n^2 - c_2 n - (c_2 n - n) \\&\leq c_1 n^2 - c_2 n \text{ if } c_2 \geq 1.\end{aligned}$$

Example (5)

Finally, solve for constants:


- ▶ Pick c_2 according to the induction proof from before ($c_2 \geq 1$).
- ▶ Pick c_1 large enough to handle the base case:
 - ▶ $T(1) = \Theta(1)$ implies $T(1) = O(1)$
 - ▶ $T(1) \leq c_1 1^2 - c_2 1 = c_1 - c_2$, where $c_2 \geq 1$
 - ▶ Therefore, $c_1 > c_2$

Recursion Tree

- ▶ For the Merge Sort analysis, we used a recursion tree
- ▶ A recursion tree models the costs (time) of a recursive execution of an algorithm
- ▶ This does not necessarily lead to a reliable solution
- ▶ However, the recursion-tree method promotes intuition
- ▶ It is good for generating guesses for the substitution method

Example (1)

Consider the recurrence $T(n) = T(n/4) + T(n/2) + n^2$
with the base case $T(1) = \Theta(1)$.

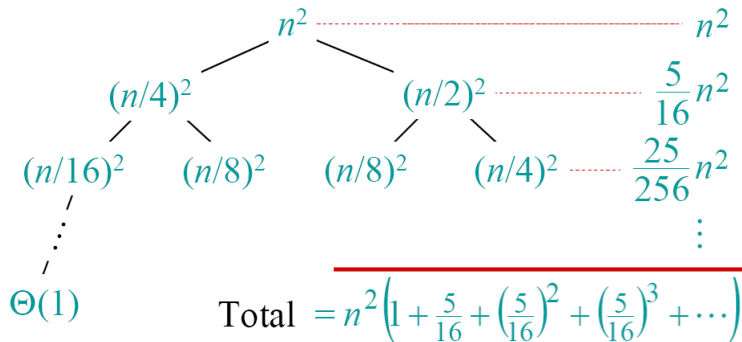

Example (2)

Considering the geometric series from below we get $T(n) = \Theta(n^2)$.

$$1 + x + x^2 + \cdots + x^n = \frac{1 - x^{n+1}}{1 - x} \quad \text{for } x \neq 1$$

$$1 + x + x^2 + \cdots = \frac{1}{1 - x} \quad \text{for } |x| < 1$$