




F1 $d \leq 10$ kb — best-of (static or auto K) per (DS, segmenter)

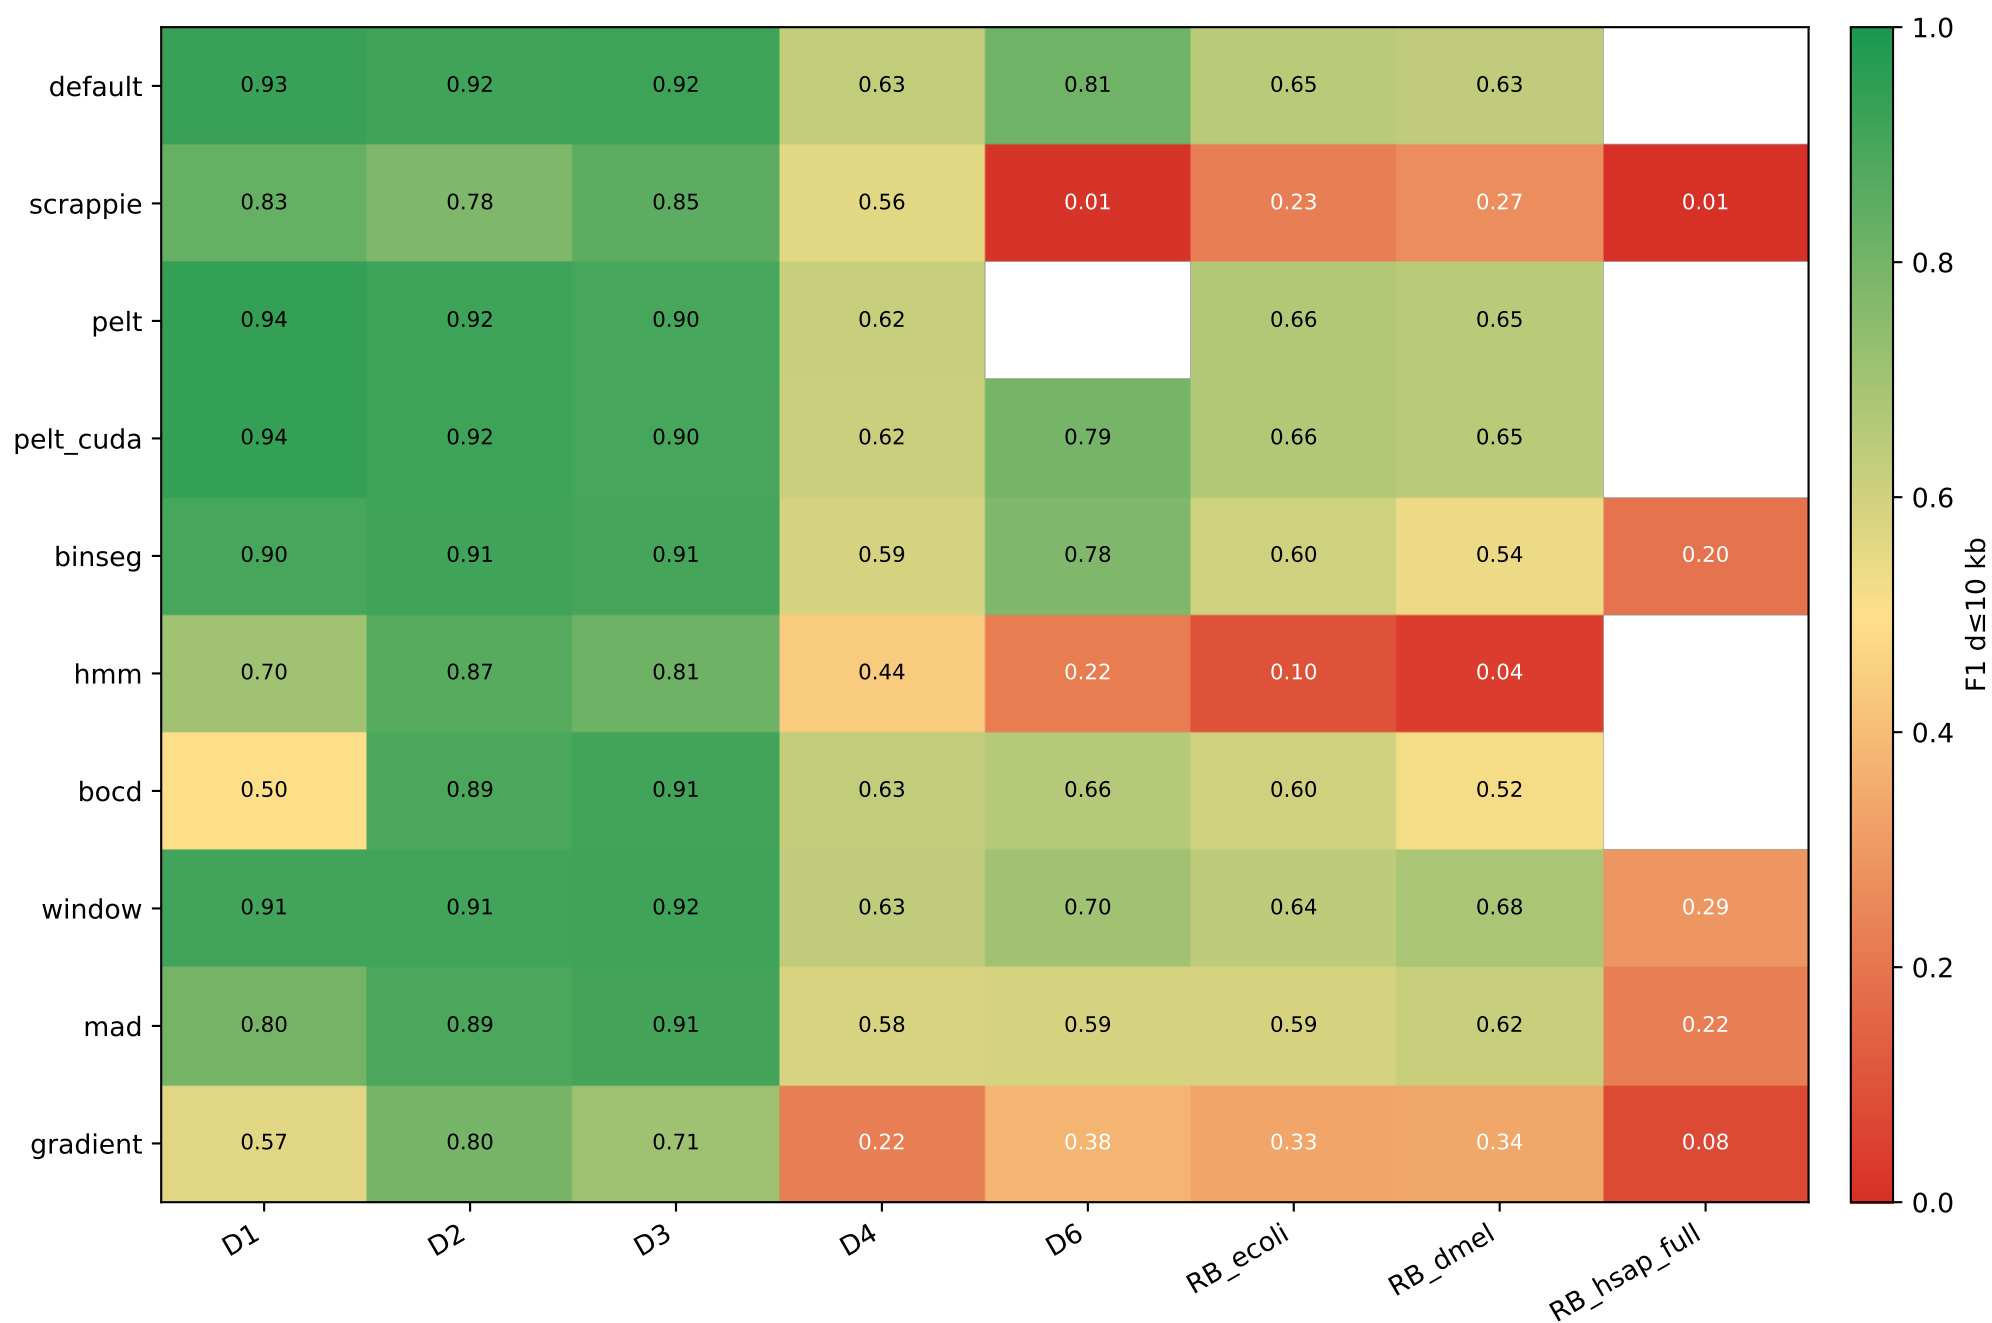


F1 d $\leq$ 100 kb — best-of (static or auto K) per (DS, segmenter)

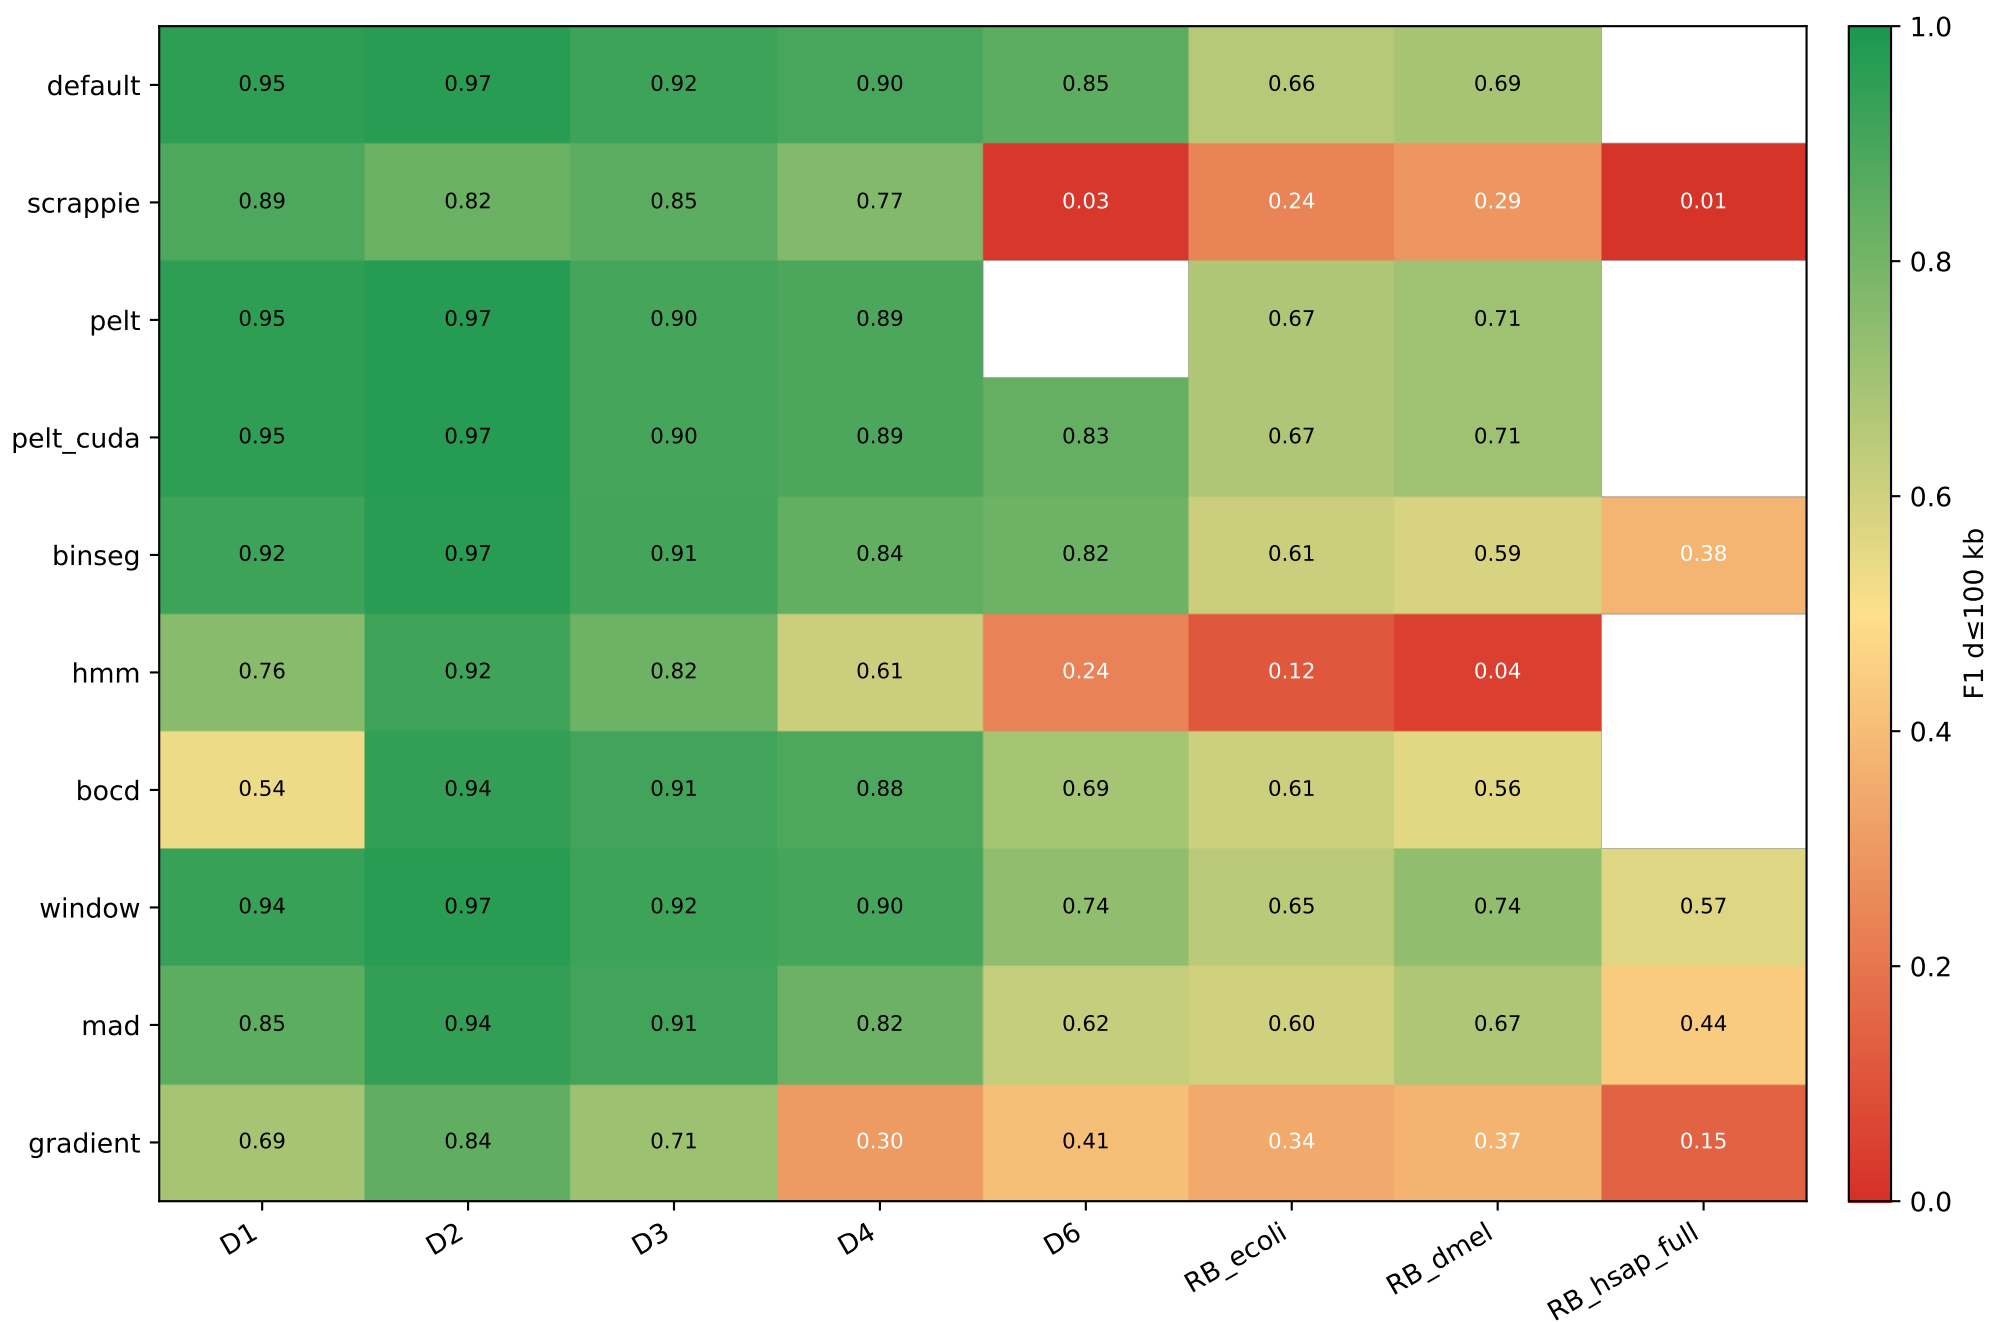


F1 ovl $\geq$ 0.1 — best-of (static or auto K) per (DS, segmenter)

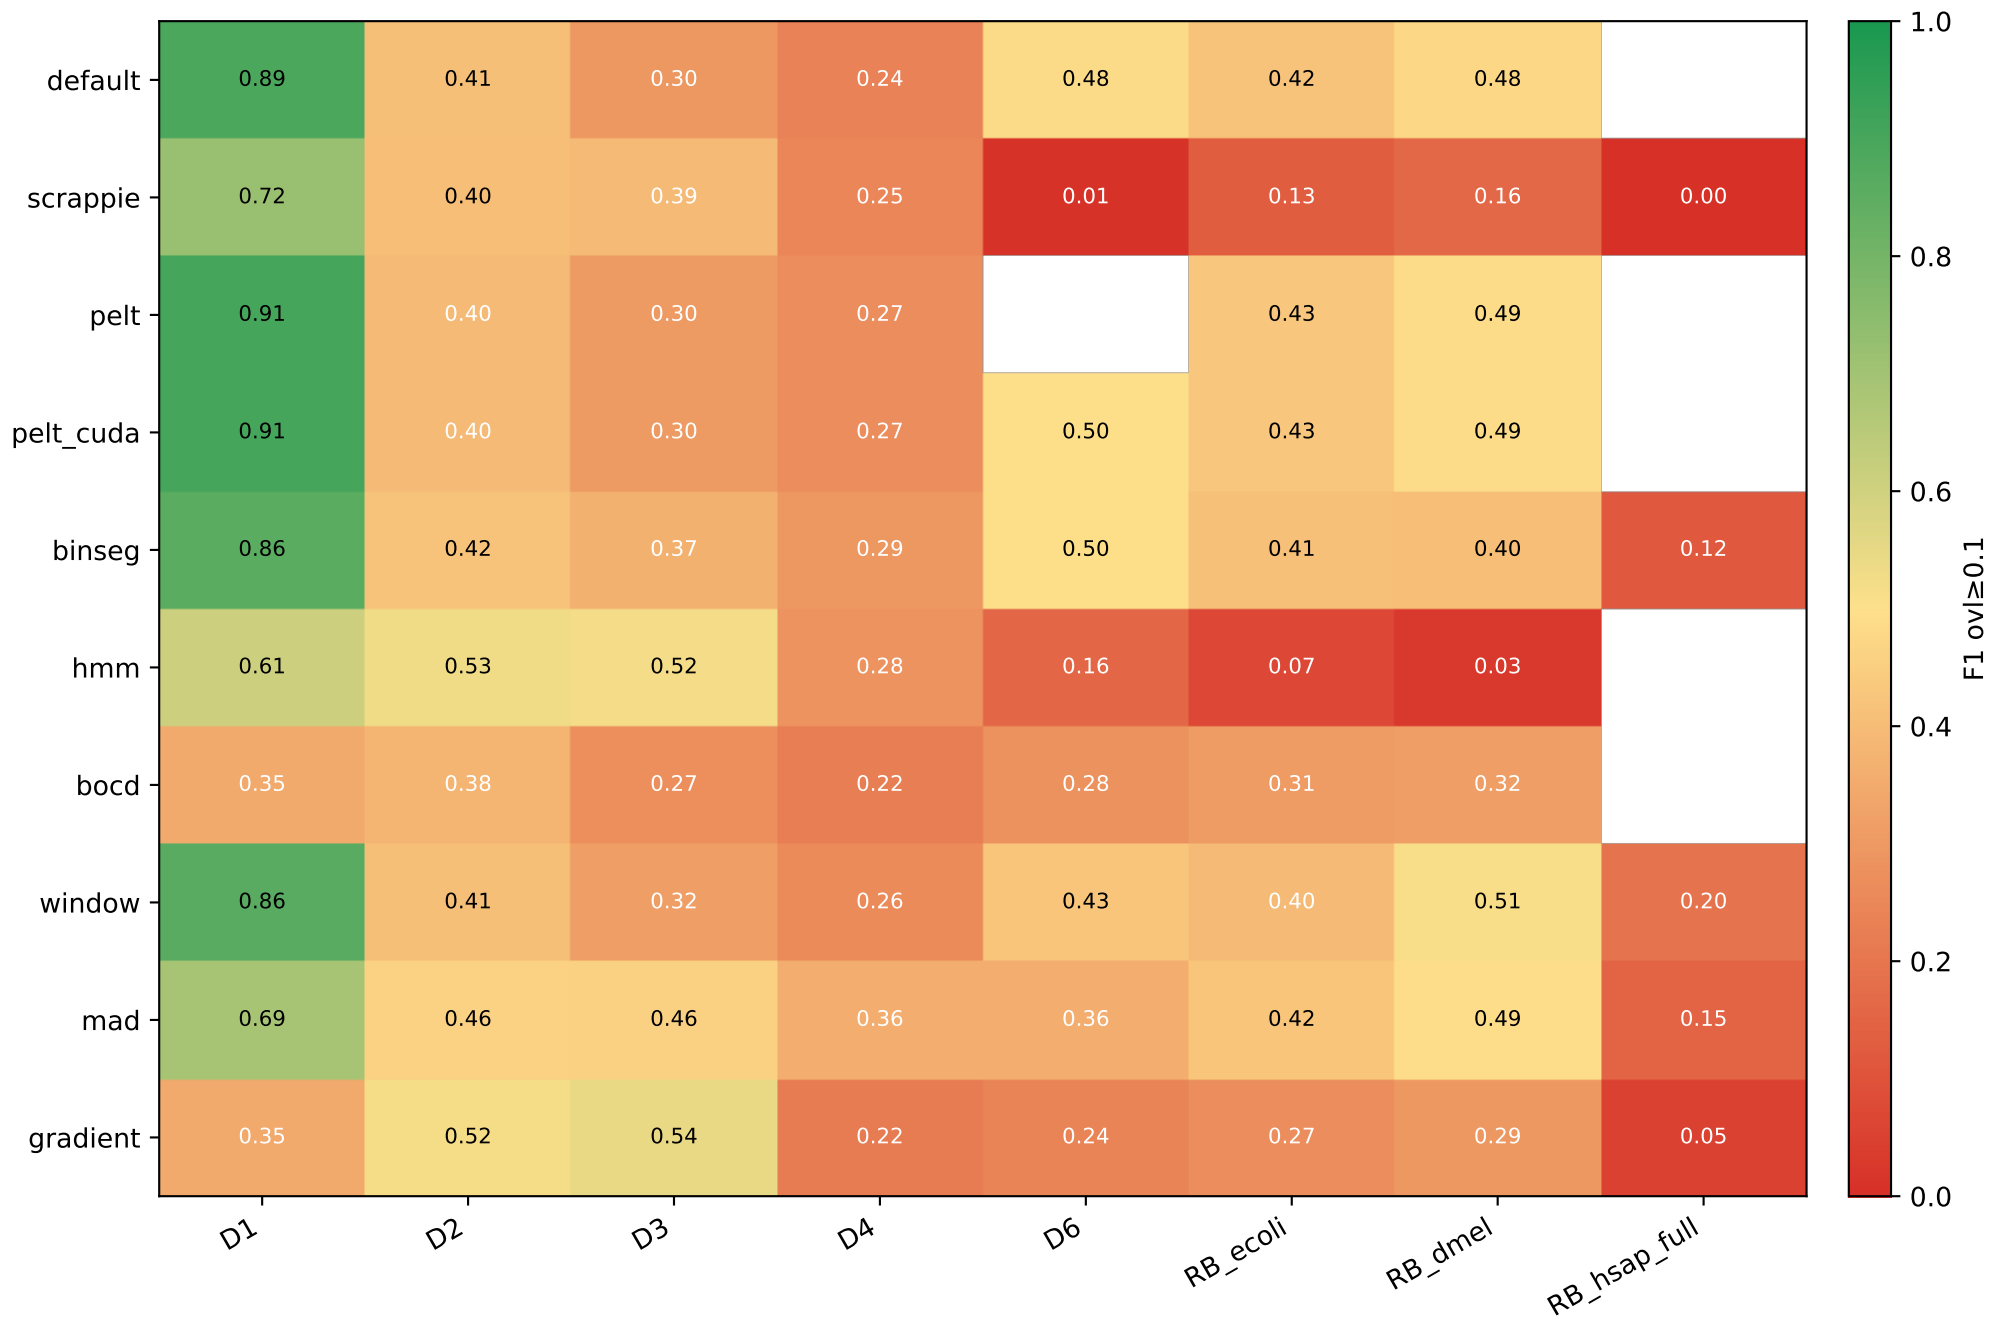


F1 $\text{ovl} \geq 0.5$ — best-of (static or auto K) per (DS, segmenter)

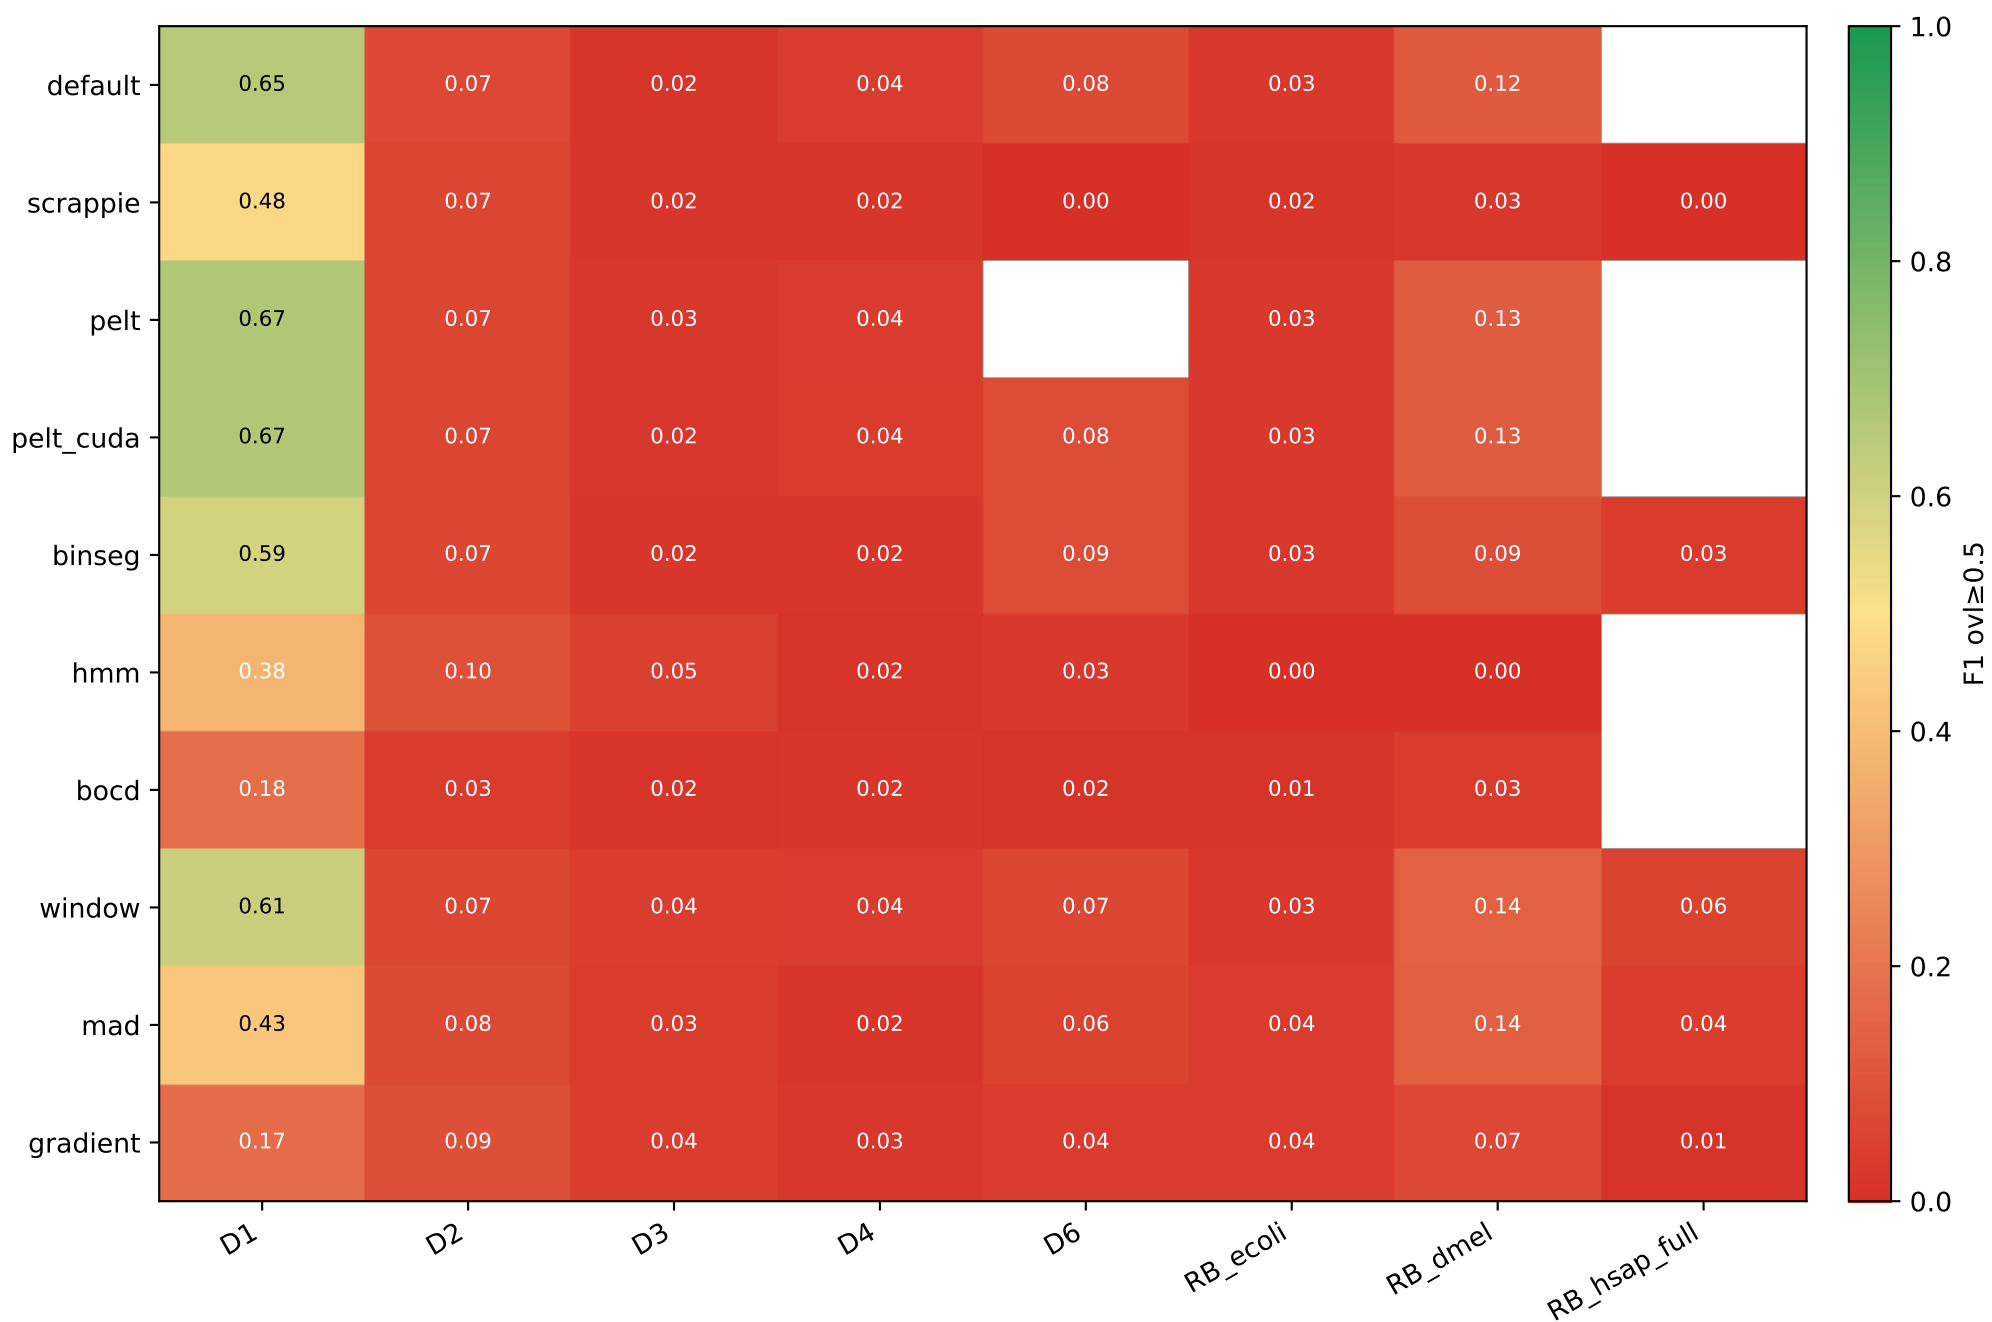


Speedup vs DEFAULT — static-K (sequential, exclusive node)

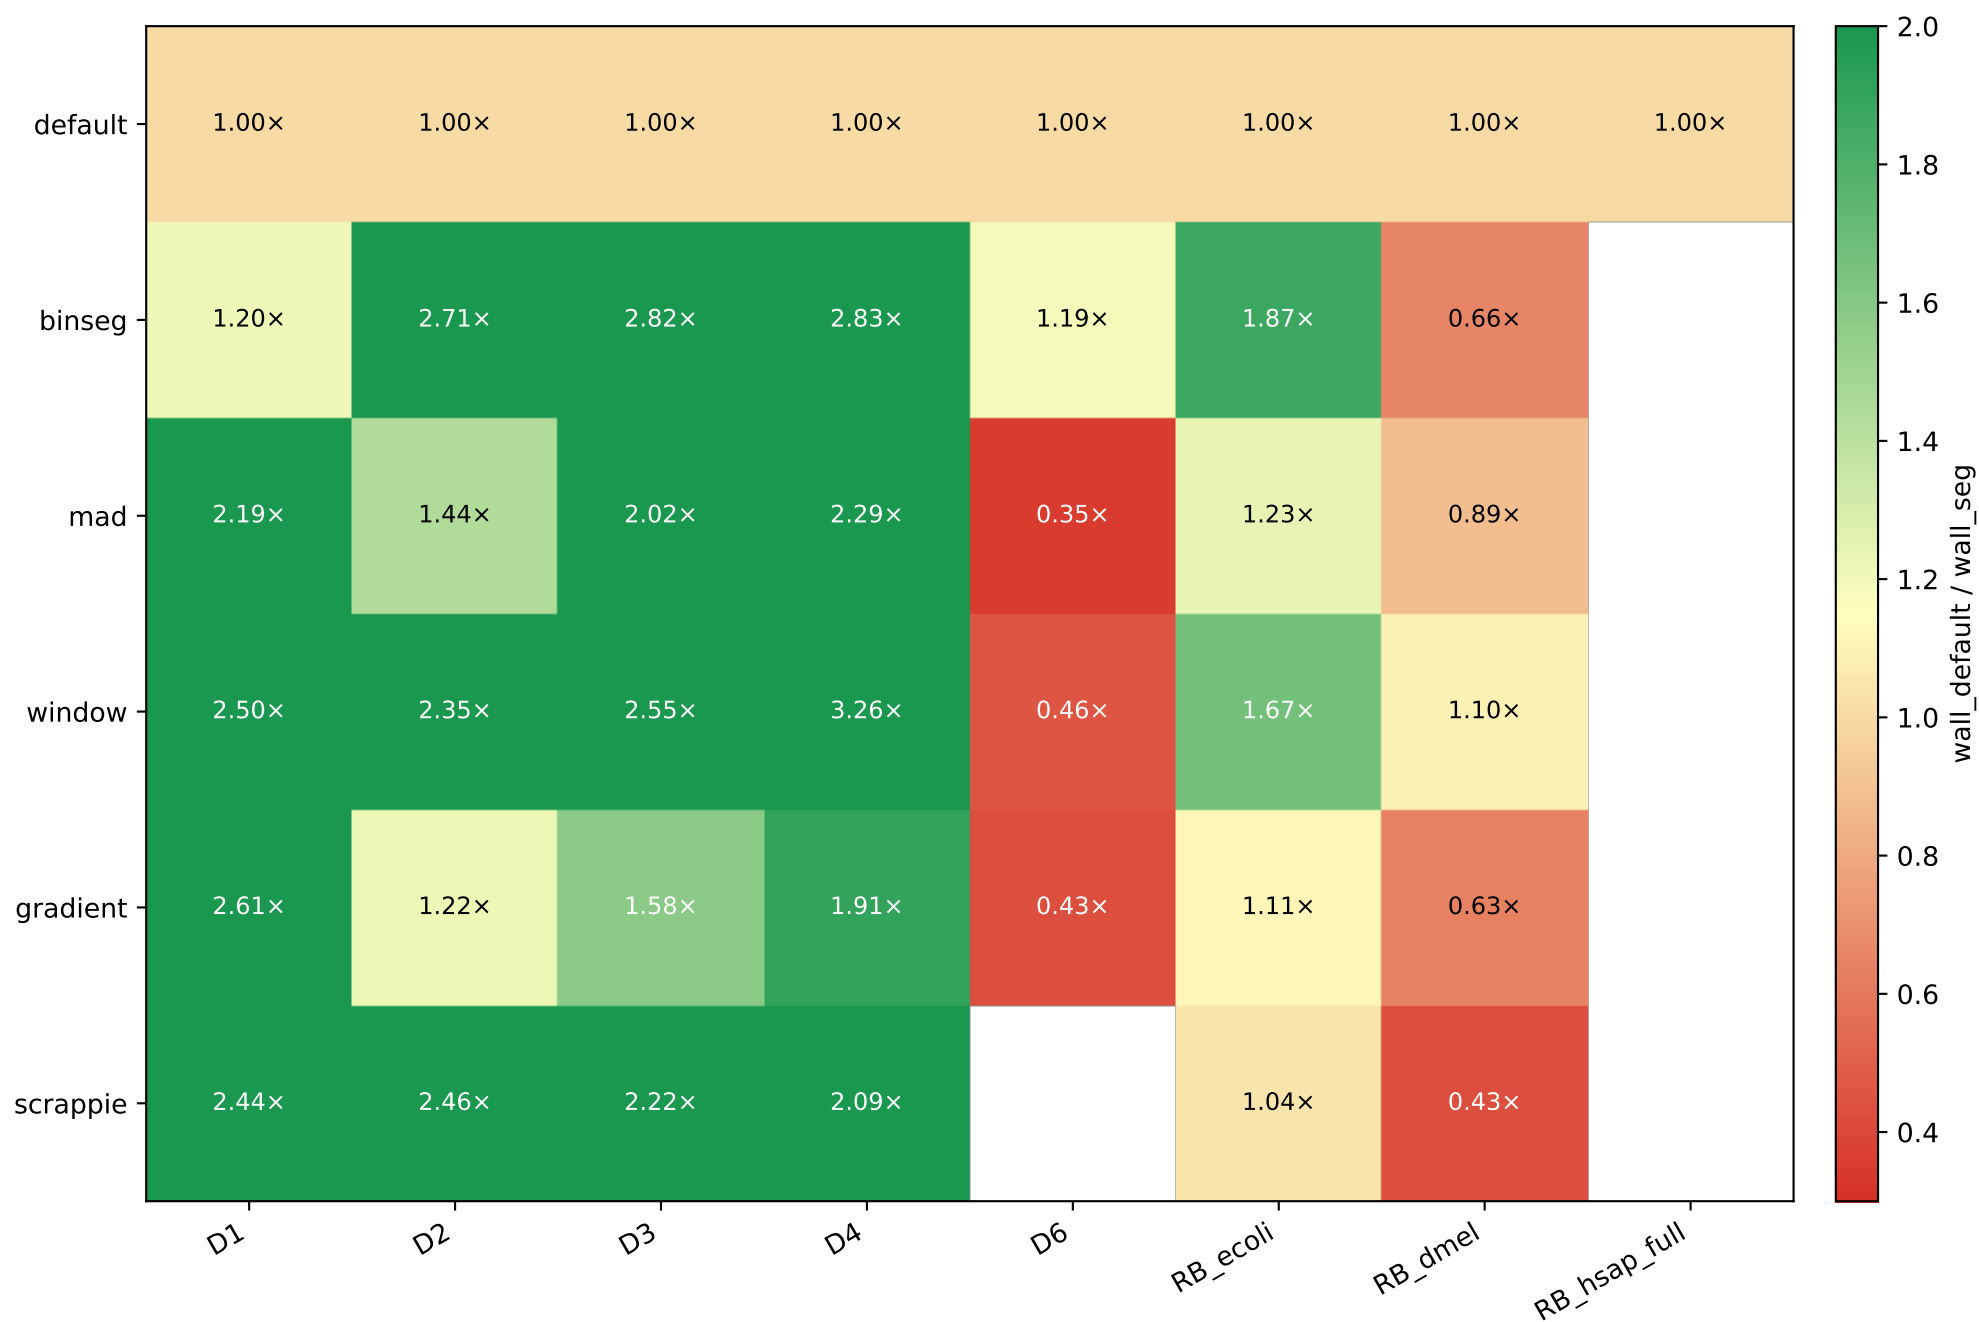


Speedup vs DEFAULT — auto-K (sequential, exclusive node)

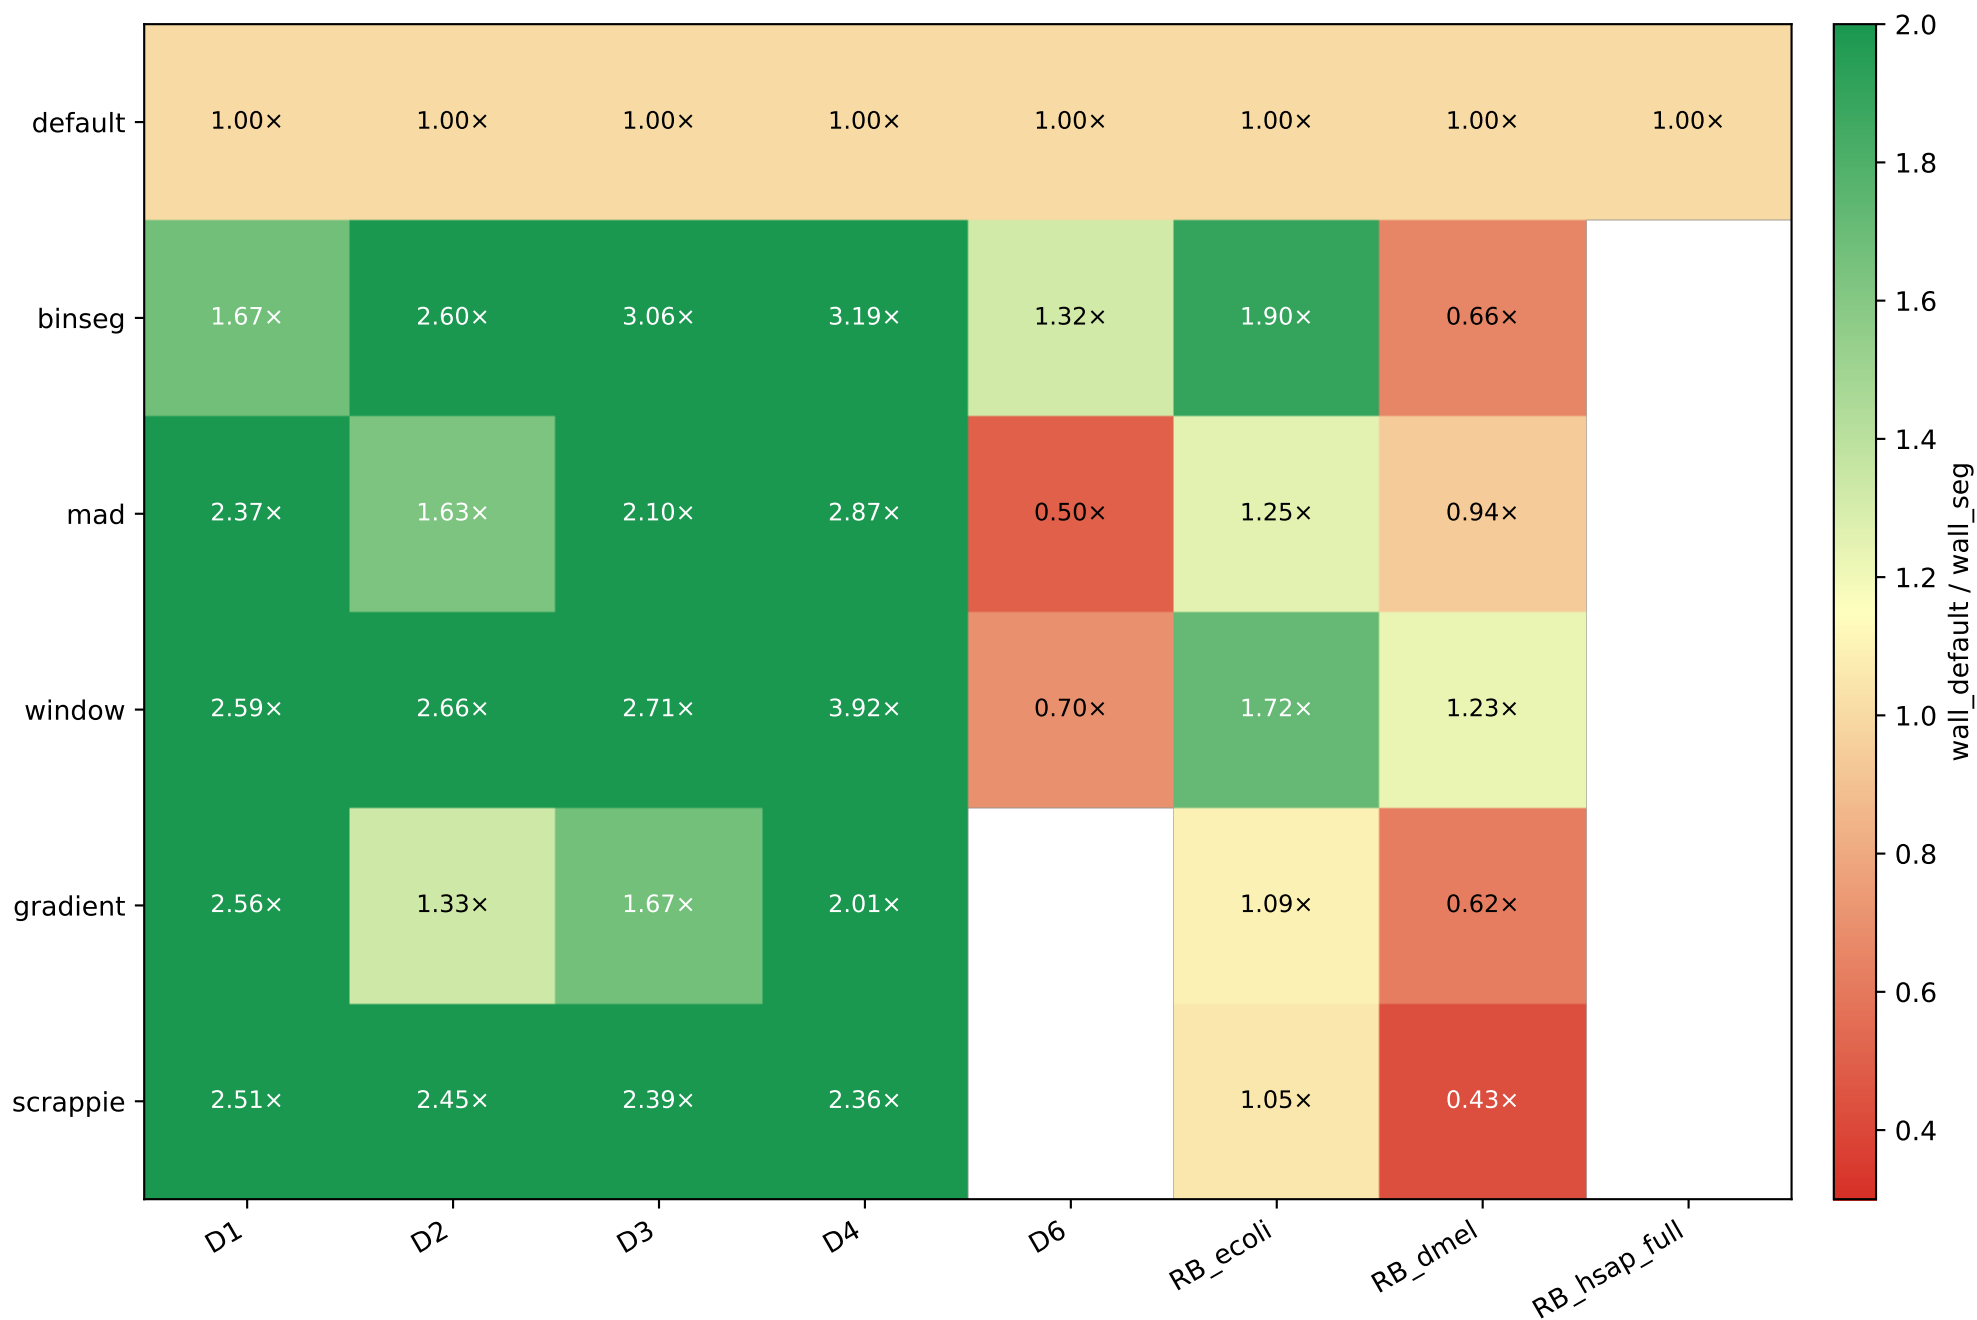


D1 — wall time (sequential, exclusive node) vs default = 2433.5s

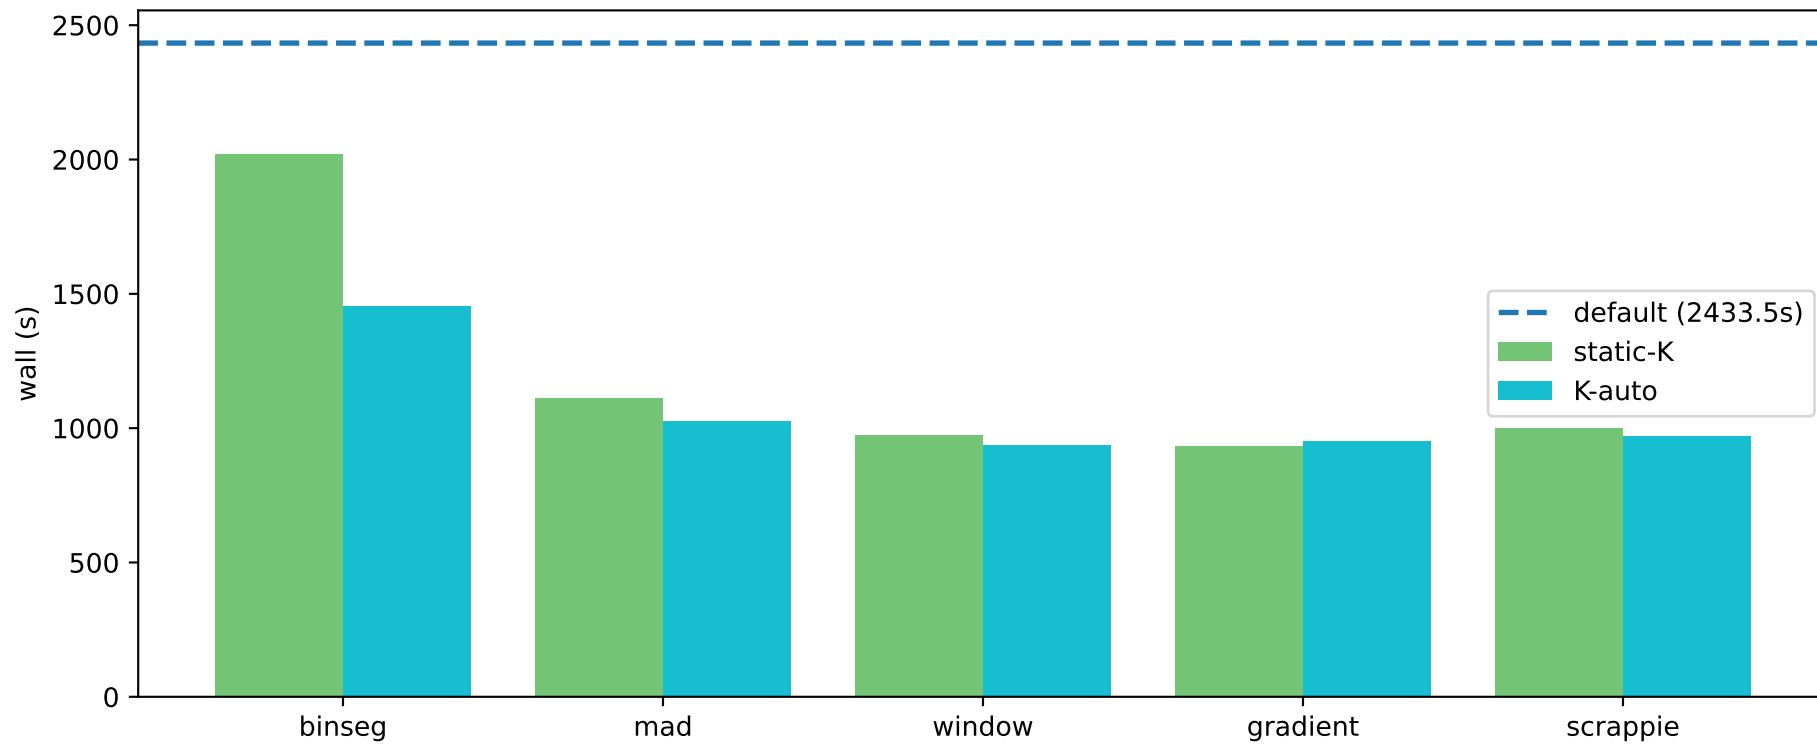


D2 — wall time (sequential, exclusive node) vs default = 1038.5s

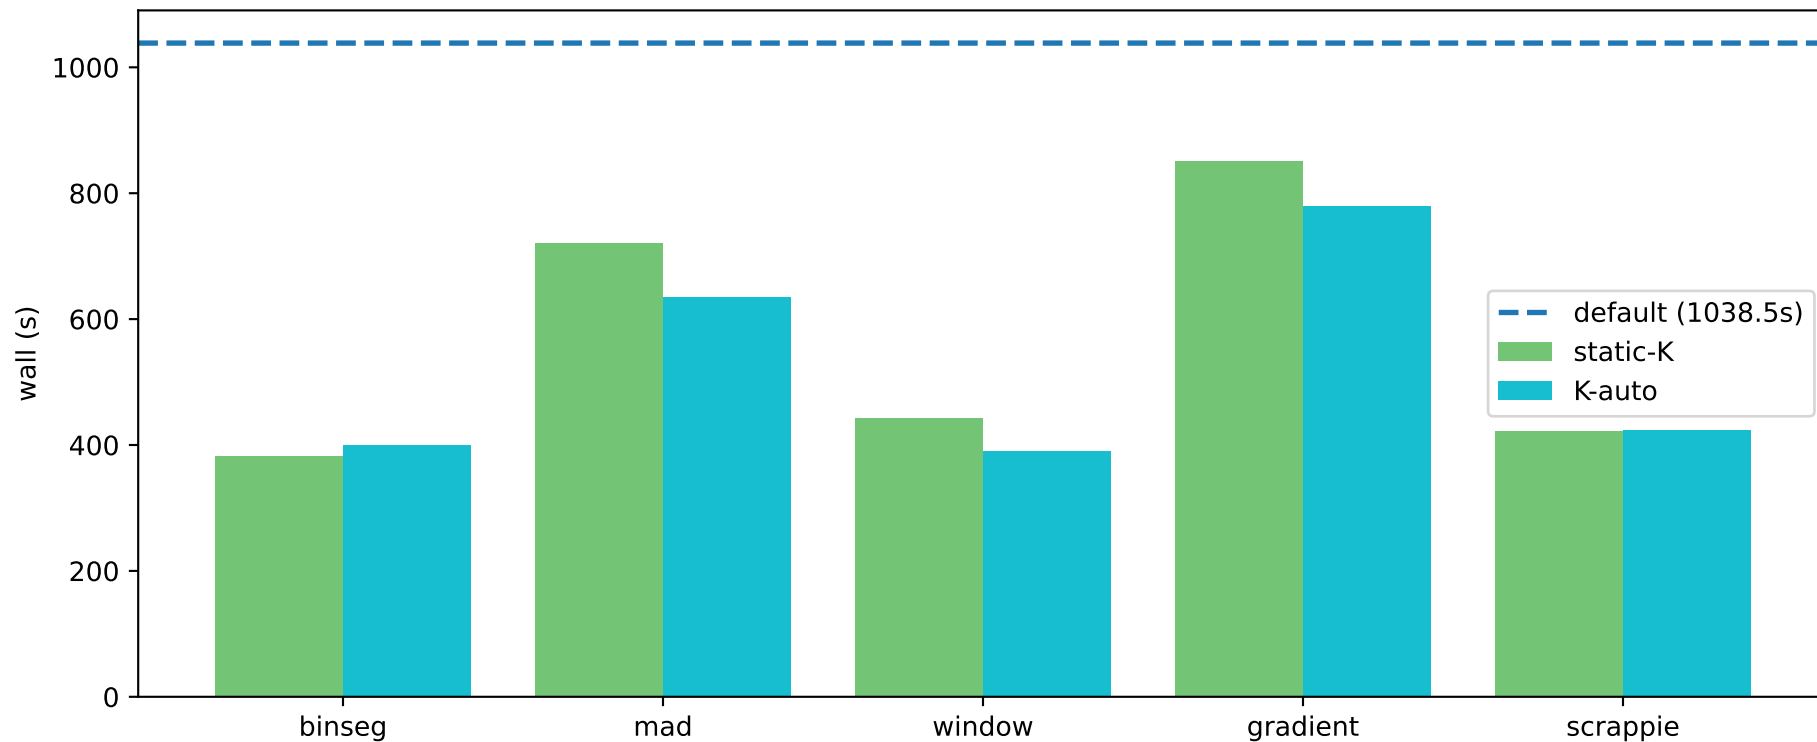


D3 — wall time (sequential, exclusive node) vs default = 9.5s

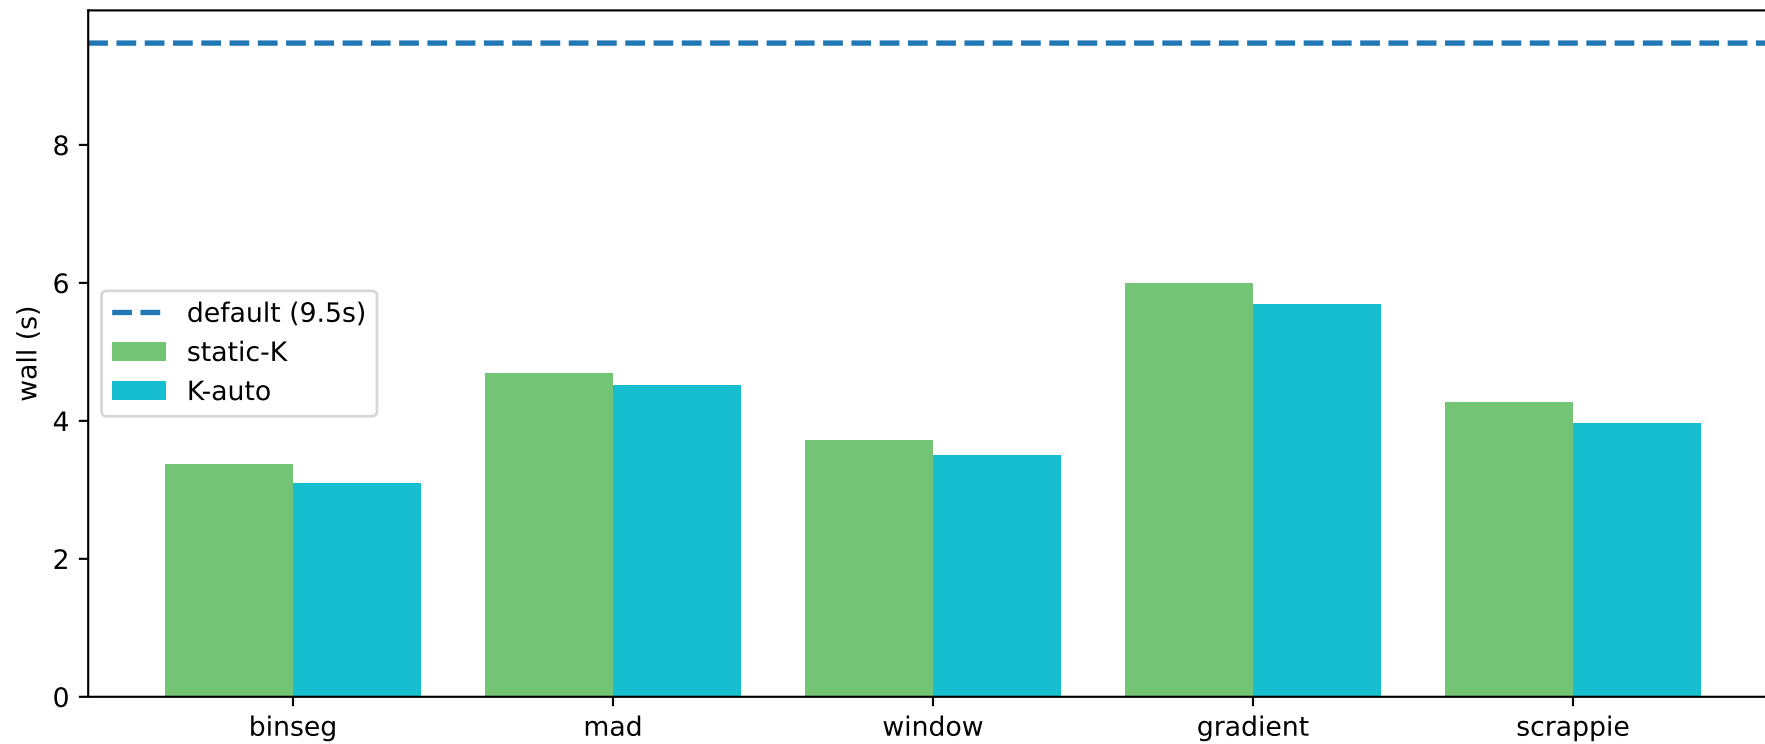


D4 — wall time (sequential, exclusive node) vs default = 72.4s

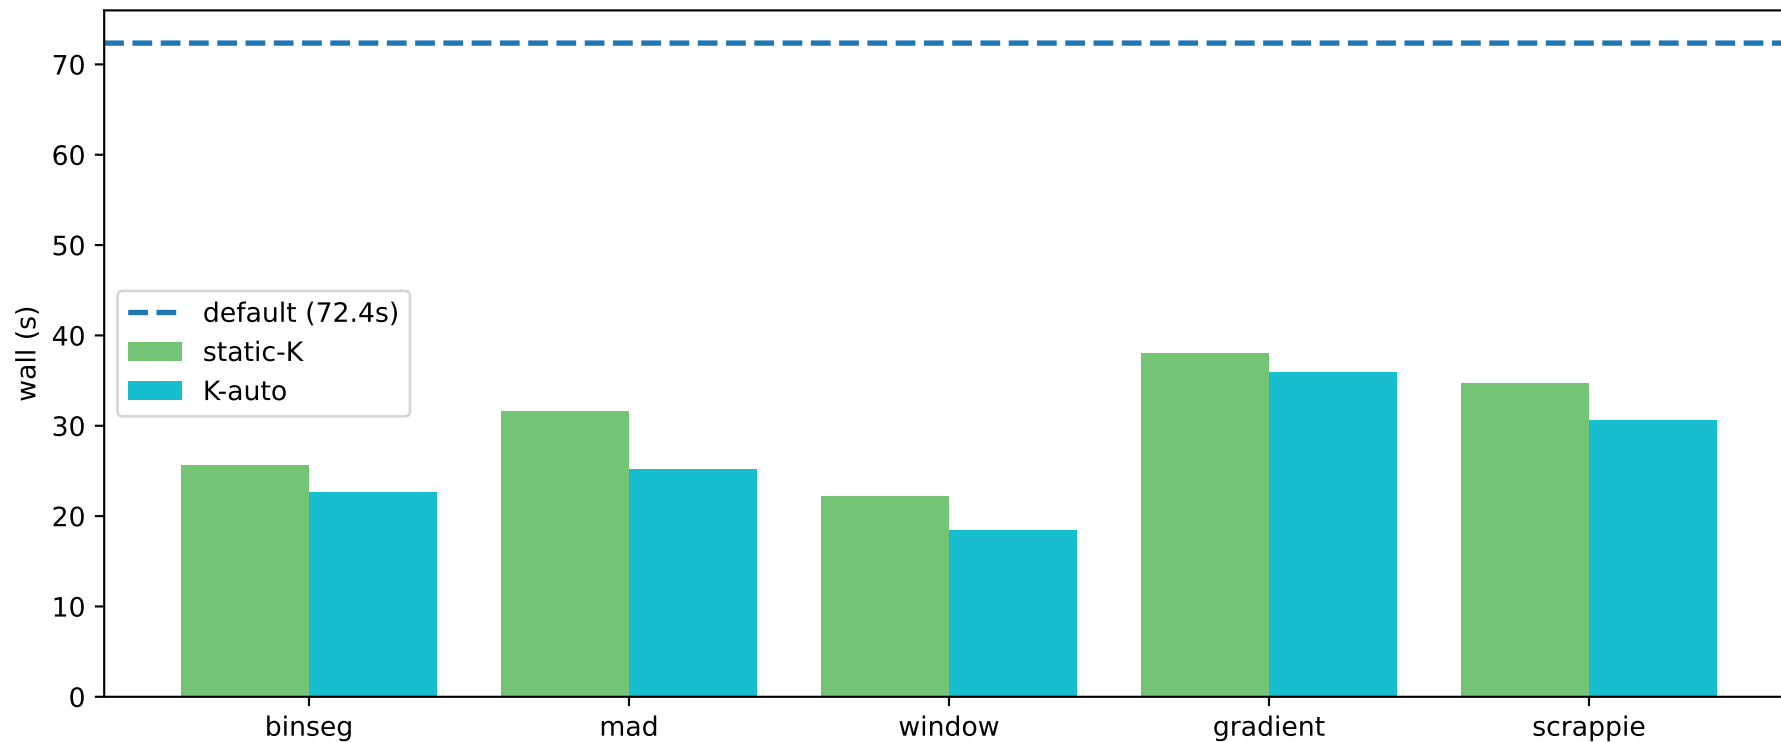


D6 — wall time (sequential, exclusive node) vs default = 2857.3s

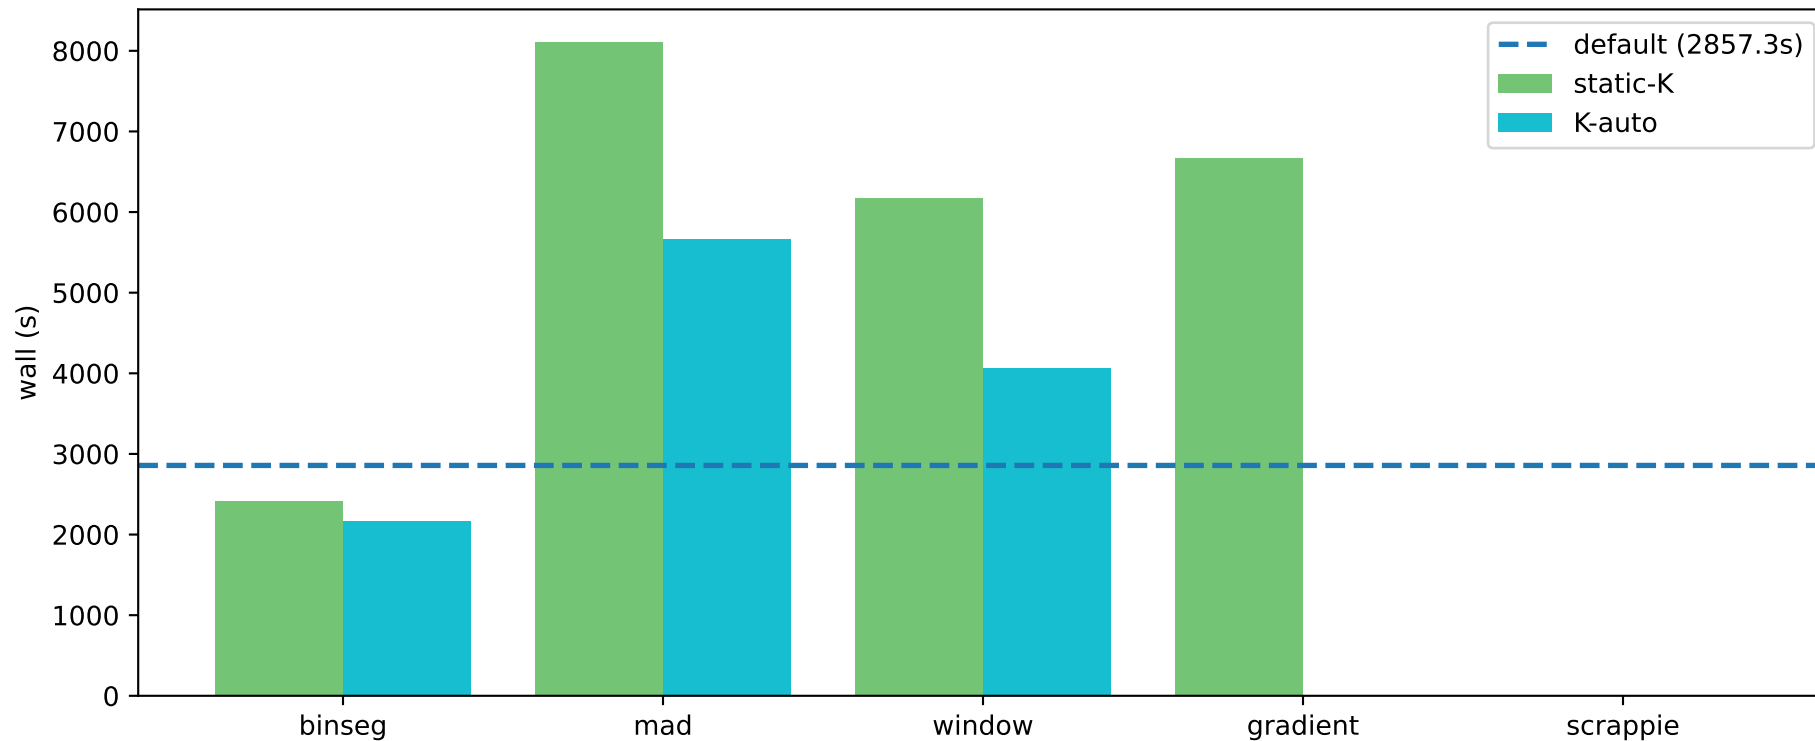

RB_ecoli — wall time (sequential, exclusive node) vs default = 260.4s

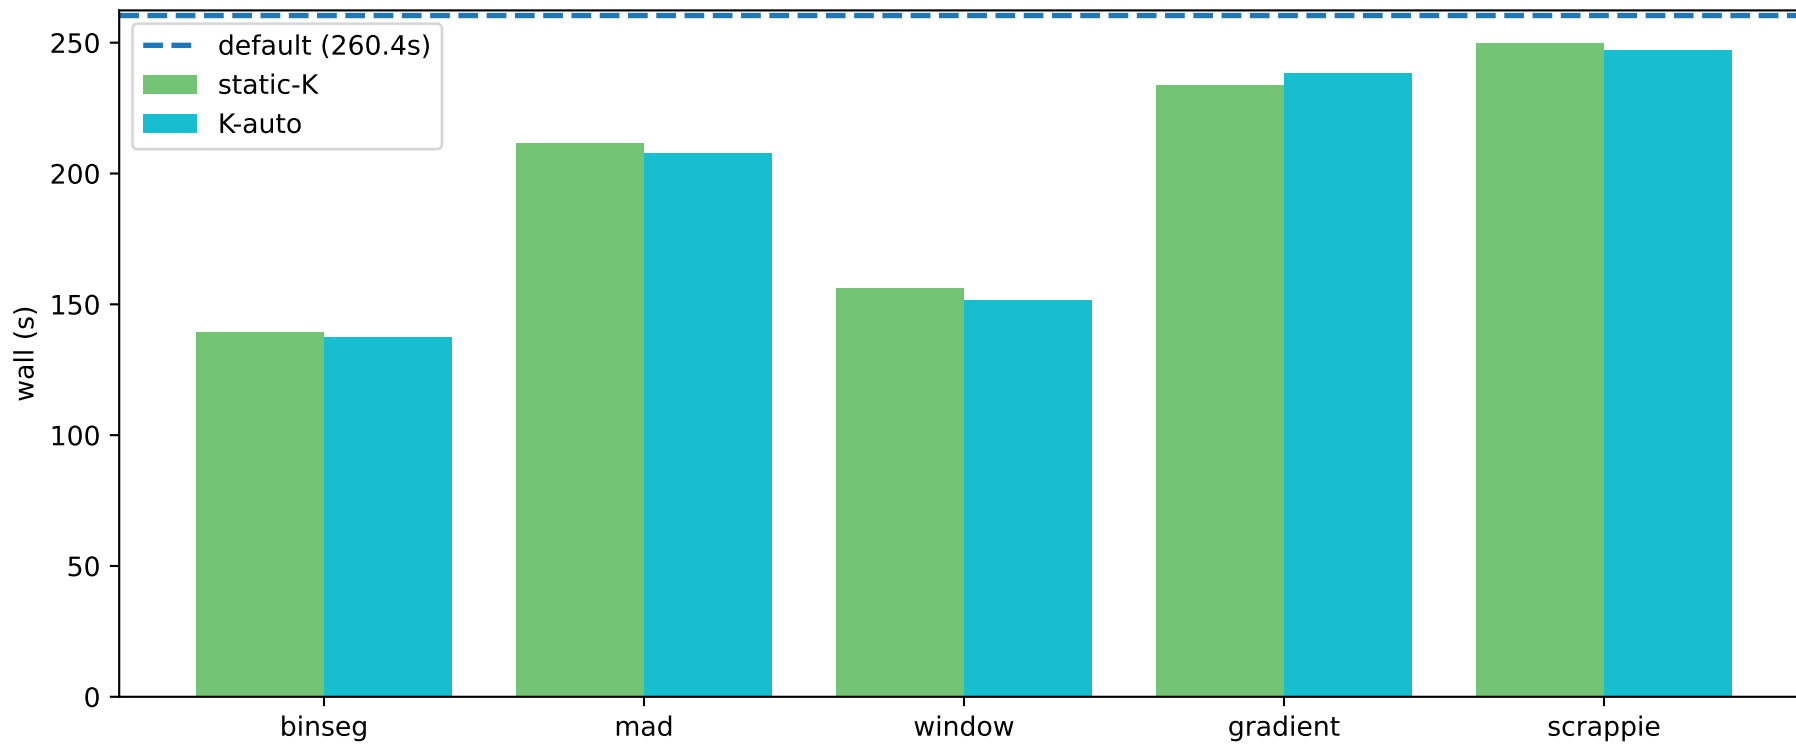

RB_dmel — wall time (sequential, exclusive node) vs default = 733.5s

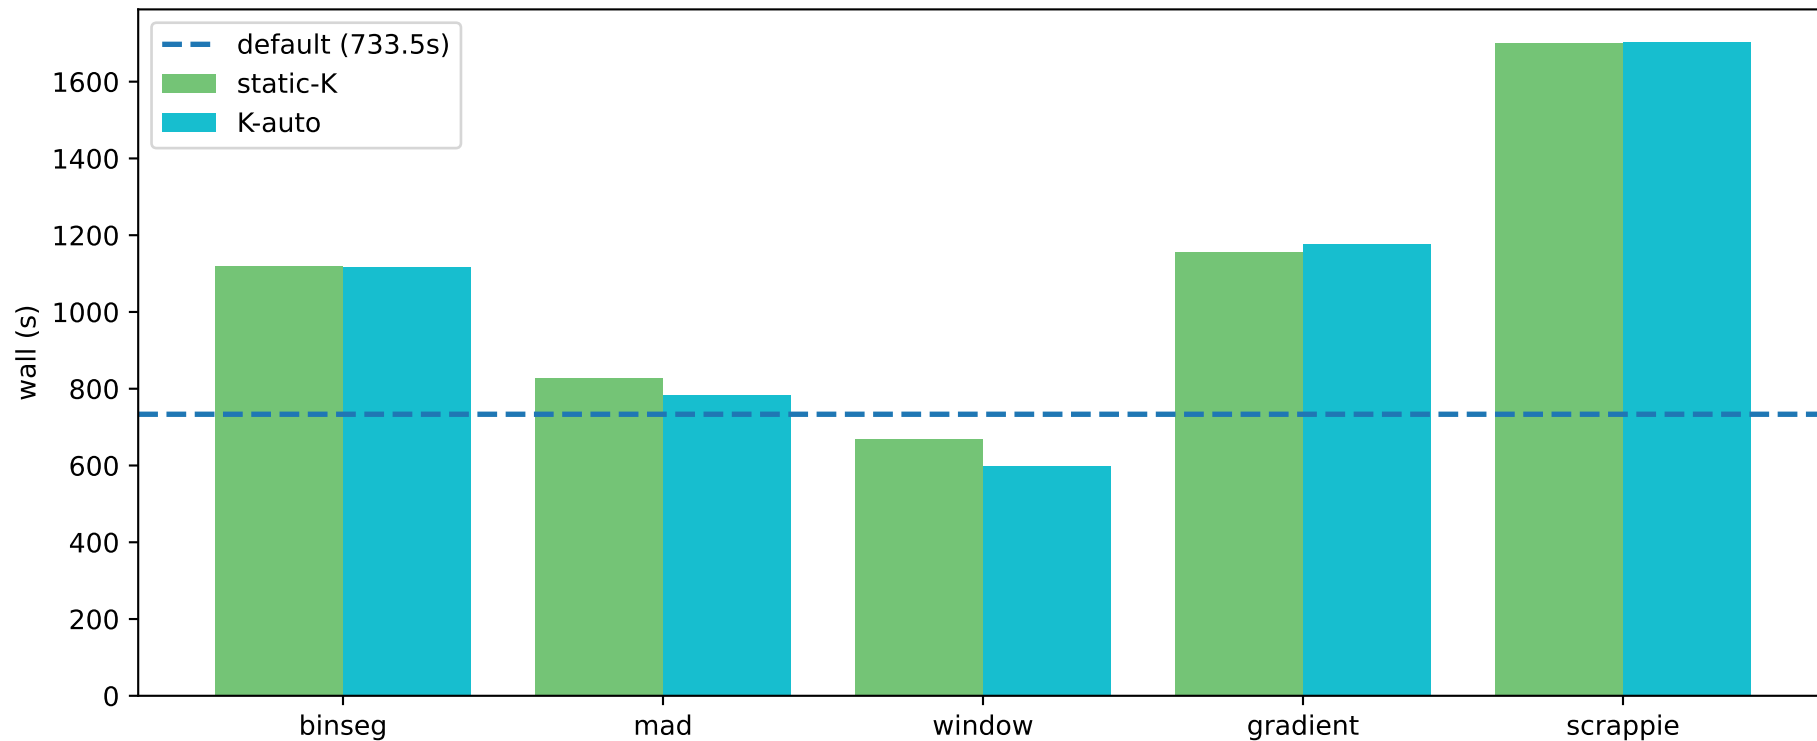

RB_hsap_full — wall time (sequential, exclusive node) vs default = 17899.1s

