JavaScript Plugin

Tony Voss

Version 3.0 18 Jan 2024 - plugin history here

Contents	Page
Introduction and summary	7
The basics	7
JavaScript and the embedded engine	8
File strings	8
Multiple consoles	8
Arranging a console	8
Parking	9
The close button	9
2. JavaScript plugin extensions	10
print(arg1, arg2)	10
alert(arg1, arg2)	10
printLog(arg1, arg2)	10
messageBox(message)	11
require(moduleName)	11
toClipboard(text)	11
text = fromClipboard()	11
text = cleanString(string)	11
timeAlloc(milliseconds)	11
consoleHide() or consoleHide(name)	12
consoleShow() or consoleShow(name)	12
consolePark() or consolePark(name)	12
consoleName(name)	12
stopScript() or stopScript(string)	12
Event handling	12
Timers	12
onSeconds(functionName, seconds[, parameter])	12
Cancelling timers	13
Other callbacks	13

onDialogue(function, dialogue)	13
onCloseButton(function)	14
Understanding the result	14
Implicit result	14
Explicit result	14
scriptResult(arg1, arg2)	14
3. OpenCPN APIs	15
OpenCPN messaging	15
OCPNgetMessageNames()	15
OCPNsendMessage(messageName[, message])	15
OCPNonMessageName(functionName, messageName)	15
Accessing OpenCPN's navigational data	16
navdata = OCPNgetNavigation()	16
navdata = OCPNonNavigation(function)	16
OCPNgetARPgpx()	16
OCPNonActiveLeg(functionName)	17
Data Streams	17
handles = OCPNgetActiveDriverHandles()	17
attributes = OCPNgetDriverAttributes(handle)	17
NMEA0183 Data	18
Sending data	18
OCPNpushNMEA0183(sentence)	18
Receiving data	18
OCPNonNMEA0183(functionName)	18
checkChars = NMEA0183checksum(sentence)	18
NMEA2000 Data	19
Receiving data	19
OCPNonNMEA2000(functionName, pgn)	19
Sending data	19
Position APIs	21
OCPNgetVectorPP(fromPosition, toPosition)	21
OCPNgetPositionPV(fromPosition, vector)	21
OCPNgetGCdistance(Pos1, pos2)	21
OCPNgetCursorPosition()	21

Waypoint APIs	22
OCPNgetWaypointGUIDs(selector)	23
OCPNgetActiveWaypointGUID()	23
OCPNgetSingleWaypoint(GUID)	23
OCPNdeleteSingleWaypoint(GUID)	23
GUID = OCPNaddSingleWaypoint(waypoint)	23
OCPNupdateSingleWaypoint(waypoint)	24
Route APIs	25
OCPNgetRouteGUIDs(selector)	25
OCPNgetActiveRouteGUID()	25
OCPNgetRoute(GUID)	25
OCPNdeleteRoute(GUID)	25
GUID = OCPNaddRoute(route)	25
OCPNupdateRoute(route)	26
Track APIs	27
OCPNgetTrackGUIDs(selector)	27
GUID = OCPNaddTrack(track)	27
OCPNgetTrack(GUID)	27
OCPNdeleteTrack(GUID)	27
OCPNupdateTrack(track)	27
Miscellaneous APIs	28
OCPNonContextMenu(function, menuItem [,info])	28
OCPNsoundAlarm()	28
OCPNgetAlSTargets()	29
OCPNgetNewGUID()	29
OCPNgetPluginConfig()	30
config = OCPNgetOCPNconfig()	30
OCPNgetCanvasView()	30
OCPNcentreCanvas(position [, ppm]);	30
OCPNrefreshCanvas()	30
4. JavaScript objects and methods	31
Position constructor	31
Position(lat, lon) or	31

Waypoints constructor	33
Waypoint()	33
About hyperlinks	34
Route constructor	35
Route() constructs a route object with its methods	35
About JavaScript objects and OpenCPN objects	37
Adding attributes to a bare object	37
5. Modules	38
Writing and loading your own object constructors	38
6. Working with Date Time	39
7. Working with files	40
Simple file access	40
readTextFile(file)	40
writeTextFile(text, file, access)	41
The File object	41
8. The _remember variable	43
9. Error handling	44
10. Execution time limit	45
11. Dialogues	46
onDialogue(function, dialogue)	46
Styling	49
Example with styling	49
12. Automatically running scripts	50
13. Working with multiple scripts	51
chainScript(fileString [, brief]);	51
<pre>brief = getBrief();</pre>	51
14. Working with multiple consoles	52
Communicating between scripts	52
Working with multiple consoles in scripts	52
consoleAdd(consoleName)	52
consoleExists(consoleName)	52
consoleClose(consoleName)	52
consoleGetOutput(consoleName)	52

consoleClearOutput(consoleName)	52
consoleLoad(consoleName, script)	52
consoleRun(consoleName [,brief])	52
consoleBusy(consoleName)	52
onConsoleResult(consoleName, function [, brief])	52
15. Tidying up	54
onExit(functionName)	54
16. The File Object	55
17. Working with SignalK	57
18. Working with NMEA2000	58
Background	58
The NMEA2000 object	58
Decoding received data	58
Shortcut	59
Sending data	59
The descriptors	59
Descriptor ambiguity	59
Concerning the descriptors	60
Using the canboat analyser	60
19. Invoking another process	61
Executing a program	61
Warnings	61
result = execute(command);	61
Running a shell script	62
20. JavaScript Plugin Tools	63
Consoles	63
Directory	63
NMEA	63
Message	63
Parking	63
Diagnostics	63
21. Tips	64
Examining objects	64
22. Trouble-shooting character code issues	65
Working with non-7-bit characters such as the degree symbol	65

23. Demonstration Scripts	66
A. Save script preferences for next script run	66
B. Process and edit NMEA sentences	66
C. Counting NMEA sentences over time	67
D. Locate and edit waypoint, inserting hyperlinks	68
E. Build routes from NMEA sentences	68
F. Build race courses	69
G. Driver	70
H. TackAdvisor	70
I. SendActiveRoute	71
Instructions for making this work with a device running iNavX	71
J. Copy ship's formatted position	72
K. Anchor watch	72
Appendix A. NMEA2000 and canboat analyser	73
Appendix B. Plugin version history	76
C. Document history	84

1. Introduction and summary

This document is a user guide and reference manual for the JavaScript plugin for OpenCPN.

The plugin allows you to run JavaScript and to interact with OpenCPN. You can use it to build your own enhancements to standard OpenCPN functionality.

There is a separate technical guide covering the inner workings of the plugin and instructions for building it from sources.

Changes since the previous version are highlighted in yellow.

Change in documentation only are highlighted in pale yellow.

The basics

Once the plugin has been enabled, its icon appears in the control strip.



Click on the icon to open the plugin console(s). The console comprises a script pane, an output pane and various buttons. You can write your JavaScript in the script pane and click on the **Run** button. The script will be compiled and executed. Any output is displayed in the output pane..

As a trivial example, enter

```
(4+8)/3
```

and the result 4 is displayed. But you could also enter, say

```
function fibonacci(n) {
    function fib(n) {
        if (n == 0) return 0;
        if (n == 1) return 1;
        return fib(n-1) + fib(n-2);
        }
    var res = [];
    for (i = 0; i < n; i++) res.push(fib(i));
    return(res.join(' '));
    }
print("Fibonacci says: ", fibonacci(20), "\n");</pre>
```

Get code

The script displays

```
Fibonacci says: 0 1 1 2 3 5 8 13 21 34 55 89 144 233 377 610 987 1597 2584 4181
```

This illustrates how functions can be defined and called, including recursively. So we have a super calculator!

This guide includes many JavaScript code examples. You can copy them and paste into the script window to try them or use as a starting point but the formatting does not survive this. For the non-trivial ones, a Get code link is given whereby you can access the code which you can copy. If the code is too long to copy from that displayed, you can use the Raw button to view it in a copyable form.

Note that the script pane displays line numbers - useful for understanding any syntax error messages. It also supports indent tabbing, which you should use to indent your script as in the above example. The plugin colours the script to aid understanding as follows:

- Comments
- Text strings
- JavaScript key words supported
- Plugin extensions to JavaScript documented in this guide
- JavaScript key words not supported do not use these words

You can use the Load button to load JavaScript from a .js file. The file name string is displayed above the script. The Save button saves the script back to the named file and the Save As button allows you to save it to a different chosen file.

If you have previously loaded scripts, Load will display a list of the ten most recently loaded scripts as well as an Other button. You can use the Organise button to move recent scripts into a Favourites list where they will endure.

If a file name string is displayed when the plugin is closed down, that script will be reloaded when the plugin is re-opened.

You can also paste a script in from somewhere else.

While a script is running, the Run button changes to Stop. This is relevant when a script is awaiting a call-back from OpenCPN (see later). Pressing Stop will cancel outstanding call-backs.

If you are online, Load also allows you to load a .js file from an https URL. The URL is recorded in the recent files and can be made a favourite. When the plugin restarts, it will reload a script from the URL. You might want save the script locally for offline use.

JavaScript and the embedded engine

A useful guide/tutorial on JavaScript can be found here. The engine fully supports ECMAScript E5.1 with partial support for E6 and E7.

Note that the embedded engine does not support:

- for-of loops
- · classes
- · arrow functions

The above tutorial also covers JavaScript's use in web pages which is not relevant at this time.

File strings

Some functions access files on your computer not by a dialogue window but by a file string, e.g. my projects/JavaScript/usefull script.js

A file string can be absolute - it identifies the location of the file explicitly. Sometimes, like the example above, it is relative to the plugin's *current directory*.

You can change the current directory in the Directory tab of the tools window, accessed via the tools button top-right in the console or via the plugin preferences button in the plugin's entry in OpenCPN options.

Multiple consoles

You can add extra consoles using the Consoles tab of the tools window. Each console can run its own script independently but can also communicate with other scripts. Typically, you may have a separate console for each task for which you are using the plugin.

You can delete a console using its close button. The console script must be cleared first as a precaution against accidental deletion and at least one console must remain.

When OpenCPN terminates normally or the plugin is deactivated, the consoles, their positions and sizes are remembered for next time the plugin is activated.

The later section <u>Working with multiple consoles</u> covers some of the many things you can do using multiple consoles.

Arranging a console

A console contains two panes, one for the script and its buttons and the other for the output and its button. They are like two panes of a sash window.

There is a sash bar between them, and the space available for each can be changed by moving the sash bar up or down.

You may find a console is in the way of other uses of OpenCPN. You can hide all consoles by toggling the JavaScript icon in the OpenCPN tool bar. Toggle it again to make all consoles visible. A script can hide itself (or another console). To make it visible again, you need to toggle the JavaScript icon once or twice until all consoles are visible. A hidden console will automatically become visible again if anything is written to its output pane.

Parking

A better way to reduce clutter is to park the console using the Park button in the top right of the console. This minimises it and parks it out of the way top left. You can unpark a parked console by clicking on its 'close' butto. This restores it to where it was before it was parked. It remembers where it was parked, so re-parking will use the same parking space.

If anything is written to the output pane when a console is parked, it will unpark itself so you can see the output.

It is possible to configure where consoles park using the plugin tools.

A script can park its console or another console. See later.

When a script terminates, the *result* (see later) is delivered to the output pane, thus making any hidden or very small console visible. It is possible to suppress the result so that this does not happen.

The close button

The console close button has several functions other than actually closing the console, depending on circumstances. What it does is explained thus:

- 1. If the script has set a call-back function, that function is called.
- 2. Else if the console is parked, it will be unparked
- Else the console is to be closed/deleted.
 - a. If the console has an active script running, a prompt is given to stop the script.
 - b. Else if the script window contains a script, a prompt is given to clear it
 - c. Else the console is closed and deleted.

2. JavaScript plugin extensions

As the JavaScript engine is intended for embedding, it does not in itself contain any input/output functionality, which is, inevitably, environment dependent.

I have implemented a number of extensions to provide interaction. Interactions with OpenCPN are covered in the next section. In this section we cover non-OpenCPN interactions..

```
print(arg1, arg2...)
```

The print function displays a series of arguments in the results pane. Each argument can be of type string, number, boolean, array or object. If an argument is an array, the elements will be listed. If it is an object, it will be displayed as its JSON string. Example:

```
print("Hello world ", 10*10, " times over\n");
```

Displays Hello world 100 times over. It is often useful to include the character "\n" as the last character to deliver a newline. If the console has been hidden, it will be shown so that the output can be seen.

```
print<colour>(arg1, arg2...)
```

Where < colour> is one of Red, Orange, Green or Blue.

As for print but prints in the specified colour. Example:

```
printGreen("This line will print in green\n");
printUnderlined(arg1, arg2...)
```

Displays the text underlined - useful for headings.

```
alert(arg1, arg2...)
```

This is similar to print but the output is displayed in an alert box. A trailing newline is not need here.

This function returns immediately, leaving the alert displayed so as not to hold up OpenCPN. The alert window has a button with which the user can dismiss the alert once read.

Because of the immediate return, it is possible to raise a subsequent alert before the previous one has been dismissed. In this case, the subsequent alert text will be added to the existing alert starting on a new line.

If you call alert with no argument, it returns the existing status true or false indicating whether the alert is being displayed, so you can test whether the alert has been dismissed by calling it without any arguments.

If you call alert with a single argument of false, any existing alert will be dismissed.

Example:

```
alert("This is the first alert");
alert("\nThis text will be added to the first alert");
[... other script steps]
if (alert()) print("The alert has not yet been dismissed\n");
alert(false); // dismisses alert
```

The script will not complete naturally until any alert has been dismissed by the user or by the script executing stopScript().

The alert box can be dragged where you wish and this repositioning will be remembered for subsequent alerts, including across OpenCPN relaunches.

```
printLog(arg1, arg2...)
```

Prints to the OpenCPN log file. No final newline is needed. Use sparingly.

messageBox(message)

Displays a message box/. There are various options available

```
choice = messageBox(message);
choice = messageBox(message, "OK");
choice = messageBox(message, "");
```

All these display the message in a message box with OK and Cancel buttons. The message may contain "\n" to split it across lines.

```
choice = messageBox(message, "YesNo");
```

Instead of the OK button, Yes and No buttons are provided

By default, the message box has a caption identifying it is from the JavaScript plugin and the console name. You can supply your own caption as a third argument. An empty string suppresses the caption.

```
choice = messageBox(message, "YesNo", "My caption");
```

The value of choice indicates which button was selected

- 1 OK
- 2 Yes
- 3 No

The cancel button raises a cancel error, which will normally terminate the script. You can handle the error yourself by catching it with the JavaScript try/catch capability - see Error Handling.

The message is displayed as a modal dialogue so the script does not continue until a button is selected. This is useful for multistep processing. It may impact the functioning of OpenCPN and the accessibility of other windows and its effect should be checked if conducting critical navigation. If called from within a callback, it will block all other callbacks. To avoid these issues, use alert or onDialogue.

```
require(moduleName)
```

Loads and compiles the given module. See the Modules section.

```
toClipboard(text)
```

Copies the supplied text string to the clipboard.

See an example application here.

```
text = fromClipboard()
```

Returns the contents of the clipboard as a string.

```
text = cleanString(string)
```

When text is copied from documents or text editors, it may contain non-obvious obscure characters, which make it difficult to parse. This filter 'cleans' the given string by converting selected non-ASCII characters to ASCII equivalents. This filter is automatically applied to JavaScript code which might be pasted in from elsewhere. Examples:

```
back & forward primes to prime

masculine ordinal and superscript 0 to degree

back & forward primes to prime

smart quotes to ordinary quote

masculine ordinal and superscript 0 to degree
```

You can test this filter in the plugin tools diagnostics tab.

```
timeAlloc(milliseconds)
```

If a script takes too long to run, it will time out to avoid blocking other functions of OpenCPN. This function grants more time and returns the time remaining at the time of the call. See the Execution time limit section.

consoleHide() or consoleHide(name)

Hides the console.

If a console name is given, that console will be hidden.

If hidden, the console will reappear when any output is added to the output window and on script termination.

NB Prior to plugin version 0.4, this function took a value of true or false. This use is deprecated.

consoleShow() or consoleShow(name)

Shows the console.

If a console name is given, that console will be shown.

consolePark() or consolePark(name)

Parks the console out of the way or if a name is given that console is parked. Parking a console is usually better than hiding it as you can gain access to it by clicking on the Close button without toggling the hide/show status, which effects all the consoles.

If no other consoles are parked, it will be parked in the left-most position at the top of the screen.

If other consoles are already parked, the console will be parked to the right of the rightmost parked console.

When a parked console is moved to a different level, it is no longer regarded as parked.

If this script step is performed in a console already parked, it will be minimised in the same parking position.

The parking place and spacing has a default location which is platform dependent. You can use the Parking tab in the tools to set your own custom location. This takes you through manually parking two consoles by which the plugin learns how you want consoles to be parked.

consoleName(name)

Changes the name of the console to that given. Returns the name.

If the argument is omitted, the existing name is returned.

You can also change any console's name in the consoles pane of the tools.

stopScript() or stopScript(string)

Causes the script to stop. If a string argument is supplied, it becomes the result.

Event handling

Often it is necessary to set up a response to an event. Many APIs set up a call-back to a function you supply and their API names include **on**. The first argument is the name of the function to be called on the event (not in quote marks). When the 'on' function is executed, a check is made that the nominated function exists within your main code. Usually any error will be reported on compilation. However, where a call is made within a called-back function, the error can only be discovered at that time.

Timers

onSeconds(functionName, seconds[, parameter])

Sets up a call to functionName after a time of seconds have elapsed. Optionally, you may include a third parameter, which will be used as the argument for the call-back. Example:

```
onSeconds(timesUp, 15, "15 seconds gone");
function timesUp(what){
    print(what, "\n");
    }
```

After 15 seconds, this would display the message 15 seconds gone.

Most APIs set up one call-back only. If you want the function to be called again, it needs set up the next call within it, e.g.:

```
onSeconds(timesUp, 15);
function timesUp(what){
    print("This will be displayed every 15 seconds\n");
    onSeconds(timesUp, 15);
   }
```

However, you can use the form

```
onAllSeconds(functionName, seconds[, parameter])
```

Which will repeatedly call the function every seconds.

You may set up up to 25 timed call-backs to different functions or the same function.

Cancelling timers

Both onSeconds & onAllSeconds return a timer identifier. You may capture this and use it to cancel a timer by calling either function with the identifier as the sole argument.

Example:

```
timerID = onAllSeconds(doSomething, 0.5);
countDown = 10;

function doSomething(){
    print("countDown ", countDown--, "\n");
    if (countDown < 0) onSeconds(timerID);
    }</pre>
```

Calling onSeconds with no parameters onSeconds () cancels all timers and their callbacks.

Other callbacks

```
onDialogue(function, dialogue)
```

Opens a dialogue window as defined in the dialogue argument which must be an array of structures each describing an element of the dialogue.

This function returns immediately to avoid holding up OpenCPN while you respond to the dialogue.

When you select one of the action buttons, the specified function is called with a modified copy of the dialogue structure as its argument. Example:

```
onDialogue(process, [{type:"field", label:"name"}]);
function process(dialogue){
    print("Name is ", dialogue[0].value, "\n");
    }
```

This script displays a dialogue with a single field labelled name together with an OK button. When the button is selected, the entered name is printed.

Complex dialogues with multiple components can be constructed and processed. This is described in the separate section <u>Dialogues</u>.

The script will not complete while a dialogue remains open, although you can use the Stop button or stopScript() to force script termination.

The dialogue box can be dragged where you wish and this repositioning will be remembered for subsequent dialogues, including across OpenCPN re-launches.

A call of onDialogue(false) will dismiss any existing dialogue and return true if there was an existing dialogue.

```
onCloseButton(function)
```

Sometimes, you might want to gain control of a script that is running without stopping it. This lets you set up a call-back to a function when you click the console's close button. If a call-back has been set up, this takes precedence over all other uses of the close button.

Understanding the result

After a script has completed, the *result* is displayed in blue in the output window after any other output, such as from print statements.

Implicit result

The result is usually the result of the last executed statement, so for

```
3+4;
3 == 4;
```

the result is false. The 3+4 is not the last statement. The last statement has a boolean value of false.

For

```
print("Hi there!\n");
```

this will display Hi there! and the result is undefined as the print function does not return a result.

If there are callbacks, the display of the result will be held over until the last callback has been completed or the script is stopped or an error has been thrown.

Explicit result

Instead of the implicit result, you can make it explicit using the scriptResult() function:

```
scriptResult(arg1, arg2...)
```

The arguments are the same as for print. This sets the result to what would be printed and it is displayed as the result later.

If scriptResult() is called more than once, the last call overrides previous calls.

The function returns the result that will be displayed, so you can manipulate previous results.

```
scriptResult("My result");
...
scriptResult("Previous result was: ", scriptResult());
```

This would leave a result of Previous result was: My result

If the scriptResult is set to null or the empty string "", the result is suppressed entirely.

```
scriptResult(null);
```

3. OpenCPN APIs

This section documents how to interact with OpenCPN through a number of Application Program Interface functions or 'API's

Their names all start with OCPN, so it is clear you are interacting with OpenCPN.

OpenCPN messaging

OpenCPN has a system of sending messages between itself and plugins or between plugins. Each console keeps a record of the messages it has received.

```
OCPNgetMessageNames()
```

Returns a list of the message names seen since the console was created. The list is one name per line. If a call-back is outstanding for that message, the name of the function is also displayed. Example:

```
print(OCPNgetMessageNames());
```

This is primarily used to determine what messages are being received and their precise names.

```
OCPNsendMessage(messageName[, message])
```

Sends an OpenCPN message. messageName is a text string being the name of the message to be sent, as reported by OCPNgetMessageNames. Optionally, you may include a second parameter being the JSON string of the message to be sent. Example:

```
OCPNonMessageName(functionName, messageName)
```

Sets up a call-back to functionName next time a message with the name messageName is received. The function is passed the message, which is in JSON format.

This example sets up a call-back to handleRT when a response is received the message requesting a route's details.

Get code

Notes:

- I have here set up the callback before sending the request to be sure the callback is in place when the message arrives.
- If the route GUID does not exist, the print will fail and throw an error. I am using JavaScript's try & catch to handle this.

As mentioned previously, call-backs are usually one-shot. But you can set up an enduring callback using the *All* variant

OCPNonAllMessageName(functionName, messageName)

Here functionName will be called each time the named message is received.

Calling OCPNonMessageName with no parameters will cancel any outstanding callbacks.

NB Sending a message to OCPN_DRAW_PI is not supported and will throw an error.

Accessing OpenCPN's navigational data

You can access OpenCPN's navigational data in several ways.

navdata = OCPNgetNavigation()

This function returns the latest OpenCPN navigation data as a structure as shown:

Attributes	.fixTime		Time of fix in seconds since 1st January 1970
	.position	.latitude	latitude in degrees
		.longitude	longitude in degrees
	.SOG	1	Speed Over Ground
	.COG		Course Over Ground
	.HDM		Heading Magnetic
	.HDT		Heading True
.variation			Magnetic variation
	.nSats		Number of satellites

Example use:

```
fix = OCPNgetNavigation();
print("Last fix had ", fix.nSats, "satellites\n");
```

While developing this API, I experimented with making it Signal K friendly and returned a Signal K style structure, which is much more complicated. That version remains available as

```
navdata = OCPNgetNavigationK();
```

If you want to explore this, you can print the structure.1

navdata = OCPNonNavigation(function)

This is an alternative to OCPNgetNavigation(). The function is called with the navigation data as its argument the next time the navigational data changes. The data structure is same as that retuned by OCPNgetNavigation except that .HDM and .nSats are not included.

```
navdata = OCPNonAllNavigation(function)
```

This invokes the function each time the navigational data changes.

It can be cancelled with a parameterless call:

```
OCPNonNavigation();
```

OCPNgetARPqpx()

This function returns the active route point as a GPX string or an empty string if there is no active route point. You need to parse the GPX string as required. Example:

¹ Printing a JavaScript object in an easy-to-read format is covered in Examining objects

```
APRgpx = OCPNgetARPgpx();  // get Active Route Point as GPX
if (APRgpx.length > 0){
    waypointPart = /<name>.*<\/name>/.exec(APRgpx);
    waypointName = waypointPart[0].slice(6, -7);
    print("Active waypoint is ", waypointName, "\n");
    }
else print("No active waypoint\n");
Get code
```

OCPNonActiveLeg(functionName)

Sets up a function to process the next active leg information received by the plugin. The function returns a structure containing the following attributes:

.markName	Destination waypoint name - abbreviated to six characters
.bearing	Bearing to waypoint
.distance	Distance to waypoint
.xte	The cross-tack error
.arrived	true if within the arrival circle, else false

Example:

```
OCPNonActiveLeg(processInfo);
function processInfo(info){
    print(info.distance, " nm to go to mark ", info.markName, "\n");
    }
```

Data Streams

OpenCPN has various data streams as set up in the Options Connections panel.

Prior to OpenCPN v5.8, all data streams were managed according to the settings in this panel. In v5.8 and later, you can direct output to a specific stream using its *handle* - a text string identifying it.

The following APIs can be used to work with handles:

```
handles = OCPNgetActiveDriverHandles()
```

This returns an array of text strings being the handles for the active streams.

We are advised treat the handles as opaque strings and not to interpret the data in them.

```
attributes = OCPNgetDriverAttributes(handle)
```

Given a handle, this returns a structure containing the handle's attributes.

The following script lists all attributes of all active streams

```
handles = OCPNgetActiveDriverHandles()
for (h = 0; h < handles.length; h++){
    attributes = OCPNgetDriverAttributes(handles[h]);
    print(handles[h], "\t", attributes, "\n");
    }
Get code</pre>
```

Page 17 of 84

NMEA0183 Data

Sending data

```
OCPNpushNMEA0183(sentence)
OCPNpushNMEA0183(sentence, driverHandle)
```

sentence is an NMEA sentence. It will be truncated at the first * character, thus dropping any existing checksum. A new checksum is appended and the sentence pushed out over the OpenCPN connections. Example:

```
OCPNpushNMEA("$OCRMB,A,0.000,L,,Yarmouth," + "5030.530,N,00120.030,W,15.386,82.924,0.000,5030.530,S,00120.030,E,V");
```

A check is made that the sentence starts with an NMEA heading. Officially, the maximum length of an NMEA sentence with checksum is 80 but OpenCPN allows much longer sentences.

If driverHandle is specified, the sentence will be pushed through the specified connection. Otherwise it will be pushed to all relevant connections.

The previous API OCPNpushNMEA is deprecated in favour of OCPNpushNMEA0183.

Receiving data

```
OCPNonNMEA0183(functionName)
OCPNonNMEA0183(functionName, ident)
```

The earlier form OCPNonNMEAsentence is deprecated

Sets up a function to process the next NMEA0183 sentence received by the plugin. The function returns a structure containing OK -a boolean value concerning the validity of the checksum - and value - the sentence itself. Example:

```
OCPNonNMEA0183(processNMEA);
function processNMEA(result){
   if (result.OK) print("Sentence received: ", result.value, "\n");
   else print("Got bad NMEA checksum\n");
}
```

If ident is omitted, any NMEA0183 sentence will be passed to the function. Only a single one of these 'any sentence' calls can be outstanding.

If ident is provided, it must be 3 or 5 letters specifying the sentence type to be received. If 5 letters, the talker ID is ignored. You can have multiple requests outstanding, allowing you to handle different sentence types in different functions. This is much more efficient than receiving evert sentence and then deciding what to do depending on the sentence type.

You can have both one 'any sentence' and many specific sentence calls.

```
OCPNonAllNMEA0183(functionName)
```

```
OCPNonAllNMEA0183(functionName, ident)
```

With these variants the function is passed every sentence without the need to set up a further call.

```
OCPNonAllNMEA0183()
```

With no parameters, this cancels all outstanding NMEA0183 listening.

```
checkChars = NMEA0183checksum(sentence)
```

Returns a two character string being the correct checksum for sentence. Any existing checksum is ignored.

The plugin handles the NME0183 checksum internally. You do not normally need to check it or calculate it. However, this function returns the check characters, should you require them.

NMEA2000 Data

Working with NMEA2000 data is much more complicated than with NMEA0183. OpenCPN has the capability built in to receive NMEA2000 data for many data types (PGNs).

It is also possible to work with NMEA2000 data within JavaScript. You might want to look at the data in more detail than is available through OpenCPN or to send or receive PGNs not built in to openCPN.

Receiving data

OCPNonNMEA2000(functionName, pgn)

OCPNonAllNMEA2000(functionName, pgn)

Sets up a function to process the next payload for the given PGN.

The function will be called with three arguments as in this example:

```
OCPNonNMEA2000(handle, pgn);
function handle(payload, pgn, source){
    // payload is binary message
    // source is the OpenCPN handle for the input driver
```

The payload comprises an Actisense header followed by the NMEA2000 data

Byte offset Containing
00, 01 0x93, xx
02 priority
03-05 PGN (binary)
06 destination
07 source address

08-11 timestamp (undefined in OpenCPN)

12 count for NMEA2000 data

13 onwards NMEA2000 data

See Working with NMEA2000 for how to work with this.

When receiving navigational data that is regularly repeated, setting up one-shot functions may be most convenient. But, if it is important to catch all data without missing some, the 'All' call would be preferable. For example, if you request a response from all stations, the data could arrived rapidly and once only.

OCPNonAllNMEA2000()

With no parameters, this cancels all outstanding NMEA2000 listening.

Sending data

OCPNpushNMEA2000(handle, pgn, destination, priority, payload)

Sends out NMEA2000 data, where

handle driver handle

pgn the PGN of the data to be sent

destination the destination address to which to be sent. 255 is all stations.

priority priority of message

payload binary payload as above

The binary data is difficult to work with. It is strongly recommended to use the plugin's NMEA2000 object, which can decode and encode payloads. See Working with NMEA2000 Data.

Position APIs

A position has two attributes - a latitude and longitude pair.

We can create a position thus:

```
myPosition = {latitude:61,longitude:2};
```

The difference between two positions is a vector comprising a bearing and distance pair.

```
OCPNgetVectorPP(fromPosition, toPosition)
```

Returns the vector to move from the first position to the second position. Example:

```
OCPNgetPositionPV(fromPosition, vector)
```

Given a position and a vector, returns the position after applying the vector. Example:

```
start = {latitude:55, longitude:-1};
vector = {bearing:180, distance:60};
end = OCPNgetPositionPV(start, vector);
print("end position ", end, "\n");
// prints end position {"latitude":54.001, "longitude":-1}
```

The new position inherits its prototype from the start position.

```
OCPNgetGCdistance(Pos1, pos2)
```

Returns the great circle distance between two positions.

```
OCPNgetCursorPosition()
```

Returns the cursor position as a latitude and longitude pair.

Waypoint APIs

In the JavaScript plugin, waypoints have the following attributes

Property	Description	Notes
.GUID		
.position	.latitude .longitude	Required
.markName	The waypoint mark name - default is Circle	
.description	Free text description of waypoint	
.isVisible	true if waypoint is displayed - default ??	
.isNameVisible	true if waypoint mark name is displayed - default is false	
.iconName	Can be set in mixed text case but is always returned in lower case	se only
.iconDescription	The icon name in mixed case, as in the property's window	Read only
.nRanges	Number of range rings - default is 0	
.rangeRingSpace	Space between rings - default 1.0	
.rangeRingColour	In HTML hex format - default #FF0000 (red)	
.useMinScale	If true, only display waypoint at large scale - default ??	
.minScale	If .useMinSCale is true, the minimum scale for waypoint to be displayed - default 1e9	
.hyperlinkList	Array of hyperlinks, each containing .description text to be linked .link The URL to link to .type (use unknown - do not use)	
.creationDateTime	Creation date/time in milliseconds since 1st January 1970 (to 1 second)	
.isFreeStanding	If true, this waypoint exists independently of any route and appears in the waypoints list. If false, this waypoint exists only by being included in one or more routes.	Read only
.routeCount	Count of the number of routes in which this waypoint occurs	Read only

Later in this guide in <u>Objects and methods</u> I describe the **position**, **waypoint** and **route** objects, which are the most powerful way of handling these concepts in JavaScript.

This section documents the underlying APIs used to implement them. You can call these APIs directly, if you wish, but the returned structures will not include any methods.

OCPNgetWaypointGUIDs(selector)

Returns an array of waypoint GUIDs.

```
selector determines which GUIDs are returned and can take the following values

0 or selector omitted objects not in layer

1 objects in a layer

-1 all objects both in layer and not

NB Prior to OpenCPN v5.8 and plugin v2.1 this selector is ignored and all objects are returned, as if it were -1. Thus the behaviour of OCPNgetWaypointGUIDs () has changed.
```

Example:

Note: the returned array includes the self-standing waypoints that are listed in the waypoints tab of the Route & Mark Manager and also routepoints that are only used in routes which are not included in that list.

OCPNgetActiveWaypointGUID()

Returns the GUID of the active waypoint or false if none.

OCPNgetSingleWaypoint(GUID)

Returns a waypoint structure for the given GUID. Throws an error if the GUID does not exist.

Example:

```
GUID = "137eecdd-e3e0-4eea-9d72-6cec0e500dbe";
myWaypoint = OCPNgetSingleWaypoint(GUID);
print("Waypoint name is ", myWaypoint.markName, "\n");
```

OCPNdeleteSingleWaypoint(GUID)

Deletes a single waypoint, given the GUID.

Example:

```
OCPNdeleteSingleWaypoint("6aaded39-8163-43ff-9b6d-13ad729c7bb1");
```

Throws an error if there is no existing waypoint with the given GUID.

```
GUID = OCPNaddSingleWaypoint(waypoint)
```

Adds a single waypoint into OpenCPN. The argument must be a waypoint structure.

If waypoint.GUID contains a GUID, that will be used. If that GUID already exists, an error is thrown. If no GUID is provided, a new GUID will be obtained for you. This function returns the GUID used. If you do not supply a GUID, you need to save the returned one if needed.

Example:

```
newWaypoint = {position:{latitude: 60, longitude:-1}};
newWaypoint.markName = "Near pub";
newWaypoint.iconName = "anchor";
newWaypoint.isVisible = true;
newWaypoint.description = "Good pub close by ashore";
GUID = OCPNaddSingleWaypoint(newWaypoint);
newWaypoint.GUID = GUID; // store the allocated GUID back in newWaypoint
```

OCPNupdateSingleWaypoint(waypoint)

Updates a single waypoint into OpenCPN. The argument must be a waypoint structure with an exiting GUID.

Throws an error if there is no existing waypoint with the given GUID.

Route APIs

Route structures have the following attributes

.GUID	
.name	Route name
.from	From text
.to	To text
.description	The route description
.isVisible	True if the route is being displayed else false
.isActive	True if this route is active
.waypoints	Array of waypoints in route

OCPNgetRouteGUIDs(selector)

Returns an array of route GUIDs. See OCPNgetWaypointGUIDs for specification of selector.

OCPNgetActiveRouteGUID()

Returns the GUID of the active route if any, else false.



When a route is active, OCPNgetActiveWaypoint() returns the GUID of the active waypoint within the route. If the same waypoint occurs more than once in the same route, it is not possible to learn which of its occurrences is the active one.

OCPNgetRoute(GUID)

Returns a route structure for the given GUID, complete with an array of the waypoints. Throws an error if route does not exist.

Example:

```
myRoute = OCPNgetroute("137eecdd-e3e0-4eea-9d72-6cec0e500abc");
print("Route name is ", myRoute.name, "\n");
```

OCPNdeleteRoute(GUID)

Deletes a route, given the GUID.

Example:

```
OCPNdeleteRoute("6aaded39-8163-43ff-9b6d-13ad729c7abc");
```

Throws an error if the route does not exist.

Any waypoints in the route that are not free-standing and are not included in any other route will be deleted.

GUID = OCPNaddRoute(route)

Adds a route into OpenCPN. The argument must be a route structure, which should contain an array of waypoints.

If a waypoint is an existing one, only the GUID need be supplied. The other attributes will be ignored.

If a waypoint is new, do not include a GUID. A new point will be created using the attributes of the point.

If route.GUID contains a GUID, that will be used. Otherwise a new GUID will be obtained for you. This function returned the GUID used. If you do not supply a GUID, you need to save the returned one if needed. If you supply a GUID and it is already in use, an error is thrown.

OCPNupdateRoute(route)

Updates a route into OpenCPN. The argument must be a route object with an exiting GUID.

Throws an error if there is no existing route with the included GUID.

This API can be used to

- update the attributes of the route structure as listed above
- add, remove or reorder waypoints in the route

Note: if an included waypoint has no GUID, it will be added as a new routepoint. If it has a GUID, that will be assumed to be an existing waypoint and the rest of the waypoint structure is ignored.

If you want to update a waypoint's details, use the OCPNupdateSingleWaypoint function on that waypoint.

Track APIs

.GUID	
.name	Track name
.from	From text
.to	To text
	St
.waypoints	Array of trackpoints, each of which comprises .latitude .longitude .timeStamp

OCPNgetTrackGUIDs(selector)

Returns an array of route GUIDs. See OCPNgetWaypointGUIDs for specification of selector.

GUID = OCPNaddTrack(track)

Adds a track into OpenCPN. The argument must be a track structure, which should contain an array of trackpoints.

If a trackpoint is an existing one, only the GUID need be supplied. The other attributes will be ignored.

If a trackpoint is new, do not include a GUID. A new point will be created using the attributes of the trackpoint.

If track.GUID contains a GUID, that will be used. Otherwise a new GUID will be obtained for you. This function returned the GUID used. If you do not supply a GUID, you need to save the returned one if needed. If you supply a GUID and it is already in use, an error is thrown.

OCPNgetTrack(GUID)

Returns a track structure for the given GUID, complete with an array of the trackpoints. Throws an error if the track does not exist.

OCPNdeleteTrack(GUID)

Deletes a track, given the GUID.

OCPNupdateTrack(track)

Updates a track into OpenCPN. The argument must be a track object with an exiting GUID.

Throws an error if there is no existing track with the included GUID.

This API can be used to

- · update the attributes of the track structure as listed above
- add, remove or reorder trackpoints in the track

Note: if an included trackpoint has no GUID, it will be added as a new trackpoint. If it has a GUID, that will be assumed to be an existing trackpoint and the rest of the trackpoint structure is ignored.

Changing details of a trackpoint is not supported.

Miscellaneous APIs

OCPNonContextMenu(function, menuItem [,info])

Adds menultem to the context menu. When this is selected, the function is invoked and given the position. The position has an additional attribute info which contains the third parameter from the above call or an empty string, if none, The context menu item is removed so it must be recreated if it is still required.

Example:

```
menuName = "Drop Anchor";
OCPNonContextMenu(dropMark, menuName);
consolePark();

function dropMark(location){
    waypoint = {
        position: location,
        markName: "Anchorage", iconName:"Anchor",
        minScale: 52000, useMinScale: true,
        }
    OCPNaddSingleWaypoint(waypoint);
    OCPNonContextMenu(dropMark, menuName);
    }
}
```

This script adds a context menu item Drop Anchor, which can be used to drop a bespoke anchor mark, which as written here only displays at large scale.

OCPNsoundAlarm()

Plays an alarm sound. Returns true if successful.

OCPNsoundAlarm(file)

Plays the sound file specified in the file. Returns true if successful.

file is resolved in the same way as when reading a file. So you could use the "?" convention to open a file dialogue.

OCPNgetAISTargets()

Returns an array of the AIS objects each with the following attributes:

.MMSI	The target's MMSI number	
.shipName	Ship name (if received)	
.class	0 if Class A; 1 if Class B	
.callSign	Radio callsign	
.IMO	Ship identification number	
.shipType	Number representing the ship type, including: 19 pleasure vessel 34 vessel diving 36 sailing vessel 37 pleasure craft 40 high speed craft 50 pilot vessel 52 tug 70 cargo ship Fuller list here.	
.navStatus	Number representing the navigational status. The following values are believed to have the meaning ascribed: 0 underway 1 at anchor 5 moored 14 AIS SART 15 AIS SART test Fuller list here.	
.position.latitude .position.longitude	Position	
.range	Range in nm	
.bearing	Bearing °T	
.CPAvalid	if true, CPA details valid	
.CPAminutes	Time to CPA in minutes	
.CPAnm	Nautical miles distance at CPA	
.alarmState	0 no alarm 1 alarm set 2 alarm acknowledged	

OCPNgetNewGUID()

This function returns a new GUID string as generated by OpenCPN.

OCPNgetPluginConfig()

This function returns a structure detailing the plugin configuration with the following attributes:

Attributes	.PluginVersionMajor	5	
	.PluginVersionMinor	Plugin version	
	.patch	Patch number	
	.comment	Any comment about the version	
	.ApiMajor	OpenCPN API version number	
	.ApiMinor		
	.wxWidgets	wxWidgets version number	
	.DuktapeVersion	Duktape JavaScript engine version number	
	.inHarness	True if plugin running in the test harness, else false	

config = OCPNgetOCPNconfig()

Returns the OCPN configuration as a JSON string.

You could print this to see what information is available.

By default this is the configuration at the time the plugin was activated. If the configuration might have changes, you can get an updated version through the OCPNsendMessage and OCPNonMessageName mechanism.

OCPNgetCanvasView()

Returns a selection of attributes of the present canvas viewport.

Attributes	.centre	The centre of the canvas as a lat & long position
	.ppm	The current scale in screen pixels per metre
	.chartScale	The scale of the chart. This scale is displayed bottom right as 1: <scale>. The displayed number is rounded and may differ slightly.</scale>
	.pixWidth	The width of the canvas in screen pixels
	pixHeight	The hight of the canvas in screen pixels

OCPNcentreCanvas(position [, ppm]);

Centres the canvas at the given position. An optional second argument can provide a new scale, expressed in screen pixels per metre. If omitted, the scale is unchanged.



If you want to zoom in or out when centering the chart, you can make the scale relative to the current scale with something like this:

// centre and zoom out x4
OCPNcentreCanvas(pos, OCPNgetCanvasView().ppm/4);

OCPNrefreshCanvas()

Refreshes the canvas window. If your script has made changes to displayed information and the display is not being updated,, this will update the display.

4. JavaScript objects and methods

JavaScript supports the use of objects. These can be a convenient way of representing complex data structures together with their own properties and methods.

You can construct your own objects within your script or load a constructor from a file using the require function. By convention, we give constructors an initial capital letter as a reminder that they are constructors.

The JavaScript plugin has a library of useful constructors for constructing relevant objects and these are described here:

Position constructor

```
Position(lat, lon) or
Position({latitude:lat, longitude:lon})
```

This constructs a position object as follows:

To load constructor	require("Position")	 Note: the constructor can take optionally latitude & longitude values, e.g. myposition = new Position(60, -1.5); a latitude & longitude pair, e.g. myposition = new Position({latitude:60,longitude:-1.5}); an existing position object e.g. myposition = new Position(existingPosition); A position text string e.g. myPosition = new position("20° 14.56'N 2° 1.5'W"); 	
Attributes	.latitude	latitude in degrees	
	.longitude	longitude in degrees	
	.fixTime	time of position fix if recorded, else 0	
Properties	.formatted	Is the position formatted for the human eye	
	.nmea	Is the position formatted as used in NMEA sentences. You need to add the comma before and after, if required.	
Methods	.NMEAdeode(sentence, n)	decodes the NMEA sentence and sets the position to the nth position in the sentence	
	.latest()	Sets the position to the latest position available from OpenCPN and .fixTime to the time of that fix. If no fix has been obtained since OpenCPN was started, the time will be zero.	

Example 1:

```
Position = require("Position"); // loads the constructor myPosition = new Position(58.5, -1.5); // constructs a position myPosition.longitude = 0.5; // change the longitude print(myPosition.formatted, "\n"); // displays 58° 30.000'N 000° 30.000'E print(myPosition.NMEA, "\n"); // displays 5830.000,N,0030.000,E
```

Example 2:

The Position constructor can also be given a latitude & longitude pair structure. Extending the code in Example 1, we could write:

print(thisPos.formatted, "\n"); // displays 50° 30.530'N 001° 20.030'W

Waypoints constructor

```
Waypoint()
```

constructs empty waypoint object with its methods

```
Waypoint(lat,lon)
```

constructs waypoint object for the given latitude and longitude

Waypoint(position)

constructs waypoint object for the given position

Waypoint(waypoint)

constructs waypoint object for the given waypoint, thus adding the waypoint object methods to a waypoint structure.

The constructed waypoint object is as follows:

To load constructor	require("Waypoint")	
Attributes		As for waypoints
Methods	.add(GUID)	Adds the waypoint into OpenCPN using the optional GUID, which must not already exist. If GUID is omitted, a new GUID will be obtained. Returns the GUID if successful, else an error is thrown. You must save the GUID if needed.
	.get(GUID)	Gets the waypoint from OpenCPN and sets the object to it. If GUID is supplied, that is the waypoint loaded. If GUID is omitted, the GUID in waypoint.GUID is used. Returns the GUID if successful, else an error is thrown. You must save the GUID if there is any doubt which one was used.
	.update()	Updates the waypoint in OpenCPN to match the contents of this object. The GUID in waypoint.GUID must already exist else an error is thrown.
	.delete(GUID)	Deletes the waypoint in OpenCPN with GUID. If GUID is omitted, uses the GUID in waypoint.GUID. An error will be thrown if a waypoint with the GUID does not exist.
	.summary()	Returns a brief readable summary of the waypoint markName and position.



A waypoint returned from OpenCPN is 'bare' - just containing the attributes and no methods. To add the methods to a bare waypoint, construct a copy using, say

```
bareWaypoint = OCPNgetWaypoint(GUID);
fullWaypoint = new Waypoint(bareWaypoint);
// now you can use...
print(fullWaypoint.summary(), "\n");
```

About hyperlinks

Waypoints and routes can have a description attribute. They can also have one or more hyperlinks - attributes which load a web link or a local file. A hyperlink is itself an object thus:

In a waypoint object, the hyperlinks exist as an array of objects in the .hyperlinks attribute. Herewith an example of adding hyperlinks to a a waypoint:

Route constructor

Route () constructs a route object with its methods

Route (route) constructs a copy of the given route adding methods

The constructed route object is as follows:

To load constructor	require("Route")	
Attributes	.name	The route name
	.GUID	
	.from	The from text
	.to	The to text
	.description	The description field
	.waypoints	An array of the waypoints in the route, each being a waypoint object.
	.isVisible	Determine whether the route is displayed.
	.isActive	Read-only. The value is ignored when updating OpenCPN
	.waypoints	An array of the waypoints in the route, each being a waypoint object.
Methods	.add(GUID)	Adds the route into OpenCPN using the optional GUID, which must not already exist. If GUID is omitted, a new GUID will be obtained. Returns the GUID which you may need to save. An error is thrown if the GUID is already in use.
	.get(GUID)	Gets the route from OpenCPN and sets the object to it. If GUID is supplied, that is the waypoint loaded. If GUID is omitted, the GUID in waypoint.GUID is used. Returns the GUID if successful, else an error is thrown. You must save the GUID if there is any doubt which one was used. route.waypoints will be an array of the route's waypoints.
	.update()	Updates the route in OpenCPN to match the contents of this object. The GUID in route.GUID must already exist otherwise an error is thrown.
	.delete(GUID)	Deletes the route in OpenCPN with GUID. If GUID is omitted, uses the GUID in route. If a route with the GUID does not exist, an error is thrown.
	.purgeWaypoints()	Deletes all waypoints within the route object, including the waypoint's hyperlinks.



A route returned from OpenCPN is 'bare' - just containing the attributes and no methods. To add the methods to a bare route, construct a copy using, say

About JavaScript objects and OpenCPN objects

It is important to understand the difference between objects in OpenCPN and the objects in a JavaScript representing them. Consider the following:

JavaScript	What changes in JavaScript	What changes in OpenCPN
<pre>myRoute = new Route()</pre>	New JavaScript route object created	Nothing
myRoute.add()	Nothing	Route is added
<pre>myRoute.purgeWaypoints()</pre>	Waypoints are purged from the JavaScript object	Nothing
myRoute.delete()	Nothing	OpenCPN route is deleted
delete myRoute	JavaScript object is deleted	Nothing

Adding attributes to a bare object

Many of the objects created by the above constructors include methods you can call or accessors such as the .formatted string in a position.

Most objects created by an OpenCPN API are 'bare' - they do not include methods etc.

If you want add the methods to a bare object, there are two ways.

Some of the constructors will accept a bare object as their argument.

```
bareRoute = OCPNgetRoute(GUID);
fullRoute = new Route(bareRoute)
// now you can use, for example, ...
fullRoute.update();
```

Another way is to use a JavaScript statement that adds the missing attributes.

```
Object.assign(bareRoute.prototype, fullRoute);
```

This assigns to bareRoute prototype the prototype of fullRoute. This technique can be used even when the constructor does not accept a bare object as an argument.

5. Modules

Above, you learnt how to load a constructor from the built-in library.

You can also load code from your own file space using the require function. If the require argument is a simple name without a suffix or file path separator, require looks for a built-in component. Otherwise it uses the require parameter to look for a file. If the parameter is a relative file string, it looks relative to the current directory set for the plugin. If it is an absolute file path, then it loads that file.

Loading your own functions

As an example of how to write your own functions to load with require, consider the fibonacci function shown above.

You could save this into a file, load it with a require statement and call it, e.g.:

```
require("myJavaScipts/fibby.js");
print("Fibonacci said: ", fibonacci(10), "\n");
```

Writing and loading your own object constructors

Constructors work similarly to functions but construct an object by assigning things to its this value. Here is a trivial constructor for an object which includes a method

Note how the attributes are set when the constructor is called. As this is a constructor, an object must be created from it, once loaded. Example:

```
Boat = require("myjavascripts/Boat.js");
myBoat = new Boat("Antipole", "Ovni", 395, 12);
myBoat.length = 12.2; // correction
print(myBoat.summary(), "\n");
// prints Antipole is an Ovni 395 of length 12.2m
```

6. Working with Date Time

OpenCPN counts the time in seconds since 1st January 1970.

The JavaScript Date object uses milliseconds since the same epoch, so it is necessary to convert as required. The following script illustrates this:

When I tested the above, it displayed:

Latest position 50° 41.054'N 002° 5.307'W was acquired 2.7s ago at 2020-08-12 09:47:34.762+01:00

7. Working with files

Files can accessed in the following modes2:

Mode	Meaning
READ	File made available read-only
WRITE	File will be over-written. No read access.
READ_WRITE	Available for read and write. File can be updated.
APPEND	Data will be appended to existing file. No read access.
WRITE_EXCL	Like WRITE but the file must not already exist

Files are located using a fileString. A simple file name can be converted to a fileString with

```
fileString = getFileString(file[, mode=READ])
```

What happens

Argument	What happens	Notes	
Is fileString	No change	Includes one or more directories	
Is fileName	Looks for the file in the plugin current directory and returns the fileString		
Starts with '??'	A dialogue is opened so you can choose the file. The text after "??" Its used as the prompt.	If mode is WRITE or WRITE_EXCL, it will be a save dialogue, otherwise an open dialogue.	
Starts with single '?'	The rest of the string will be treated as a fileName or fileString. If the file is not found, a dialogue will be opened so you can choose the file.		

Simple file access

readTextFile(file)

file is passed through getFileString and so can be a file name or fileString and can start with '?' or '??'.

Reads the text file and returns the text content as a string. Example:

```
input = readTextFile("/Users/Tony/myfile");
print("File contains: ", input, "\n");
```

The whole file will be loaded into memory. This is not wise for large files. For these see the File object below.

If file commences "https:" or "http:", it is taken to be a URL and the file will be read from that location. NB OpenCPN will be blocked while the file is read.

² These modes are those supported by wxWidget's wxFile class

writeTextFile(text, file, access)

Writes the text to the file.

Access	Mode used
0	WRITE_EXCL
1	WRITE
2	APPEND

Example to append a sentence to a file:

```
sentence = "$PCDIN,01F802,000C8286,09,3AFC8CCA0500FFFF";
writeTextFile(sentence, "/Users/Tony/myfile.txt", 2);
```

The File object

The file object provides a flexible way to work with large files, whether text or binary. The File object constructor must be loaded and a file object constructed for each file being used.

```
File = require("File");  // load the constructor
myFile = new File("myData.txt" [, mode]);
```

The file name string follows the rules for <code>getTextFile()</code>, so if it commences with '?', a dialogue will be opened. The file object has the following properties

Property	Description	Notes
.length()	Returns length of the file in bytes	
.eof()	true if the current position is at file end	
.seek(offset)	Sets the current position to offset and returns the new offset.	The maximum offset is length - 1. If offset > length-1, offset is left at end of file and that offset is returned.
.tell()	Returns the present offset.	
.getAllText()	Returns all data as text	Not suitable for large files
<pre>.getTextLine()</pre>	Each successive call returns one line of text, starting from the beginning of the file.	Excludes any newline character \n
.getText(count)	Returns count characters starting from present position	The number of characters returned will be less than count if the end of file is encountered.
.getBytes(count)	As for .getText but returns a Uint8Array (array of unsigned 8-bit bytes).	The length of the array will be less than count if the end of file is encountered.
<pre>.writeText(string)</pre>	Writes the string starting at the current offset.	
.writeBytes(Uint8Array)	Writes a byte array starting at the current offset.	
.fileString	The fileString for the file.	Read-only attribute

.getTextLine() accesses the file in blocks and can be used to read large files without using large amounts of memory. You could process a large text file with

```
while (!myFile.eof()){
    textLine = myFile.getTextLine();
    // do something useful with textLine
}
```

The first call to getNextLine() returns the first line in the file. Successive calls return the text line-by-line. Any call to seek() causes getNextLine() to start again at the beginning, regardless the offset given.

The File object can be used for complex file operations. The following example replaces bytes at offsets 100 & 101:

```
File = require("File");
myFile = new File("testWriteData.txt", READ_WRITE);
data = new Uint8Array(2);
data[0] = 111; data[1] = 222;
myFile.seek(100);
myFile.writeBytes(data);
```

8. The remember variable

Sometimes you may want to remember information from one script run to another - such as some preference choices.

The plugin has a special variable <u>remember</u>, which is remembered from one script run to another and across OpenCPN restarts. The <u>remember</u> variable is unique to each console.

You can set _remember to anything you like - a number, string or object and it will be available to the next script run. By making it an object, you can remember several different things.

This example script remembers OpenCPN's navigation object when it wraps up.

On each run, it prints the position from the previous run after checking _remember has been set.

This example uses _remember to remember a log file name. The first time it runs, it will open a save dialogue. On subsequent runs it will use the same file without asking again.

```
File = require("File");
logFile = new File("?" + _remember, APPEND);
_remember = logFile.fileString;
logFile.writeText("Data to be logged\n");
logFile.writeText("More data to be logged\n");
```

You might use the same console for a different purpose and _remember might be left over from a previous use. It can be useful to store a flag for the particular script by which you can check for a first time run.

9. Error handling

Many of the extensions 'throw' an error when an error situation is encountered. The script will be terminated with an error message. This makes for simple scripting - you do not need to test for errors in these cases.

If you wish to handle the error yourself and continue with the script, you can catch it using the try/catch JavaScript construct:

```
try {
    OCPNdeleteWaypoint("non-existent GUID");
  }
catch(error) {
    print("Caught error ", error.message, "\n");
    // corrective action here
}
```

Catch is passed the error object of which error message is the most useful. The attributes are:

.message	The error message.
.fileName	Name of file where error was thrown.
.lineNumber	Line number within file. If an error is thrown from your script, this will show the line number. However, errors are often thrown from within the plugin and the fileName and lineNumber are for the plugin code rather than your script.
.stack	Stack trace back from the throw.



It is wise to always display the error message. The error might not be what you think it is and without that information you could look for the problem in the wrong place.

10. Execution time limit

Your script could get into a continuous loop and never end. This might be because of a simple scripting error or because some condition for ending the script was not being met. As simple example, the following script never ends because true is always true:

```
while(true) ;
```

This would lead to OpenCPN being locked up with the only way out to force-quit OpenCPN - not something you want to happen during navigation!

To protect against this, the plugin places a time limit on script execution and will terminate it if the limit is exceeded. By default this is set at 1000ms. Each callback gets its own 1000ms limit.

The timeAlloc function extends the time limit and returns the number of milliseconds remaining at the time of the call before it is extended. Optionally you may provide a new time allocation in place of the default. This new allocation will be used at the call and all subsequent calls not specifying a different one. Subsequent call-backs will be given this allocation.

For a long script, you might use timeAlloc to grant extra time once you have reached a point where time might be exhausted.

Beware of using timeAlloc in a loop. If the script gets stuck in the loop, it might repeatedly allocate more time thus defeating the timeout mechanism.

```
[ long script steps reach a point where further time will be needed] print("At this point ", timeAlloc(2000), "ms remain\n"); [ more script steps for which 2000ms have been granted ]
```

There is a detailed time-out tester available.

Get code

11. Dialogues

The onDialogue API provides a way of creating and completing dialogues in a way that does not prevent other functioning of OpenCPN. It is possible to build quite complex dialogues with multiple buttons and this is described in this section.

The basic call is:

onDialogue(function, dialogue)

where function is the function to be called when a button is selected and dialogue is a descriptor of the dialogue to be presented. This function returns immediately so that functioning of OpenCPN is not suspended while the user responds to the dialogue.

dialogue is an array of one or more structures each describing an element of the dialogue to be displayed. Each element of the dialogue array must include its type attribute. Which other attributes are applicable depends on the type.

The specified function is given a copy of the dialogue array, in which certain elements will be changed to reflect the action taken with the dialogue, as described in the table in purple. An additional element will have been added identifying the button used to dismiss the dialogue.

type	Purpose	Other attributes Grey items are optional	Explanation
"caption"	Specify caption in dialogue bar	value:"caption"	If value is omitted, the caption will be blank. If no caption element is provided, the caption defaults to "JavaScript dialogue".
"text"	Places text in the dialogue	value:"text"	The text from the value attribute in placed in the dialogue. Multiple text elements can be used to place information as required.
"field"	Provide an input	label:"text"	Text to form label for field.
field.	value:"text"	This attribute will always be included in the returned structure and will be set to the value of the field on completion of the dialogue. If this attribute is included in the call, it will be displayed in the field as place holder text which can be edited/replaced while the dialogue is open.	
		width:number	Width of field. Default is width:100.
		height:number	Height of field. Default is 22 or whatever is needed for larger text set by style.
		multiLine:boolean	If true, the field will be be multi-line.
		sufix:"text"	Suffix text to be displayed after the field, e.g. "oT"
	fieldStyle	See below on styling	

type	Purpose	Other attributes Grey items are optional	Explanation
"tick"	Provide a tick box	value:"text"	The text against the tick box. If the value starts with "*" that character will not be displayed but the box will be pre-ticked. In the returned structure value will be true or false.
"tickList"	Provide a list of items to tick	value:["A", "B"]	In the returned structure, value is an array of the ticked items only. If none, it will be an empty array.
"choice"	Choose one from a list of items.	value:["A", "B"]	The first item is the default value. In the returned structure, value is the selected value.
"radio"	Provide a set of radio buttons, of	label:"text"	Text to form label for the buttons. Omit to suppress label.
which just one can be selected. No more than 50 buttons will be displayed.		value:["one","two"]	Array of texts specifying the button choices. If a button name starts with "*" that is omitted from the name and it becomes the default button. In the returned structure, this attribute will be set to the single button selected on completion of the dialogue (not in an array).
"slider"	Provides a horizontal slider allowing selection of an integer value	range:[start, end]	Numeric values for the start and end of the slider range
		value:number	Initial value of slider In the returned structure, value is the selected value.
		width:number	Width of slider (not a string). Default is width:200.
		label:"text"	Text to form label for the slider. Omit to suppress label.
"spinner"	Provides a numerical field that can be spun up or down	range:[start, end]	Numeric values for the start and end of the spinner range
		value:number	Initial value of spinner. Defaults to zero. In the returned structure, value is the selected value.
		label:"text"	Text to form label for the spinner. Omit to suppress label.
"hLine"	Horizontal line	None	Adds a horizontal line as a separator.

type	Purpose	Other attributes Grey items are optional	Explanation
"button"	Add one or more action buttons	label:"button" or label:["one","two"]	The label for the button. If more than one, these are specified in an array. If the button starts with '*', it will become the default button, which can be acted on using the enter key. The '*' is not displayed. Example: "*Done" In the returned structure, this attribute will be set to the single button selected on completion of the dialogue (not in an array) and without any *. If there is no element of type button, a default button "OK" will be added by the plugin. No corresponding element will be added to the returned structure as OK will be the only action choice.

Simple example:

Styling

You may want to adjust the style of text in a dialogue. You can include the style attribute with any of the above but it will not have any effect on some dialogue components.

For the field type the style operates on the label, field and any suffix. You can override the style for the field itself with fieldStyle

Styling is not included in the returned version of the dialogue array.


style:{style attributes}		Available with fieldStyle?
size: <number></number>	Font size e.g. size:20	
font: <string></string>	Font name e.g. font:"courier" If the font name does not match one in your system, it may prevent other style components from working. As a special case, if the font name is set to "monospace", a monospaced font will be used, which is useful when displaying tabular data over multiple lines.	√
italic: <bool></bool>	e.g. italic:true	√
bold: <bool></bool>	e.g. bold:true	V
underline: <bool></bool>	e.g. underline:true	

Example with styling

Here is an example showing various types and including some styling.

Get code.

In the <u>demonstration scripts</u>, there is practical application which builds race routes through a series of dialogues.

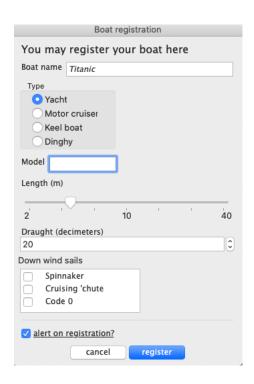

12. Automatically running scripts

It is possible to arrange for a script to be automatically loaded and run when the plugin is started, without the need to load the script and run it manually.

Your script needs to be stored in a .js file. Test it before attempting to run it automatically.

When a script has been loaded from a file or saved to one, the auto run button will be shown at the top of the console. If this is ticked before OpenCPN closes normally, then when the plugin is activated, that script will be loaded and run automatically.

If the script hides the console, the console will not be seen until it is unhidden or the script produces output in the output pane or the script terminates.

If a script is running while hidden and you need to stop it, you can make the console appear by toggling the tool bar icon. You could then stop the script if required.

To stop a script running automatically, untick the option before quitting OpenCPN.

In the unlikely event that a script were to crash OpenCPN and that script were being run automatically, OpenCPN might crash immediately on launch before you could stop it running. To get out of this situation, open the <code>opencpn.ini</code> file and in the JavaScript section find the offending console name and <code>change AutoRun=1</code> to <code>AutoRun=0</code>. This will stop the script running automatically on launch.

13. Working with multiple scripts

You can link scripts in a chain to be run successively. This can be used to break up long scripts into successive 'chapters'. A script can pass a brief to its successor.

```
chainScript(fileString [, brief]);
```

Loads the script in the file fileString into the script window, gives it a brief if supplied and runs it.

The successor script can collect its brief with

```
brief = getBrief();
Example:
Let a file successor.js contain the script
print("Found brief ", getBrief(), "\n");
And run the script
chainScript("successor.js", "Brief text", true);
```

This last will load and run successor.js, which will print

Found brief Brief text

Although the brief is limited to a text string, an array or structure could be passed as a JSON string.

14. Working with multiple consoles

You can have more than one console. Each console has its own script, which runs independently, apart from interactions detailed later.

To create an additional console, use the Consoles tab in JavaScript tools to give it an alphanumeric name and create it. You can also access the tools through the Preferences button in the plugin entry in the list of plugins in the OpenCPN Options panel.

To delete a console, use its close button. As a precaution against accidental loss of a script, the script window must be cleared before being closed. You cannot delete the last and only console.

Communicating between scripts

Working with multiple consoles in scripts

```
require("Consoles");
```

consoleAdd(consoleName)

Adds the console specified, the same as adding via the tools.

An error will be thrown if the console already exists.

consoleExists(consoleName)

Returns true if the console exists, else false.

consoleClose(consoleName)

Closes the console.

You cannot close the console running this script step.

consoleGetOutput(consoleName)

Returns the contents of the output pane of the named console.

consoleClearOutput(consoleName)

Clears the contents of the output pane of the console.

If the argument is omitted, it clears its own output.

```
consoleLoad(consoleName, script)
```

If script ends with .js, it will load the script from a file of that name. Otherwise, script is taken to be a JavaScript and that is loaded.

```
consoleRun(consoleName [,brief])
```

Runs the script in the console, optionally giving a brief.

```
consoleBusy(consoleName)
```

Returns true of the console is busy running a script or waiting for callbacks, else false;

```
onConsoleResult(consoleName, function [, brief])
```

Runs the script in the console and sets up a call-back to the specified function on completion. The other script is given the brief, if supplied.

On completion, the function is invoked and given an argument being the outcome from the other as a structure with attributes:

.type	The type of outcome as an integer 0 other script threw an error 1 other script timed out 2 other script completed normally 4 other script executed a scriptStop() step 8 other script's console was closed by another script	
.value	If an error, the error reason. Otherwise, the script result	

Example

```
require("Consoles");

name = "TestConsole";
if (!consoleExists(name)) consoleAdd(name);
consoleLoad(name, "myJavaScript.js");
onConsoleResult(name, allDone, "Go well");

function allDone(result){
   if (result.type == 1)
        throw("myJavaScript threw error " + result.value);
   print("Result from myJavaScript was ", result.value, "\n");
}
```

This script creates the console if it does not already exist, loads it with a script and runs it giving it a brief. On completion, the callback to function allDone checks for an error and throws an error in itself and otherwise prints the result.

15. Tidying up

Sometimes you may need to tidy up after a script terminates, a console is closed or is terminated because OpenCPN has quit. As an example, the <u>Tack Advisor script</u> creates a temporary two-point route to suggest where to tack. If OpenCPN were to quit with Tack Advisor displaying this route, the route would still exist when OpenCPN is next run although it would then be meaningless.

onExit(functionName)

This call specifies a function to be called after the script has completed, including when a console is stopped. This can be used to clean up. In the above example, any route created to advise where to tack is deleted.

The function is called during the wrapping up process. Some actions within such a function are meaningless. For example, if call-backs are set up they will have no effect. If the onExit function itself throws an error, it will be displayed in the output window but if the window is being closed, it would vanish along with the console. It would be prudent to test the function in a situation where the console remains visible.

The following calls are not allowed in the function and will throw an error:

- require()
- stopScript()
- Any function setting up a callback, such as OCPNonSeconds

The function will not be called when a script terminates because

- An error has been thrown
- The console has been closed, including closed by another script
- The plugin is deactivated, including when OpenCPN is shut down

16. The File Object

The readTextFile and writeTextFile APIs provide a simple way to read or write text files which are small enough to hold in memory.

The file object provides a way to work with large files, whether text or binary. It must be loaded and a file object created for each file being used.

The file name string follows the rules for getTextFile(), so if it commences with '?', a dialogue will be opened. The file object has the following properties

Property	Description	Notes
.length()	Returns length of the file in bytes	
.eof()	true if the current position is at file end	
.seek(offset)	Sets the current position to offset and returns the new offset.	The maximum offset is length - 1. If offset > length-1, offset is left at end of file and that offset is returned.
.tell()	Returns the present offset.	
<pre>.getAllText()</pre>	Returns all data as text	Not suitable for large files
<pre>.getTextLine()</pre>	Each successive call returns one line of text, starting from the beginning of the file.	Excludes any newline character \n
.getText(count)	Returns count characters starting from present position	The number of characters returned will be less than count if the end of file is encountered.
.getBytes(count)	As for .getText but the data is returned as a Uint8Array (array of unsigned 8-bit bytes). For handling of non-text binary data.	The length of the array will be less than count if the end of file is encountered.
<pre>.writeText(string)</pre>	Writes the string starting at the current offset.	
.writeBytes(Uint8Array)	Writes a byte array starting at the current offset.	

.getTextLine() accesses the file in blocks and can be used to read large files without using large amounts of memory. You could process a large text file with

```
while (!myFile.eof()){
    textLine = myFile.getTextLine();
    // do something useful with textLine
}
```

If permission is omitted from the constructor, 0 (read) is assumed. Otherwise:

Permission	wxFile::Access enumerator	Notes
READ	read	Read access only.
WRITE	write	No reading allowed.
READ_WRITE	read_write	Can read and write
APPEND	append	Write appending data only. No read allowed
WRITE_EXCL	write_excl	Write to new file. The file must not exist.

17. Working with SignalK

OpenCPN processes certain SignalK messages. If you wish, you can process SignalK messages in a JavaScript, which has a natural affinity with JSON.

The following script shows how to use the OpenCPN message interface to receive SignalK messages. This illustration script simply prints out certain information.

```
// Listen out for SignalK messages and display
Position = require("Position");
OCPNonMessageName(received, "OCPN CORE SIGNALK");
function received(message){
     signalK = JSON.parse(message);
//
     uncomment next line to pretty-print object
//
     print(JSON.stringify(signalK, null, "\t"), "\n\n");
     for (u = 0; u < signalK.updates.length; u++){</pre>
     update = signalK.updates[u];
     timeStamp = update.timestamp;
     sentence = update.source.sentence;
     values = update.values;
     for (v = 0; v < values.length; v++){
           what = values[v].path;
           value = values[v].value;
     switch (sentence){
           case "GLL":
                position = new Position(value);
                print("Position at\t\t", timeStamp, " is\t",
                     position.formatted, "\n");
                break;
           case "VTG":
                cog = values[1].value;
                 sog = values[2].value;
                print("Over ground at\t\t", timeStamp, " is\tCOG:",
                     cog, "\tSOG:", sog, "\n");
                break;
           case "VHW":
                hdt = values[0].value;
                 stw = values[1].value;
                print("Through water at\t", timeStamp, " is\tHDT:",
                     hdt, "\tSTW:", stw, "\n");
                break:
           default:
           }
           }
     OCPNonMessageName(received, "OCPN CORE SIGNALK");
     };
Sample output:
Position at
                2023-11-13T13:39:36.000Z is 49° 42.903'N 003° 35.039'W
Over ground at
                2023-11-13T12:51:05.808Z is COG:123.4 SOG:2.34
Through water at 2023-11-13T12:51:05.814Z is HDT:125.2 STW:2.86
```

18. Working with NMEA2000

An NMEA2000 message type is known as its PGN (Parameter Group Number).

OpenCPN includes decoders for some 50 PGNs and uses these to handle navigational data. Plugins such as Dashboard use them to display a variety of data.

The JavaScript plugin can independently decode and give access to any message for which there is a known description - presently 373.

Background

Unlike NMEA0183 and Signal K, NMEA2000 messages are complex and coded in binary. How they are encoded is proprietary and available only to NMEA2000 licensees, who are bound by a non-disclosure agreement. However, a few projects have worked out how the various PGNs are encoded.

The <u>canboat project</u> has published a list of 'descriptors' - computer readable descriptions of the PGNs and created utilities written in C++ to process messages according to these descriptors.

A daughter project canboatjs has replicated the code in JavaScript. However, it is a large complex suite of scripts using the latest JavaScript concepts not available to the JavaScript plugin and is not usable for our purpose here.

The JavaScript plugin can independently decode NMEA2000 messages using the canboat descriptors.

The NMEA2000 object

The NMEA2000 object has 'beta' status. More extensive testing could reveal issues. There could be changes.

A script can construct any NMEA2000 object for which there is a canboat descriptor and can be used to decode NMEA messages into JavaScript objects. An example with comments illustrates this.

```
Nmea2000 = require("NMEA2000");
// by convention, constructors are given an initial capital letter
// to remind us it is a constructor and not an object

// construct an NMEA2000 object for 129029 (GNSS Position Data)
NMEA129029 = new Nmea2000(129029);

// the bare object has the attributes of PGN 129029 but the values are
// undefined. You could pretty-print it using
print(JSON.stringify(NMEA129029, null, "\t"), "\n");
```

Decoding received data

The object's decode method will decode a message's data. Example:

```
Pos = require("Position"); // constructor so we can format positions
OCPNonNMEA2000(handle129029, 129029); // listen for message

function handle129029(message){
    fix = NMEA129029.decode(message.data); //decodes data in the payload
    position = new Position(fix.latitude, fix.longitude);
    print("Position: ", position.formatted, "\n");
    print("Fix time: ", fix.date + " " + fix.time, "\n");
    print("using ", fix.numberOfSvs, " satellites\n");
}
```

Sample output:

```
Position: 52° 37.143'N 001° 28.919'E

Fix time: 2023.10.22 17:34:59

using 12 satellites
```

Shortcut

The above code constructs the NMEA129029 object once at the start and can use it for repeatedly decoding PGN129029 messages. If you are not repeatedly using it, you could construct and decode in one step by including the data for the constructor:

```
fix = new Nmea2000(message.pgn, message.data);
```

Sending data

NMEA2000 data can be sent using the object's push method. This encodes the object into an NMEA2000 payload and sends it out.

```
Nmea2000 = require("NMEA2000");
nmeaSend = new Nmea2000(59904); // construct object
// set desired attributes of nmeaSend...
nmeaSend.push(handle);
```

If the handle of the output stream is omitted, the push method will look for a single NMEA2000 stream and use that and remember it for the next push. So it is only necessary to specify this if there is more than one NMEA2000 stream.

The descriptors

The plugin has a library of descriptors copied from canboatjs. The NMEA2000 constructor loads the appropriate descriptor. Should you wish to view the descriptor, it is available as the .descriptor, attribute. You could pretty-print it by

```
print(JSON.stringify(NMEA129029.descriptor, null, "\t"), "\n");
```

One of the descriptor's attributes is .Complete, which is true if is believed to be a complete description. You could write:

```
print("This descriptor is ",
NMEA129029.descriptor.Complete?"complete":"doubtful", "\n");
```

You can also load a descriptor directly from the library without using the NMEA2000 constructor:

```
descriptor = require("pgnDescriptors")(129029);
```

You can load an array of all descriptors with

```
descriptors = require("pgnDescriptors")();
```

You might want to decode using a custom descriptor. Perhaps you have a descriptor not in the plugin's library or have a corrected version of a descriptor. You can construct the NMEA2000 object using a custom descriptor in place of one from the library using one of these:

```
NMEAspecial = new Nmea2000(myDescriptor);
NMEAspecial = new Nmea2000(myDescriptor, message.data);
```

Descriptor ambiguity

Some PGNs are used differently by different manufacturers. For example PGN 130824 is useddifferently by Maretron for Annunciator and B&G for key-value data. Attempts to load PGN 130824 will throw an error citing this ambiguity.

However, you can load an array containing all definitions of a PGN using, e.g.:

```
descriptors = require("pgnDescriptors")(130824, {"options":"returnAll");
```

You could decide which of these is correct for your installation and construct using the relevant descriptor.

Should you have the complication of having equipment from both manufacturers, you would need to construct both NMEA2000 objects and examine the manufacturer code in the data to decide which object to use on a message by message basis. The manufacturer code can be decoded by

```
code = ((data[14] << 8) & (data[13])) >> 5;
```

See here to relate the code to the manufacturer.

Concerning the descriptors

The descriptors contain an array of fields, each describing an element of the pgn. Each field includes an attribute Order being the serial number of the field. Confusingly, in the canboat library, Order 1 is at index 0. To simply scripting and reduce confusion, the plugin inserts an element zero at index 0 so that Order 1 is at index 1 et seq.

If you display the descriptor stored in the constructed object, it has this extra element.

If you supply a custom descriptor, the plugin will insert this element if it is not already present.

Using the canboat analyser

If you have the canboat software installed on your computer, you can use it to decode an NMEA2000 message instead of the NMEA2000 object. The canboatAnalyzer function converts the message data from that provided by OpenCPN to the pseudo-Actisense format expected by canboat analyzer, invokes the analyser and returns an NMEA2000 object. This process is significantly slower than using the decoder built in to the NMEA2000 object but might be useful if you wish to compare results. Example:

The attribute values should be the same for the two methods but the object structure differs. See Appendix A for this.

19. Invoking another process

Executing a program

Warnings

The plugin waits for the other process to complete. You could start a long one. There is no timeout.

You could start a process that cannot complete. For example, it might try to read from the terminal input (stdin). Since there is no terminal it will wait indefinitely. There is no way to get out of this, other than to force quit OpenCPN.

You should not experiment with this while depending on OpenCPN to navigate!

```
result = execute(command);
```

```
result = execute(command, env, errorOption);
```

The command is run as a sub-process and the script waits for the result. The result is a structure holding the output to stdout and stderr. Example:

```
result = execute("hostname");
print(result.stdout, "\n");// on my computer this prints its host name
```

A second argument env can be provided set the environment for the sub-process. The following illustrates all options:

Some programs, such as the canboat analyzer, write non-error information to stderr. If you wish to see such output, it is available at result.stderr.

If a real error occurs, an error will be thrown. This would show you the error message but you would not get an opportunity to see what had been written to that point. You can override this by providing a third argument of true. In this case an error will not be thrown and the result will have an addition property errorCode, which will be

- 0 no error
- -1 unable to launch process
- +ve error code

If the error code is positive, you can examine the output on stdout up to the error. stderr should include the real error message.

If you want to provide this third argument but not set the env options, you can use null.

Running a shell script

For non-trivial commands, such as a shell pipeline, it will be easier to use the shell function, which you can load if required. The following example imagines you want a list of the track files in a particular folder

```
shell = require("shell");
result = shell("cd ~/Tracks; ls | grep track");
trackFiles = result.stdout; // list of files with 'track' in their name
You can give the shell function optional arguments thus:
result = shell(pipeline, shell, errorOption);
shell is the name of the shell to use. The default is "bash".!
errorOption is the same as for execute above.
```

20. JavaScript Plugin Tools

The tools window is accessed top right of any console or through the Preferences button in plugin's entry in the plugin manager.

The tools comprise six pages

Consoles

Allow creation of an additional console and renaming of an existing console.

Console options:

- Float windows on the OpenCPN frame (on by default). Mainly relevant to MacOS.
- Preserve the Show consoles toggle status in the toolbar (off by default)

Directory

Allows setting of the current directory.

NMEA

Allow allows you to simulate sending an NMEA message to the plugin for testing purposes.

Message

Allow allows you to simulate sending an OPenCPN message to the plugin for testing purposes.

Parking

Allows you to customise the parameters for parking consoles, including the park location.

Diagnostics

See the technical manual for this.

21. Tips

}

This section provides a few tips on working with the plugin.

Examining objects

During development of a script, it can be very helpful to examine a JavaScript object. You can do this by printing it out.

```
nav = OCPNgetNavigation();
print(nav, "\n");
The printed object will look something like:
{"fixTime":1672843366,"position"{"latitude":57.494,"longitude":-4.2344},"
SOG":null,"COG":null,"variation":0,"HDM":null,"HDT":null,"nSats":0}
```

For a large object, reading this can be tricky. In such a case it is better to use <code>JSON.stringify()</code> to transform it into a pretty JSON string. The following uses a tab character to indent the structure.

```
print(JSON.stringify(nav, null, "\t"), "\n");
which would display the following equivalent, which is much easier to read.
{
    "fixTime": 1672843366,
    "position": {
        "latitude": 57.494,
        "longitude": -4.2344
    },
    "SOG": null,
    "COG": null,
    "variation": 0,
    "HDM": null,
    "HDT": null,
    "nSats": 0
```

See a JavaScript tutorial for all the capabilities of JSON transformations in JavaScript

22. Trouble-shooting character code issues

If you prepare or edit your script in an external program, it may introduce characters not compatible with the JavaScript engine. Examples

- smart quotes around "Hello" like this: "Hello"
- · Smart single quotes around 'goodbye' like this: 'goodbye'
- The apostrophe can be useful as itself or as an alternative string delimiter, as in 'This string includes a quote character "'
 The apostrophe 'might get entered as any of '''
- wxWidgets uses Unicode characters and copying text from OpenCPN could introduce characters which would throw the JavaScript engine.

The plugin tried to fix up unacceptable characters in scripts before compiling. If your script fails with the engine tripping over bad characters, narrow it down to which characters are causing the problem with a simple script as short as possible thus:

```
"♀′\€".
```

Running this script should return a result of the contents of the quoted string.

In the diagnostics tab of the tools window is a facility to examine characters and their translation. Please submit the dumped code analysis with a problem report.

Under Windows, the plugin is unable to convert the prime character ' and it will likely cause a JavaScript error.

Working with non-7-bit characters such as the degree symbol

If you use characters not included in the 7-bit set, it may or may not work and you may have compatibility issues across different platforms. It is safest to generate these characters within a script using the String.fromCharCode() function that return the required character.

A relevant case is the degree symbol $^{\circ}$ which has the decimal code 176 and is not in the 7-bit set. If you display a bearing with, say,

```
print("Bearing is " , bearing, "OT\n");
this works under MacOS but not under Windows. Instead you could use
print("Bearing is ", bearing, String.fromCharCode(176), "T\n");
```

23. Demonstration Scripts

In this section, you will find a number of scripts that demonstrate aspects of in the plug-in. They are chosen for their ability to demonstrate the capabilities of the plugin and perhaps act as starters for creating your own applications. You can copy the scripts and paste them into the script window. In many cases they do things that can be done in OpenCPN itself but aim to show how these things can be done programatically.

There is also a library of contributed scripts available here.

A. Save script preferences for next script run

This script demonstrates one way of saving some preferences for use in a subsequent script or re-run of the same script.

The preferences are held in a structure prefs and saved to a text file in a JSON string. For this simple script to work, the preferences file must already exist and contain at least the empty JSON string { }.

The script sets up a call to saveConfig() on its exit in which the prefs structure is saved to the file as a JSON string.

When the script starts, it reads the file and parses it into a structure.

It then modifies some preferences.

B. Process and edit NMEA sentences

This script addresses an issue someone had whereby their RMC sentences did not include magnetic variation, which was available in their HDG sentences. This script captures variation from the HDG sentences and inserts it into any RMC sentences that do not already have the variation.

(Hint to help you understand this: the .split method splits a string at each of the specified character into an array, here called splut. .join does the reverse.)

```
// insert magnetic variation into RMC sentence
var vardegs = "";
var varEW = "";
OCPNonNMEAsentence(processNMEA);
function processNMEA(input){
     if (input.OK){
           sentence = input.value;
           if (sentence.slice(3,6) == "HDG")
                 splut = sentence.split(",");
                vardeqs = splut[4]; varEW = splut[5];
           else if (sentence.slice(3,6) == "RMC")
                 splut = sentence.split(",");
                 if ((splut[10] == "") && (vardegs != ""))
                      { // only if no existing variation and
                        // we have var to insert
                      splut[10] = vardegs; splut[11] = varEW;
                      splut[0] = "$JSRMC";
                      result = splut.join(",");
                      OCPNpushNMEA(result);
                 }
     OCPNonNMEAsentence(processNMEA);
     };
```

Getcode

When you push an NMEA sentence from within a function like this, it will itself be processed by the function. If that processing causes another matching sentence to be pushed, you could set up an infinite loop, which would cause OpenCPN to hang. In the above code, the pushed sentence is given a different sender, which is being filtered out of received sentences by OpenCPN.

C. Counting NMEA sentences over time

This script NMEA-counter.js counts down for 30 seconds and then lists the OpenCPN messages and NMEA sentences it has seen. The NMEA sentences are sorted by count and then alphabetically.

Get code

D. Locate and edit waypoint, inserting hyperlinks

This script locates a waypoint called "lunch stop" and changes its icon name to "Anchor". It nudges the waypoint slightly north, adds a description and adds some hyperlinks referencing the nearby pub.

```
// Add hyperlinks to an existing waypoint with markName of 'lunch stop'
wpName = "lunch stop";
guids = OCPNgetWaypointGUIDs();
foundIt = false;
for (i = 0; i < guids.length; i++){
     // look for our waypoint
     lunchWaypoint = OCPNgetSingleWaypoint(guids[i]);
     if (lunchWaypoint.markName == wpName){
           foundIt = true;
           break;
if (!foundIt) throw("Waypoint not found");
// we have our waypoint - now update it
lunchWaypoint.iconName = "Anchor";
// nudge the position north towards shore
lunchWaypoint.position.latitude += 0.001;
lunchWaypoint.description = "Great anchorage with pub close ashore";
lunchWaypoint.hyperlinkList.push({description: "Pub website",
     link: "https://goldenanchor.co.uk" });
lunchWaypoint.hyperlinkList.push({description: "Menu",
     link:"https://goldenanchor.co.uk/menu"});
OCPNupdateSingleWaypoint(lunchWaypoint); // update OpenCPN waypoint
Get code
```

E. Build routes from NMEA sentences

This script listens for routes being received over NMEA in the form of WPL and RTE sentences and creates OpenCPN routes from them.

There is an option to match received routes with any existing route of the same name and replace it. In this case a check is made that the existing routes have unique route names.

There is an internal simulator. In simulation mode, the script does not listen for real NMEA sentences but generates simulated ones which are passed to the sentence processor.

As a JavaScript example, this script is interesting because it:

- it has a built-in simulator allowing testing without having incoming NMEA data
- makes full use of the Position, Waypoint and Route constructors
- has to deal with the complication that RTE sentences may be sent in instalments, as necessitated by the 80 character length limit
- It makes good use of JavaScript arrays, including:
 - pushing items onto an array
 - pulling (shift) items off the front
 - joining items into a string

This script was written as a demonstrator for researchers at the Technical University of Denmark.

Get code

F. Build race courses

This script was inspired by <u>bobgarrett's wish to be able to create race course routes from a list of waypoint names</u> rather than hunt for them on the chart.

The script allows the user to specify a regular expression pattern by which to select those waypoints which are race marks.

In the eastern Solent, the race mark names all start with the digit 5 followed by another character and a space. In this example there is also a waypoint *Line* placed on the start line and we are going to build a route for *Race 1*. When you click on *Build route*, you are presented with the Race mark selector.


In this dialogue you select the course marks in order adding them to the course. You can indicate whether they are to be left to port or starboard.


In this example, the finish is through the start line, so the final selection is *Line* and the button *to finish.*


The script then builds the route in OpenCPN and also displays the route with the list of waypoints indicating the bearing and distance to each and which side to pass. The caption includes the course length.

Get code

This script makes extensive use of the onDialogue function and is a useful example to work from.

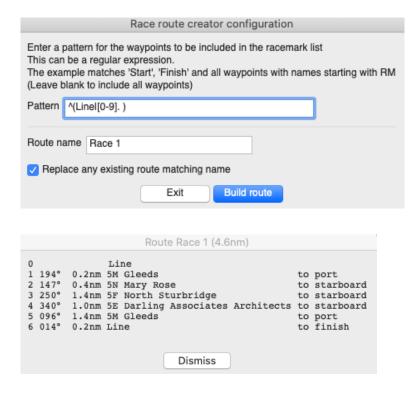

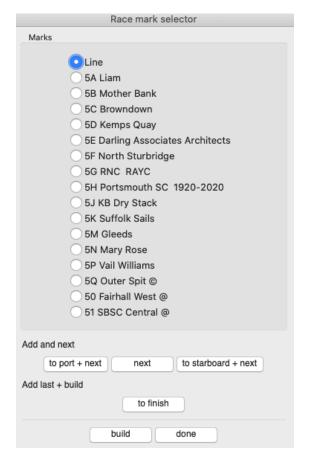

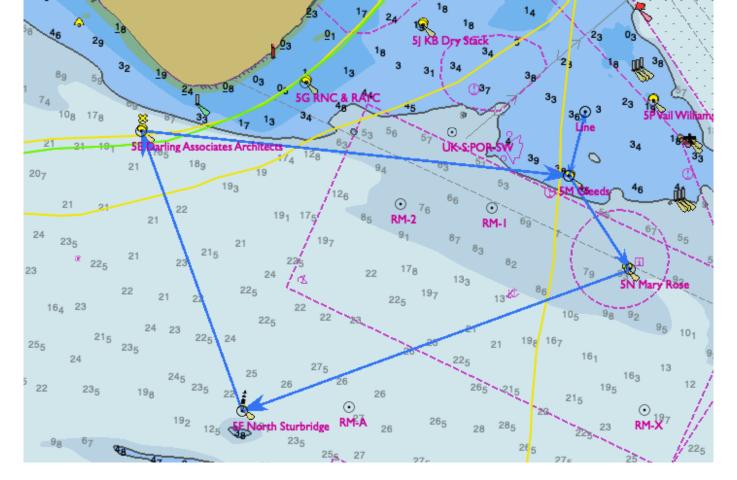

G. Driver

This is a simulator that can be used to drive the ship in the absence of actual NMEA inputs. It is an alternative to the ShipDriver plugin but does not use steering to gradually change course. It generates GLL, VTG and WML NMEA sentences. You could add others as required.

You can set Speed Over Ground (SOG), Course Over Ground (COG), Wind angle and wind speed. Selecting Compass course will then drive the boat along the selected course. The angle to the wind is displayed.

You can instead specify an angle to the wind and port or starboard tack. It will then calculate the required COG. Selecting the opposite tack will tack the boat.

Driver can be run in its own console and used, for example, to experiment with or test the TackAdvisor and SendActiveRoute scripts running in their own consoles.

Get code

H. TackAdvisor

This script monitors for when you have an active waypoint and will need to tack to reach it. It then displays the two tack legs required.

If you are running off the wind to an active waypoint, and will need to gybe to reach it, it displays the two legs and hence the recommended point to gybe.

TackAdvisor does not take cross-current offsets into account and will not give an accurate tack point if the cross-current is significant.

If TackAdvisor is standing by and not displaying your tacks when you are expecting it to, check for the following. It will not display tacks under any of these conditions:

- No active waypoint
- You are off the wind by more than the configured amount, i.e. reaching
- · You are heading too close to the wind to be sailing
- You are running close to straight for the waypoint

Get code

I. SendActiveRoute

This script monitors for when you have an active route and sends a series of NMEA sentences so that another device such as a chart plotter or a device running iNavX will follow the route itself. Any updates to the route, such as modifying a route point or advancing from one route point to the next will be updated within the receiving device.

When the script detects an active route, it sends the following NMEA sentences:

- A. A series of WPL sentences defining the waypoints in the route
- B. A group of RTE sentences creating a route comprising the waypoints
- C. A BOD sentence with the bearing from the position at which the leg was activated to the next route point.

These sentences cause a device running iNavX to hold a mirror copy of the current route and navigate to the active point within the route.

While a route is active, OpenCPN sends APB sentences with the routeName. Unfortunately, the route name is truncated. This script fixes up the APB sentences to carry the full route name.

Instructions for making this work with a device running iNavX

- 1. Have OpenCPN receive NMEA data on one port say 60001
- 2. Have OpenCPN send NMEA data on a different port say 60002. Because my Wifi router only handles a single TCP connection, I send using UDP.
- 3. Connect your iPad/iPhone to the same WiFi network.
- 4. Within iNavX select Instruments > TCP/IP and set the protocol and port number to as in Step 2 above.
- 5. On the same panel, Enable Waypoints and enable Link. You should now see the NMEA sentences scrolling in the monitoring pane of this panel.
- 6. Click Done and then select the Chart.

The device should now follow the ship's navigation using the ship's navigation data.

When a waypoint becomes active in OpenCPN, it becomes active in iNavX.

When a route is activated in OpenCPN, it appears as the active route in iNavX. As OpenCPN advances the routepoint, so iNavX advances its active routepoint. Progress along the route is available in the route tab of the ribbon at the top of the iNavX screen, together with predicted time on route and ETA.

If you wish to force an advance to the next routepoint, this is best done on OpenCPN, whereupon iNavX will update too. Should you advance the routepoint in iNavX, it will start ignoring changes in the active routepoint send from OpenCPN. To restore this, go to the panel used for step 5 above, turn Enable Waypoints off and back on again.

Should OpenCPN fail/crash/hang-up etc., iNavX will continue to navigate the route independently. Should the ship's navigational data over NMEA fail, an iOS device with GPS will use its location service instead and continue to navigate the route.

This has been tested on iNavX running on an iPad and iPhone. It should also work on an Android device running iNavX but I have not tested that.

Get code

J. Copy ship's formatted position

This script creates an extra context menu that copes the ship's latest position as a formatted string. This could be used to paste the position into a log or report.

```
Position = require("Position");
OCPNonContextMenu(doIt, "Copy position");
function doIt(){
    navData = OCPNgetNavigation();
    Shipos = new Position(navData.position);
    toClipboard(Shipos.formatted);
    OCPNonContextMenu(doIt, "Copy position");
}
```

K. Anchor watch

This script creates an extra context menu to set or unset an anchor watch.

```
checkSeconds = 30;
                     // how often to check
                      // drag limit in nm
drag = 0.001;
OCPNonContextMenu(setAnchor, "Set Anchor");
var anchorPos;
function setAnchor(){
     navData = OCPNgetNavigation();
     anchorPos = navData.position;
     OCPNonContextMenu(unsetAnchor, "Unset anchor");
     onSeconds (checkAnchor, 30);
     alert("Anchor alarm set for ", drag, "nm");
     }
function checkAnchor(){
     nowPos = OCPNgetNavigation();
     if (OCPNgetVectorPP(anchorPos, newPos.position).distance > drag)
           OCPNsoundAlarm();
     onSeconds(checkAnchor, 30);
     }
function unsetAnchor(){
                    // cancel timer)
     onSeconds();
     alert(false);
     OCPNonContextMenu(setAnchor, "Set Anchor");
```

Appendix A. NMEA2000 and canboat analyser

The objects returned by these two methods of decoding NMEA message data yield the same data attribute values (with one exception noted below) but differ in the structure.

There follows a side-by-side example using PGN 129540.

- 1. The first seven attributes come from the Actisense header and are enumerated in a different order. This does not effect accessing them programatically.
- OpenCPN leaves the Actisense header timestamp undefined. The canboat analyser requires a
 valid timestamp and so the canboatAnalyzer function inserts an arbitrary one. This is
 always the same and should be ignored.
- 3. After the Actisense header come the fields according to the descriptor. Canboat analyzser creates all these as attributes of an attribute fields. This complicates access to the data and NMEA2000 puts them directly in the NMEA2000 object.
- 4. For the attributes thereafter, canboat analyser uses the attribute description from the descriptor as the attribute name. These may include spaces, which makes for invalid attributes when accessing the data. You cannot write sats = object.GNSS Sats in View; NMEA2000 uses the attribute id so you can write

sats = object.gnssSatsInView;

The attribute ids start lower case.

- 5. Where the is a repeating field, such as for each satellite, canboat analyser creates an array list[]. If there were more than one set of repeating fields, there would be two lists with the same name. NMEA2000 creates an attribute for the count and then an array with the name of the list.
- 6. Many of the descriptor fields specify the units of the parameter. For example, it will tell you whether a temperature is in °C or °K. Navigation parameters such as headings or courses are in degrees. Satellite elevation and azimuth are in radians, as recorded in the descriptor. Canboat analyser arbitrarily converts these to degrees, despite what the descriptor says. This is the only such case I have found. NMEA2000 leaves them in radians.

```
NMEA2000
         "pgn": 129540,
         "id": "gnssSatsInView",
         "description": "GNSS Sats in View",
         "timestamp": "undefined",
         "prio": 3,
         "dst": 255,
         "src": 1,
         "sid": 13,
         "rangeResidualMode": "invalid",
         "satsInViewCount": 12,
         "satsInView": [
                 {
                           "prn": 25,
                           "elevation": "1.308900",
                           "azimuth": "4.694900",
                           "snr": "31.000000",
                           "rangeResiduals": 0,
                           "status": "Used"
                 },
                           "prn": 28,
                           "elevation": "0.523500",
                           "azimuth": "5.288300",
                           "snr": "28.000000",
                           "rangeResiduals": 0,
                           "status": "Used"
                 },
```

```
canboatAnalyzer.js
         "timestamp": "2023-11-24-22:42:04.388",
         "prio": 3,
         "src": 1,
         "dst": 255,
         "pgn": 129540,
         "description": "GNSS Sats in View",
         "fields": {
                  "SID": 13,
                  "Sats in View": 12,
                  "list": [
                          {
                                    "PRN": 25,
                                    "Elevation": 75,
                                    "Azimuth": 269,
                                    "SNR": 31,
                                    "Range residuals": 0,
                                    "Status": "Used"
                          },
                          {
                                    "PRN": 28,
                                    "Elevation": 30,
                                    "Azimuth": 303,
                                    "SNR": 28,
                                    "Range residuals": 0,
                                    "Status": "Used"
                          },
```

Page 75 of 84	Page	75	of	84
---------------	------	----	----	----

Appendix B. Plugin version history

Version	Date	
0.1	20 Jul 2020	Initial alpha release for feedback
0.2		 Error reporting regularised Added various APIs including those to access GUIDs, waypoints & routes Script window greatly enhanced for writing JavaScript Output window brought into line with script window Dealing with spurious characters such as accents improved User and technical guides developed Builds for Windows and Linux added Established on GitHub

Version	Date	
0.3		The script window now highlights plugin extensions and unsupported keywords by colourising them.
		 The result is now displayed last after any callbacks have completed rather than at the end of the main script. The scriptResult() function can be called to set the result.
		 Error handling has been improved and makes proper use of the Dukcode error object.
		Various APIs now throw an error rather than returning a boolean result, namely
		◆ OCPNgetSingleWaypoint()
		◆OCPNdeleteSingleWaypoint()
		◆ OCPNaddSingleWaypoint()
		◆ OCPNupdateSingleWaypoint()
		◆ OCPNgetRoute()
		◆OCPNdeleteRoute()
		◆ OCPNaddRoute()
		◆ OCPNupdateRoute()
		Print & alert now accept arrays and objects as arguments
		Alert no longer holds up OpenCPN
		Scripts will now timeout if they take too long, such as if in a loop.
		timeAlloc() allows management of the time limit.
		Extensive support for creating and responding to dialogue windows.
		OCPNonSeconds() has been renamed to onSeconds()
		New JavaScript extensions
		print <colour>()</colour>
		printLog()
		◆ scriptResult()
		→ onDialogue()
		◆ exitScript()
		New APIs added
		◆ OCPNgetPluginConfig()
		◆ OCPNrefreshCanvas()
		◆ OCPNgetAlSTargets()
		◆ OCPNgetVectorPP()
		◆ OCPNgetPositionPV()
		◆ OCPNgetGCdistance()

Version	Date	
0.4		 Position.NMEA precision increased from 3 to 5 decimal places Added writeTextFile Console Hide & Show now separate calls Added script auto-start ability Added chainScript Added JavaScript tools panel and current directory concept Added support for multiple consoles Added support for inter-console calls Errors thrown from within the plugin APIs now show the line number and trace-back where applicable Added onExit() capability Bug fix: hidden console was reappearing if OCPNdeleteRoute failed Extra example scripts
0.5		Functional changes: Waypoints Enhanced: waypoint APIs have extended attributes allowing more control over waypoint details. Additional attribute to distinguish between a free-standing waypoint and a routepoint Additional attribute giving a count of the number of routes including this waypoint New: get active waypoint GUID Routes New: get all route GUIDs New: get active route GUID Tracks (all new) get all track GUIDS get/update/delete track New: get active leg information New: printUnderlined Behind the scenes The plugin options have been moved within the opencpn.ini file from [Settings] to [Plugins]. The plugin will move settings to the new location as required. Numerous changes for the move from wxWidgetsv512 to v515
0.6		Functional changes Script and output panes Now soft-fold text at window boundary Dialogues Text field styles: If the font is set to "monospace" a monospaced font is used.
1.0		Re-issue to accompany v1.0

Version	Date		
1.1		 Output pane The output pane is now scrolled, so that the last output is always visible. The output length is now limited to 100,000 characters to avoid a rogue script exhausting memory. If the output exceeds this, text is deleted from the top of the pane and a message inserted to indicate that this has happened. 	
		 Sending a message to OCPN_DRAW_PI was causing a crash. Because of the way OD processes messages, this cannot be supported. It will now throw an error. A check is now made to avoid a called back function being invoked while any other JavaScript code is being executed. This is generalised protection against situations such as 1 above. 	
		 Some dialogue elements require or accept a list of values. An empty list could lead to a crash. Now an error is thrown. Dialogue multi-line text fields now soft-wrap so long lines are readable. When adding or updating a route, a routepoint without a GUID was not being allocated a new GUID. Now it is. onExit() was not being lexed blue in the script pane. 	
		 User Guide Error in documentation of track structure corrected. Added that with functions such as consoleClearOutput(), if the console name is omitted, it performs the action on the script's own console. 	

Version	Date	
2.0	18 Jan 2023	The plugin now keeps a list of the ten most recently accessed script files. Load now displays a dialogue in which you can select a file from the lists or you can choose Other which opens a file selection dialogue. You can also add a recent file to a list of favourites, which will always be offered, or you can remove a favourite.
		 Consoles
		while being moved. ☆Consoles can now be reduced to a minimal size just showing the console name.
		☆ Consoles can be parked in the frame top bar using the Park button. A script can park its own console or another console.
		☆The parking page of the tools allows you to set your own parameters for console parking, including the location of the park.
		☆The consoles page of the tools now allows you to change the name of a console.
		Extended APIs ☆readTextFile(fileString) - fileString can now be a URL and text will be read from that location, if OpenCPN is on-line.
		New APIs
		 consoleName() - set the console name from a script consolePark() - park this or another console
		<pre></pre>
		Other

Version	Date	
2.1	14 Apr 2023	Console Parking Consoles are now parked by screen position rather than by the OpenCPN frame.
		Getting GUIDs You can now select whether to get GUIDs for ordinary objects, objects in a layer or both
		Routes These now include the description and the isVisible attributes
		Windows scaled displays Supported
		Console options Options to choose Float on Top and to preserve toolbar toggle status

Version	Date	
3.0		Clipboard Added toClipboard and fromClipboard functions
		Added toolippoard and from clippoard functions
		<u>Drivers</u> Support for accessing and using the new input/output driver handles
		capport for accessing and asing the new input cutput arriver manages
		Navigation data Added OCPNonNavigation & OCPNonAllNavigation
		NMEA0183 OCPNonNMEA → OCPNonNMEA0183
		NMEA0183 data can now be written via a specific driver handle OCPNonNMEAsentence now supports receipt by specific NMEA sentence type
		NMEA2000
		Added OCPNonNMEA2000 & OCPNonAllNMEA2000 Built in scripts gain OCPN2000, pgnDescriptors & canboatAnalyzer objects.
		Enduring callbooks
		Enduring callbacks Many callback APIs now have an All variant that invokes the handler function repeatedly rather than once only.
		<u>Timers</u>
		Internally, the timer functionality has been completely rewritten to be more efficient and accurate. You can now specify timer intervals to less than 1 second (0.5, 2.5 etc.). You can now cancel individual timers as well as all timers. You can set a repeating timer.
		Running other processes
		Added execute and shell function APIs
		File handling
		Added built in constructor for the File object that allows more flexible file handling.
		<u>remember</u> Added a variable that endures between script runs
		Parking
		Parked consoles now remember where they were before being parked and will
		re-park in their own parking space. The close button can be used to unpark a console. Parking spaces are adjusted for console name changes and compacted when a console is deleted.
		onCloseButton()
		You can set a function to be called when the close button is clicked.
		OCPNsoundAlarm()
		You can now specify a sound file to be played.
		OCPNgetCanvasView()
		Fetches certain attributes of the current view port

Version	Date	
		cleanString() text filter to convert non-ASCII characters to nearest ASCII equivalent.
		NMEA0183checksum(sentence() Calculates the NMEA0183 sentence checksum.
		Load You can now load a script from a URL on the clipboard.

C. Document history

Version	Date	
0.1	19 Jul 2020	Initial version to accompany the plugin v0.1
0.2	20 Aug 2020	Update to accompany plugin release v0.2
0.2.1	3 Sep 2020	Code source links now to to gist itself rather than the raw window. They no longer need to be changed if gist is updated.
0.3	16 Nov 2020	To accompany plugin v0.3
0.3.1	22 Dec 2020	Correction to demo script Process and edit NMEA sentences
0.4	20 Apr 2021	To accompany plugin v0.4
0.5	06 Dc 2021	To accompany plugin v0.5
0.6	23 Jan 2022	To accompany plugin v1.0
2.0	03 Jan 2023	To accompany plugin v2.0
2.1	14 April 2023	To accompany plugin v2.1
3.0		To accompany plugin v3.0