

Enter password: ****

Welcome to the MySQL monitor. Commands end with ; or \g.

Your MySQL connection id is 18

Server version: 8.0.44 MySQL Community Server - GPL

Copyright (c) 2000, 2025, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

```
mysql> show databases;
```

```
+-----+
| Database      |
+-----+
| information_schema |
| mysql          |
| performance_schema |
| sys            |
+-----+
```

4 rows in set (0.00 sec)

```
mysql> create database nit;
```

Query OK, 1 row affected (0.02 sec)

```
mysql> show databases;
```

```
+-----+
| Database      |
+-----+
```

```
| information_schema |
| mysql              |
| nit                |
| performance_schema |
| sys                |
+-----+
```

5 rows in set (0.00 sec)

```
mysql> use nit;
```

Database changed

```
mysql> create table student(
```

```
    -> name varchar(30),
```

```
    -> id int not null primary key,
```

```
    -> address varchar(50),
```

```
    -> marks int);
```

Query OK, 0 rows affected (0.05 sec)

```
mysql> desc student;
```

```
+-----+-----+-----+-----+-----+
| Field | Type   | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+
| name  | varchar(30) | YES |     | NULL    |       |
| id    | int       | NO  | PRI | NULL    |       |
| address | varchar(50) | YES |     | NULL    |       |
| marks | int       | YES |     | NULL    |       |
+-----+-----+-----+-----+-----+
```

4 rows in set (0.00 sec)

```
mysql> show tables;
```

```
+-----+
| Tables_in_nit |
+-----+
```

```
+-----+
```

```
| student |
```

```
+-----+
```

1 row in set (0.00 sec)

```
mysql> insert into student(marks, id, name, address)values(78,12,'rashmi','mumbai')
```

```
-> ;
```

Query OK, 1 row affected (0.02 sec)

```
mysql> insert into student values('balurkar','40','bng',66);
```

Query OK, 1 row affected (0.00 sec)

```
mysql> insert into student values('alex','45','hyd',79),('cathy', 17, 'delhi',
90),('dolly',48,'pune',67),('chancy', 78,'mumbai',34)
```

```
-> ;
```

Query OK, 4 rows affected (0.01 sec)

Records: 4 Duplicates: 0 Warnings: 0

```
mysql> select * from student;
```

```
+-----+---+-----+-----+
```

```
| name   | id | address | marks |
```

```
+-----+---+-----+-----+
```

```
| rashmi | 12 | mumbai | 78 |
```

```
| cathy  | 17 | delhi  | 90 |
```

```
| balurkar | 40 | bng    | 66 |
```

```
| alex   | 45 | hyd    | 79 |
```

```
| dolly  | 48 | pune   | 67 |
```

```
| chancy | 78 | mumbai | 34 |
```

```
+-----+---+-----+-----+
```

6 rows in set (0.00 sec)

```
mysql> select name from student;
```

```
+-----+
```

```
| name  |
```

```
+-----+
```

```
| rashmi |
```

```
| cathy  |
```

```
| balurkar |
```

```
| alex   |
```

```
| dolly  |
```

```
| chancy |
```

```
+-----+
```

```
6 rows in set (0.00 sec)
```

```
mysql> select name,id from student;
```

```
+-----+----+
```

```
| name  | id |
```

```
+-----+----+
```

```
| rashmi | 12 |
```

```
| cathy  | 17 |
```

```
| balurkar | 40 |
```

```
| alex   | 45 |
```

```
| dolly  | 48 |
```

```
| chancy | 78 |
```

```
+-----+----+
```

```
6 rows in set (0.00 sec)
```

```
mysql> select * from student where id = 12;
```

```
+-----+----+-----+-----+
```

```
| name  | id | address | marks |
```

```
+-----+----+-----+-----+
```

```
| rashmi | 12 | mumbai  | 78 |
```

```
+-----+---+-----+-----+
```

1 row in set (0.00 sec)

```
mysql> select * from student;
```

```
+-----+---+-----+-----+
```

```
| name   | id | address | marks |
```

```
+-----+---+-----+-----+
```

```
| rashmi | 12 | mumbai | 78 |
```

```
| cathy  | 17 | delhi  | 90 |
```

```
| balurkar | 40 | bng    | 66 |
```

```
| alex   | 45 | hyd    | 79 |
```

```
| dolly  | 48 | pune   | 67 |
```

```
| chancy | 78 | mumbai | 34 |
```

```
+-----+---+-----+-----+
```

6 rows in set (0.00 sec)

```
mysql>quit
```

Using workbench:

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

bank_custom

nit

Tables

student

Views

Stored Procedures

Functions

sys

Query 1

Limit to 1000 rows

```
1 use nit;
2 show databases;
3 select * from student;
4 select name from student;
5
```

Result Grid

Filter Rows:

Exports

Wrap Cell Contents

Database

bank_custom

information_schema

mysql

nit

performance_schema

sys

Administration Schemas

Result 4

Information

No object selected

Object Info Session

Output

Action Output

#	Time	Action	Message
1	13:48:25	use nit	0 row(s) affected
2	13:48:34	show databases	6 row(s) returned
3	13:48:40	select * from student LIMIT 0, 1000	6 row(s) returned
4	13:48:44	select name from student LIMIT 0, 1000	6 row(s) returned
5	13:58:25	use nit	0 row(s) affected
6	13:58:32	show databases	6 row(s) returned

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

bank_custom

nit

Tables

student

Views

Stored Procedures

Functions

sys

Query 1

Limit to 1000 rows

```
1 use nit;
2 show databases;
3 select * from student;
4 select name from student;
5
```

Result Grid

Filter Rows:

Edit

Export/Import

Wrap Cell Contents

name	id	address	marks
rashmi	12	mumbai	78
cathy	17	delhi	90
balurkar	40	bng	66
alex	45	chennai	79
dolly	48	pune	67
chancy	78	mumbai	34

Administration Schemas

student 5

Information


No object selected

Object Info Session

Output

Action Output

#	Time	Action	Message
2	13:48:34	show databases	6 row(s) returned
3	13:48:40	select * from student LIMIT 0, 1000	6 row(s) returned
4	13:48:44	select name from student LIMIT 0, 1000	6 row(s) returned
5	13:58:25	use nit	0 row(s) affected
6	13:58:32	show databases	6 row(s) returned
7	13:59:25	select * from student LIMIT 0, 1000	6 row(s) returned

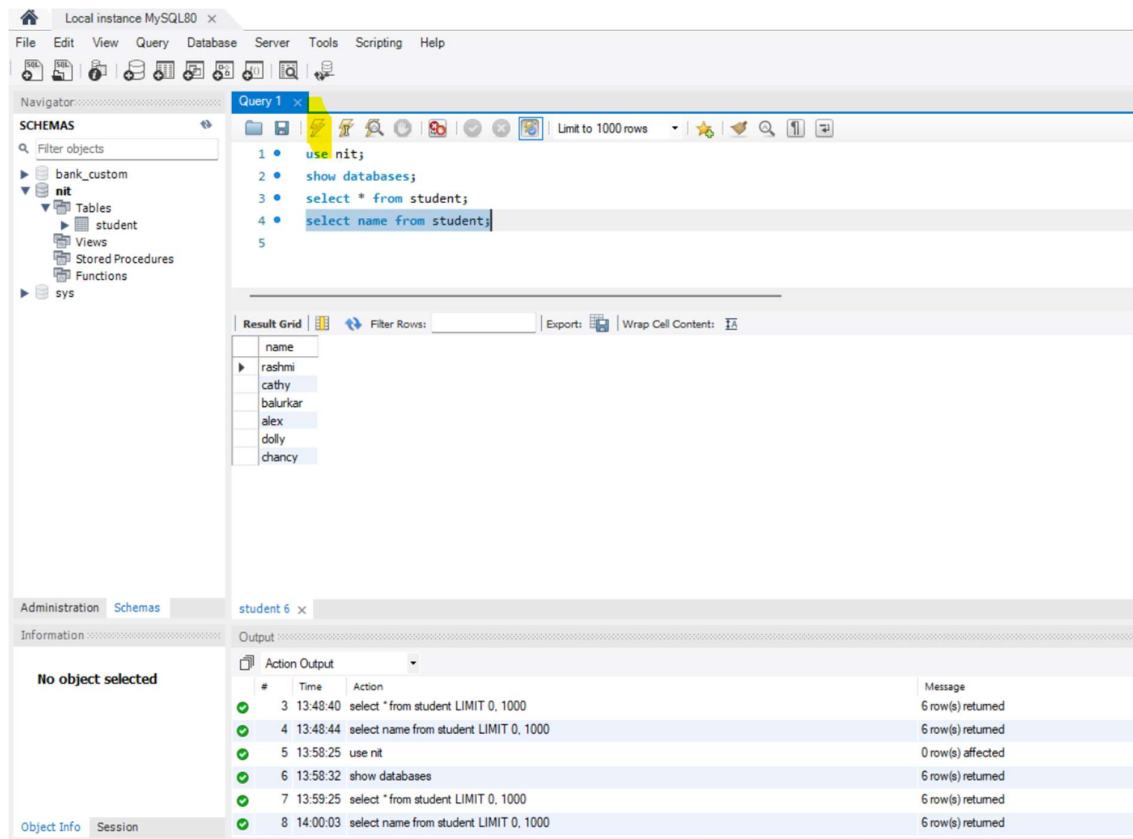

17th Nov, 2025

mysql> show databases;

```

+-----+
| Database      |
+-----+
| bank_custom   |
| information_schema |
| mysql         |
| nit           |
| performance_schema |
| sys           |
+-----+

```

6 rows in set (0.03 sec)

mysql> use nit;

Database changed

```
mysql> show tables;
```

```
+-----+
| Tables_in_nit |
+-----+
| student      |
+-----+
```

1 row in set (0.02 sec)

```
mysql> select * from student;
```

```
+-----+----+-----+-----+
| name  | id | address | marks |
+-----+----+-----+-----+
| rashmi | 12 | mumbai  | 78 |
| cathy  | 17 | delhi   | 90 |
| balurkar | 40 | bng     | 66 |
| alex   | 45 | chennai | 79 |
| dolly  | 48 | pune    | 67 |
| chancy | 78 | mumbai  | 34 |
+-----+----+-----+-----+
```

6 rows in set (0.00 sec)

```
mysql> alter table student add phoneNo int;
```

Query OK, 0 rows affected (0.06 sec)

Records: 0 Duplicates: 0 Warnings: 0

```
mysql> select * from student;
```

```
+-----+----+-----+-----+-----+
| name  | id | address | marks | phoneNo |
+-----+----+-----+-----+-----+
| rashmi | 12 | mumbai  | 78 | NULL |
+-----+----+-----+-----+-----+
```


cathy	17	delhi	90	NULL
balurkar	40	bng	66	NULL
alex	45	chennai	79	NULL
dolly	48	pune	67	NULL
chancy	78	mumbai	34	NULL

6 rows in set (0.00 sec)

```
mysql> update student set phoneNo = 123;
Query OK, 6 rows affected (0.01 sec)
Rows matched: 6 Changed: 6 Warnings: 0
```

```
mysql> select * from student;
```

name	id	address	marks	phoneNo
rashmi	12	mumbai	78	123
cathy	17	delhi	90	123
balurkar	40	bng	66	123
alex	45	chennai	79	123
dolly	48	pune	67	123
chancy	78	mumbai	34	123

6 rows in set (0.00 sec)

```
mysql> update student set phoneNo = 456 where id = 12;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1 Changed: 1 Warnings: 0
```

```
mysql> select * from student;
```

name	id	address	marks	phoneNo
------	----	---------	-------	---------

name	id	address	marks	phoneNo
rashmi	12	mumbai	78	456
cathy	17	delhi	90	123
balurkar	40	bng	66	123
alex	45	chennai	79	123
dolly	48	pune	67	123
chancy	78	mumbai	34	123

6 rows in set (0.00 sec)

```
mysql> desc student;
```

Field	Type	Null	Key	Default	Extra
name	varchar(30)	YES		NULL	
id	int	NO	PRI	NULL	
address	varchar(50)	YES		NULL	
marks	int	YES		NULL	
phoneNo	int	YES		NULL	

5 rows in set (0.01 sec)

```
mysql> alter table student modify column name varchar(60);
```

Query OK, 0 rows affected (0.02 sec)

Records: 0 Duplicates: 0 Warnings: 0

```
mysql> desc student;
```

Field	Type	Null	Key	Default	Extra
-------	------	------	-----	---------	-------

name	varchar(60)	YES		NULL		
id	int	NO	PRI	NULL		
address	varchar(50)	YES		NULL		
marks	int	YES		NULL		
phoneNo	int	YES		NULL		

```
+-----+-----+-----+-----+-----+-----+
```

5 rows in set (0.00 sec)

```
mysql> alter table student drop column phoneNo;
```

Query OK, 0 rows affected (0.02 sec)

Records: 0 Duplicates: 0 Warnings: 0

```
mysql> select * from student;
```

name	id	address	marks
------	----	---------	-------

```
+-----+-----+-----+-----+
```

rashmi	12	mumbai	78
cathy	17	delhi	90
balurkar	40	bng	66
alex	45	chennai	79
dolly	48	pune	67
chancy	78	mumbai	34

```
+-----+-----+-----+-----+
```

6 rows in set (0.00 sec)

```
mysql> delete from student where name = 'balurkar';
```

Query OK, 1 row affected (0.01 sec)

```
mysql> select * from student;
```

name	id	address	marks
------	----	---------	-------

```

+-----+-----+-----+
| rashmi | 12 | mumbai | 78 |
| cathy  | 17 | delhi   | 90 |
| alex   | 45 | chennai | 79 |
| dolly  | 48 | pune    | 67 |
| chancy | 78 | mumbai  | 34 |
+-----+-----+-----+

```

5 rows in set (0.00 sec)

```
mysql> select sum(marks) from student;
```

```

+-----+
| sum(marks) |
+-----+
|      348   |
+-----+

```

1 row in set (0.00 sec)

```
mysql> select avg(marks) from student;
```

```

+-----+
| avg(marks) |
+-----+
|  69.6000   |
+-----+

```

1 row in set (0.00 sec)

```
mysql> select count(name) from student;
```

```

+-----+
| count(name) |
+-----+
|           5 |
+-----+

```

1 row in set (0.00 sec)

```
mysql> select min(marks) from student;
```

```
+-----+
| min(marks) |
+-----+
|      34 |
+-----+
```

1 row in set (0.01 sec)

```
mysql> select max(marks) from student;
```

```
+-----+
| max(marks) |
+-----+
|      90 |
+-----+
```

1 row in set (0.00 sec)

```
mysql> select * from student order by marks;
```

```
+-----+----+-----+-----+
| name  | id | address | marks |
+-----+----+-----+-----+
| chancy | 78 | mumbai  | 34 |
| dolly  | 48 | pune    | 67 |
| rashmi | 12 | mumbai  | 78 |
| alex   | 45 | chennai | 79 |
| cathy  | 17 | delhi   | 90 |
+-----+----+-----+-----+
```

5 rows in set (0.00 sec)

```
mysql> select * from student;
```

```

+-----+----+-----+-----+
| name  | id  | address | marks |
+-----+----+-----+-----+
| rashmi | 12 | mumbai  | 78  |
| cathy  | 17 | delhi   | 90  |
| alex   | 45 | chennai | 79  |
| dolly  | 48 | pune    | 67  |
| chancy | 78 | mumbai  | 34  |
+-----+----+-----+-----+
5 rows in set (0.00 sec)

```

```
mysql> select * from student order by marks desc;
```

```

+-----+----+-----+-----+
| name  | id  | address | marks |
+-----+----+-----+-----+
| cathy  | 17 | delhi   | 90  |
| alex   | 45 | chennai | 79  |
| rashmi | 12 | mumbai  | 78  |
| dolly  | 48 | pune    | 67  |
| chancy | 78 | mumbai  | 34  |
+-----+----+-----+-----+
5 rows in set (0.00 sec)

```

```
mysql> select * from student where name like 'a%';
```

```

+-----+----+-----+-----+
| name  | id  | address | marks |
+-----+----+-----+-----+
| alex  | 45 | chennai | 79  |
+-----+----+-----+-----+
1 row in set (0.01 sec)

```

```
mysql> select * from student where name like 'a*';
```

Empty set (0.00 sec)

```
mysql> select * from student where name like '%y';
```

```
+-----+----+-----+-----+
| name  | id  | address | marks |
+-----+----+-----+-----+
| cathy | 17  | delhi   | 90    |
| dolly | 48  | pune    | 67    |
| chancy| 78  | mumbai  | 34    |
+-----+----+-----+-----+
```

3 rows in set (0.00 sec)

```
mysql> select * from student where name like '_a%';
```

```
+-----+----+-----+-----+
| name  | id  | address | marks |
+-----+----+-----+-----+
| rashmi| 12  | mumbai  | 78    |
| cathy | 17  | delhi   | 90    |
+-----+----+-----+-----+
```

2 rows in set (0.00 sec)

```
mysql> select * from student where name like '%s_';
```

Empty set (0.00 sec)

```
mysql> select * from student where name like '%m_';
```

```
+-----+----+-----+-----+
| name  | id  | address | marks |
+-----+----+-----+-----+
| rashmi| 12  | mumbai  | 78    |
+-----+----+-----+-----+
```

1 row in set (0.00 sec)

```
mysql> create table emp(id int not null primary key, salary int, empcode int, name varchar(30));
```

Query OK, 0 rows affected (0.04 sec)

```
mysql> insert into emp values(12, 20000, 102, 'aman'),(23,60000,104,'arup'),(78,30000,105,'max'),(80,25000,103,'ram'),(34,90000,106,'sam');
```

Query OK, 5 rows affected (0.01 sec)

Records: 5 Duplicates: 0 Warnings: 0

```
mysql> select * from emp;
```

id	salary	empcode	name
12	20000	102	aman
23	60000	104	arup
34	90000	106	sam
78	30000	105	max
80	25000	103	ram

5 rows in set (0.00 sec)

```
mysql> show tables;
```

Tables_in_nit
emp
student

2 rows in set (0.00 sec)


```
mysql> select * from student;
```

```
+-----+----+-----+-----+
| name  | id | address | marks |
+-----+----+-----+-----+
| rashmi | 12 | mumbai  | 78 |
| cathy  | 17 | delhi   | 90 |
| alex   | 45 | chennai | 79 |
| dolly  | 48 | pune    | 67 |
| chancy | 78 | mumbai  | 34 |
+-----+----+-----+-----+
```

5 rows in set (0.00 sec)

```
mysql> select * from student inner join emp on student.id = emp.id;
```

```
+-----+----+-----+-----+----+-----+-----+-----+
| name  | id | address | marks | id | salary | empcode | name |
+-----+----+-----+-----+----+-----+-----+-----+
| rashmi | 12 | mumbai  | 78 | 12 | 20000 | 102 | aman |
| chancy | 78 | mumbai  | 34 | 78 | 30000 | 105 | max  |
+-----+----+-----+-----+----+-----+-----+-----+
```

2 rows in set (0.00 sec)

```
mysql> select * from emp inner join student on emp.id = student.id;
```

```
+---+-----+-----+-----+-----+----+-----+-----+
| id | salary | empcode | name | name  | id | address | marks |
+---+-----+-----+-----+-----+----+-----+-----+
| 12 | 20000 | 102 | aman | rashmi | 12 | mumbai  | 78 |
| 78 | 30000 | 105 | max  | chancy | 78 | mumbai  | 34 |
+---+-----+-----+-----+-----+----+-----+-----+
```

2 rows in set (0.00 sec)

```
mysql> select * from student;
```

```

+-----+---+-----+-----+
| name | id | address | marks |
+-----+---+-----+-----+
| rashmi | 12 | mumbai | 78 |
| cathy | 17 | delhi | 90 |
| alex | 45 | chennai | 79 |
| dolly | 48 | pune | 67 |
| chancy | 78 | mumbai | 34 |
+-----+---+-----+-----+
5 rows in set (0.00 sec)

```

```

mysql> select * from emp;
+---+-----+-----+-----+
| id | salary | empcode | name |
+---+-----+-----+-----+
| 12 | 20000 | 102 | aman |
| 23 | 60000 | 104 | arup |
| 34 | 90000 | 106 | sam |
| 78 | 30000 | 105 | max |
| 80 | 25000 | 103 | ram |
+---+-----+-----+-----+
5 rows in set (0.00 sec)

```

```

mysql> select * from student left join emp on student.id = emp.id;
+-----+---+-----+-----+---+-----+-----+-----+
| name | id | address | marks | id | salary | empcode | name |
+-----+---+-----+-----+---+-----+-----+-----+
| rashmi | 12 | mumbai | 78 | 12 | 20000 | 102 | aman |
| cathy | 17 | delhi | 90 | NULL | NULL | NULL | NULL |
| alex | 45 | chennai | 79 | NULL | NULL | NULL | NULL |
| dolly | 48 | pune | 67 | NULL | NULL | NULL | NULL |

```

	chancy		78		mumbai		34		78		30000		105		max	
--	--------	--	----	--	--------	--	----	--	----	--	-------	--	-----	--	-----	--

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

5 rows in set (0.00 sec)

mysql> select * from emp left join student on student.id = emp.id;

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

	id		salary		empcode		name		name		id		address		marks	
--	----	--	--------	--	---------	--	------	--	------	--	----	--	---------	--	-------	--

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

	12		20000		102		aman		rashmi		12		mumbai		78	
--	----	--	-------	--	-----	--	------	--	--------	--	----	--	--------	--	----	--

	23		60000		104		arup		NULL		NULL		NULL		NULL	
--	----	--	-------	--	-----	--	------	--	------	--	------	--	------	--	------	--

	34		90000		106		sam		NULL		NULL		NULL		NULL	
--	----	--	-------	--	-----	--	-----	--	------	--	------	--	------	--	------	--

	78		30000		105		max		chancy		78		mumbai		34	
--	----	--	-------	--	-----	--	-----	--	--------	--	----	--	--------	--	----	--

	80		25000		103		ram		NULL		NULL		NULL		NULL	
--	----	--	-------	--	-----	--	-----	--	------	--	------	--	------	--	------	--

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

5 rows in set (0.00 sec)

mysql> select * from student right join emp on student.id = emp.id;

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

	name		id		address		marks		id		salary		empcode		name	
--	------	--	----	--	---------	--	-------	--	----	--	--------	--	---------	--	------	--

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

	rashmi		12		mumbai		78		12		20000		102		aman	
--	--------	--	----	--	--------	--	----	--	----	--	-------	--	-----	--	------	--

	NULL		NULL		NULL		NULL		23		60000		104		arup	
--	------	--	------	--	------	--	------	--	----	--	-------	--	-----	--	------	--

	NULL		NULL		NULL		NULL		34		90000		106		sam	
--	------	--	------	--	------	--	------	--	----	--	-------	--	-----	--	-----	--

	chancy		78		mumbai		34		78		30000		105		max	
--	--------	--	----	--	--------	--	----	--	----	--	-------	--	-----	--	-----	--

	NULL		NULL		NULL		NULL		80		25000		103		ram	
--	------	--	------	--	------	--	------	--	----	--	-------	--	-----	--	-----	--

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

5 rows in set (0.00 sec)

mysql> select * from emp right join student on student.id = emp.id;

+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+	-----	+
---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---	-------	---

	id		salary		empcode		name		name		id		address		marks	
--	----	--	--------	--	---------	--	------	--	------	--	----	--	---------	--	-------	--

```

+-----+-----+-----+-----+-----+-----+
| 12 | 20000 | 102 | aman | rashmi | 12 | mumbai | 78 |
| NULL | NULL | NULL | NULL | cathy | 17 | delhi | 90 |
| NULL | NULL | NULL | NULL | alex | 45 | chennai | 79 |
| NULL | NULL | NULL | NULL | dolly | 48 | pune | 67 |
| 78 | 30000 | 105 | max | chancy | 78 | mumbai | 34 |
+-----+-----+-----+-----+-----+-----+
5 rows in set (0.00 sec)

```

```
mysql> select * from student cross join emp;
```

```

+-----+-----+-----+-----+-----+-----+-----+
| name | id | address | marks | id | salary | empcode | name |
+-----+-----+-----+-----+-----+-----+-----+
| chancy | 78 | mumbai | 34 | 12 | 20000 | 102 | aman |
| dolly | 48 | pune | 67 | 12 | 20000 | 102 | aman |
| alex | 45 | chennai | 79 | 12 | 20000 | 102 | aman |
| cathy | 17 | delhi | 90 | 12 | 20000 | 102 | aman |
| rashmi | 12 | mumbai | 78 | 12 | 20000 | 102 | aman |
| chancy | 78 | mumbai | 34 | 23 | 60000 | 104 | arup |
| dolly | 48 | pune | 67 | 23 | 60000 | 104 | arup |
| alex | 45 | chennai | 79 | 23 | 60000 | 104 | arup |
| cathy | 17 | delhi | 90 | 23 | 60000 | 104 | arup |
| rashmi | 12 | mumbai | 78 | 23 | 60000 | 104 | arup |
| chancy | 78 | mumbai | 34 | 34 | 90000 | 106 | sam |
| dolly | 48 | pune | 67 | 34 | 90000 | 106 | sam |
| alex | 45 | chennai | 79 | 34 | 90000 | 106 | sam |
| cathy | 17 | delhi | 90 | 34 | 90000 | 106 | sam |
| rashmi | 12 | mumbai | 78 | 34 | 90000 | 106 | sam |
| chancy | 78 | mumbai | 34 | 78 | 30000 | 105 | max |
| dolly | 48 | pune | 67 | 78 | 30000 | 105 | max |
| alex | 45 | chennai | 79 | 78 | 30000 | 105 | max |

```

cathy 17 delhi 90 78 30000 105 max
rashmi 12 mumbai 78 78 30000 105 max
chancy 78 mumbai 34 80 25000 103 ram
dolly 48 pune 67 80 25000 103 ram
alex 45 chennai 79 80 25000 103 ram
cathy 17 delhi 90 80 25000 103 ram
rashmi 12 mumbai 78 80 25000 103 ram

```
+-----+---+-----+-----+---+-----+-----+-----+
```

25 rows in set (0.00 sec)

```
mysql> select * from emp cross join student;
```

+---+-----+-----+-----+---+-----+-----+-----+
id salary empcode name name id address marks
+---+-----+-----+-----+---+-----+-----+-----+
80 25000 103 ram rashmi 12 mumbai 78
78 30000 105 max rashmi 12 mumbai 78
34 90000 106 sam rashmi 12 mumbai 78
23 60000 104 arup rashmi 12 mumbai 78
12 20000 102 aman rashmi 12 mumbai 78
80 25000 103 ram cathy 17 delhi 90
78 30000 105 max cathy 17 delhi 90
34 90000 106 sam cathy 17 delhi 90
23 60000 104 arup cathy 17 delhi 90
12 20000 102 aman cathy 17 delhi 90
80 25000 103 ram alex 45 chennai 79
78 30000 105 max alex 45 chennai 79
34 90000 106 sam alex 45 chennai 79
23 60000 104 arup alex 45 chennai 79
12 20000 102 aman alex 45 chennai 79
80 25000 103 ram dolly 48 pune 67
78 30000 105 max dolly 48 pune 67

34	90000	106	sam	dolly	48	pune	67
23	60000	104	arup	dolly	48	pune	67
12	20000	102	aman	dolly	48	pune	67
80	25000	103	ram	chancy	78	mumbai	34
78	30000	105	max	chancy	78	mumbai	34
34	90000	106	sam	chancy	78	mumbai	34
23	60000	104	arup	chancy	78	mumbai	34
12	20000	102	aman	chancy	78	mumbai	34

+---+-----+-----+-----+-----+---+-----+-----+

25 rows in set (0.00 sec)

mysql>quit