



## **HATFD1010**

### **Rotate a String Left by K Positions**

Write a program to rotate a given string `s` left by `k` positions without using any built-in string functions. For example, rotating "abcdef" by 2 would give "cdefab".

**Instructions:** Do not use built-in rotation or substring functions. Implement the logic manually.

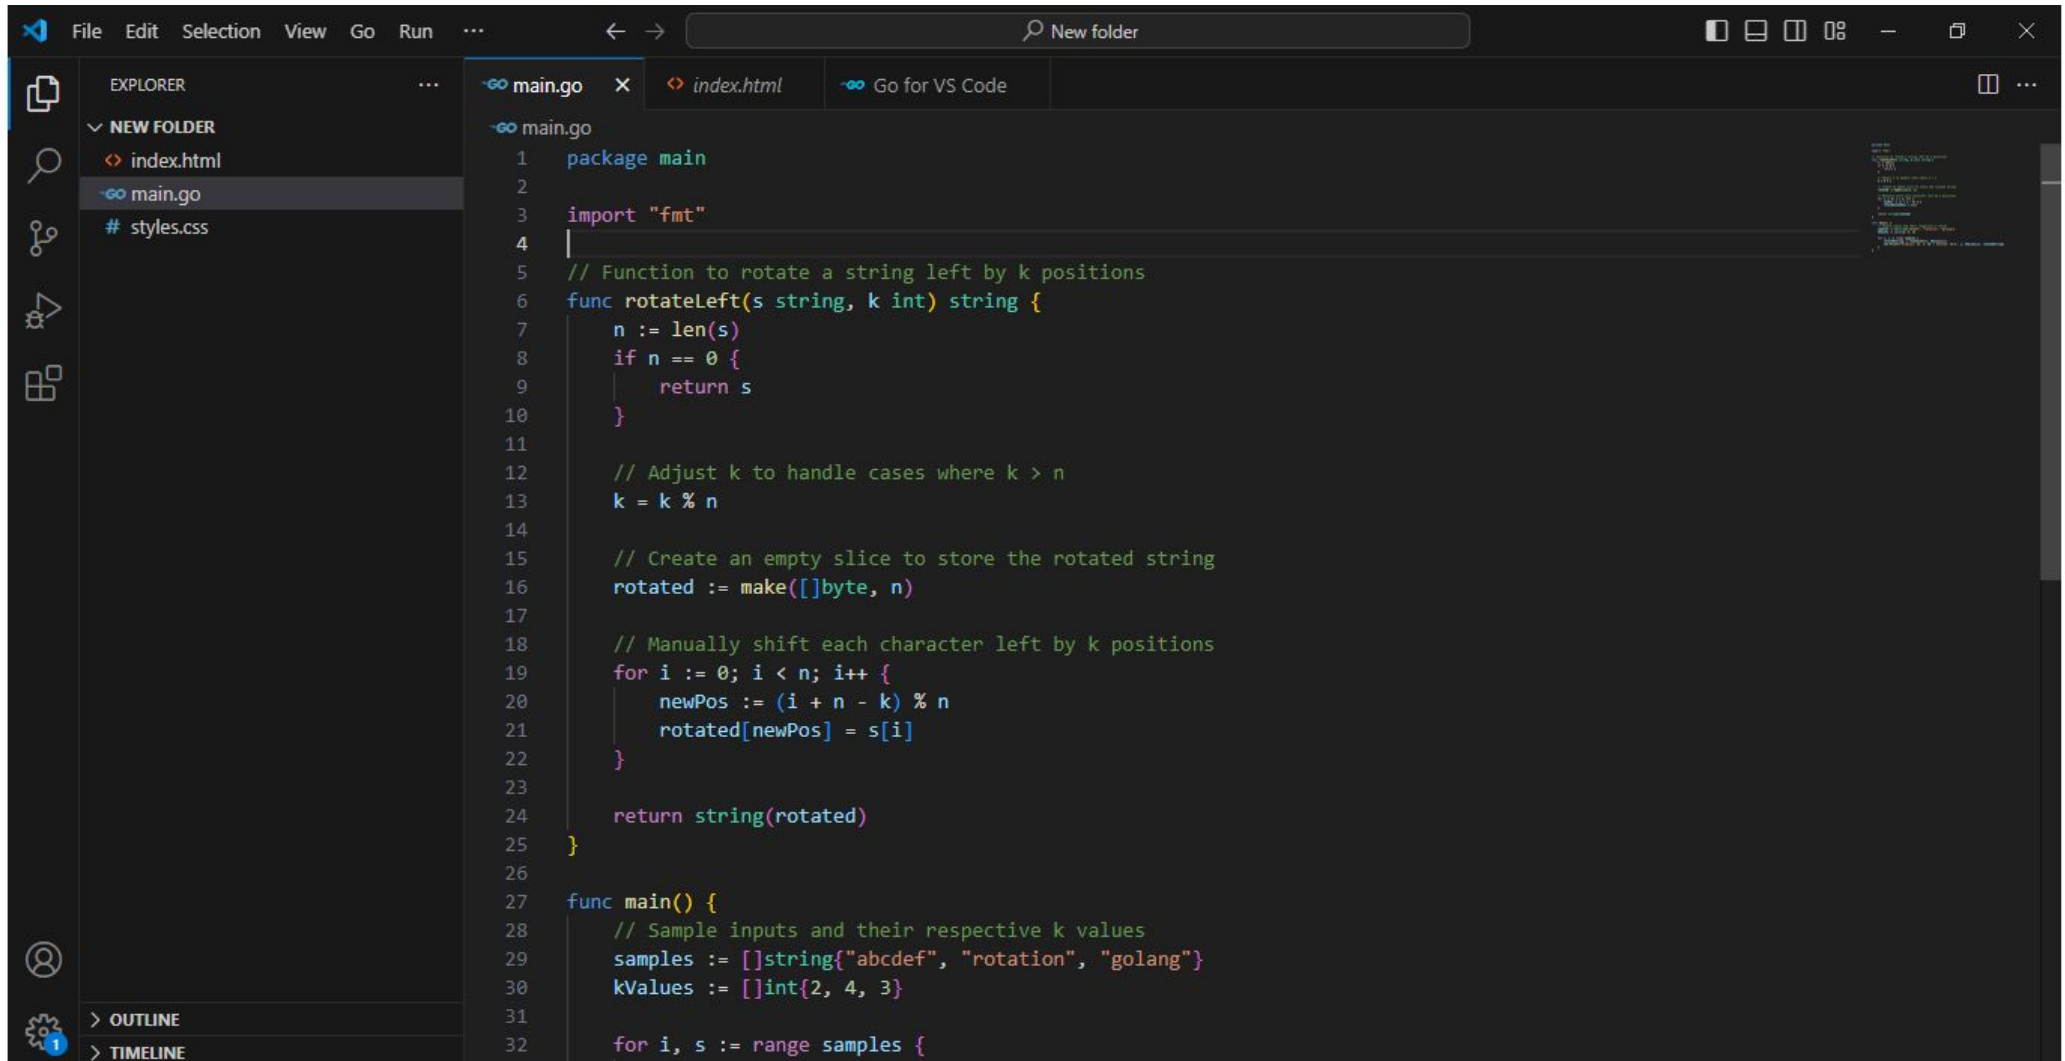

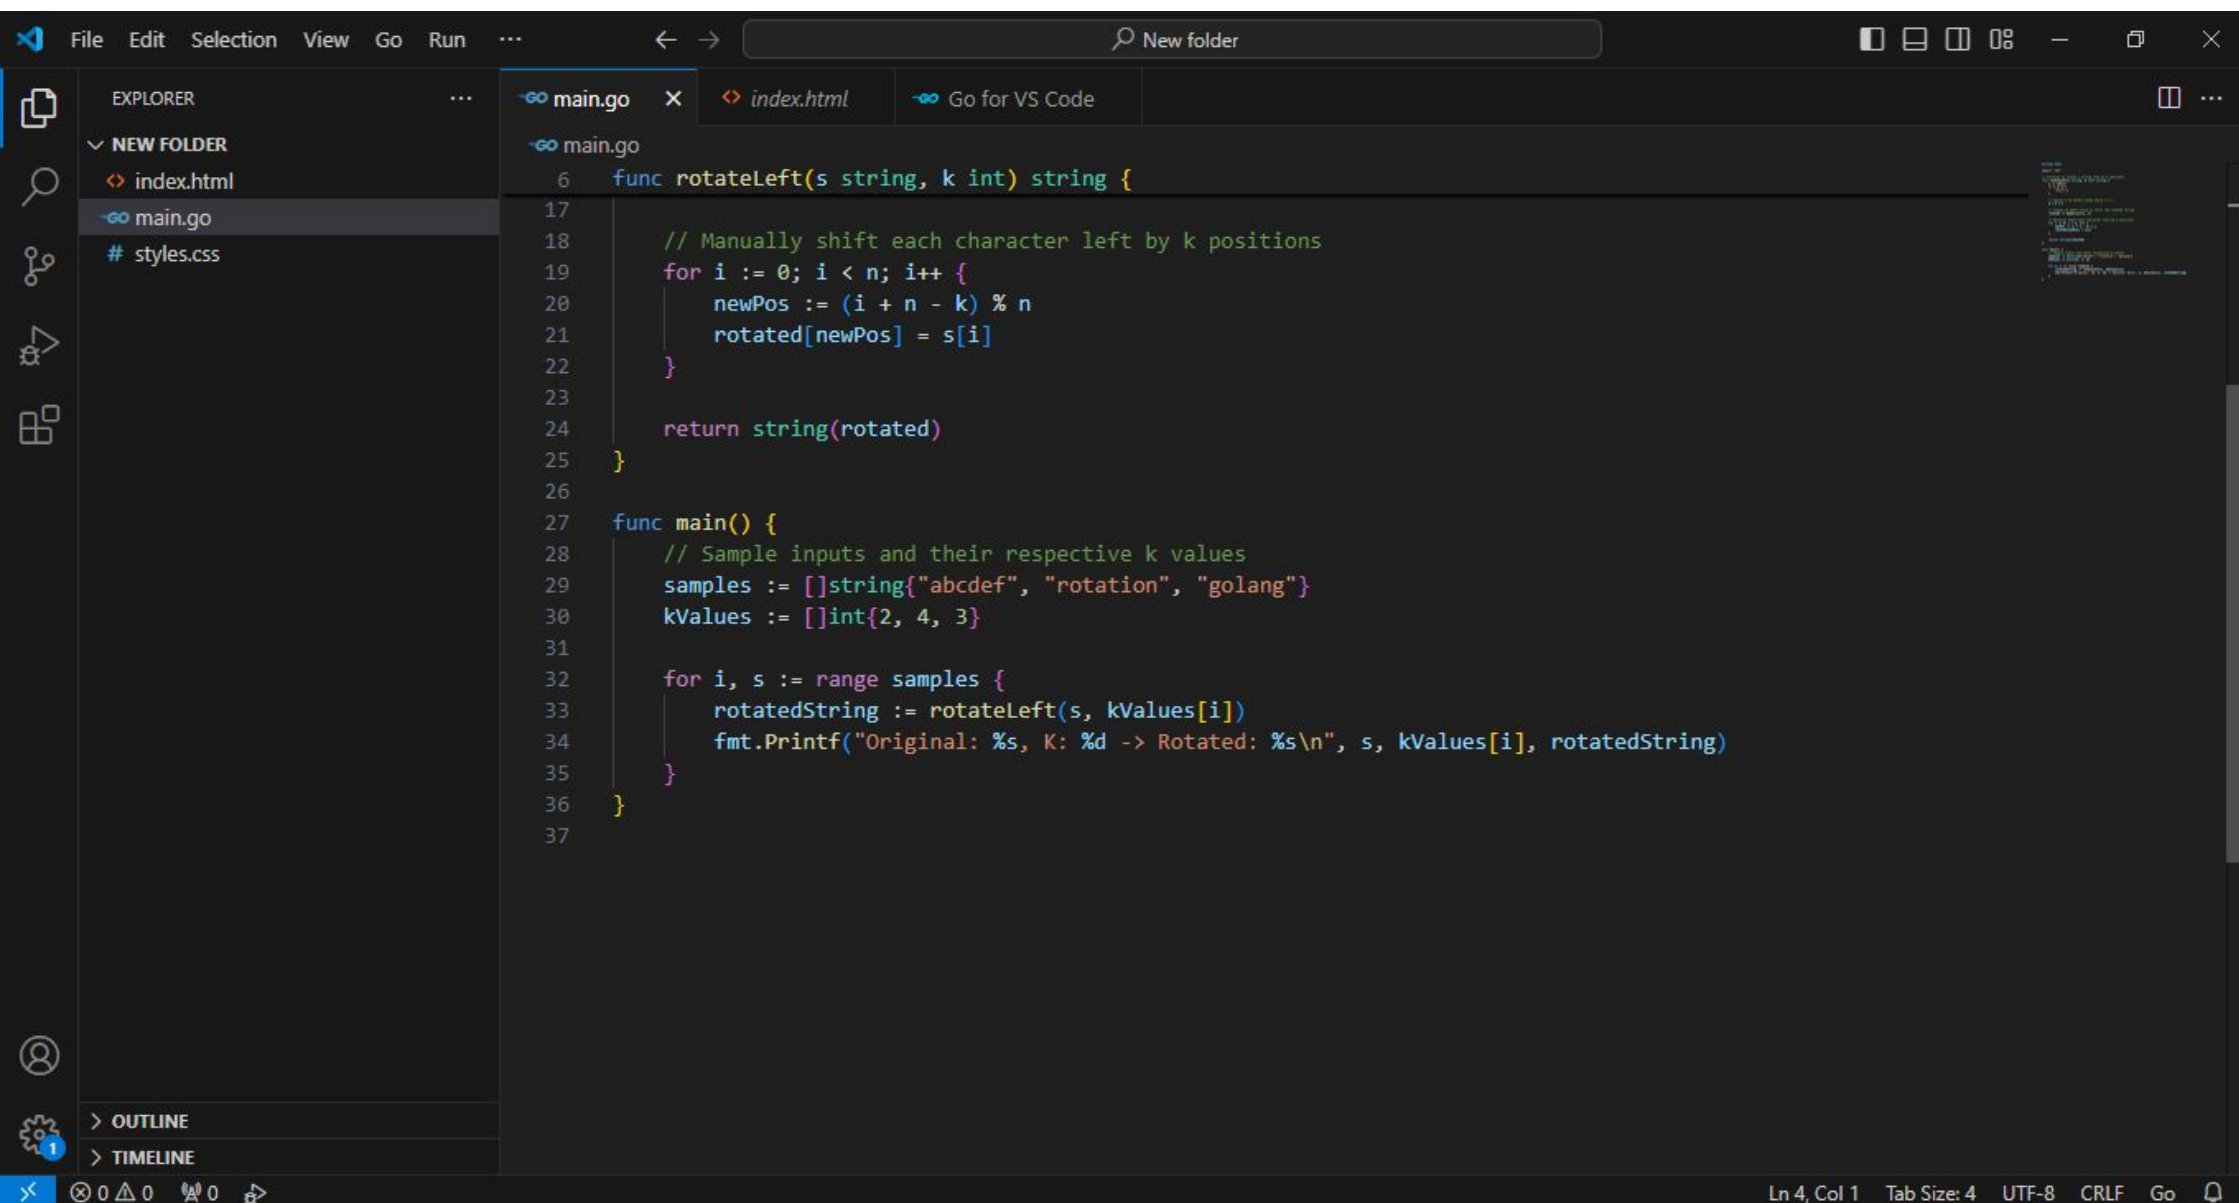

---

Output for Sample Inputs:

1.Input: "abcdef", k = 2

Output: "cdefab"

2.Input: "rotation", k = 4

Output: "ationrot"

3.Input: "golang", k = 3|

Output: "nggola"