

Raspirus docs

A simple hash-based virus scanner

Benjamin Demetz

Copyright © 2022 - 2023 Raspirus Project

Table of contents

1. Home	3
1.1 Welcome to Raspirus Docs	3
1.2 Contents:	5
1.3 Introduction	5
1.4 Related projects	5
2. FAQ	6
2.1 What is the Icon of the project?	7
2.2 How do I generate the documentation for this repository?	8
2.3 In VS Code, how do I set up Rust analyzer to work in non-standard directory structure?	8
2.4 Updating database crashes app	8
2.5 Comments	8
3. Guides	9
3.1 Export to PDF	9
3.2 Translations	9
3.3 Comments	9
4. Installation	10
4.1 Table of contents	10
4.2 Introduction	10
4.3 Limitations	10
4.4 Step-by-step guide	10
4.5 Conclusion	12
4.6 Comments	12
5. Usage	13
5.1 Tutorial	13
5.2 Case study	13
5.3 Comments	13
6. Contributing	14
6.1 Contributing to Raspirus	14
6.2 Code of Conduct - Raspirus	18
6.3 Code	20
6.4 Translations	21
7. Developers	23
7.1 Developers	23
7.2 Backend	26
7.3 Frontend	30

1. Home

1.1 Welcome to Raspirus Docs



1.2 Contents:

- [Introduction](#)
- [Installation](#)
- [Guides](#)
- [FAQ](#)
- [Usage and Diagrams](#)
- [Developers Section](#)
 - [Frontend \(Next.js\)](#)
 - [Backend \(Rust\)](#)
- [Contributing](#)
 - [Coding](#)
 - [Translations](#)

1.3 Introduction

This repository contains all documentation of the Raspirus project. It is currently in development and therefore not too reliable.

1.4 Related projects

Raspirus is a simple virus scanner, and there are many similar projects out there. I will list a few of them I know and why I decided not to use them for my project, or why Raspirus is better.

- [Clam AV](#): This program is an open-source Antivirus, but it can also be used like Raspirus to scan single files or folders. It surely is more accurate when it comes to search for viruses, but it is very resource intensive and a bit slow. Therefore, it is not suited for single-board computers like the Raspberry Pi, as it doesn't have enough RAM. Nonetheless, Clam AV is a great open-source tool.
- [Windows Defender](#): This program from Windows doesn't just scan files and folders on-demand, but scans the entire system continuously. This slows down the entire system. Furthermore, it is also Windows-only, while Raspirus is cross-platform.
- [Bitdefender](#): This is another great Antivirus software, but it comes with a cost. I think that security should be a must, not something you need to pay for. But if you are willing to pay a bit, this piece of software really has it all, and as far as I know it is even cross-platform.

There surely are many others that I could compare here, but Raspirus is not aimed at beating other Antivirus software. Its aim is to do one thing, and do it as best as possible: Compare Hashes of a file with a list of signatures.

- This project is free and will always stay free.
- It is open-source, so you can look at the code and judge for yourself if you trust the app or not.
- Community helps grow the project, and many smart minds surely can achieve a lot if they work together
- Cross-platform as a standard: Raspirus should work everywhere
- Lightweight and fast, usable even on your Potato PC


Last update: April 21, 2023

Created: April 3, 2023

2. FAQ

In this page, we will answer your most asked questions. As more questions arise, we will expand this page to include more answers. This page is very useful if you encounter any errors during development or usage. Maybe your error can be easily fixed and doesn't require a bug report.

2.1 What is the Icon of the project?

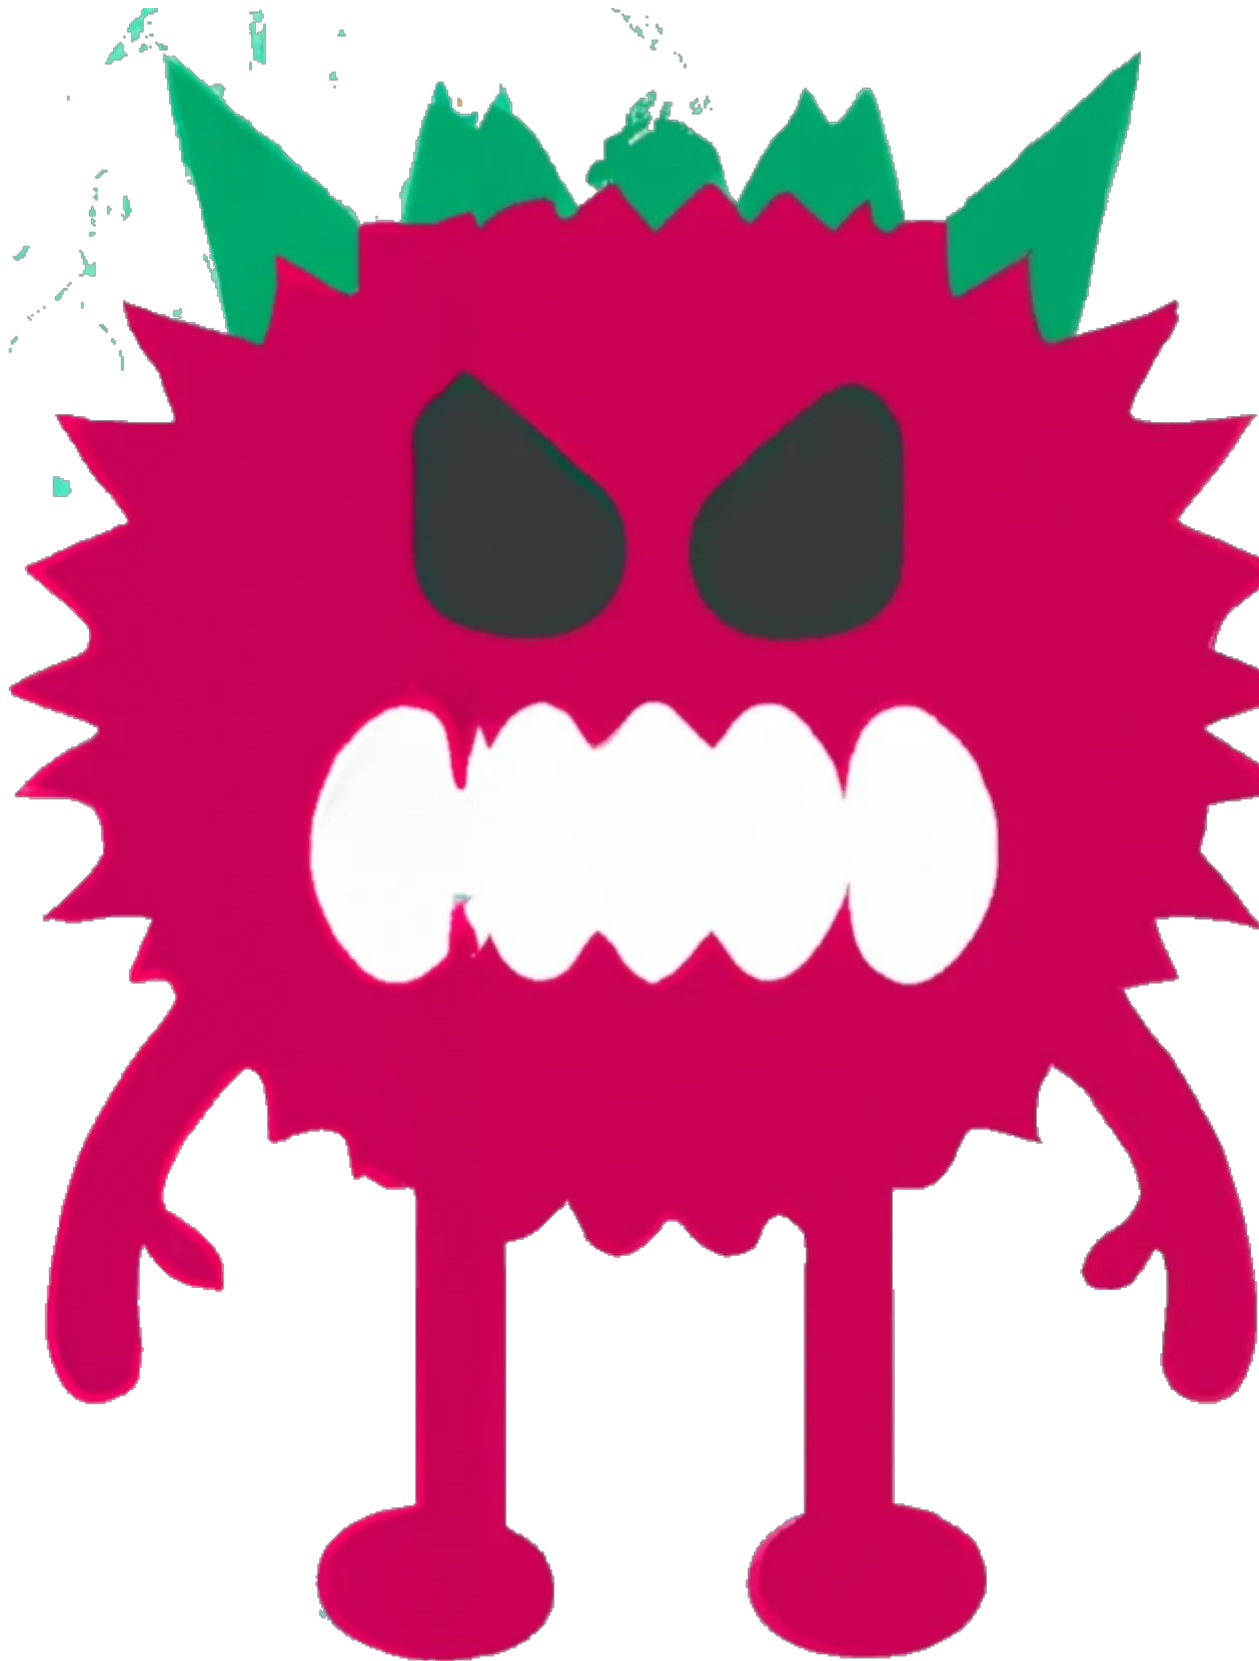

In case you didn't notice yet, this is the logo of the Raspirus app. It was generated with [DALL-E](#) and some creative image editing and merging. It should represent a red monster that eats viruses. His name is Stuart by

the way, and don't worry, he is a very kind monster, except for when he is hungry, then you better feed him viruses. You can find more media and documents in the [dedicated repository](#). You are free to use these images to create your own art and showcase them in the [discussion boards](#)

2.2 How do I generate the documentation for this repository?

You can find the generated documentation in the [rust folder](#) and in case you want to generate your own, you can do so by using the `cargo doc` command. Here are some parameters you might want to use with it: `--no-deps`: Ignores dependencies, only documents the code itself `--release`: It is generally better than a debug `--target-dir`: Where to output the docs All together, the command might look something like this: `\ cargo doc --no-deps --release --target-dir=/docs/generated/`

2.3 In VS Code, how do I set up Rust analyzer to work in non-standard directory structure?

The Rust analyzer plugin in Visual Studio Code tries to search for a `Cargo.toml` file in the current directory, or parent directory. But since we packed the entire application in the `app` directory, it's unable to find the file and therefore might not work. This is a big lost, as it doesn't tell you if your Rust files have correct syntax or not. To solve this issue, you can add an option to the plugin and specify the location of your `Cargo.toml` file. As stated [in this comment](#), you need to add the following lines to the end of your plugin settings' JSON. Afterward, you will also need to restart the Analyzer for the modification to take effect.

```
{
  "rust-analyzer.linkedProjects": [
    "/home/matklad/tmp/hello/Cargo.toml"
  ]
}
```

2.4 Updating database crashes app

On Windows, it seems like the app crashes when the user tries to update the database. We are aware of this issue and working to fix it. The issue arises because the function needs administrative privileges, which Windows isn't providing. To fix this issue for now, simply execute the app in administration mode, aka. With admin privileges. You can do so by right-clicking the app and clicking `Run as administrator`.

Last update: April 20, 2023

Created: April 5, 2023

2.5 Comments

3. Guides

Here are some guides on how to export the docs to PDF format, or how to add translations to this project. If anything is missing, make sure to post a comment below and request a guide!

3.1 Export to PDF

This documentation can be exported in PDF format for offline sharing. The exported PDF has some issues with Images and iFrames, but the text is readable and can be shared. Here step by step: 1. [Clone](#) this repository, you can find instructions on how to it on [GitHub](#) 2. Install the requirements for the PDF conversion tool, you can find them for your OS [here](#) 3. Change to the cloned directory and install the required dependencies. Note: You will need Python3 and pip for this. You can install the dependencies with the command: `pip install -r requirements.txt` 4. Install [mkdocs](#) and run the build command: `mkdocs build` 5. If everything works as expected, your PDF should be located in `site/pdf/document.pdf`

3.2 Translations

- Translate this document: <https://github.com/ultrabug/mkdocs-static-i18n>

Last update: April 21, 2023

Created: April 3, 2023

3.3 Comments

4. Installation

This guide will help you in building the project on your own machine.

4.1 Table of contents

- [Introduction](#)
- [Limitations](#)
- [Step-by-step guide](#)
- [1. Download the repository](#)
- [2. Install Rust](#)
- [3. Install NPM](#)
- [4. Install Next.js](#)
- [5. Install Tauri](#)
- [6. Install project dependencies](#)
- [7. Build the project](#)
- [Conclusion](#) <https://github.com/Raspirus/Raspirus/releases>

4.2 Introduction

For people that just want a working app, they can just head over to the [Release page](#) and download the executable for the correct platform. But if you are on a different Linux distribution, unsupported OS, or just want to compile the project on your own, this step-by-step guide will guide you.

4.3 Limitations

- Glibc can cause problems on Linux: <https://tauri.app/v1/guides/building/linux#limitations>
- You need to use 64-bit systems, else the app might crash because it's using memory improvements that only work there
- The app is meant to be run as a "I'm the only app running on this system" app. This is important regarding RAM usage, because if you have much RAM, it will use much RAM. And if you, for some reason, try to limit the initially available RAM, the app might crash because it doesn't have the promised amount of RAM. (A future version might have a toggle for this)

4.4 Step-by-step guide

Please read the whole guide once before starting to execute each step!

4.4.1 1. Download the repository

This step is very straightforward, just download the whole repository by clicking the green button on the homepage of this repository. Optionally, you can also download code specific to a Release by visiting the

Release page and download the .zip file in the assets. Another thing you might want to do is [clone this repository](#)

4.4.2 2. Install Rust

One of the requirements to compile the project is to have Rust installed. You can check if you have Rust installed on your machine with the command `rustc --version`, if this command fails, head over to the [Rust website](#) and follow the instructions for your OS. Also make sure that your Rust installation is up-to-date with the command `rustup update`.

4.4.3 3. Install NPM

NPM is needed because the frontend of the app works on JavaScript and is basically a website. To check if you already have Node.js installed, try executing the commands: `node -v` and `npm -v`. If any of them fail, or you find out you have an older version, head over to the [NPM Website](#) to install the latest version for your OS. If you are using a WSL, [this guide](#) might be useful to you.

4.4.4 4. Install Next.js

The frontend is built on JavaScript using a well-known framework named [Next.js](#), it makes website development faster and more efficient. You will need to install this tool too to be able to build the application. But don't worry, you can do this easily with NPM: `npm install next@latest react@latest react-dom@latest eslint-config-next@latest`. This will install Next.js, React (which Next.js is based on) and ESLint. You can learn more about the installation process [here](#).

4.4.5 5. Install Tauri

Tauri is the framework that connects the Rust backend with the Next.js frontend. It is an open-source project made by very friendly and welcoming people. Unfortunately, installing Tauri is not as straightforward as other processes. It is very OS dependent, and you will therefore make sure that you meet the [Prerequisites](#) before you start. Afterward, you can install Tauri using cargo: `cargo install tauri-cli`. You could also use NPM to install it, but we will mainly work with cargo in this short guide. Check out [their FAQ section](#) to learn about why NPM might be better for you.

4.4.6 6. Install project dependencies

Firstly, we will install the node modules. To do this, head over to the directory that contains all the Raspirus code. Open the app directory, open a terminal in this location and execute the command: `npm install`. This might take a while, but it will download all the necessary modules. **Warning!:** On WSL you might get an `openssl is missing` error, to fix this you need to edit the file `app/src-tauri/Cargo.toml` and add the following line: `openssl-sys = {version = "0.9.66", features = ["vendored"]}` in the `[dependencies]` section.

4.4.7 7. Build the project

Before you can completely build the project, there is one more thing you might want to check. To make sure that the Rust part of the project works fine, open the folder `app/src-tauri/` and execute the command `cargo build`. If this command succeeds, you can go back to the `app/` directory. If this command fails, please [open an issue](#) on this repository with as much information about the error as possible. If everything went well, you are now in the app directory, and you can safely execute the command `cargo tauri build`. This command will build the entire

application and display a path at the end of the process showing you where the executable is located. By default, you should be able to find it in the `app\src-tauri\target\release` folder.

4.5 Conclusion

This application is basically a website attached to some Rust code and packaged with the Tauri framework. It will therefore need a graphical overlay to start and display the website. This project is in constant development and therefore, if you find anything unusual, have some good ideas or find some errors, don't be afraid to open an issue on this repository and I will be happy to help you out.

Last update: April 7, 2023

Created: February 7, 2023

4.6 Comments

5. Usage

5.1 Tutorial

How to use this app. It is super easy

5.2 Case study

Here are some metrics of the app, how fast it is, how reliable and what it can actually do. It also describes how the app is intended to be used.

5.2.1 Spezifikation

- App size: 5MB
- RAM usage: ~ 50MB
- Works offline, only requires connection to Internet to update the database file

5.2.2 Metrics

The speed in which the app is able to scan highly depends on three things: - The USB or Storage medium used
- The CPU of the system the app runs on. - The size of the single files that need to be scanned

For optimal scanning speed, you should use a modern storage medium with high read speeds, a modern CPU that is not overloaded with other apps and files that are low in size. It is faster to scan 100 files of 10GB than 1 file of 10GB. The reason being that the Hash funktion is faster on smaller files.

For Raspberry Pis, don't look at RAM, as the app only requires a couple MB. Instead, look at CPU speed, as that's more important.

5.2.3 Application

The app was originally intended to use only on Raspberry Pis with a touchscreen. The Raspberry Pi with Linux on it is easy to setup and very secure. Most of the viruses target Windows PC, and therefore have no effect on Linux. Furthermore, if you add a battery to your Raspberry Pi and set the app in Kiosk mode, you can create some sort of Raspirus box that can be carried around and is focused on scanning USB sticks. Thanks to Tauri and it's cross-compilation feature, Raspirus is available for all major systems: macOS, Windows, Linux. The app is primarily being developed and tested on Windows and Debian Linux. You can find installation instructions in the [Installation page](#).

Last update: April 21, 2023

Created: April 3, 2023

5.3 Comments

6. Contributing

6.1 Contributing to Raspirus

First off, thanks for taking the time to contribute! ❤️

All types of contributions are encouraged and valued. See the [Table of Contents](#) for different ways to help and details about how this project handles them. Please make sure to read the relevant section before making your contribution. It will make it a lot easier for us maintainers and smooth out the experience for all involved. The community looks forward to your contributions. 🎉

And if you like the project, but just don't have time to contribute, that's fine. There are other easy ways to support the project and show your appreciation, which we would also be very happy about: - Star the project - Tweet about it - Refer this project in your project's readme - Mention the project at local meetups and tell your friends/colleagues

6.1.1 Table of Contents

- [Code of Conduct](#)
- [I Have a Question](#)
- [I Want To Contribute](#)
- [Reporting Bugs](#)
- [Suggesting Enhancements](#)
- [Your First Code Contribution](#)
- [Improving The Documentation](#)
- [Adding translations](#)
- [Styleguides](#)
- [Commit Messages](#)
- [Join The Project Team](#)

6.1.2 Code of Conduct

This project and everyone participating in it is governed by the [Raspirus Code of Conduct](#). By participating, you are expected to uphold this code. Please report unacceptable behaviour to demetzbenjamin@duck.com.

6.1.3 I Have a Question

If you want to ask a question, we assume that you have read the available [Documentation](#).

Before you ask a question, it is best to search for existing [Issues](#) that might help you. In case you have found a suitable issue and still need clarification, you can write your question in this issue. It is also advisable to search the internet for answers first.

If you then still feel the need to ask a question and need clarification, we recommend the following:

- Open an [Issue](#).
- Provide as much context as you can about what you're running into.
- Provide project and platform versions (nodejs, npm, etc), depending on what seems relevant.
- If the question is about the docs, write a comment at the bottom of the said page.

We will then take care of the issue as soon as possible.

6.1.4 I Want To Contribute

Legal Notice

When contributing to this project, you must agree that you have authored 100% of the content, that you have the necessary rights to the content and that the content you contribute may be provided under the project licence.

Reporting Bugs

Before Submitting a Bug Report

A good bug report shouldn't leave others needing to chase you up for more information. Therefore, we ask you to investigate carefully, collect information and describe the issue in detail in your report. Please complete the following steps in advance to help us fix any potential bug as fast as possible.

- Make sure that you are using the latest version.
- Determine if your bug is really a bug and not an error on your side e.g. using incompatible environment components/versions (Make sure that you have read the [documentation](#). If you are looking for support, you might want to check [this section](#)).
- To see if other users have experienced (and potentially already solved) the same issue you are having, check if there is not already a bug report existing for your bug or error in the [bug tracker](#).
- Also make sure to search the internet (including Stack Overflow) to see if users outside of the GitHub community have discussed the issue.
- Collect information about the bug:
 - Stack trace (Traceback)
 - OS, Platform and Version (Windows, Linux, macOS, x86, ARM)
 - Version of the interpreter, compiler, SDK, runtime environment, package manager, depending on what seems relevant.
 - Possibly your input and the output
 - Can you reliably reproduce the issue? And can you also reproduce it with older versions?

How Do I Submit a Good Bug Report?

You must never report security related issues, vulnerabilities or bugs including sensitive information to the issue tracker, or elsewhere in public. Instead sensitive bugs must be sent by email to demetzbenjamin@duck.com.

We use GitHub issues to track bugs and errors. If you run into an issue with the project:

- Open an [Issue](#). (Since we can't be sure at this point whether it is a bug or not, we ask you not to talk about a bug yet and not to label the issue.)
- Explain the behaviour you would expect and the actual behaviour.
- Please provide as much context as possible and describe the *reproduction steps* that someone else can follow to recreate the issue on their own. This usually includes your code. For good bug reports you should isolate the problem and create a reduced test case.
- Provide the information you collected in the previous section.

Once it's filed:

- The project team will label the issue accordingly.
- A team member will try to reproduce the issue with your provided steps. If there are no reproduction steps or no obvious way to reproduce the issue, the team will ask you for those steps and mark the issue as `needs-repro`. Bugs with the `needs-repro` tag will not be addressed until they are reproduced.
- If the team is able to reproduce the issue, it will be marked `needs-fix`, as well as possibly other tags (such as `critical`), and the issue will be left to be [implemented by someone](#).

Suggesting Enhancements

This section guides you through submitting an enhancement suggestion for Raspirus, **including completely new features and minor improvements to existing functionality**. Following these guidelines will help maintainers and the community to understand your suggestion and find related suggestions.

Before Submitting an Enhancement

- Make sure that you are using the latest version.
- Read the [documentation](#) carefully and find out if the functionality is already covered, maybe by an individual configuration.
- Perform a [search](#) to see if the enhancement has already been suggested. If it has, add a comment to the existing issue instead of opening a new one.
- Find out whether your idea fits with the scope and aims of the project. It's up to you to make a strong case to convince the project's developers of the merits of this feature. Keep in mind that we want features that will be useful to the majority of our users and not just a small subset. If you're just targeting a minority of users, consider writing an add-on/plugin library.

How Do I Submit a Good Enhancement Suggestion?

Enhancement suggestions are tracked as [GitHub issues](#).

- Use a **clear and descriptive title** for the issue to identify the suggestion.
- Provide a **step-by-step description of the suggested enhancement** in as many details as possible.
- **Describe the current behaviour** and **explain which behaviour you expected to see instead** and why. At this point you can also tell which alternatives do not work for you.
- You may want to **include screenshots and animated GIFs** which help you demonstrate the steps or point out the part which the suggestion is related to. You can use [this tool](#) to record GIFs on macOS and Windows, and [this tool](#) or [this tool](#) on Linux.
- **Explain why this enhancement would be useful** to most Raspirus users. You may also want to point out the other projects that solved it better and which could serve as inspiration.

Your First Code Contribution

Improving The Documentation

Translating The App

There are two types of translations on Raspirus:

Translating The Frontend

In the [main repository](#), in the [locales folder](#) you can find different folders containing the different languages the project is translated in.

Translating The Documentation

6.1.5 Styleguides

Commit Messages

6.1.6 Join The Project Team

6.1.7 Attribution

This guide is based on the **contributing-gen**. [Make your own!](#)

Last update: April 21, 2023

Created: April 5, 2023

6.2 Code of Conduct - Raspirus

6.2.1 Our Pledge

In the interest of fostering an open and welcoming environment, we as contributors and maintainers pledge to make participation in our project and our community a harassment-free experience for everyone, regardless of age, body size, disability, ethnicity, sex characteristics, gender identity and expression, level of experience, education, socio-economic status, nationality, personal appearance, race, religion, or sexual identity and orientation.

6.2.2 Our Standards

Examples of behaviour that contributes to a positive environment for our community include:

- Demonstrating empathy and kindness toward other people
- Being respectful of differing opinions, viewpoints, and experiences
- Giving and gracefully accepting constructive feedback
- Accepting responsibility and apologising to those affected by our mistakes, and learning from the experience
- Focusing on what is best not just for us as individuals, but for the overall community

Examples of unacceptable behaviour include:

- The use of sexualised language or imagery, and sexual attention or advances
- Trolling, insulting or derogatory comments, and personal or political attacks
- Public or private harassment
- Publishing others' private information, such as a physical or email address, without their explicit permission
- Other conduct which could reasonably be considered inappropriate in a professional setting

6.2.3 Our Responsibilities

Project maintainers are responsible for clarifying and enforcing our standards of acceptable behaviour and will take appropriate and fair corrective action in response to any instances of unacceptable behaviour.

Project maintainers have the right and responsibility to remove, edit, or reject comments, commits, code, wiki edits, issues, and other contributions that are not aligned to this Code of Conduct, or to ban temporarily or permanently any contributor for other behaviours that they deem inappropriate, threatening, offensive, or harmful.

6.2.4 Scope

This Code of Conduct applies within all community spaces, and also applies when an individual is officially representing the community in public spaces. Examples of representing our community include using an official e-mail address, posting via an official social media account, or acting as an appointed representative at an online or offline event.

6.2.5 Enforcement

Instances of abusive, harassing, or otherwise unacceptable behaviour may be reported to the community leaders responsible for enforcement at demetzbenjamin@duck.com. All complaints will be reviewed and investigated promptly and fairly.

All community leaders are obligated to respect the privacy and security of the reporter of any incident.

6.2.6 Attribution

This Code of Conduct is adapted from the [Contributor Covenant](#), version [1.4](#) and [2.0](#), and was generated by [contributing-gen](#).

Last update: April 21, 2023

Created: April 21, 2023

6.3 Code

6.3.1 COMING SOON

Last update: April 5, 2023

Created: April 3, 2023

6.3.2 Comments

6.3.3 comments: true

6.4 Translations

Translations are very important and can help other people understand the app easier and make it wider available. If you know a language outside of English and would like to add your translations, you can do so in two ways: The first one is to translate the documentation, the second one is to translate the frontend strings.

6.4.1 Translating code

This is a work in progress, but essentially it will be done in one of two possible ways:

Translation file

There is a translations file in JSON format for each different language. So the app would load the strings it needs from that file. This is a bit easier to implement for the developers, but not very efficient or great for translators, as it involves forking the repository.

Translation service

We use an external translations service to translate the project. This option would allow translators to just translate the given strings and have an overview of how much has been translated and what still needs to be translated. This would be the preferred option, but the downside is the setup for this option. Since we don't know which service to use yet, this option will be added in the future when we have more concrete ideas and hopefully a bigger team. We will probably use [Crowdin](#)

6.4.2 Translating Docs

The docs you are reading right now also need translations and will require a much bigger effort than translating strings used on the frontend. The documentation is quite big and can therefore take quite some time to translate. As the option above, we could use the service here too, but that will be added in the future. If you want to start adding translations right away, I would suggest doing the following:

1. [Fork this repository](#): You can follow a [guide](#) online on how to do it properly.
2. Enter the docs folder and, if the language you want to translate doesn't exist yet, add a new directory whose name is the name of the language you want to write translations for. For example, it would be it for Italian, de for German and so on.
3. Then change to that directory and edit the Markdown files inside that directory. Make sure you keep the original folder structure.
4. After you have finished editing, save your files and upload them to your fork on GitHub. Basically make a [GitHub commit](#)
5. Now you can open a [pull-request](#) to the original repository and request that your changes get added to the main project.
6. Someone of the team will review the translations and if accepted add them to the main project.

In the future, we hopefully have an external service that handles all this for you, so that you can focus on your translations without distractions. We will probably use [Crowdin](#).

Last update: April 20, 2023

Created: April 5, 2023

7. Developers

7.1 Developers

The Raspirus project mainly uses two different programming languages and frameworks. One for the backend and one for the frontend. \ The frontend is written in JavaScript using the [Next.js](#) framework. The backend on the other side is written in Rust. The communication between these two programming languages is made using the [Tauri](#) framework. Using this framework, one can write functions in Rust and call them from the frontend easily.

7.1.1 Technologies used

- [NPM](#): I wanted the frontend to be beautiful, and at first I tried creating an actual native application, but that just didn't have the customization I was searching for. Therefore, I decided to write a Web-frontend, and for that I could choose between Node.js or [Deno](#). I ended up using Node.js as it's the one I am mostly familiar with.
- [Next.js](#): Next.js is a frontend framework that is fairly easy to implement, and once setup can be very powerful. The most useful feature used in this project is the export of the website in static HTML. This is essential for Tauri to function. Another advantage of Next.js is that it optimizes itself, by automatically stripping away everything unnecessary, this makes the app lightweight and fast. Navigation with Next.js is practically instant.
- [Rust](#): Rust was not my first choice for the backend. At first, I started with C++, but I was not skilled enough to create the entire app with that language, so I turned to Python. Python is way slower than C++, but it's my favorite language and the one I know best, so I was able to develop faster. Nonetheless, the lack of speed with Python was a big drawback. Luckily, a friend of mine helped me out and rewrote the entire backend in Rust, basically speeding the app up by 100x. What previously took a couple of minutes, now took mere seconds. Rust is a compiled language and faster than Python, which is an interpreted language. If you want to test the old Python system, there is an entire [repository](#) for that.
- [Tauri](#): Tauri plays a very important part in this project, as it is a framework that allows connecting the Rust backend to a JavaScript frontend. This essentially allowed us to have a beautiful frontend in Next.js and an impressively fast backend in Rust. Furthermore, Tauri compiles the application for different systems, like Windows, Linux or macOS by creating installers or binaries. This improved the installation of the app.
- [SweetAlertv2](#): When errors occur, or there are warnings and information to display as a pop-up to the user, the simple JavaScript alert just doesn't look that good. SweetAlert improves the look of these pop-ups by a lot. It's fairly easy to install and to use. In our case, it is mainly used to display errors or warnings, for example when the scanning process is suddenly interrupted.
- [next-i18next](#): The app doesn't have much text, and with the icons and colors it should be fairly simple to understand what you need to do. Nonetheless, we decided to add translations to the app. This is done using a Next.js plugin named i18next, that allows to translate the project easily with .JSON files.
- [Crowdin](#): Crowdin is a website that collects translations from users and helps translate open-source and private projects. I am especially grateful that for open-source projects, the price for this service is free. It is useful for translators to focus on translations, without the need to look at code. It also helps developers, as it automatically syncs new translations with GitHub and vice versa.

- [MkDocs](#): MkDocs is a Python framework used to create documentation for projects. In fact, it is the framework used to create this specific translation. It is really easy to use and makes structuralizing docs or integrating plugins like Crowdin fairly easily.
- [Dependabot](#): Dependabot comes with every GitHub repository, and can be activated fairly easily. Its job is to check dependencies for updates and therefore to keep the entire app up-to-date. This also ensures that the app has the latest patches and functions. By improving its dependencies, the app might become faster and more efficient. Furthermore, Dependabot also informs the user about Security vulnerabilities of used dependencies or crates, a very useful feature to maintain the app secure.
- [GitHub](#): GitHub has been chosen as the file hosting platform mainly because it is popular, easy to use and has everything needed. Plus it's free. A company also suggested hosting the project on their GitLab servers, but in the end the project remained on GitHub as it is easier to use and to collaborate than to use a VPN to connect to a PC that then connects to GitLab. GitHub also has a lot of features: Project planing, Milestones, Issues, Actions, ...
- [CodeQL](#): CodeQL is another powerful tool from GitHub. It scans the entire project and checks for vulnerabilities in the code. For example, if there is cross-site-scripting happening somewhere, or we are not hiding passwords and secrets correctly, or we are coding inefficiently. This is very useful, as it assures a certain reliability of the code.
- [CodeCov](#): Codecov is an external tool that can be installed on GitHub, and it tracks test coverage. It basically tells you how efficient the tests you just wrote actually are, and if they cover the entire project. Testing the frontend is hard, as we would likely need to test user interaction, but testing the backend is doable. Therefore, we set up Codecov to check our Rust backend for test coverage.

7.1.2 Integration

Raspirus is a standalone app and everything happens inside the app. What I mean by this is that there are no APIs for the outside to get information from, and the app is also not meant to be used by other apps. The main usage of the app is through a touchscreen, that's why there are no input fields where a user has to type text, as that is a quite frustrating experience on bad touchscreen, as the one from a Raspberry Pi. Actually, there are API calls, but they happen inside the app. In fact, the Next.js frontend calls the backend through the Tauri API.

For example, in the `loading.js` file, we call the scanning function from the frontend to tell Rust to start the scanner:

```
const message = await invoke("start_scanner", {
  path: scan_path,
  dbfile: db_location,
  obfuscated: obfuscatedMode,
});
```

We basically start the `start_scanner` function and give it the needed parameters. Then we save the result in the `message` constant. This is a basic Tauri API call.

To instead communicate from the backend back to the frontend, Tauri uses the principle of signals:

```
fn calculate_progress(&mut self, last_percentage: &mut f64, file_size: u64) {
  self.scanned_size = self.scanned_size + file_size;
  let scanned_percentage = (self.scanned_size as f64 / self.folder_size as f64 * 100.0).round();
  info!("Scanned: {}%", scanned_percentage);
  if scanned_percentage != *last_percentage {
    self.tauri_window.emit_all("progress", TauriEvent {message: scanned_percentage.to_string()}).unwrap();
    *last_percentage = scanned_percentage;
  }
}
```



```
}  
}
```

If you want to know more about how this internal API system exactly works, you can refer to the official [Tauri guide](#).


Last update: April 20, 2023


Created: April 5, 2023

7.1.3 Comments

7.2 Backend

7.2.1 Planing

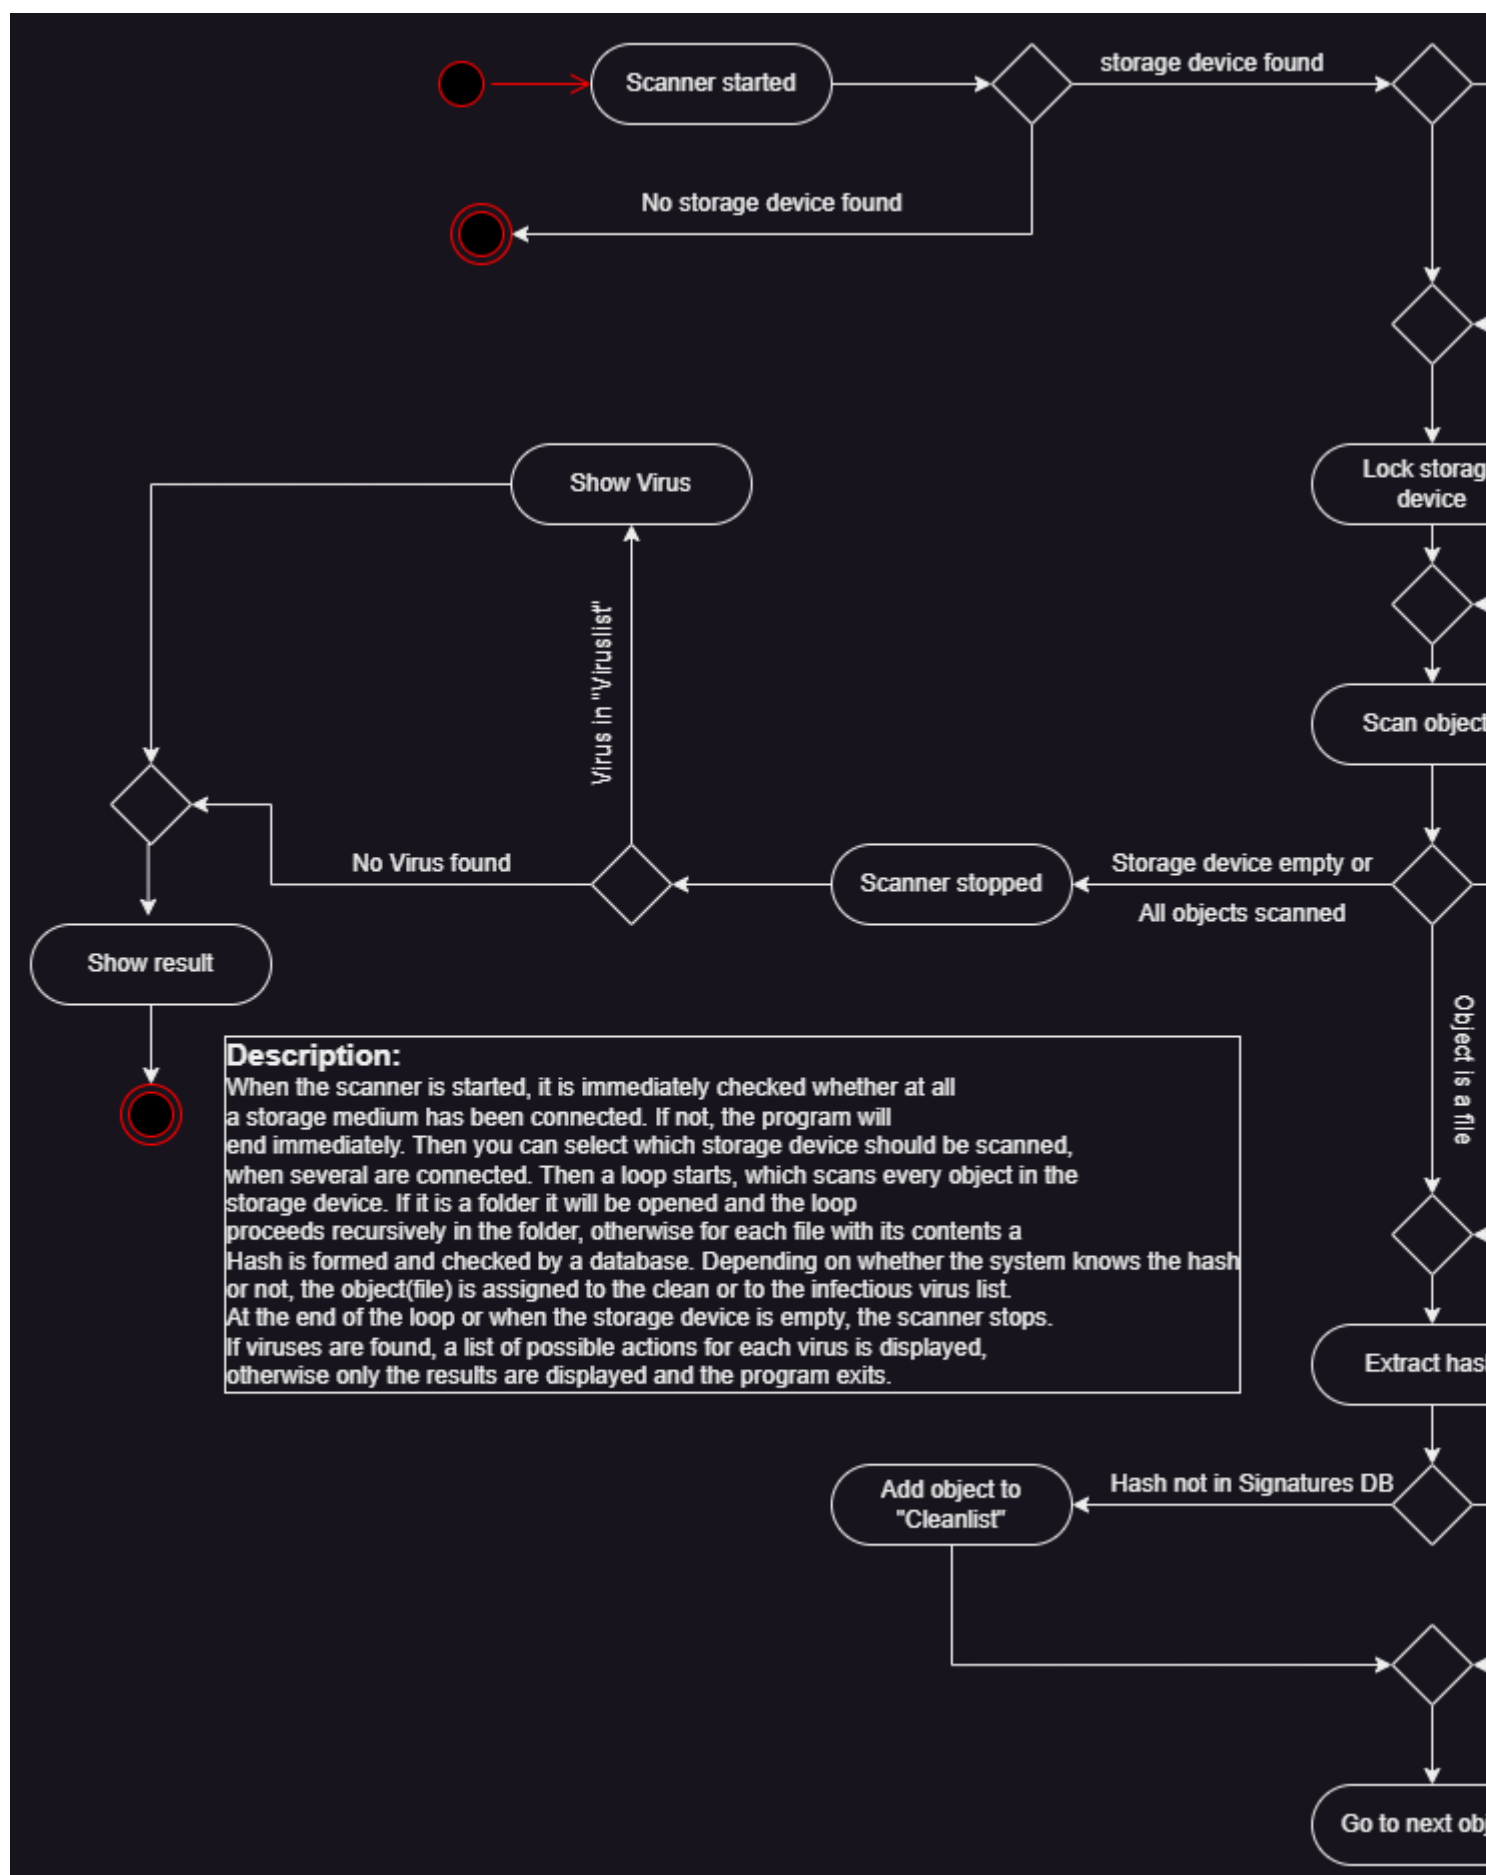

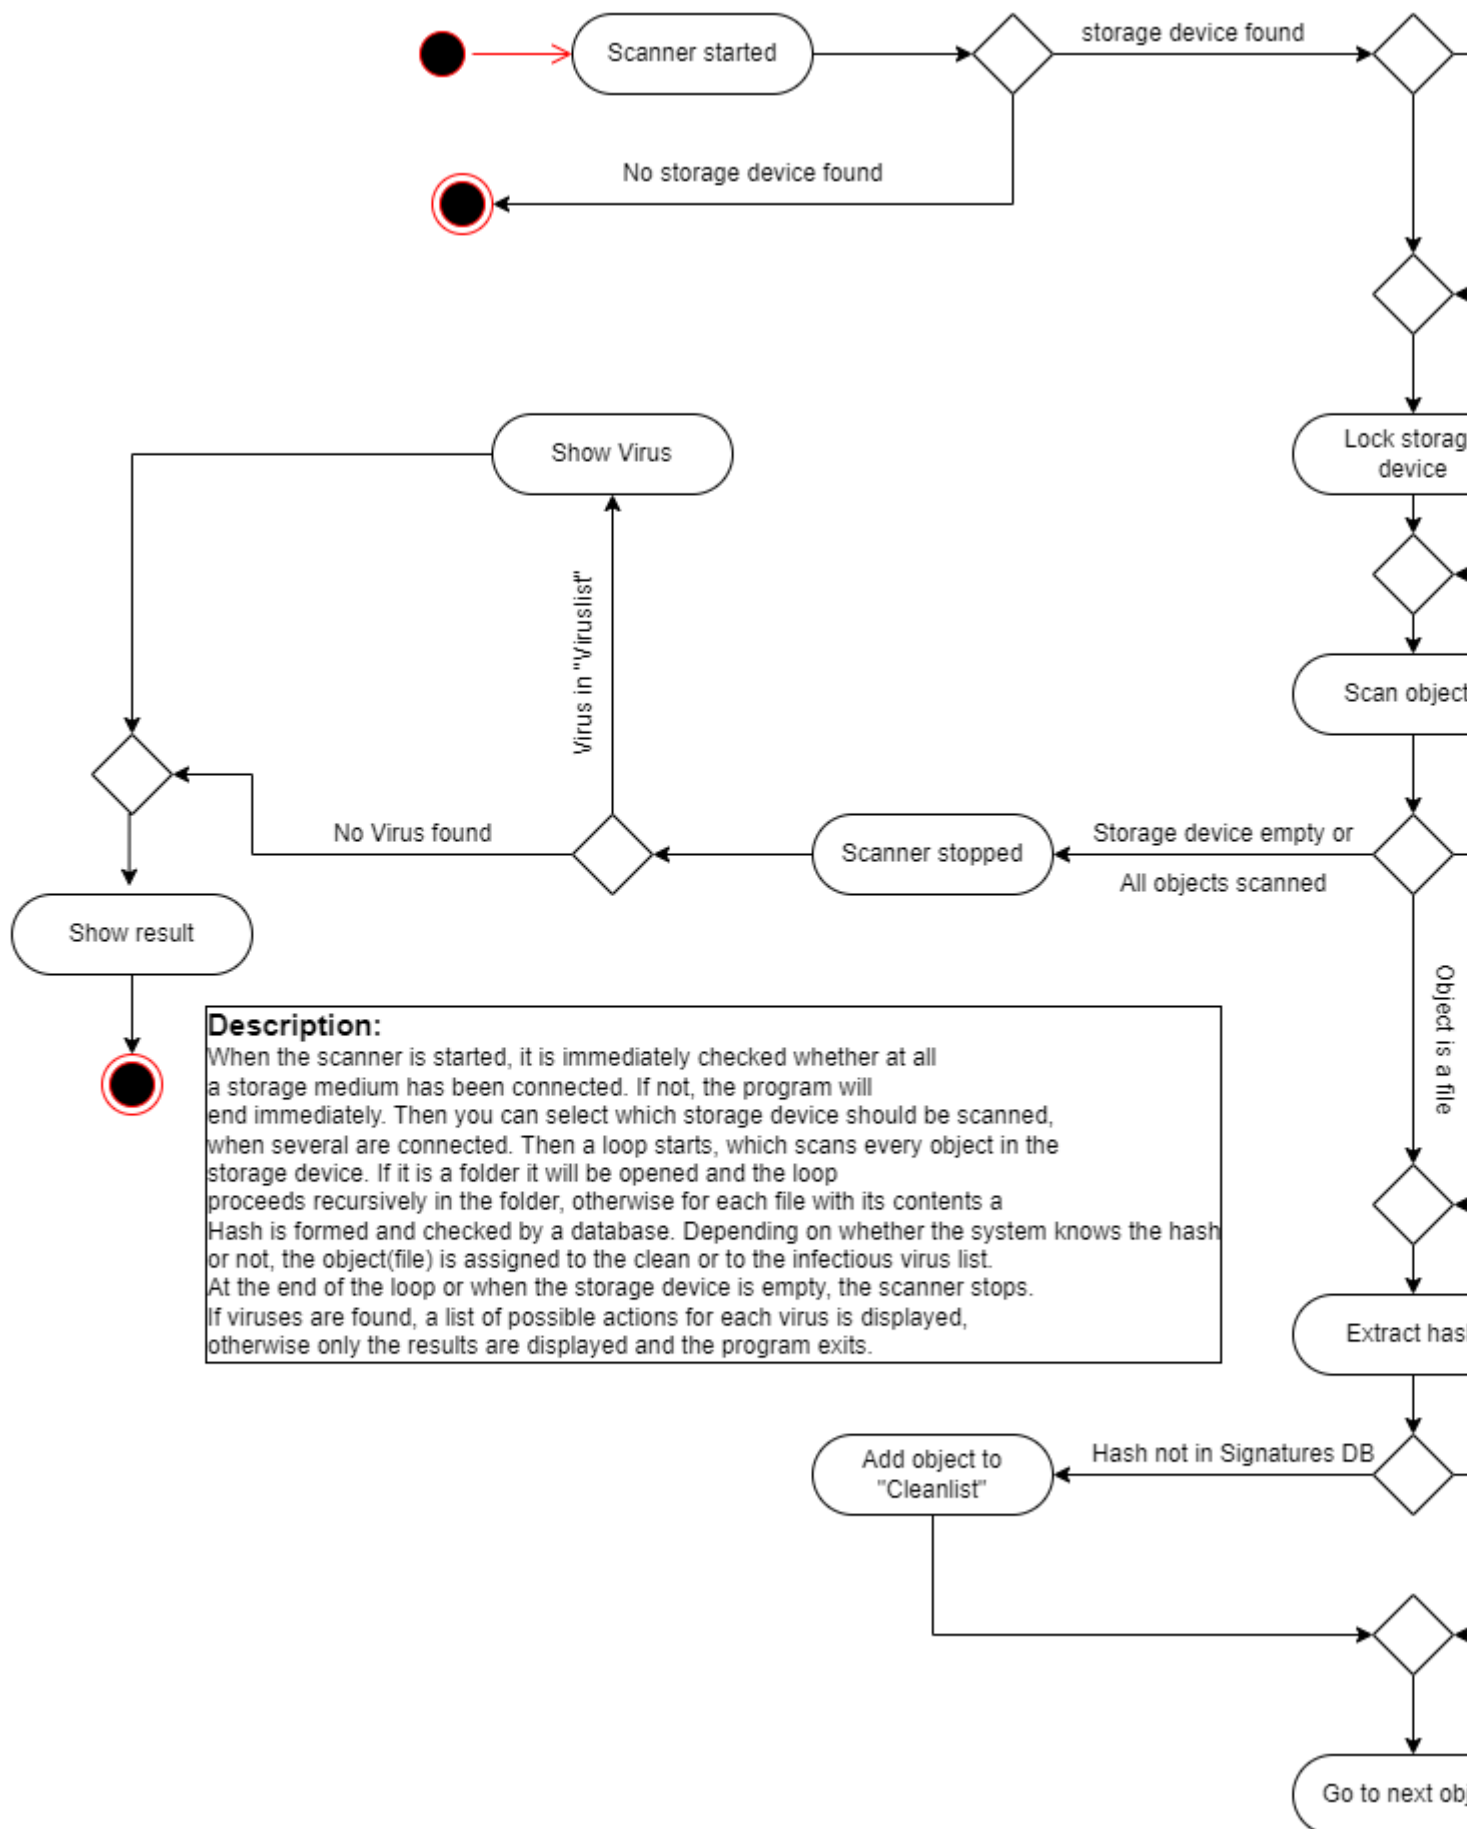

This diagram describes how the logical flow of the app work. The exact flow can change in the future, but this was the initial planing of the app. As you can see, it is rather simple with just a couple if statements and a for-each loop. The backend is actually not that hard to understand, the complicated part is the more in-depth part of how to manage the database, scan files, create the hash and most importantly, communicate the result to the frontend by emitting signals.

7.2.2 Database

7.2.3 Scanner

7.2.4 Logging

Last update: April 20, 2023

Created: April 3, 2023

7.2.5 Comments

7.3 Frontend

7.3.1 Planing

The planing of the Raspirus frontend happened on an external Website called Figma. The styling changed a bit and there are some more functions now, but the logical structure is roughly the same. Each screen you see is a single page on Next.js. Furthermore, the pop-ups have been replaced with ones from SweetAlertv2. You can explore the Figma project in the iFrame below, else if nothing is showing up, you can look at the project [here](#).

7.3.2 Screenshots

7.3.3 Pages

7.3.4 Components

7.3.5 Localizing

7.3.6 Invoke Rust

Last update: April 20, 2023

Created: April 3, 2023

7.3.7 Comments
