



1.Install Wireshark on your computer and capture 2 minutes of network traffic while you browse Instagram or YouTube. Save the capture file as insta_traffic.pcap.

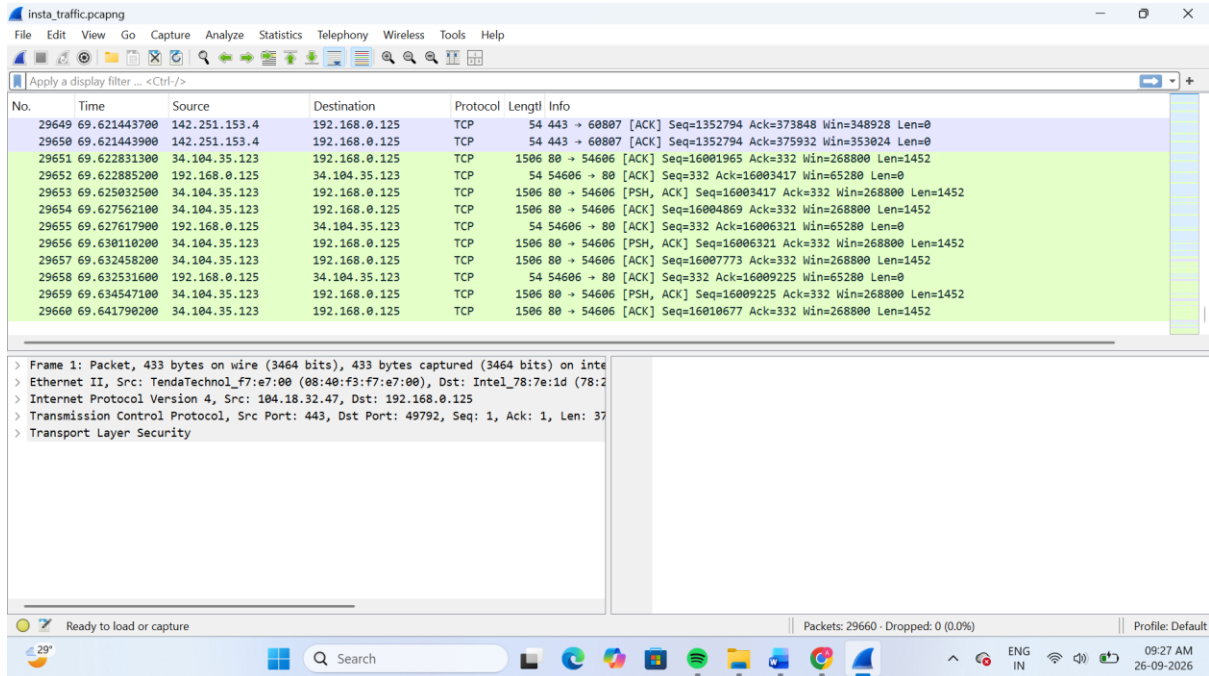

2.Use Wireshark to filter and list all HTTP or HTTPS requests made by your browser during the capture. Write down the domains you see most frequently.

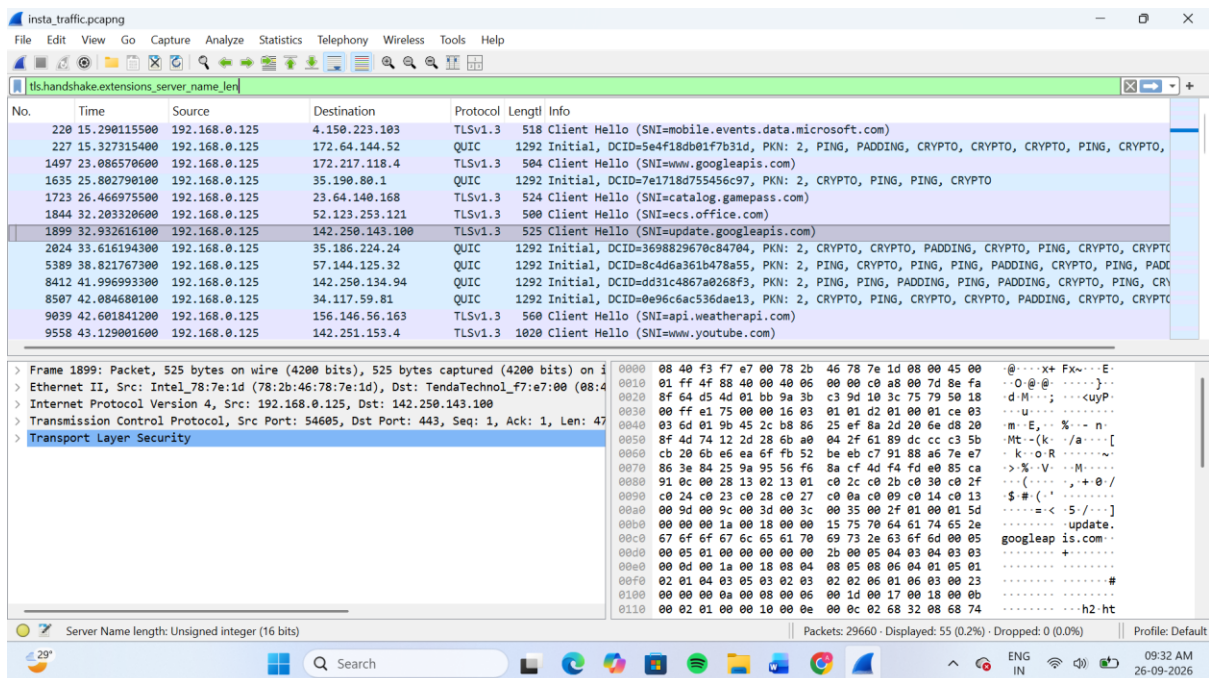

Wireshark was used to filter HTTP/HTTPS traffic generated by the browser. The captured traffic mainly contained HTTPS/TLS connections. The domains observed during the capture included:

1. www.youtube.com
2. update.googleapis.com
3. www.googleapis.com
4. mobile.events.data.microsoft.com
5. api.weatherapi.com

Result:

The browser generated multiple HTTPS requests during browsing, and the above domains were observed in the captured traffic.

3.Open your insta_traffic.pcap in Wireshark and find a TCP packet. Document the source IP, destination IP, and TCP port numbers for that packet.

Field	Value
Source IP	34.104.35.123
Destination IP	192.168.0.125
Source Port	80
Destination Port	54606
Protocol	TCP

A TCP packet was identified in Wireshark. The source IP address is 34.104.35.123 and the destination IP address is 192.168.0.125. The source port is 80 and the destination port is 54606.

4.Run an Nmap scan on your own machine (localhost) to detect open ports. Save the command you used and list the open ports

found.

Hint: Use 'nmap 127.0.0.1' in your terminal.

```
C:\WINDOWS\system32\cmd. x + -
Microsoft Windows [Version 10.0.26200.9457]
(c) Microsoft Corporation. All rights reserved.

C:\Users\HP>nmap --version
Nmap version 7.991 ( https://nmap.org )
Platform: i686-pc-windows-windows
Compiled with: nmap-liblua-5.4.8 openssl-3.0.21 nmap-libssh2-1.11.1_NMAP1 nmap-libz-1.3.2 nmap-libpcap-1.0.47 Npcap-1.88 nmap-libnet
-1.18.0 ipv6
Compiled without:
Available nsock engines: iocp poll select

C:\Users\HP>nmap 127.0.0.1
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-26 09:45 +0530
Nmap scan report for localhost (127.0.0.1)
Host is up (0.00016s latency).
Not shown: 994 closed tcp ports (reset)
PORT      STATE SERVICE
135/tcp    open  msrcpc
445/tcp    open  microsoft-ds
1521/tcp   open  oracle
2179/tcp   open  vmrdp
8080/tcp   open  http-proxy
16992/tcp  open  amt-soap-http

Nmap done: 1 IP address (1 host up) scanned in 0.47 seconds

C:\Users\HP>
```

nmap 127.0.0.1

Open Ports Found

- 135/tcp – msrcpc
- 445/tcp – microsoft-ds
- 1521/tcp – oracle
- 2179/tcp – vmrdp
- 8080/tcp – http-proxy
- 16992/tcp – amt-soap-http


Result

Nmap scan was successfully performed on localhost (127.0.0.1), and six open TCP ports were detected.

5.Capture network traffic while using a food delivery app (like Zomato or Swiggy) for 1 minute. In Wireshark, identify at least one DNS request and document the domain name being

resolved.

Hint: Use the 'dns' filter in Wireshark to find DNS packets.

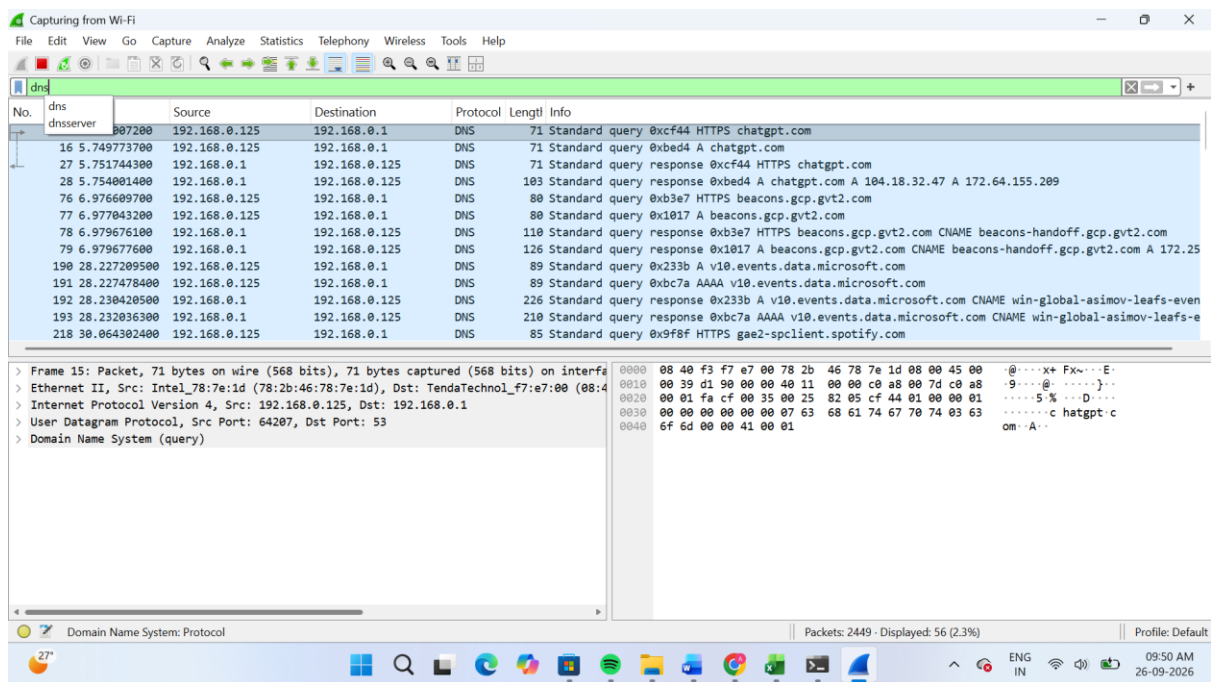

The network traffic was captured for one minute, and the DNS request for chatgpt.com was identified using Wireshark.