






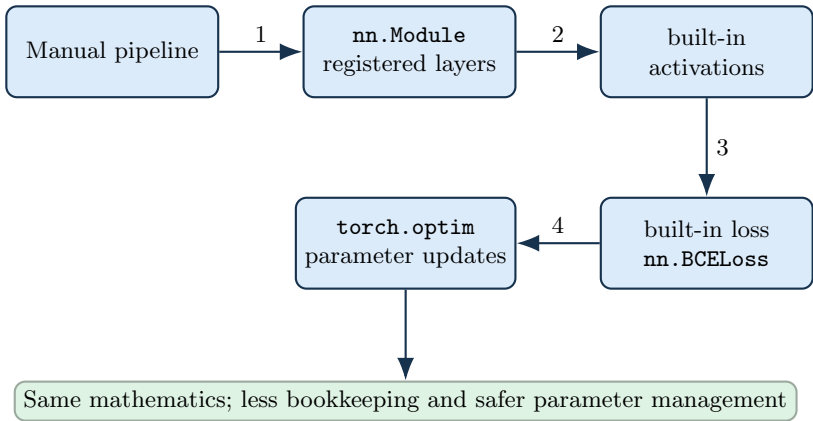


Prefer invocation over calling `forward` directly

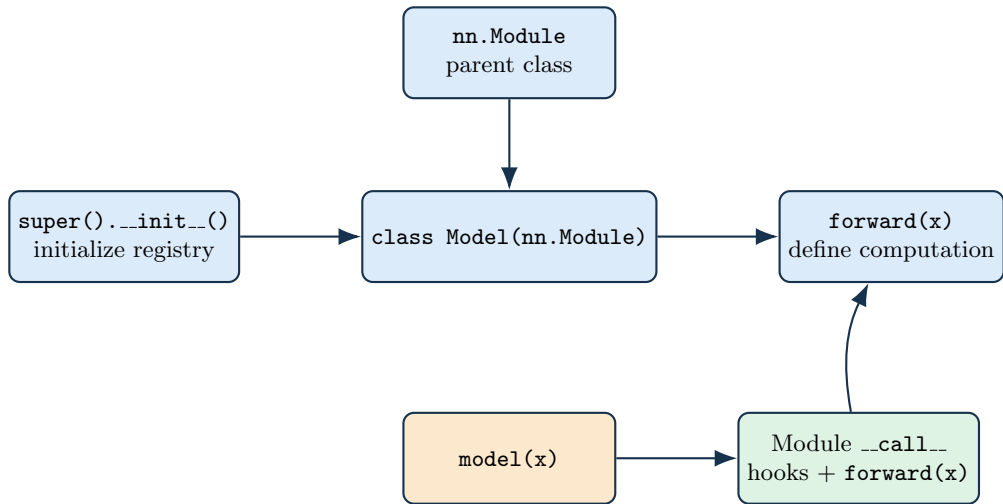


Trainable scalars: 5 weights +1 bias = 6

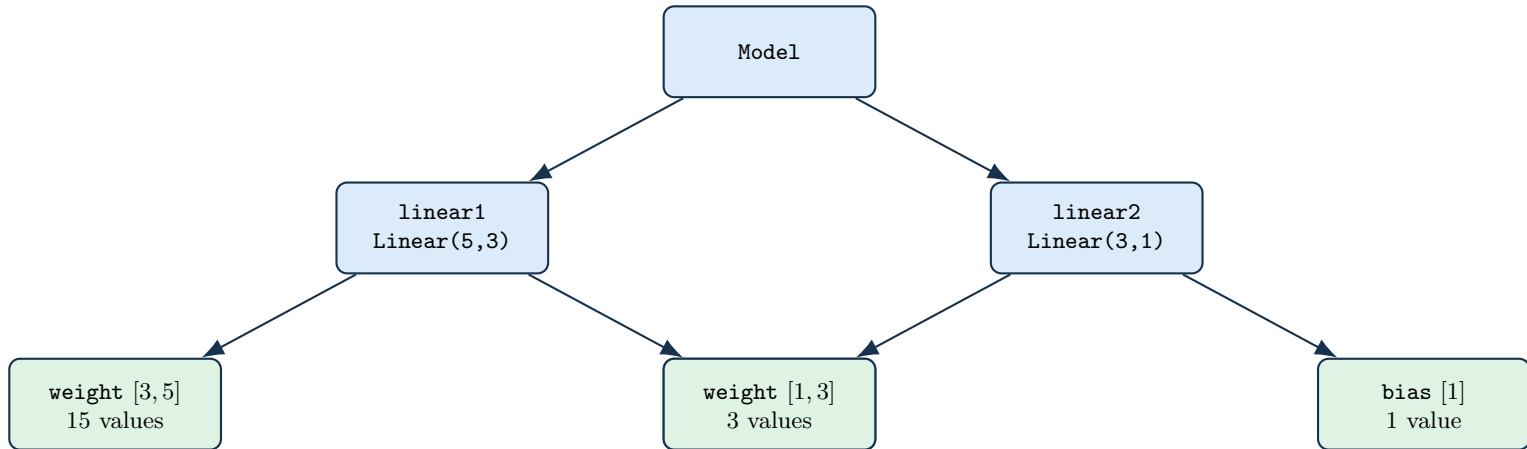

Assignment as attributes registers submodules and parameters
`parameters()` iterates them; `state_dict()` names them




$$15 + 3 + 3 + 1 = 22 \text{ trainable parameters}$$



```
forward(x): return self.network(x)
```

The container applies modules in declaration order

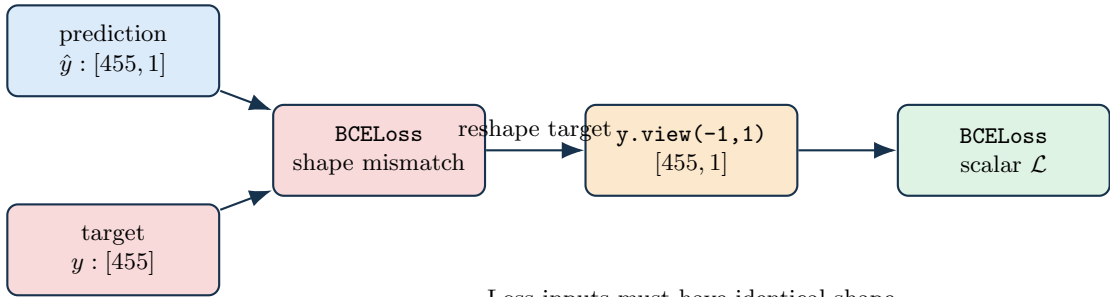

Loss inputs must have identical shape

