In [127…
```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

In [4]:
```
emp = pd.read_excel(r"C:\Users\mohap\Rawdata.xlsx")
```

In [5]:
```
emp
```

Out[5]:

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience#$	34 years	Mumbai	5^00#0	2+
1	Teddy^	Testing	45' yr	Bangalore	10%%000	<3
2	Uma#r	Dataanalyst^^#	NaN	NaN	1$5%000	4> yrs
3	Jane	Ana^^lytics	NaN	Hyderbad	2000^0	NaN
4	Uttam*	Statistics	67-yr	NaN	30000-	5+ year
5	Kim	NLP	55yr	Delhi	6000^$0	10+

In [6]:
```
id(emp)
```

Out[6]:
```
2737312324096
```

In [7]:
```
emp.head()
```

Out[7]:

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience#$	34 years	Mumbai	5^00#0	2+
1	Teddy^	Testing	45' yr	Bangalore	10%%000	<3
2	Uma#r	Dataanalyst^^#	NaN	NaN	1$5%000	4> yrs
3	Jane	Ana^^lytics	NaN	Hyderbad	2000^0	NaN
4	Uttam*	Statistics	67-yr	NaN	30000-	5+ year

In [8]:
```
emp.tail()
```

Out[8]:

	Name	Domain	Age	Location	Salary	Exp
1	Teddy^	Testing	45' yr	Bangalore	10%%000	<3
2	Uma#r	Dataanalyst^^#	NaN	NaN	1$5%000	4> yrs
3	Jane	Ana^^lytics	NaN	Hyderbad	2000^0	NaN
4	Uttam*	Statistics	67-yr	NaN	30000-	5+ year
5	Kim	NLP	55yr	Delhi	6000^$0	10+

In [9]:
```
emp.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 6 entries, 0 to 5
Data columns (total 6 columns):
 #   Column    Non-Null Count  Dtype 
---  ------    --------------  ----- 
 0   Name      6 non-null      object
 1   Domain    6 non-null      object
 2   Age       4 non-null      object
 3   Location  4 non-null      object
 4   Salary    6 non-null      object
 5   Exp       5 non-null      object
dtypes: object(6)
memory usage: 420.0+ bytes
```

In [10]:
```
emp.isnull()
```

Out[10]:

	Name	Domain	Age	Location	Salary	Exp
0	False	False	False	False	False	False
1	False	False	False	False	False	False
2	False	False	True	True	False	False
3	False	False	True	False	False	True
4	False	False	False	True	False	False
5	False	False	False	False	False	False

In [21]:
```
emp.isnull().sum()
```

Out[21]:
```
Name        0
Domain      0
Age         2
Location    2
Salary      0
Exp         1
dtype: int64
```

In [23]:
```
emp
```

Out[23]:

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience#$	34 years	Mumbai	5^00#0	2+
1	Teddy^	Testing	45' yr	Bangalore	10%%000	<3
2	Uma#r	Dataanalyst^^#	NaN	NaN	1$5%000	4> yrs
3	Jane	Ana^^lytics	NaN	Hyderbad	2000^0	NaN
4	Uttam*	Statistics	67-yr	NaN	30000-	5+ year
5	Kim	NLP	55yr	Delhi	6000^$0	10+

In [25]:
```
emp['Name']
```

Out[25]:
```
0      Mike
1    Teddy^
2     Uma#r
3      Jane
4    Uttam*
5       Kim
Name: Name, dtype: object
```

In [27]:
```
emp['Name']=emp['Name'].str.replace(r'\W','',regex=True) # non word char
```

In [29]:
```
emp['Name']
```

Out[29]:
```
0     Mike
1    Teddy
2     Umar
3     Jane
4    Uttam
5      Kim
Name: Name, dtype: object
```

In [31]:
```
emp
```

Out[31]:

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience#$	34 years	Mumbai	5^00#0	2+
1	Teddy	Testing	45' yr	Bangalore	10%%000	<3
2	Umar	Dataanalyst^^#	NaN	NaN	1$5%000	4> yrs
3	Jane	Ana^^lytics	NaN	Hyderbad	2000^0	NaN
4	Uttam	Statistics	67-yr	NaN	30000-	5+ year
5	Kim	NLP	55yr	Delhi	6000^$0	10+

In [35]:
```
emp['Domain']=emp['Domain'].str.replace(r'\W','',regex=True) # non word char
```

In [37]:
```
emp['Domain']
```

Out[37]:
```
0    Datascience
1        Testing
2    Dataanalyst
3      Analytics
4     Statistics
5            NLP
Name: Domain, dtype: object
```

In [39]:
```
emp['Age']=emp['Age'].str.replace(r'\W','',regex=True) # non word char
```

In [41]:
```
emp['Age']
```

Out[41]:
```
0    34years
1       45yr
2        NaN
3        NaN
4       67yr
5       55yr
Name: Age, dtype: object
```

In [45]:
```
emp['Age'] = emp['Age'].str.extract("(\\d+)")
```

In [47]:
```
emp['Age']
```

Out[47]:
```
0     34
1     45
2    NaN
3    NaN
4     67
5     55
Name: Age, dtype: object
```

In [49]:
```
emp
```

Out[49]:

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience	34	Mumbai	5^00#0	2+
1	Teddy	Testing	45	Bangalore	10%%000	<3
2	Umar	Dataanalyst	NaN	NaN	1$5%000	4> yrs
3	Jane	Analytics	NaN	Hyderbad	2000^0	NaN
4	Uttam	Statistics	67	NaN	30000-	5+ year
5	Kim	NLP	55	Delhi	6000^$0	10+

In [51]:
```
emp['Location'] = emp['Location'].str.replace(r'\W','',regex=True)
```

In [53]:
```
emp['Location']
```

Out[53]:
```
0       Mumbai
1    Bangalore
2          NaN
3     Hyderbad
4          NaN
5        Delhi
Name: Location, dtype: object
```

In [55]:
```
emp['Salary'] = emp['Salary'].str.replace(r'\W','',regex=True)
```

In [57]:
```
emp['Salary']
```

Out[57]:
```
0     5000
1    10000
2    15000
3    20000
4    30000
5    60000
Name: Salary, dtype: object
```

In [59]:
```
emp['Exp']
```

Out[59]:
```
0         2+
1         <3
2     4> yrs
3        NaN
4    5+ year
5        10+
Name: Exp, dtype: object
```

In [61]:
```
emp['Exp'] = emp['Exp'].str.extract('(\\d+)')
```

In [63]:
```
emp['Exp']
```

Out[63]:
```
0      2
1      3
2      4
3    NaN
4      5
5     10
Name: Exp, dtype: object
```

In [65]:
```
emp
```

Out[65]:

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience	34	Mumbai	5000	2
1	Teddy	Testing	45	Bangalore	10000	3
2	Umar	Dataanalyst	NaN	NaN	15000	4
3	Jane	Analytics	NaN	Hyderbad	20000	NaN
4	Uttam	Statistics	67	NaN	30000	5
5	Kim	NLP	55	Delhi	60000	10

In [67]:
```
clean_data = emp.copy()
```

In [69]:
```
clean_data
```

Out[69]:

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience	34	Mumbai	5000	2
1	Teddy	Testing	45	Bangalore	10000	3
2	Umar	Dataanalyst	NaN	NaN	15000	4
3	Jane	Analytics	NaN	Hyderbad	20000	NaN
4	Uttam	Statistics	67	NaN	30000	5
5	Kim	NLP	55	Delhi	60000	10

In [73]:
```
clean_data['Age'] = clean_data['Age'].fillna(np.mean(pd.to_numeric(clean_data['Age'])))
```

In [75]:
```
clean_data['Age']
```

Out[75]:
```
0       34
1       45
2    50.25
3    50.25
4       67
5       55
Name: Age, dtype: object
```

In [77]:
```
clean_data['Exp']
```

Out[77]:
```
0      2
1      3
2      4
3    NaN
4      5
5     10
Name: Exp, dtype: object
```

In [79]:
```
clean_data['Exp'].isnull().sum()
```

Out[79]:
```
1
```

In [83]:
```
# Convert Exp column from string to numeric
clean_data['Exp'] = pd.to_numeric(clean_data['Exp'], errors='coerce')
# Now fill missing value with median and convert to int
clean_data['Exp'] = clean_data['Exp'].fillna(clean_data['Exp'].median()).astype(int)
```

In [85]:
```
clean_data['Exp']
```

Out[85]:
```
0     2
1     3
2     4
3     4
4     5
5    10
Name: Exp, dtype: int32
```

In [89]:
```
clean_data['Location'].isnull().sum()
```

Out[89]:
```
2
```

In [93]:
```
clean_data['Location']=clean_data['Location'].fillna(clean_data['Location'].mode()[0])
```

In [95]:
```
clean_data['Location']
```

Out[95]:
```
0       Mumbai
1    Bangalore
2    Bangalore
3     Hyderbad
4    Bangalore
5        Delhi
Name: Location, dtype: object
```

In [97]:
```
emp.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 6 entries, 0 to 5
Data columns (total 6 columns):
 #   Column    Non-Null Count  Dtype 
---  ------    --------------  ----- 
 0   Name      6 non-null      object
 1   Domain    6 non-null      object
 2   Age       4 non-null      object
 3   Location  4 non-null      object
 4   Salary    6 non-null      object
 5   Exp       5 non-null      object
dtypes: object(6)
memory usage: 420.0+ bytes
```

In [99]:
```
clean_data.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 6 entries, 0 to 5
Data columns (total 6 columns):
 #   Column    Non-Null Count  Dtype 
---  ------    --------------  ----- 
 0   Name      6 non-null      object
 1   Domain    6 non-null      object
 2   Age       6 non-null      object
 3   Location  6 non-null      object
 4   Salary    6 non-null      object
 5   Exp       6 non-null      int32 
dtypes: int32(1), object(5)
memory usage: 396.0+ bytes
```

In [101…
```
clean_data['Age'] = clean_data['Age'].astype(int)
```

In [103…
```
clean_data['Salary'] = clean_data['Salary'].astype(int)
```

In [105…
```
clean_data.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 6 entries, 0 to 5
Data columns (total 6 columns):
 #   Column    Non-Null Count  Dtype
---  ------    --------------  -----
 0   Name      6 non-null      object
 1   Domain    6 non-null      object
 2   Age       6 non-null      int32
 3   Location  6 non-null      object
 4   Salary    6 non-null      int32
 5   Exp       6 non-null      int32
dtypes: int32(3), object(3)
memory usage: 348.0+ bytes
```

In [107…
```
clean_data['Name']= clean_data['Name'].astype('category')
clean_data['Domain']= clean_data['Domain'].astype('category')
clean_data['Location']= clean_data['Location'].astype('category')
```

In [109…
```
clean_data.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 6 entries, 0 to 5
Data columns (total 6 columns):
 #   Column    Non-Null Count  Dtype
---  ------    --------------  -----
 0   Name      6 non-null      category
 1   Domain    6 non-null      category
 2   Age       6 non-null      int32
 3   Location  6 non-null      category
 4   Salary    6 non-null      int32
 5   Exp       6 non-null      int32
dtypes: category(3), int32(3)
memory usage: 866.0 bytes
```

In [111…
```
clean_data
```

Out[111…

	Name	Domain	Age	Location	Salary	Exp
0	Mike	Datascience	34	Mumbai	5000	2
1	Teddy	Testing	45	Bangalore	10000	3
2	Umar	Dataanalyst	50	Bangalore	15000	4
3	Jane	Analytics	50	Hyderbad	20000	4
4	Uttam	Statistics	67	Bangalore	30000	5
5	Kim	NLP	55	Delhi	60000	10

In [113…
```
clean_data.to_csv("clean_data.csv")
```

In [115…
```
import os
os.getcwd()
```

Out[115… 'C:\\Users\\mohap'

In [117…
```
import warnings
warnings.filterwarnings('ignore')
```

In [119…
```
clean_data['Salary']
```

Out[119…
```
0     5000
1    10000
2    15000
3    20000
4    30000
5    60000
Name: Salary, dtype: int32
```

In [121…
```
vis1 = sns.distplot(clean_data['Salary'])
```

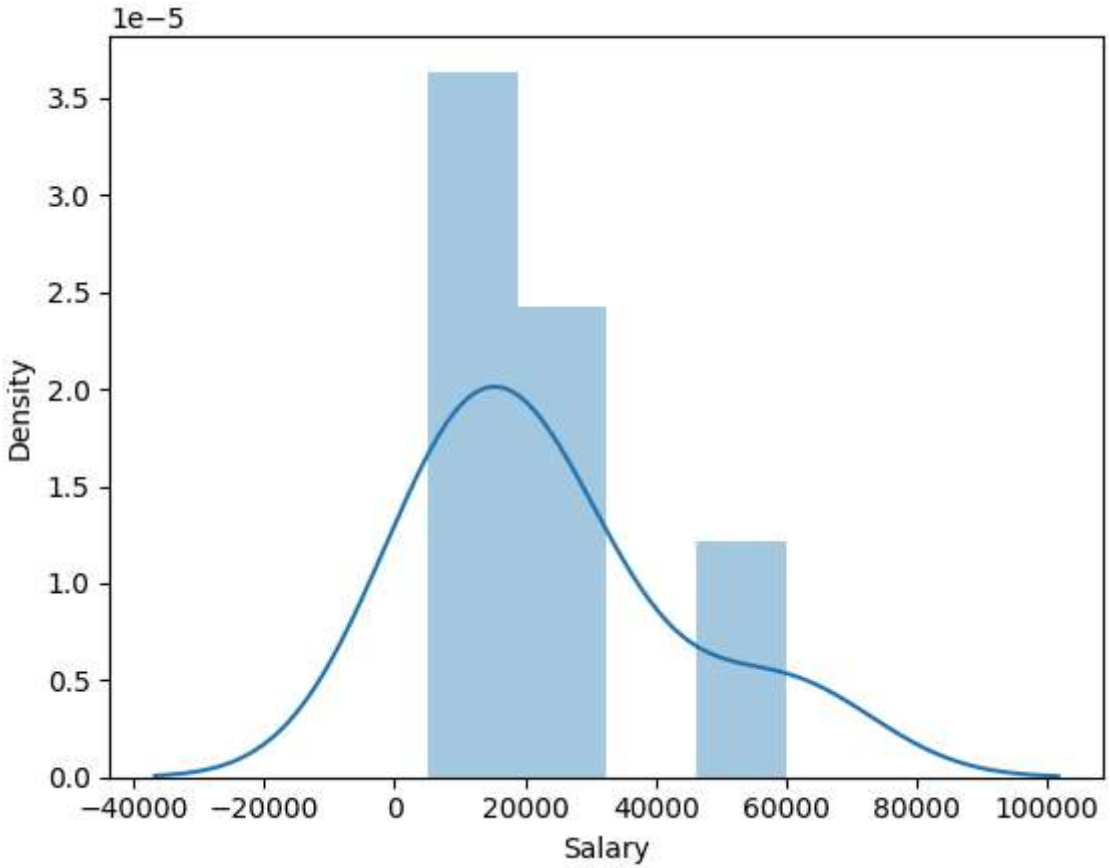

In [129…

```
vis2 =plt.hist(clean_data['Salary'])
plt.show()
```

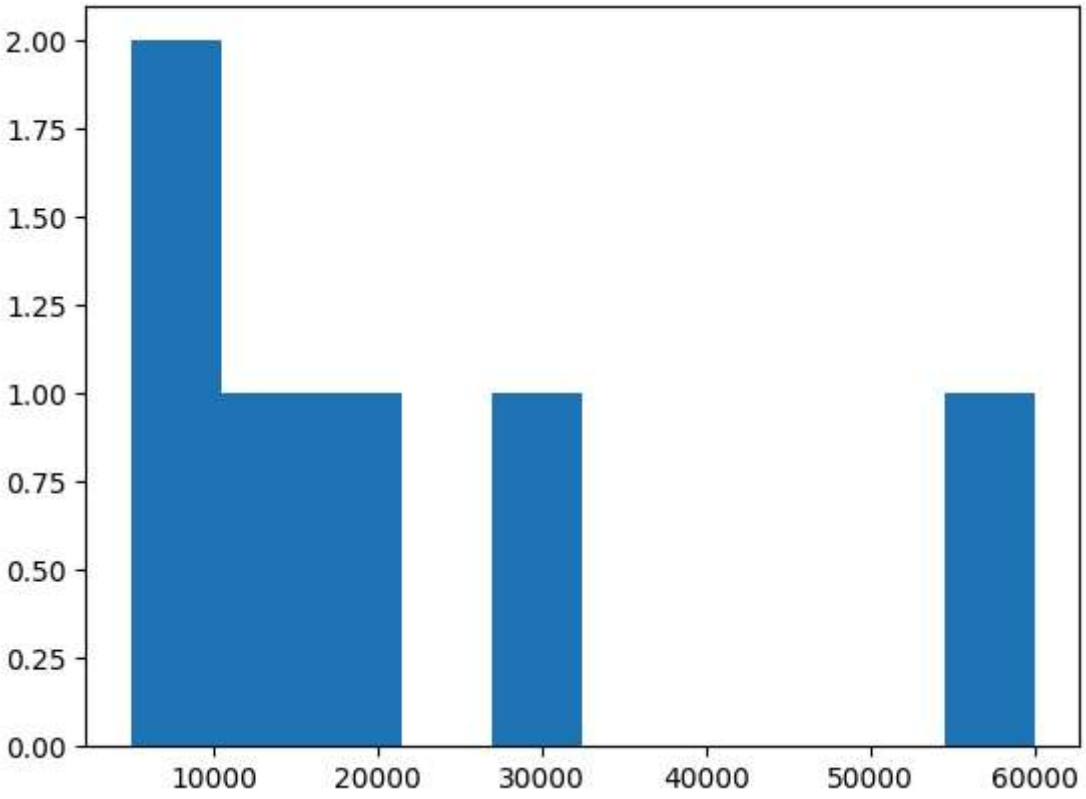

In [131…

```
vis4 = sns.lmplot(data=clean_data,x='Exp',y='Salary')
```

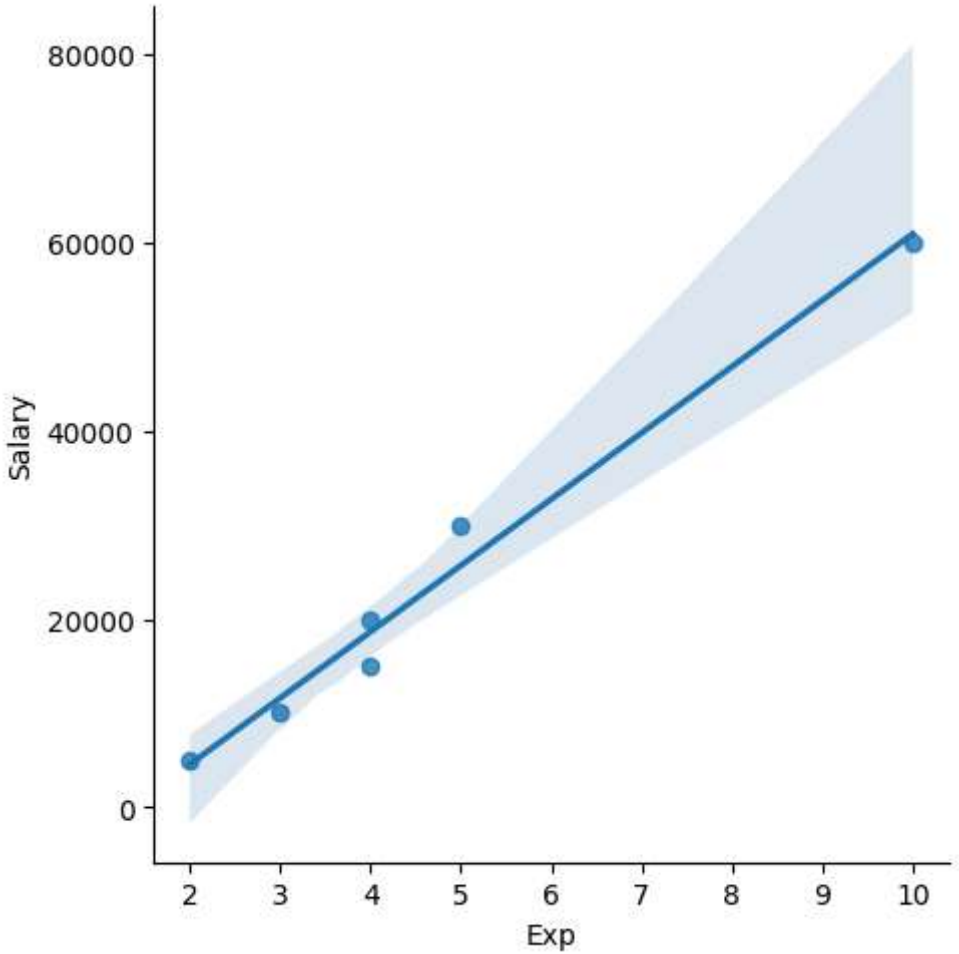

In [135…

```
vis5 = sns.lmplot(data = clean_data,x = 'Exp',y ='Salary',fit_reg=False)
```

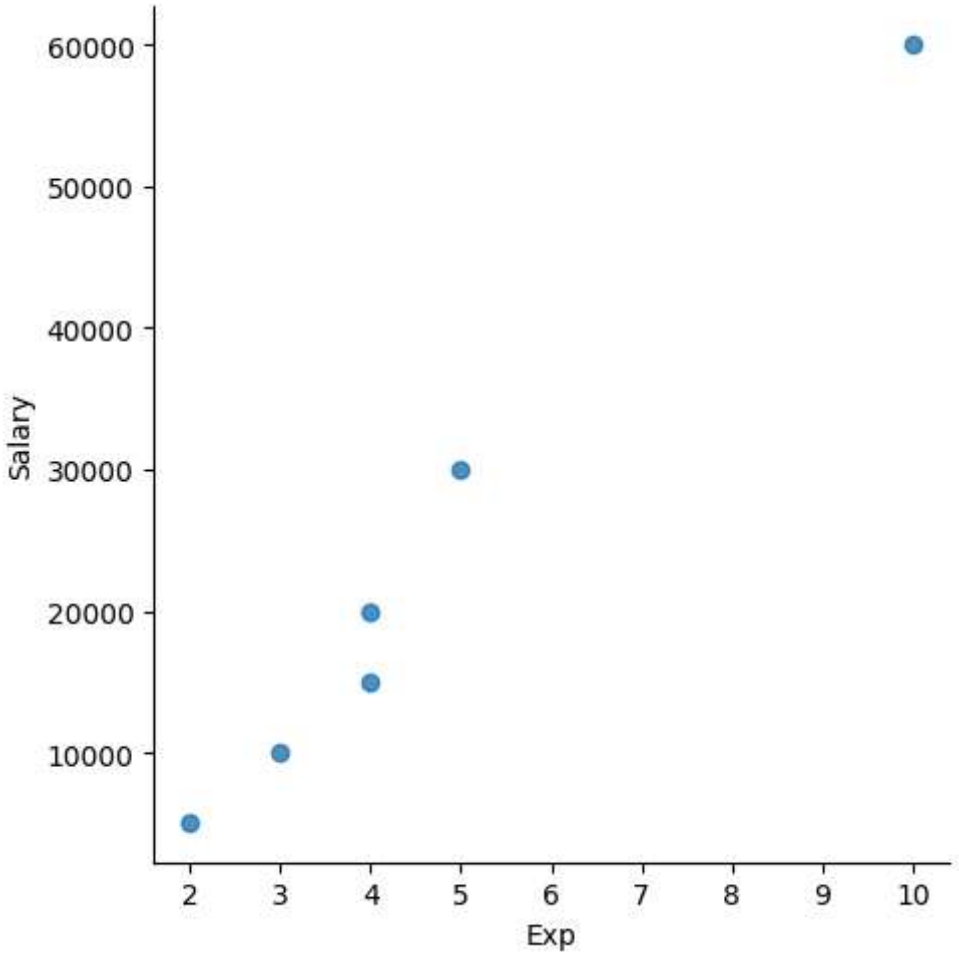

In [137…
```
x_iv =  clean_data[['Name','Domain','Age','Location','Exp']]
```

In [139…
```
x_iv
```

Out[139…

	Name	Domain	Age	Location	Exp
0	Mike	Datascience	34	Mumbai	2
1	Teddy	Testing	45	Bangalore	3
2	Umar	Dataanalyst	50	Bangalore	4
3	Jane	Analytics	50	Hyderbad	4
4	Uttam	Statistics	67	Bangalore	5
5	Kim	NLP	55	Delhi	10

In [141…
```
y_dv = clean_data[['Salary']]
```

In [143…
```
y_dv
```

Out[143…

	Salary
0	5000
1	10000
2	15000
3	20000
4	30000
5	60000

In [145…
```
imputation = pd.get_dummies(clean_data,dtype=int)
```

In [147…
```
imputation
```

Out[147…

	Age	Salary	Exp	Name_Jane	Name_Kim	Name_Mike	Name_Teddy	Name_Umar	Name_Uttam	Domain_Analytics	Domain
0	34	5000	2	0	0	1	0	0	0	0	
1	45	10000	3	0	0	0	1	0	0	0	
2	50	15000	4	0	0	0	0	1	0	0	
3	50	20000	4	1	0	0	0	0	0	1	
4	67	30000	5	0	0	0	0	0	1	0	
5	55	60000	10	0	1	0	0	0	0	0	

In [151…
```
len(clean_data)
```

Out[151…
```
6
```

In [153…
```
imputation.columns
```

Out[153…
```
Index(['Age', 'Salary', 'Exp', 'Name_Jane', 'Name_Kim', 'Name_Mike',
       'Name_Teddy', 'Name_Umar', 'Name_Uttam', 'Domain_Analytics',
       'Domain_Dataanalyst', 'Domain_Datascience', 'Domain_NLP',
       'Domain_Statistics', 'Domain_Testing', 'Location_Bangalore',
       'Location_Delhi', 'Location_Hyderbad', 'Location_Mumbai'],
      dtype='object')
```

In [155…
```
len(imputation.columns)
```

Out[155…
```
19
```

In [ ]:
```

```