

≡ PYTHON OOPS & COLLECTIONS NOTES ≡

CHAPTER 1


Page 1/8

1. PYTHON OOPS - INTRODUCTION

- ★ OOPS stands for Object Oriented Programming.
- ★ Python is an object oriented language.
- ★ Everything in Python is an object.
- ★ OOPS helps to make code modular, reusable and easy to maintain.
- ★ OOPS is based on the concept of classes and objects.

Key Benefits

- Code reusability
- Better organization
- Easy maintenance
- Data security

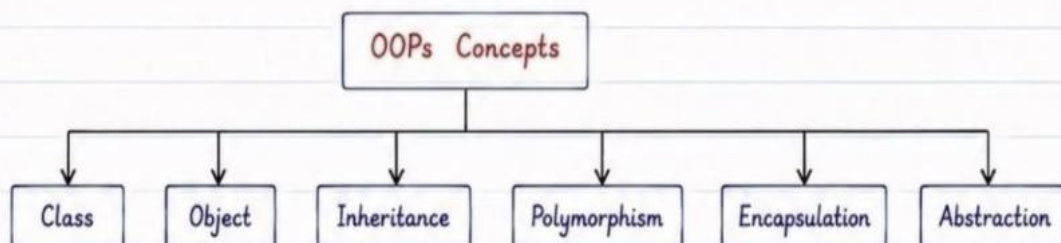

2. CLASS AND OBJECT

- ★ Class is a blueprint or template for creating objects.
- ★ Object is an instance of a class.
- ★ A class can have attributes (variables) and methods (functions).


Example :

```
class Car:
    def __init__(self, brand, color):
        self.brand = brand
        self.color = color

    def show(self):
        print(self.brand, self.color)
```

```
c1 = Car("BMW", "Black")
c2 = Car("Audi", "White")
c1.show() # Output: BMW Black
c2.show() # Output: Audi White
```

How it works ?

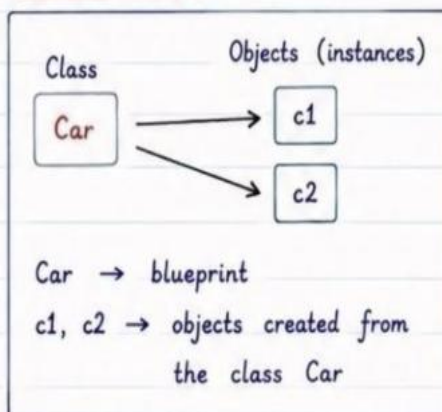

≡ PYTHON OOPS & COLLECTIONS NOTES ≡

CHAPTER 1

Page 2/8

3. CONSTRUCTOR (`__init__`)

- ★ A constructor is a special method used to initialize objects.
- ★ In Python, `__init__()` is called automatically when an object is created.
- ★ It is used to assign initial values to object attributes.


Example :

```
class Person:
    def __init__(self, name, age):
        self.name = name
        self.age = age

p1 = Person("Aman", 22)

# Output:
# p1.name = Aman, p1.age = 22
```

How it works ?

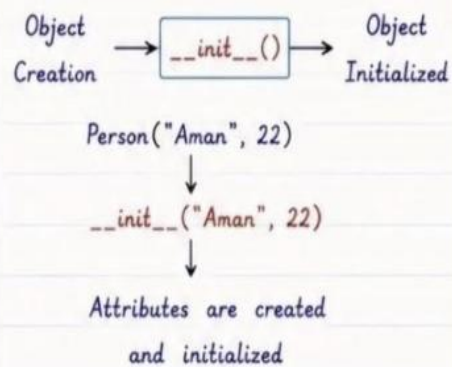

4. INHERITANCE

- ★ Inheritance allows a class (child) to inherit attributes and methods from another class (parent).
- ★ It promotes code reusability and represents "is-a" relationship.
- ★ Python supports single, multiple, multilevel and hierarchical inheritance.


Example (Single Inheritance) :

```
class Animal:
    def speak(self):
        print("Animal speaks")

class Dog(Animal): # Dog inherits from Animal
    def bark(self):
        print("Dog barks")

d = Dog()
d.speak() # Output: Animal speaks
d.bark() # Output: Dog barks
```

Diagram :

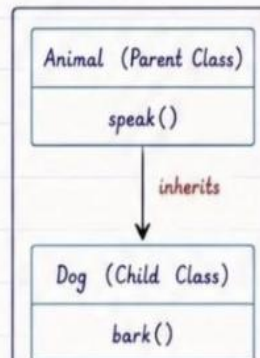

Key Point :

Child class can use parent class methods and can also have its own methods.

5. POLYMORPHISM

- ★ Polymorphism means "many forms".
- ★ It allows methods to do different things based on the object.
- ★ Python supports polymorphism through method overriding.

Example : Method Overriding


```
class Animal:
    def speak(self):
        print("Animal speaks")

class Dog(Animal):
    def speak(self):
        print("Dog barks")

a = Animal()
d = Dog()

a.speak() # Output: Animal speaks
d.speak() # Output: Dog barks
```

How it works ?

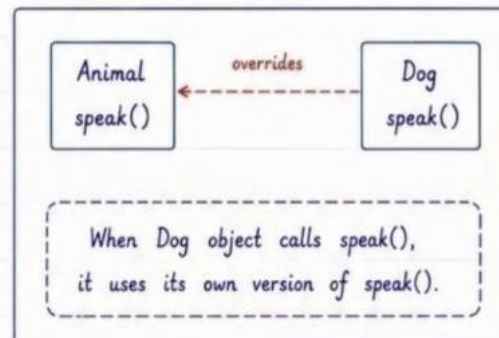

Key Point :

Method in child class overrides the method of parent class.

6. ENCAPSULATION

- ★ Encapsulation is the concept of wrapping data and methods into a single unit (class).
- ★ It restricts direct access to some components.
- ★ In Python, we use private (__) and protected (_) members.

Example :

```
class Bank:
    def __init__(self):
        self.__balance = 1000 # private

    def deposit(self, amount):
        self.__balance += amount

    def get_balance(self):
        return self.__balance

b = Bank()
b.deposit(500)
```

Access Specifiers in Python

Specifier	Syntax	Access	Purpose
Public	member	Anywhere	Accessible from anywhere
Protected	_member	Within class and subclasses	For internal use (by convention)
Private	__member	Only within class	To prevent direct access

Key Point :

Encapsulation helps in data hiding.

7. ABSTRACTION

- ★ Abstraction hides the complex implementation and shows only the essential features.
- ★ In Python, we achieve abstraction using abstract classes and interfaces.

Example :

```
from abc import ABC, abstractmethod

class Shape(ABC):
    @abstractmethod
    def area(self):
        pass


class Circle(Shape):
    def __init__(self, r):
        self.r = r
    def area(self):
        return 3.14 * self.r * self.r

c = Circle(5)
print(c.area()) # Output: 78.5
```

Key Point :

Abstraction focuses on what to do instead of how to do.

Abstraction Concept.

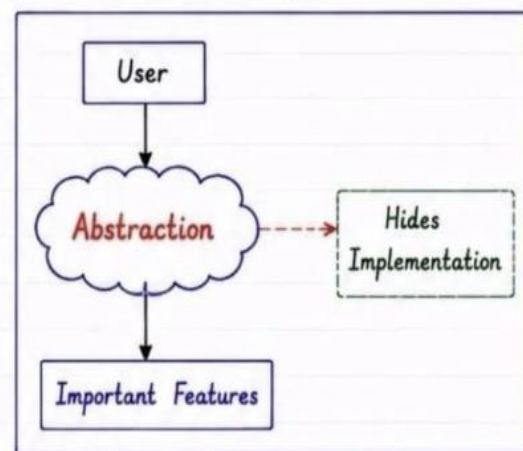

8. SPECIAL / MAGIC METHODS

- ★ Python provides special methods (dunder methods) to customize the behavior of objects.
- ★ They start and end with double underscore `__`.

Example :

```
class Book:
    def __init__(self, title, price):
        self.title = title
        self.price = price
    def __str__(self):
        return f"{self.title} - {self.price}"
    def __add__(self, other):
        return self.price + other.price

b1 = Book("Python Basics", 300)
b2 = Book("Java Guide", 200)
print(b1) # Output: Python Basics - 300
print(b1 + b2) # Output: 500
```

Common Magic Methods

Method	Purpose
<code>__init__()</code>	Constructor
<code>__str__()</code>	String representation
<code>__len__()</code>	Length of object
<code>__add__()</code>	Addition of objects
<code>__eq__()</code>	Equality check

Summary

- OOPS makes code modular and reusable.
- Classes and objects are the building blocks.
- Python supports all core OOPS concepts.
- Magic methods give more power to objects.

PYTHON OOPS & COLLECTIONS NOTES

CHAPTER 2


Page 5/8

1. PYTHON COLLECTIONS - INTRODUCTION

- ★ Collections are used to store multiple items in a single variable.
- ★ Python has four built-in collection datatypes.
- ★ They are mutable (changeable) except Tuple which is immutable.
- ★ Choosing the right collection type makes the program efficient.

Why Collections ?

- Store multiple values together
- Easy to access and manage
- Built-in functions & methods
- Improve code readability

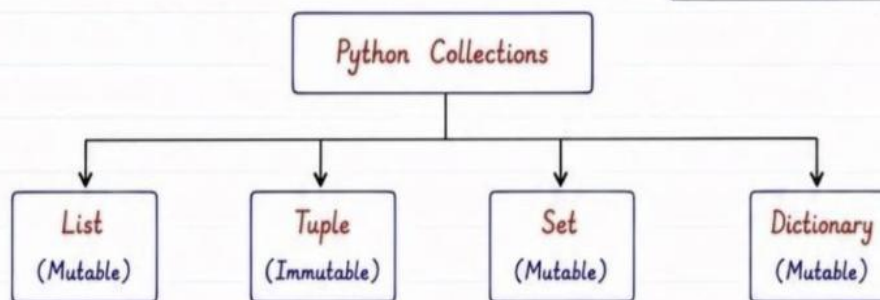

2. COLLECTIONS OVERVIEW

Collection Type	Ordered	Mutable	Allows Duplicates	Syntax	Use When
List	Yes	Yes	Yes	[]	Ordered items, changeable, duplicates allowed
Tuple	Yes	No	Yes	()	Ordered items, fixed, duplicates allowed
Set	No	Yes	No	{ }	Unique items, membership testing
Dictionary	Yes (3.7+)	Yes	No (Keys)	{key: value}	Key-Value pairs, fast lookups

3. EXAMPLES

```
List      : my_list = [10, 20, 30, 40]
Tuple     : my_tuple = (1, 2, 3, 4)
Set       : my_set = {10, 20, 30}
Dictionary : my_dict = {"name": "Aman", "age": 22}
```

Key Points :

- List, Set, Dictionary are mutable.
- Tuple is immutable.
- Set stores unique items only.
- Dictionary stores data in key-value pair.

4. LIST (Mutable, Ordered)

- ★ List is used to store multiple items in a single variable.
- ★ It is ordered, changeable and allows duplicate values.
- ★ Elements can be of any data type.

Example :

```
my_list = [10, 20, 30, 40]
mixed_list = ["Aman", 22, 5.5, True]

# Accessing elements
print(my_list[0]) # 10
print(my_list[-1]) # 40

# Slicing
print(my_list[1:3]) # [20, 30]
```

Common List Operations

append(x)	- Add item at the end
insert(i, x)	- Insert at index i
extend(iterable)	- Add multiple items
remove(x)	- Remove first occurrence of x
pop(i)	- Remove and return item at index i
index(x)	- Return index of first occurrence
count(x)	- Count occurrences of x
sort()	- Sort the list
reverse()	- Reverse the list
clear()	- Remove all items

List Methods with Example

Method	Example	Output
append(x)	my_list.append(50)	[10, 20, 30, 40, 50]
insert(i, x)	my_list.insert(1, 15)	[10, 15, 20, 30, 40]
extend([60,70])	my_list.extend([60,70])	[10, 20, 30, 40, 60, 70]
remove(30)	my_list.remove(30)	[10, 20, 40]
pop()	my_list.pop()	40 (returned)
index(20)	my_list.index(20)	1
count(20)	my_list.count(20)	1
sort()	my_list.sort()	[10, 20, 30, 40]
reverse()	my_list.reverse()	[40, 30, 20, 10]
clear()	my_list.clear()	[]

Key Point :

- Lists can be changed
- Lists allow duplicates
- Lists maintain order
- Lists are written using square brackets []

List Comprehension

Compact way to create lists.

Syntax :

[expression for item in iterable if condition]

Example :

```
squares = [x*x for x in range(1,6)]
print(squares)
# Output: [1, 4, 9, 16, 25]
```

Example with condition :

```
even = [x for x in range(1,11)
        if x % 2 == 0]
print(even)
# Output: [2, 4, 6, 8, 10]
```

8. COLLECTION OPERATIONS - QUICK OVERVIEW

Collection	Ordered	Mutable	Allows Duplicates	Access	Use When
List	Yes	Yes	Yes	Index / Slice	Need ordered, mutable collection
Tuple	Yes	No	Yes	Index / Slice	Need ordered, immutable collection
Set	No	Yes	No	No Index	Need unique items (membership testing)
Dictionary	Yes (3.7+)	Yes	No (Keys)	Key	Need key-value mapping (Fast lookup)

9. DICTIONARY METHODS (Detailed)

Common Dictionary Methods

Example :

```
d = {'name': 'Aman', 'age': 22, 'city': 'Delhi'}
d.get('name') # Output: Aman
d.keys() # Output: dict_keys(['name', 'age', 'city'])
d.values() # Output: dict_values(['Aman', 22, 'Delhi'])
d.items() # Output: dict_items([('name', 'Aman'), ('age', 22), ('city', 'Delhi')])
d.update({'age': 23, 'gender': 'M'})
d.pop('city') # Removes city
d.clear() # Removes all items
```

Method	Description
get(key, default)	Returns value for key, else default
keys()	Returns all keys
values()	Returns all values
items()	Returns key-value pairs
update()	Update dictionary with items
pop(key)	Remove and return value for key
popitem()	Remove and return last inserted pair
clear()	Remove all items from dictionary

10. COMPREHENSIONS

- ★ Comprehensions provide a concise way to create lists, sets and dictionaries.
- ★ They improve readability and are generally faster.

List Comprehension

[expression for item in iterable if condition]

Example :

```
squares = [x*x for x in range(1, 6)]
print(squares)
# Output: [1, 4, 9, 16, 25]
```

Set Comprehension

{expression for item in iterable if condition}

Example :

```
even_set = {x for x in range(1, 11) if x % 2 == 0}
print(even_set)
# Output: {2, 4, 6, 8, 10}
```

Dictionary Comprehension

{key_expr: value_expr for item in iterable if condition}


Example :

```
cube_dict = {x: x**3 for x in range(1, 5)}
print(cube_dict)
# Output: {1: 1, 2: 8, 3: 27, 4: 64}
```

Key Takeaways

- List is ordered & mutable.
- Tuple is ordered & immutable.
- Set is unordered & stores unique items.
- Dictionary stores key-value pairs.




When to Use What?

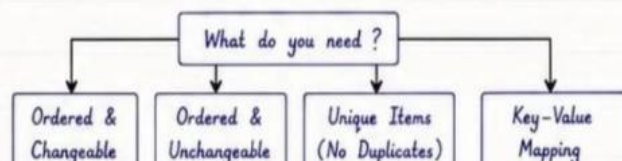

11. COLLECTIONS - SUMMARY & WHEN TO USE

Collection	Ordered	Mutable	Allows Duplicates	Access	Best Used For
List	Yes	Yes	Yes	Index / Slice	Dynamic data, ordered items, frequent changes
Tuple	Yes	No	Yes	Index / Slice	Fixed data, read-only access
Set	No	Yes	No	No Index	Unique items, membership testing, mathematical ops
Dictionary	Yes (3.7+)	Yes	No (Keys)	Key	Key-value data, lookups, mapping

12. NESTED COLLECTIONS EXAMPLES

List of Lists	List of Dictionaries	Dictionary of Lists	Set of Tuples
<pre>matrix = [[1, 2, 3], [4, 5, 6]]</pre> 	<pre>students = [{'name': 'Aman', 'age': 22}, {'name': 'Riya', 'age': 21}]</pre> 	<pre>marks = { 'Aman': [80, 90, 85], 'Riya': [88, 92, 79] }</pre> 	<pre>points = {(1, 2), (3, 4), (1, 2)}</pre> ↓ Duplicates removed <pre>{(1, 2), (3, 4)}</pre>

13. QUICK COMPARISON (LIST vs TUPLE vs SET vs DICTIONARY)

LIST	TUPLE	SET	DICTIONARY
- Ordered - Mutable - Allows Duplicates - Access by index/slice - Syntax: [] - Methods: append(), remove(), pop(), sort(), reverse()	- Ordered - Immutable - Allows Duplicates - Access by index/slice - Syntax: () - Methods: count(), index(), len()	- Unordered - Mutable - No Duplicates - No index access - Syntax: { } - Methods: add(), remove(), discard(), union(), intersection()	- Ordered (3.7+) - Mutable - No duplicate keys - Access by keys - Syntax: { key: value } - Methods: get(), keys(), values(), items(), update()

14. KEY TAKEAWAYS

- ★ Choose List when you need ordered, changeable sequence.
- ★ Choose Tuple when data should not change.
- ★ Choose Set when you need unique items and fast membership testing.
- ★ Choose Dictionary when you need key-value mapping and fast lookups.

Happy Coding! 😊

Master Python OOPs & Collections with Easy-to-Understand Notes!

If you're learning Python for Data Analytics, Data Engineering, Automation, or Interviews, these handwritten notes will help you understand the core concepts quickly.

- Topics Covered:

OOPs Introduction

Class & Object

Constructor (`__init__`)

Inheritance

Polymorphism V Encapsulation

Abstraction

Magic (Dunder) Methods

Lists, Tuples, Sets & Dictionaries

Collection Methods V Dictionary Methods V Comprehensions

Quick Comparison & Cheat Sheets