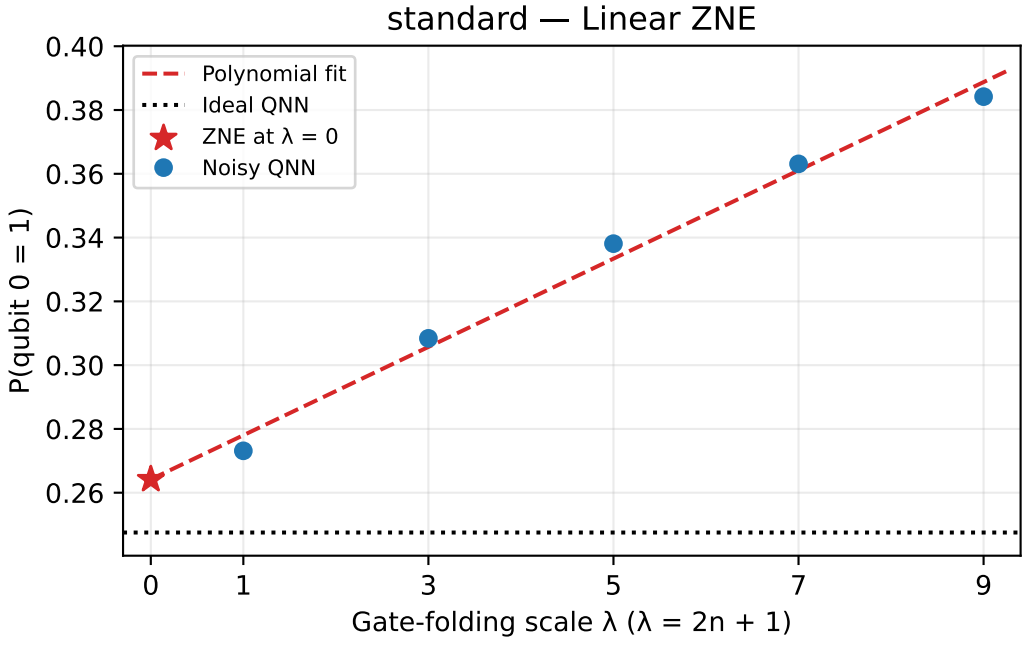
standard — Linear ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)

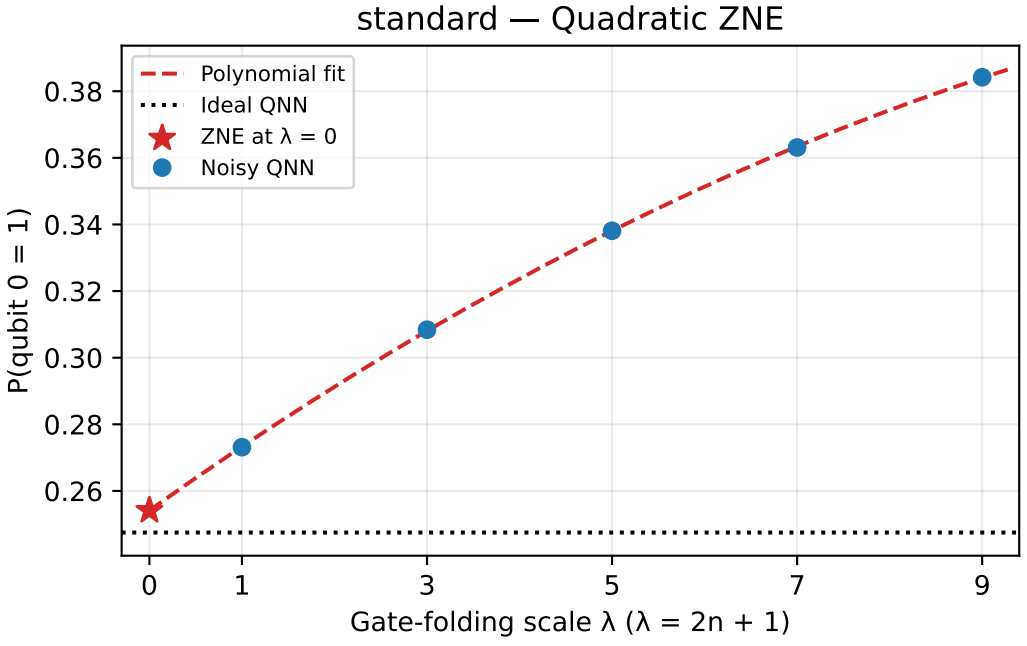
standard — Quadratic ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)

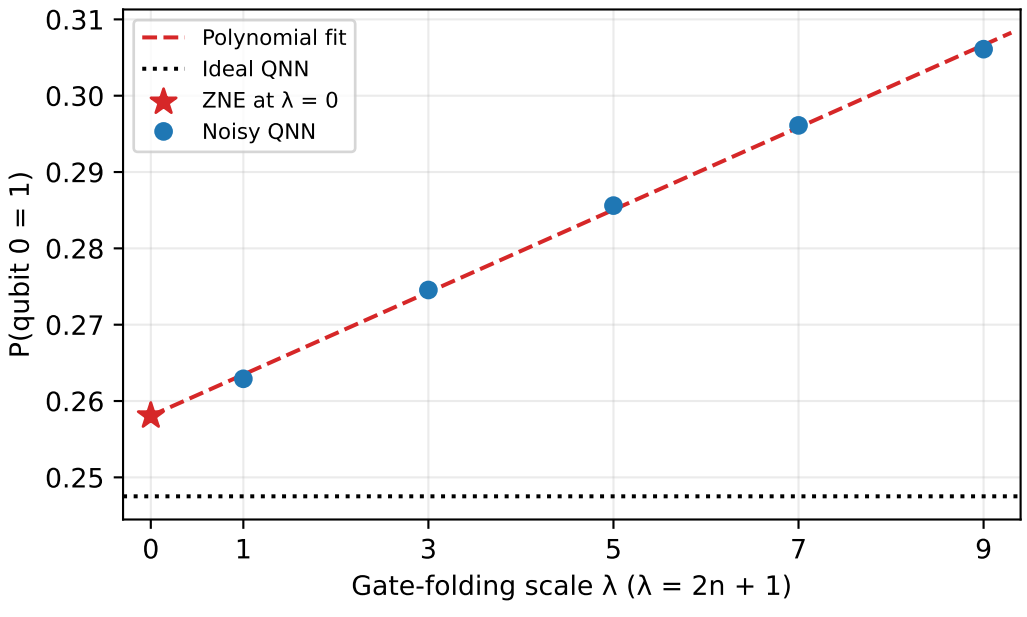
Brisbane — Linear ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)

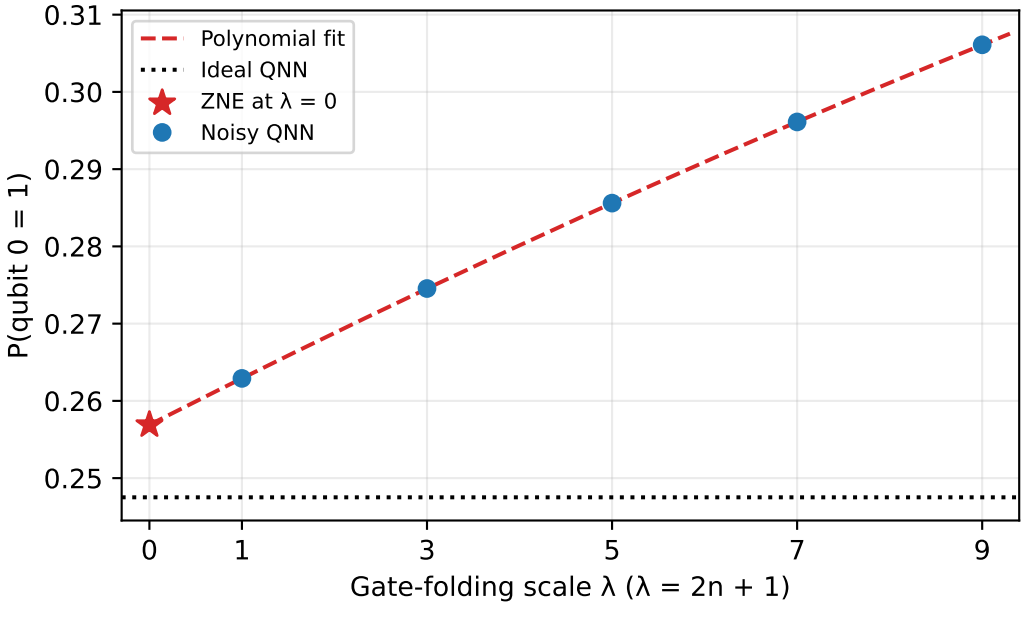
Brisbane — Quadratic ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)

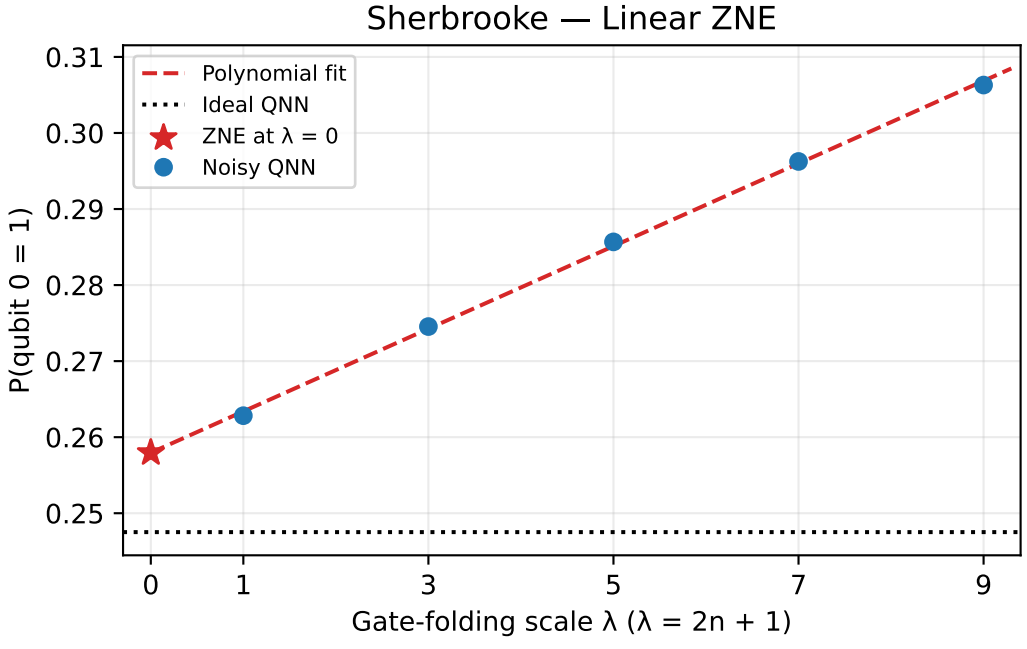
Sherbrooke — Linear ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)

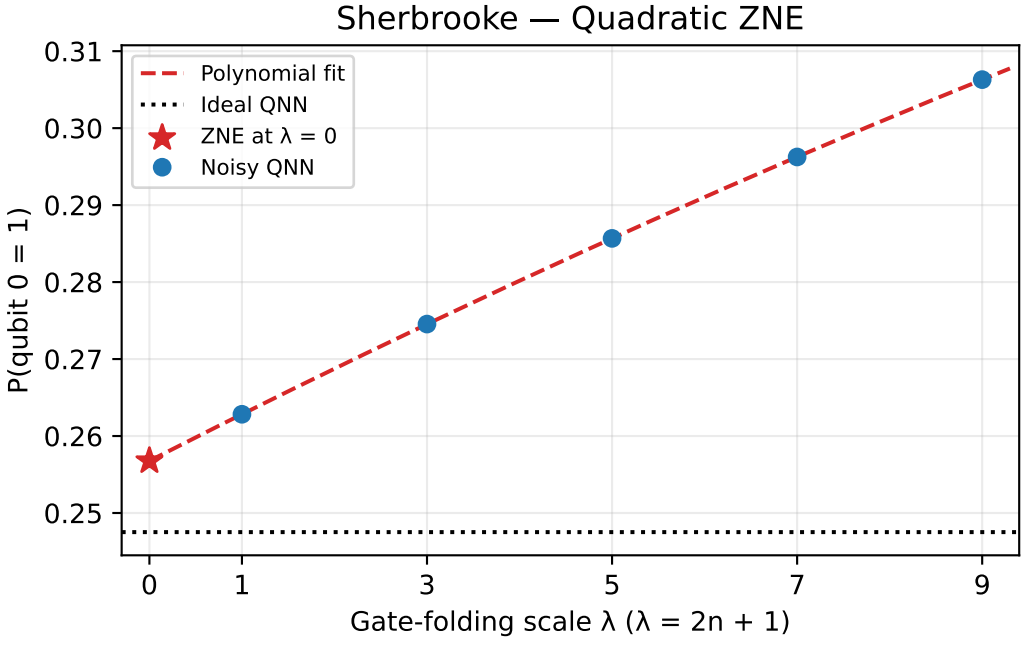
Sherbrooke — Quadratic ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)

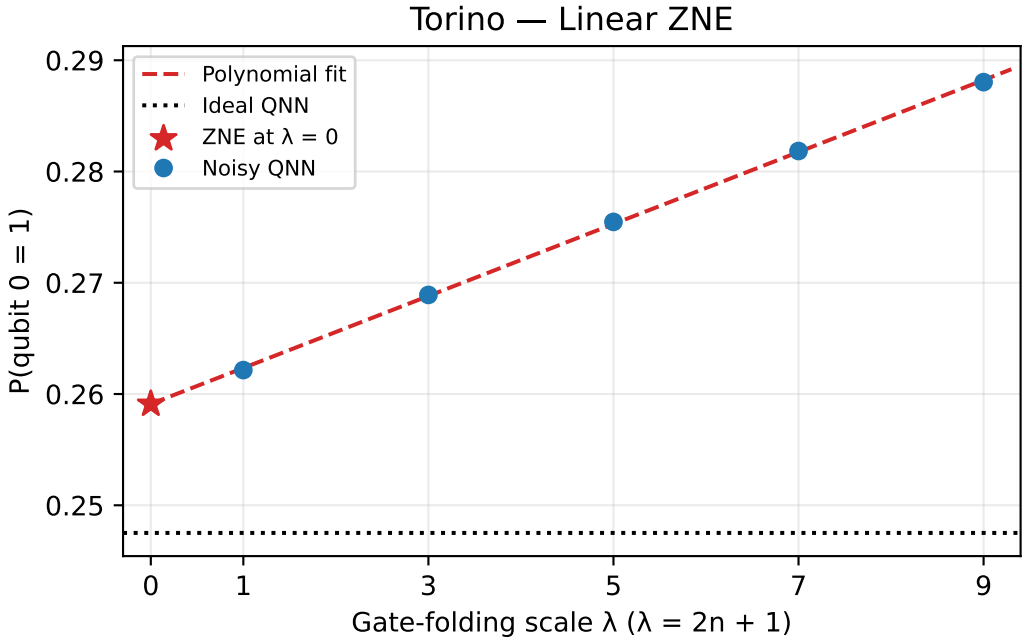
Torino — Linear ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)

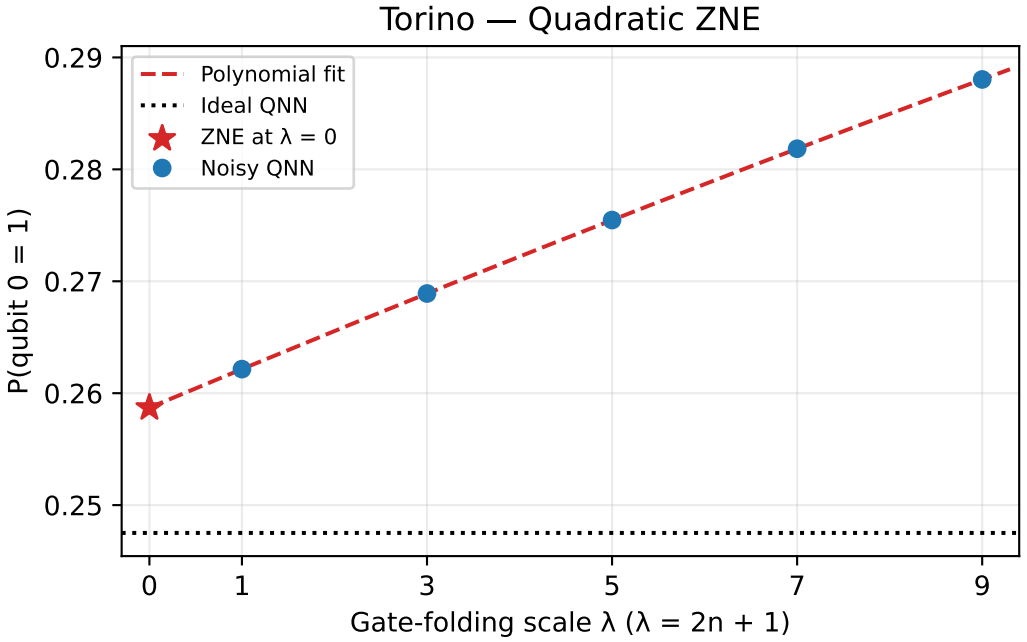
Torino — Quadratic ZNE
Polynomial fit
Ideal QNN
ZNE at λ = 0
Noisy QNN
P(qubit 0 = 1)
Gate-folding scale λ (λ = 2n + 1)