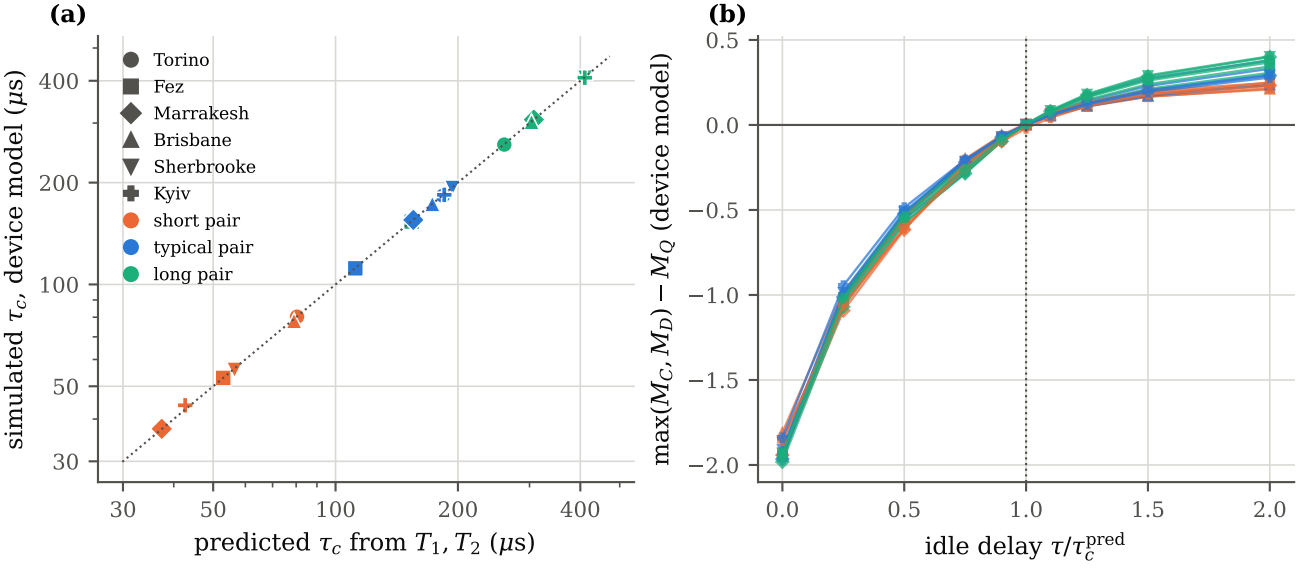
(a)
Torino
Fez
Marrakesh
Brisbane
Sherbrooke
Kyiv
short pair
typical pair
long pair
simulated τ_c, device model (μs)
predicted τ_c from T_1, T_2 (μs)
30
50
100
200
400
(b)
$\max(M_C, M_D) - M_Q$ (device model)
idle delay $\tau/\tau_c^{\text{pred}}$
0.5
0.0
−0.5
−1.0
−1.5
−2.0
0.0
0.5
1.0
1.5
2.0