


Coding Challenge #3- SQL Crime Management Schema

1. Select all open incidents.

SELECT * FROM Crime WHERE Status = 'Open';

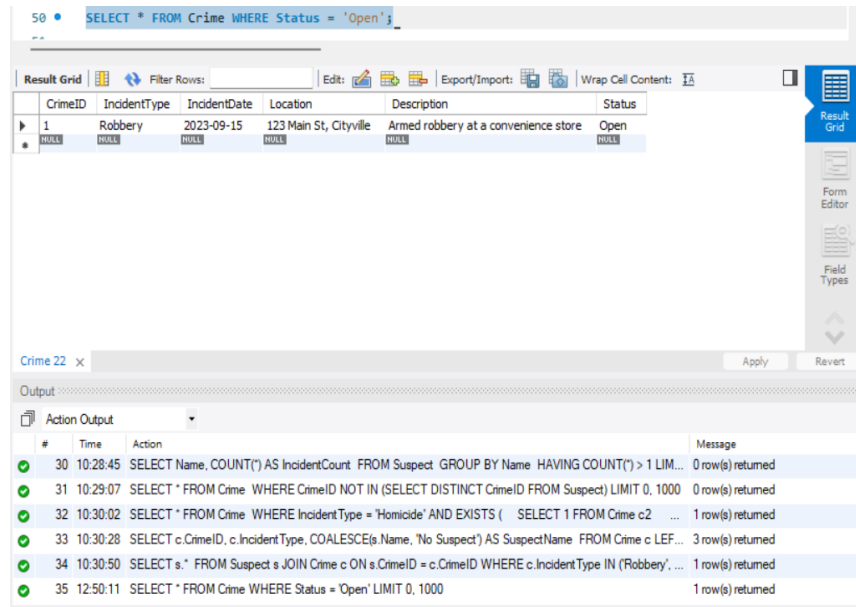

CrimeID	IncidentType	IncidentDate	Location	Description	Status
1	Robbery	2023-09-15	123 Main St, Cityville	Armed robbery at a convenience store	Open

#	Time	Action	Message
30	10:28:45	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIMIT 0, 1000	0 row(s) returned
31	10:29:07	SELECT * FROM Crime WHERE CrimeID NOT IN (SELECT DISTINCT CrimeID FROM Suspect) LIMIT 0, 1000	0 row(s) returned
32	10:30:02	SELECT * FROM Crime WHERE IncidentType = 'Homicide' AND EXISTS (SELECT 1 FROM Crime c2 ...	1 row(s) returned
33	10:30:28	SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect') AS SuspectName FROM Crime c LEF...	3 row(s) returned
34	10:30:50	SELECT s.* FROM Suspect s JOIN Crime c ON s.CrimeID = c.CrimeID WHERE c.IncidentType IN ('Robbery', ...	1 row(s) returned
35	12:50:11	SELECT * FROM Crime WHERE Status = 'Open' LIMIT 0, 1000	1 row(s) returned

2. Find the total number of incidents.

SELECT COUNT(*) AS TotalIncidents FROM Crime;



TotalIncidents
3

#	Time	Action	Message
31	10:29:07	SELECT * FROM Crime WHERE CrimeID NOT IN (SELECT DISTINCT CrimeID FROM Suspect) LIMIT 0, 1000	0 row(s) returned
32	10:30:02	SELECT * FROM Crime WHERE IncidentType = 'Homicide' AND EXISTS (SELECT 1 FROM Crime c2 ...	1 row(s) returned
33	10:30:28	SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect') AS SuspectName FROM Crime c LEF...	3 row(s) returned
34	10:30:50	SELECT s.* FROM Suspect s JOIN Crime c ON s.CrimeID = c.CrimeID WHERE c.IncidentType IN ('Robbery', ...	1 row(s) returned
35	12:50:11	SELECT * FROM Crime WHERE Status = 'Open' LIMIT 0, 1000	1 row(s) returned
36	12:52:43	SELECT COUNT(*) AS TotalIncidents FROM Crime LIMIT 0, 1000	1 row(s) returned

3. List all unique incident types.

SELECT DISTINCT IncidentType FROM Crime;

55 #3

56 **SELECT DISTINCT IncidentType FROM Crime;**

57

Result Grid

IncidentType
Robbery
Homicide
Theft

Crime 24 x Read Only

Output

Action Output

#	Time	Action	Message
32	10:30:02	SELECT * FROM Crime WHERE IncidentType = 'Homicide' AND EXISTS (SELECT 1 FROM Crime c2 ...	1 row(s) returned
33	10:30:28	SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect') AS SuspectName FROM Crime c LEF...	3 row(s) returned
34	10:30:50	SELECT s.* FROM Suspect s JOIN Crime c ON s.CrimeID = c.CrimeID WHERE c.IncidentType IN ('Robbery', ...	1 row(s) returned
35	12:50:11	SELECT * FROM Crime WHERE Status = 'Open' LIMIT 0, 1000	1 row(s) returned
36	12:52:43	SELECT COUNT(*) AS TotalIncidents FROM Crime LIMIT 0, 1000	1 row(s) returned
37	12:55:11	SELECT DISTINCT IncidentType FROM Crime LIMIT 0, 1000	3 row(s) returned

4. Retrieve incidents that occurred between '2023-09-01' and '2023-09-10'.

SELECT * FROM Crime

WHERE IncidentDate BETWEEN '2023-09-01' AND '2023-09-10';

58 #4

59 **SELECT * FROM Crime**

60 **WHERE IncidentDate BETWEEN '2023-09-01' AND '2023-09-10';**

Result Grid

CrimeID	IncidentType	IncidentDate	Location	Description	Status
3	Theft	2023-09-10	789 Oak St, Villagetown	Shoplifting incident at a mall	Closed

Crime 25 x Apply Revert

Output

Action Output

#	Time	Action	Message
33	10:30:28	SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect') AS SuspectName FROM Crime c LEF...	3 row(s) returned
34	10:30:50	SELECT s.* FROM Suspect s JOIN Crime c ON s.CrimeID = c.CrimeID WHERE c.IncidentType IN ('Robbery', ...	1 row(s) returned
35	12:50:11	SELECT * FROM Crime WHERE Status = 'Open' LIMIT 0, 1000	1 row(s) returned
36	12:52:43	SELECT COUNT(*) AS TotalIncidents FROM Crime LIMIT 0, 1000	1 row(s) returned
37	12:55:11	SELECT DISTINCT IncidentType FROM Crime LIMIT 0, 1000	3 row(s) returned
38	13:00:26	SELECT * FROM Crime WHERE IncidentDate BETWEEN '2023-09-01' AND '2023-09-10' LIMIT 0, 1000	1 row(s) returned

5. List persons involved in incidents in descending order of age.

SELECT Name, Age FROM Victim

UNION

SELECT Name, Age FROM Suspect

ORDER BY Age DESC;

```

79 #5
80 SELECT Name, Age FROM Victim
81 UNION
82 SELECT Name, Age FROM Suspect
83 ORDER BY Age DESC;
84

```

Name	Age
Robber 1	40
John Doe	34
Suspect 1	30
Jane Smith	29
Alice Johnson	22
Unknown	10000

Result 26 x Read Only

#	Time	Action	Message
34	10:30:50	SELECT s.* FROM Suspect s JOIN Crime c ON s.CrimeID = c.CrimeID WHERE c.IncidentType IN ('Robbery', ...	1 row(s) returned
35	12:50:11	SELECT * FROM Crime WHERE Status = 'Open' LIMIT 0, 1000	1 row(s) returned
36	12:52:43	SELECT COUNT(*) AS TotalIncidents FROM Crime LIMIT 0, 1000	1 row(s) returned
37	12:55:11	SELECT DISTINCT IncidentType FROM Crime LIMIT 0, 1000	3 row(s) returned
38	13:00:26	SELECT * FROM Crime WHERE IncidentDate BETWEEN '2023-09-01' AND '2023-09-10' LIMIT 0, 1000	1 row(s) returned
39	13:01:14	SELECT Name, Age FROM Victim UNION SELECT Name, Age FROM Suspect ORDER BY Age DESC	6 row(s) returned

6. Find the average age of persons involved in incidents.

SELECT AVG(Age) AS AverageAge FROM (

SELECT Age FROM Victim

UNION ALL

SELECT Age FROM Suspect

) AS AllPersons;

```

84
85 #6
86 SELECT AVG(Age) AS AverageAge FROM (
87 SELECT Age FROM Victim
88 UNION ALL
89 SELECT Age FROM Suspect
90 ) AS AllPersons;

```


AverageAge
31.0000

Result 27 x Read Only

#	Time	Action	Message
35	12:50:11	SELECT * FROM Crime WHERE Status = 'Open' LIMIT 0, 1000	1 row(s) returned
36	12:52:43	SELECT COUNT(*) AS TotalIncidents FROM Crime LIMIT 0, 1000	1 row(s) returned
37	12:55:11	SELECT DISTINCT IncidentType FROM Crime LIMIT 0, 1000	3 row(s) returned
38	13:00:26	SELECT * FROM Crime WHERE IncidentDate BETWEEN '2023-09-01' AND '2023-09-10' LIMIT 0, 1000	1 row(s) returned
39	13:01:14	SELECT Name, Age FROM Victim UNION SELECT Name, Age FROM Suspect ORDER BY Age DESC	6 row(s) returned
40	13:02:15	SELECT AVG(Age) AS AverageAge FROM (SELECT Age FROM Victim UNION ALL SELECT Age FR...	1 row(s) returned


7. List incident types and their counts, only for open cases.

```
SELECT IncidentType, COUNT(*) AS OpenCaseCount  
FROM Crime  
WHERE Status = 'Open'  
GROUP BY IncidentType;
```

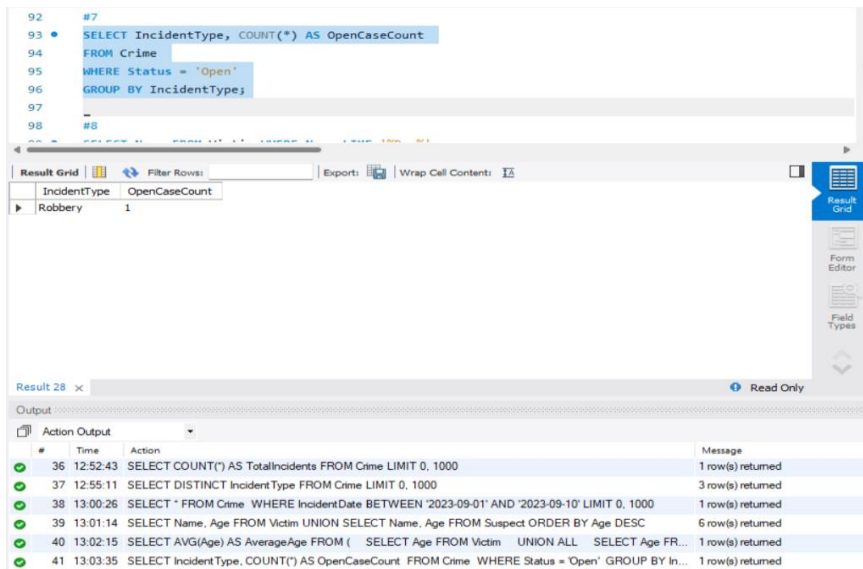

8. Find persons with names containing 'Doe'.

```
SELECT Name FROM Victim WHERE Name LIKE '%Doe%'  
UNION  
SELECT Name FROM Suspect WHERE Name LIKE '%Doe%';
```

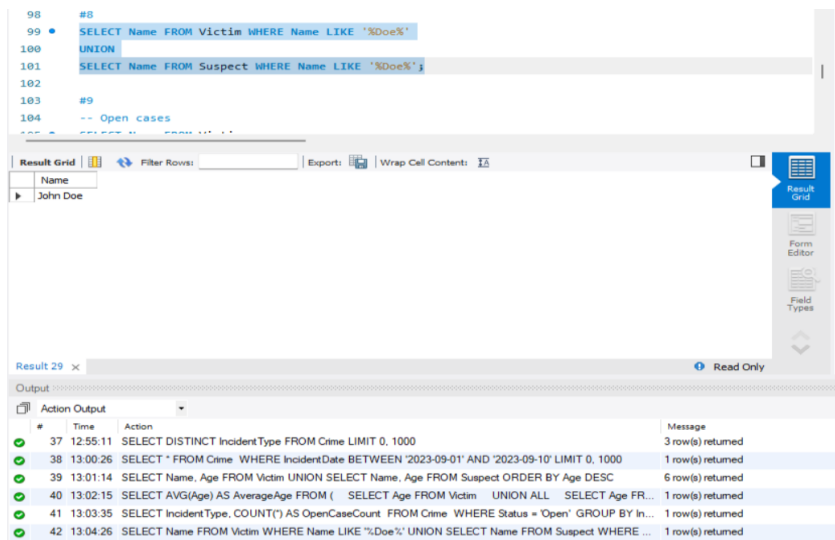

9. Retrieve the names of persons involved in open cases and closed cases.

-- Open cases

SELECT Name FROM Victim

WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Open')

UNION

SELECT Name FROM Suspect

WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Open');

-- Closed cases

SELECT Name FROM Victim

WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Closed')

UNION

SELECT Name FROM Suspect

WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Closed');

103 #9
 104 -- Open cases
 105 SELECT Name FROM Victim
 106 WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Open')
 107 UNION
 108 SELECT Name FROM Suspect
 109 WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Open');

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

Name
Alice Johnson
Suspect 1


Result 30 x Read Only

Output

#	Time	Action	Message
38	13:00:26	SELECT * FROM Crime WHERE IncidentDate BETWEEN '2023-09-01' AND '2023-09-10' LIMIT 0, 1000	1 row(s) returned
39	13:01:14	SELECT Name, Age FROM Victim UNION SELECT Name, Age FROM Suspect ORDER BY Age DESC	6 row(s) returned
40	13:02:15	SELECT AVG(Age) AS AverageAge FROM (SELECT Age FROM Victim UNION ALL SELECT Age FR...	1 row(s) returned
41	13:03:35	SELECT IncidentType, COUNT(*) AS OpenCaseCount FROM Crime WHERE Status = 'Open' GROUP BY In...	1 row(s) returned
42	13:04:26	SELECT Name FROM Victim WHERE Name LIKE '%Doe%'; UNION SELECT Name FROM Suspect WHERE ...	1 row(s) returned
43	13:05:38	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Closed') ...	2 row(s) returned

10. List incident types where there are persons aged 30 or 35 involved.

```
SELECT DISTINCT c.IncidentType
FROM Crime c
JOIN Victim v ON c.CrimeID = v.CrimeID
WHERE v.Age IN (30, 35)
UNION
SELECT DISTINCT c.IncidentType
FROM Crime c
JOIN Suspect s ON c.CrimeID = s.CrimeID
WHERE s.Age IN (30, 35);
```

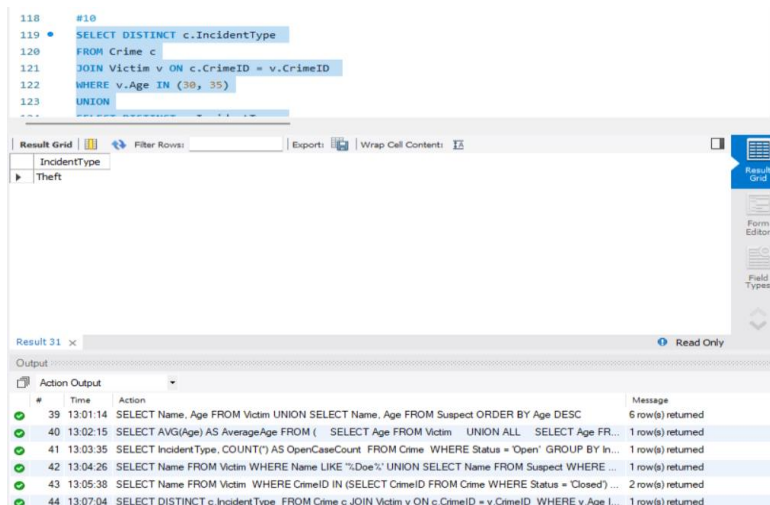

11. Find persons involved in incidents of the same type as 'Robbery'.

SELECT Name FROM Victim

WHERE CrimeID IN (

SELECT CrimeID FROM Crime WHERE IncidentType = 'Robbery'

)

UNION

SELECT Name FROM Suspect

WHERE CrimeID IN (

SELECT CrimeID FROM Crime WHERE IncidentType = 'Robbery'

);

129 #11
 130 • SELECT Name FROM Victim
 131 WHERE CrimeID IN (
 132 SELECT CrimeID FROM Crime WHERE IncidentType = 'Robbery'
 133)
 134 UNION
 135 SELECT Name FROM Suspect

Result Grid

Name
John Doe
Robber 1

Result 32 x Read Only

Output

Action Output

#	Time	Action	Message
40	13:02:15	SELECT AVG(Age) AS AverageAge FROM (SELECT Age FROM Victim UNION ALL SELECT Age FR...	1 row(s) returned
41	13:03:35	SELECT IncidentType, COUNT(*) AS OpenCaseCount FROM Crime WHERE Status = 'Open' GROUP BY In...	1 row(s) returned
42	13:04:26	SELECT Name FROM Victim WHERE Name LIKE '%Doe%' UNION SELECT Name FROM Suspect WHERE ...	1 row(s) returned
43	13:05:38	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Closed') ...	2 row(s) returned
44	13:07:04	SELECT DISTINCT c.IncidentType FROM Crime c JOIN Victim v ON c.CrimeID = v.CrimeID WHERE v.Age I...	1 row(s) returned
45	13:07:57	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE IncidentType =...	2 row(s) returned

12. List incident types with more than one open case.

SELECT IncidentType, COUNT(*) AS OpenCount

FROM Crime

WHERE Status = 'Open'

GROUP BY IncidentType

HAVING COUNT(*) > 1;

140 #12
 141 • SELECT IncidentType, COUNT(*) AS OpenCount
 142 FROM Crime
 143 WHERE Status = 'Open'
 144 GROUP BY IncidentType
 145 HAVING COUNT(*) > 1;
 146

Result Grid

IncidentType	OpenCount
--------------	-----------

Result 33 x Read Only

Output

Action Output

#	Time	Action	Message
41	13:03:35	SELECT IncidentType, COUNT(*) AS OpenCaseCount FROM Crime WHERE Status = 'Open' GROUP BY In...	1 row(s) returned
42	13:04:26	SELECT Name FROM Victim WHERE Name LIKE '%Doe%' UNION SELECT Name FROM Suspect WHERE ...	1 row(s) returned
43	13:05:38	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Closed') ...	2 row(s) returned
44	13:07:04	SELECT DISTINCT c.IncidentType FROM Crime c JOIN Victim v ON c.CrimeID = v.CrimeID WHERE v.Age I...	1 row(s) returned
45	13:07:57	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE IncidentType =...	2 row(s) returned
46	13:09:05	SELECT IncidentType, COUNT(*) AS OpenCount FROM Crime WHERE Status = 'Open' GROUP BY Inciden...	0 row(s) returned


13. List all incidents with suspects whose names also appear as victims in other incidents.

SELECT c.*

FROM Crime c

JOIN Suspect s ON c.CrimeID = s.CrimeID

WHERE s.Name IN (SELECT Name FROM Victim);

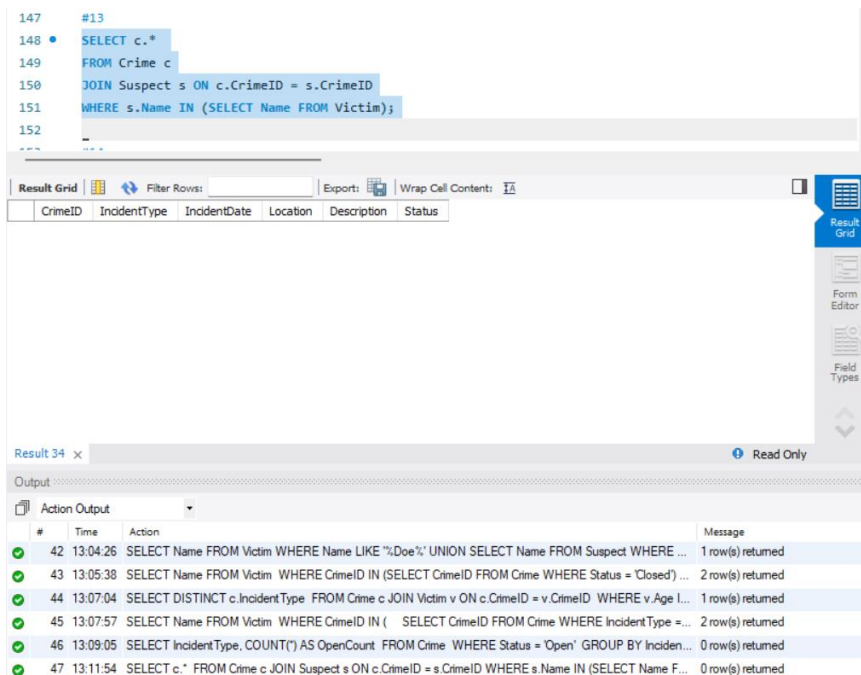

14. Retrieve all incidents along with victim and suspect details.

SELECT c.*, v.Name AS VictimName, s.Name AS SuspectName

FROM Crime c

LEFT JOIN Victim v ON c.CrimeID = v.CrimeID

LEFT JOIN Suspect s ON c.CrimeID = s.CrimeID;

```

152
153 #14
154 • SELECT c.*, v.Name AS VictimName, s.Name AS SuspectName
155 FROM Crime c
156 LEFT JOIN Victim v ON c.CrimeID = v.CrimeID
157 LEFT JOIN Suspect s ON c.CrimeID = s.CrimeID;
158

```

CrimeID	IncidentType	IncidentDate	Location	Description	Status	VictimName	SuspectName
1	Robbery	2023-09-15	123 Main St, Cityville	Armed robbery at a convenience store	Open	John Doe	Robert Johnson
2	Homicide	2023-09-20	456 Elm St, Townsville	Investigation into a murder case	Under Investigation	Jane Smith	Unknown
3	Theft	2023-09-10	789 Oak St, Villagetown	Shoplifting incident at a mall	Closed	Alice Johnson	Suspect

Result 35 x Read Only

Output

#	Time	Action	Message
43	13:05:38	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE Status = 'Closed') ...	2 row(s) returned
44	13:07:04	SELECT DISTINCT c.IncidentType FROM Crime c JOIN Victim v ON c.CrimeID = v.CrimeID WHERE v.Age > c.CrimeID	1 row(s) returned
45	13:07:57	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE IncidentType = ...	2 row(s) returned
46	13:09:05	SELECT IncidentType, COUNT(*) AS OpenCount FROM Crime WHERE Status = 'Open' GROUP BY IncidentType	0 row(s) returned
47	13:11:54	SELECT c.* FROM Crime c JOIN Suspect s ON c.CrimeID = s.CrimeID WHERE s.Name IN (SELECT Name F...	0 row(s) returned
48	13:12:36	SELECT c.*, v.Name AS VictimName, s.Name AS SuspectName FROM Crime c LEFT JOIN Victim v ON c.CrimeID = v.CrimeID	3 row(s) returned

15. Find incidents where the suspect is older than any victim.

SELECT DISTINCT c.*

FROM Crime c

JOIN Suspect s ON c.CrimeID = s.CrimeID

WHERE s.Age > ALL (SELECT v.Age FROM Victim v WHERE v.CrimeID = c.CrimeID);

159 #15 Execute the statement under the keyboard cursor

```
160 SELECT DISTINCT c.*
161 FROM Crime c
162 JOIN Suspect s ON c.CrimeID = s.CrimeID
163 WHERE s.Age > ALL (SELECT v.Age FROM Victim v WHERE v.CrimeID = c.CrimeID);
164
```

CrimeID	IncidentType	IncidentDate	Location	Description	Status
1	Robbery	2023-09-15	123 Main St, Cityville	Armed robbery at a convenience store	Open
3	Theft	2023-09-10	789 Oak St, Villagetown	Shoplifting incident at a mall	Closed

Result 36 x Read Only

Output

#	Time	Action	Message
44	13:07:04	SELECT DISTINCT c.IncidentType FROM Crime c JOIN Victim v ON c.CrimeID = v.CrimeID WHERE v.Age > ALL (SELECT v.Age FROM Victim v WHERE v.CrimeID = c.CrimeID);	1 row(s) returned
45	13:07:57	SELECT Name FROM Victim WHERE CrimeID IN (SELECT CrimeID FROM Crime WHERE IncidentType = 'Robbery');	2 row(s) returned
46	13:09:05	SELECT IncidentType, COUNT(*) AS OpenCount FROM Crime WHERE Status = 'Open' GROUP BY IncidentType;	0 row(s) returned
47	13:11:54	SELECT c.* FROM Crime c JOIN Suspect s ON c.CrimeID = s.CrimeID WHERE s.Name IN (SELECT Name FROM Suspect WHERE Name LIKE 'J%');	0 row(s) returned
48	13:12:36	SELECT c.*, v.Name AS VictimName, s.Name AS SuspectName FROM Crime c LEFT JOIN Victim v ON c.CrimeID = v.CrimeID LEFT JOIN Suspect s ON c.CrimeID = s.CrimeID;	3 row(s) returned
49	13:13:10	SELECT DISTINCT c.* FROM Crime c JOIN Suspect s ON c.CrimeID = s.CrimeID WHERE s.Age > ALL (SELECT v.Age FROM Victim v WHERE v.CrimeID = c.CrimeID);	2 row(s) returned

16. Find suspects involved in multiple incidents:

SELECT Name, COUNT(*) AS IncidentCount

FROM Suspect

GROUP BY Name

HAVING COUNT(*) > 1;

```
165 #16
166 SELECT Name, COUNT(*) AS IncidentCount
167 FROM Suspect
168 GROUP BY Name
169 HAVING COUNT(*) > 1;
170
```

Name	IncidentCount
------	---------------

Result 38 x Read Only


Output

#	Time	Action	Message
46	13:09:05	SELECT IncidentType, COUNT(*) AS OpenCount FROM Crime WHERE Status = 'Open' GROUP BY IncidentType;	0 row(s) returned
47	13:11:54	SELECT c.* FROM Crime c JOIN Suspect s ON c.CrimeID = s.CrimeID WHERE s.Name IN (SELECT Name FROM Suspect WHERE Name LIKE 'J%');	0 row(s) returned
48	13:12:36	SELECT c.*, v.Name AS VictimName, s.Name AS SuspectName FROM Crime c LEFT JOIN Victim v ON c.CrimeID = v.CrimeID LEFT JOIN Suspect s ON c.CrimeID = s.CrimeID;	3 row(s) returned
49	13:13:10	SELECT DISTINCT c.* FROM Crime c JOIN Suspect s ON c.CrimeID = s.CrimeID WHERE s.Age > ALL (SELECT v.Age FROM Victim v WHERE v.CrimeID = c.CrimeID);	2 row(s) returned
50	13:13:45	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIMIT 10;	0 row(s) returned
51	13:14:07	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIMIT 10;	0 row(s) returned

17. List incidents with no suspects involved.

SELECT * FROM Crime

WHERE CrimeID NOT IN (SELECT DISTINCT CrimeID FROM Suspect);

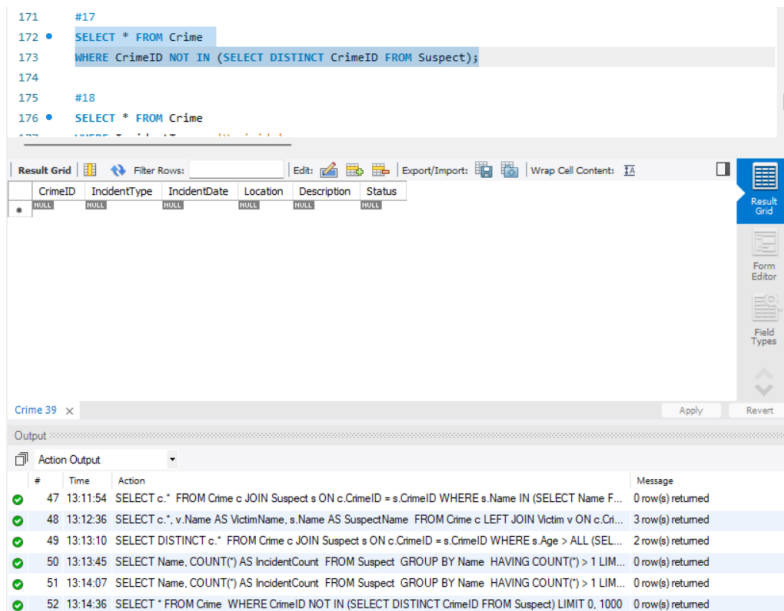

18. List all cases where at least one incident is of type 'Homicide' and all other incidents are of type 'Robbery'.

SELECT * FROM Crime

WHERE IncidentType = 'Homicide'

AND EXISTS (

SELECT 1 FROM Crime c2

WHERE c2.IncidentType = 'Robbery'

);

```

175 #18
176 • SELECT * FROM Crime
177 WHERE IncidentType = 'Homicide'
178 AND EXISTS (
179     SELECT 1 FROM Crime c2
180     WHERE c2.IncidentType = 'Robbery'
181 )

```

CrimeID	IncidentType	IncidentDate	Location	Description	Status
2	Homicide	2023-09-20	456 Elm St, Townsville	Investigation into a murder case	Under Inve...

Crime 40 x Apply Revert

Output

Action Output

#	Time	Action	Message
48	13:12:36	SELECT c.*, v.Name AS VictimName, s.Name AS SuspectName FROM Crime c LEFT JOIN Victim v ON c.CrimeID = v.CrimeID	3 row(s) returned
49	13:13:10	SELECT DISTINCT c.* FROM Crime c JOIN Suspect s ON c.CrimeID = s.CrimeID WHERE s.Age > ALL (SELECT s2.Age FROM Suspect s2 WHERE s2.CrimeID = c.CrimeID)	2 row(s) returned
50	13:13:45	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIMIT 10	0 row(s) returned
51	13:14:07	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIMIT 10	0 row(s) returned
52	13:14:36	SELECT * FROM Crime WHERE CrimeID NOT IN (SELECT DISTINCT CrimeID FROM Suspect) LIMIT 0, 1000	0 row(s) returned
53	13:15:34	SELECT * FROM Crime WHERE IncidentType = 'Homicide' AND EXISTS (SELECT 1 FROM Crime c2 WHERE c2.IncidentType = 'Robbery')	1 row(s) returned

19. Retrieve a list of all incidents and the associated suspects, showing suspects for each incident, or 'No Suspect' if there are none.

SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect')
AS SuspectName

FROM Crime c

LEFT JOIN Suspect s ON c.CrimeID = s.CrimeID;

```

183 #19
184 SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect') AS SuspectName
185 FROM Crime c
186 LEFT JOIN Suspect s ON c.CrimeID = s.CrimeID;
187

```

CrimeID	IncidentType	SuspectName
1	Robbery	Robber 1
2	Homicide	Unknown
3	Theft	Suspect 1

Result 41 x Read Only

Output

#	Time	Action	Message
49	13:13:10	SELECT DISTINCT c.* FROM Crime c JOIN Suspect s ON c.CrimeID = s.CrimeID WHERE s.Age > ALL (SEL...	2 row(s) returned
50	13:13:45	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIM...	0 row(s) returned
51	13:14:07	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIM...	0 row(s) returned
52	13:14:36	SELECT * FROM Crime WHERE CrimeID NOT IN (SELECT DISTINCT CrimeID FROM Suspect) LIMIT 0, 1000	0 row(s) returned
53	13:15:34	SELECT * FROM Crime WHERE IncidentType = 'Homicide' AND EXISTS (SELECT 1 FROM Crime c2 ...	1 row(s) returned
54	13:16:15	SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect') AS SuspectName FROM Crime c LEF...	3 row(s) returned

20. List all suspects who have been involved in incidents with incident types 'Robbery' or 'Assault'

SELECT s.*

FROM Suspect s

JOIN Crime c ON s.CrimeID = c.CrimeID

WHERE c.IncidentType IN ('Robbery', 'Assault');

```

188 #20
189 SELECT s.*
190 FROM Suspect s
191 JOIN Crime c ON s.CrimeID = c.CrimeID
192 WHERE c.IncidentType IN ('Robbery', 'Assault');

```

SuspectID	CrimeID	Name	Description	CriminalHistory	Age
1	1	Robber 1	Armed and masked robber	Previous robbery convictions	40

Result 42 x Read Only

Output

#	Time	Action	Message
50	13:13:45	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIM...	0 row(s) returned
51	13:14:07	SELECT Name, COUNT(*) AS IncidentCount FROM Suspect GROUP BY Name HAVING COUNT(*) > 1 LIM...	0 row(s) returned
52	13:14:36	SELECT * FROM Crime WHERE CrimeID NOT IN (SELECT DISTINCT CrimeID FROM Suspect) LIMIT 0, 1000	0 row(s) returned
53	13:15:34	SELECT * FROM Crime WHERE IncidentType = 'Homicide' AND EXISTS (SELECT 1 FROM Crime c2 ...	1 row(s) returned
54	13:16:15	SELECT c.CrimeID, c.IncidentType, COALESCE(s.Name, 'No Suspect') AS SuspectName FROM Crime c LEF...	3 row(s) returned
55	13:16:51	SELECT s.* FROM Suspect s JOIN Crime c ON s.CrimeID = c.CrimeID WHERE c.IncidentType IN ('Robbery', ...	1 row(s) returned