

prelim-assign-report

*AI Transparency: We used Claude Code, because LLM based tools can be a powerful companion in code based knowledge work. We were careful to not use it as a substitute for our own thinking. The report is self contained at 5 pages. See the appendix for calculation of the tangent portolfio and the bonus task.

Methology

General architecture


For our IT architecture we had a number of desirable characteristics.

1. Programmatic approach (facilitates automation)
2. A tool we where familiar with
3. Open Source based
4. Low complexity

Any IT Architecture is a compromise between different goals. The programmatic approach ruled out excel. When choosing between AMPL and Python, we decided to use Python because it is both open source and would be more beneficial for us in a work context. It is often easier to get access to a Python runtime than an AMPL runtime. The drawback of our approach is that using python packages increases the complexity (environment management is needed), by ruling out commercial solvers we might also be sacrificing some "computational performance", but the effect of this will be negligible for the scope our project.

We used the python package [Pyomo](#) as the modelling language. The benefit of this package is modularity: Throughout the entire project we can use one modelling language interface, while swapping out the solver used on a problem to problem basis. For this preliminary report the solved [HIGHS](#) was used

Design flowchart

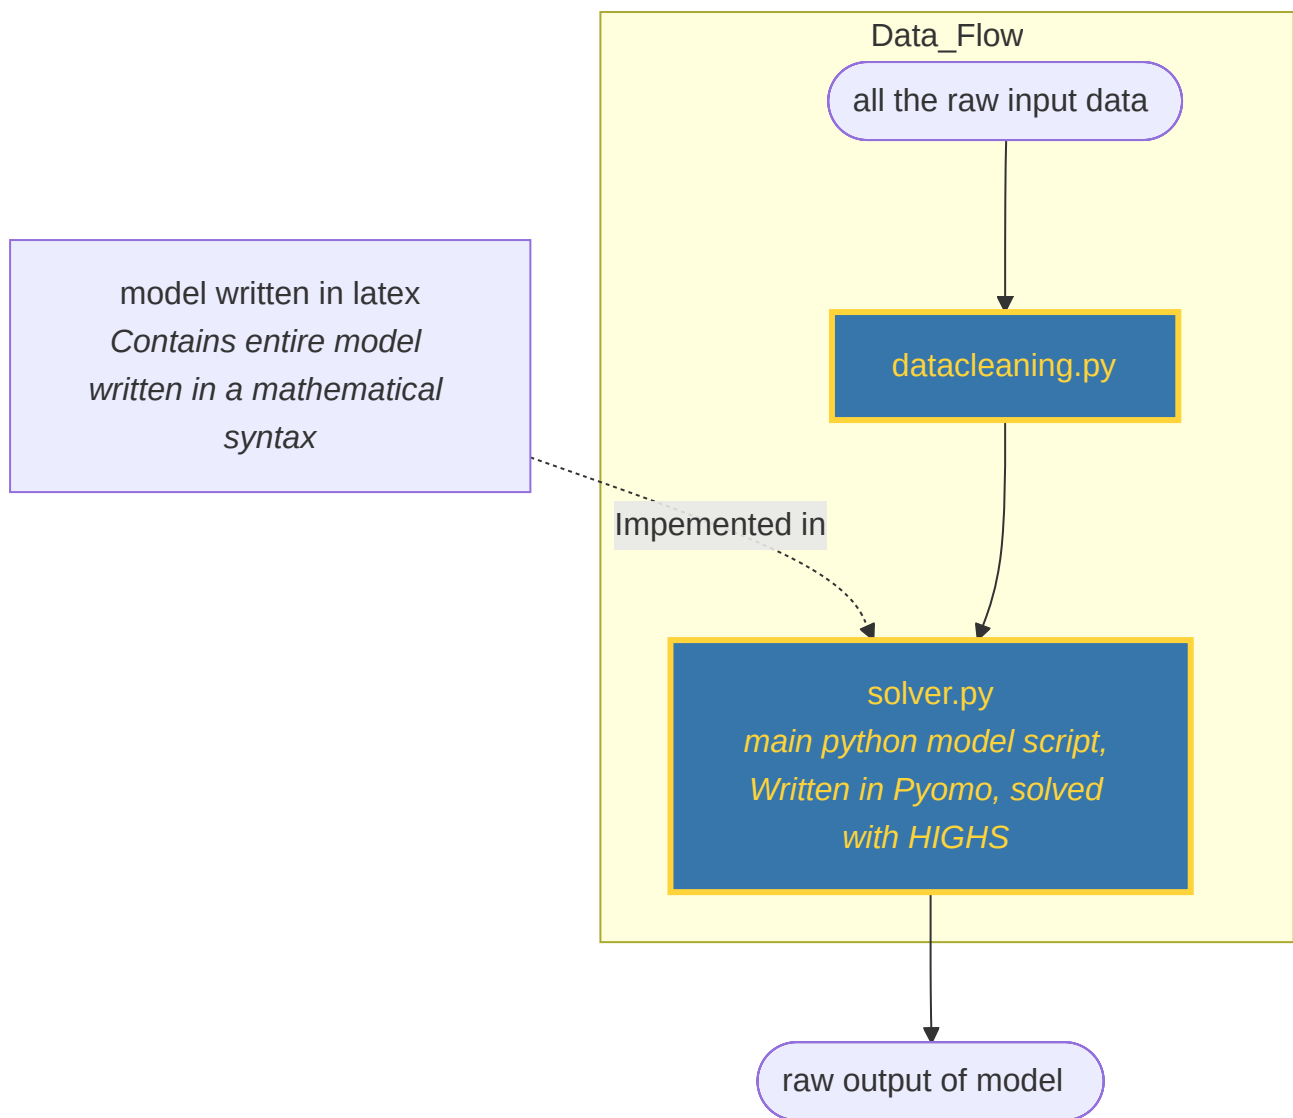

Our architecture only has two Python scripts, this was done to lower the complexity. When the input data changes, the user simply needs to run two python scripts (in order) and then the entire analysis is done.

For graphs we used some python scripts after the raw output of the model step.

Documentation for .py files

datacleaning.py

We first convert the raw csv data into a tidy data format (one col per ticker, one row per date). At this stage we see that we are missing 125 entries for the ticker SYENS. This is because SYENS joined the BEL20 on December 20 2023. We right align the SYENS data to account for this (if we did not do this it would seem like missing data is from 2025,2026, this is due to how a csv is formatted)

computing average geometric returns

We choose to use the geometric growth rate instead of the arithmetic one, because it generally gives more meaningful figures when working with stocks.

For each ticker, we compute the average geometric growth rate across all the 260 weeks with the following formula:

$$g = \left(\frac{P_n}{P_0} \right)^{1/n}$$

We interestingly note that a lot of the stocks have had a net decrease in price during the 5 year time window, and thus give us a geometric growth multiplier of below 1. One could argue that these stocks should not have a negative expected return, but this is a weakness of our frequentist methodology. For SYENS we only compute based on the available data.

computing covariance matrix

We first transform our tidy dataset from raw values to pct change, because this is a more interesting metric. We then calculate the covariance matrix using a pandas function, saving us from writing the logic by hand. This calculation excludes the NA values of SYENS.

At the end of the file we save our cleaned data to a JSON file.

solver.py

No short selling allowed model formulation

In the main_optimization_model we implement both the short selling and non short selling optimization model. The non short selling model can be formulated as:

$$\begin{aligned} \min_w \quad & \sum_{i=1}^n \sum_{j=1}^n w_i w_j \text{Cov}(r_i, r_j) \\ \text{s.t.} \quad & \sum_{i=1}^n w_i = 1 \\ & \mu^T w \geq \bar{\mu} - \epsilon \\ & \mu^T w \leq \bar{\mu} + \epsilon \\ & w_i \geq 0 \quad \forall i = 1, \dots, n \end{aligned}$$

where:

- w_i = weight allocated to asset i (between 0 and 1 for no-short case)
- Σ_{ij} = covariance between asset i and asset j
- μ_i = expected weekly growth rate for asset i
- $\bar{\mu}$ = target portfolio return we want to achieve
- $\epsilon = 0.0001$ = tolerance (we allow the portfolio return to be within ± 0.0001 of the target)
- $n = 20$ (number of stocks in the BEL20 index)

The model minimizes portfolio variance (risk) subject to achieving approximately the target return, with all weights constrained to be non-negative (no short selling allowed). The tolerance band allows the solver flexibility to find feasible solutions when the exact target

return is unachievable. The unit of measure for the return rate is weekly geometric growth factor (ie 1.001 for a weekly increase of 0.1%)

Short selling allowed model formulation

In the short selling allowed version the only change we make is that negative values are allowed, ie.

$$w_i \in \mathbb{R} \quad \forall i = 1, \dots, n$$


Methology for running the models

For the both short selling allowed and the no short selling models, we define a lists of expected returns to to use as constraints. For both lists, we set the minimum value is set to the lowest expected return in the cleaned input. For the no short selling list the maximum value is equall to the maximum expected returns in the cleaned input. For the short selling allowed list the maximum values is equall to this value +0.01. For both lists, we populated the space between the min and max value in increments of 0.001.

Once we had the exp_return_list for both short selling allowed and no short selling we run a for loop to iterate over all the desired exp returns, running the solver and minimizing the variance for each entry

The output is saved to JSON files.

Findings

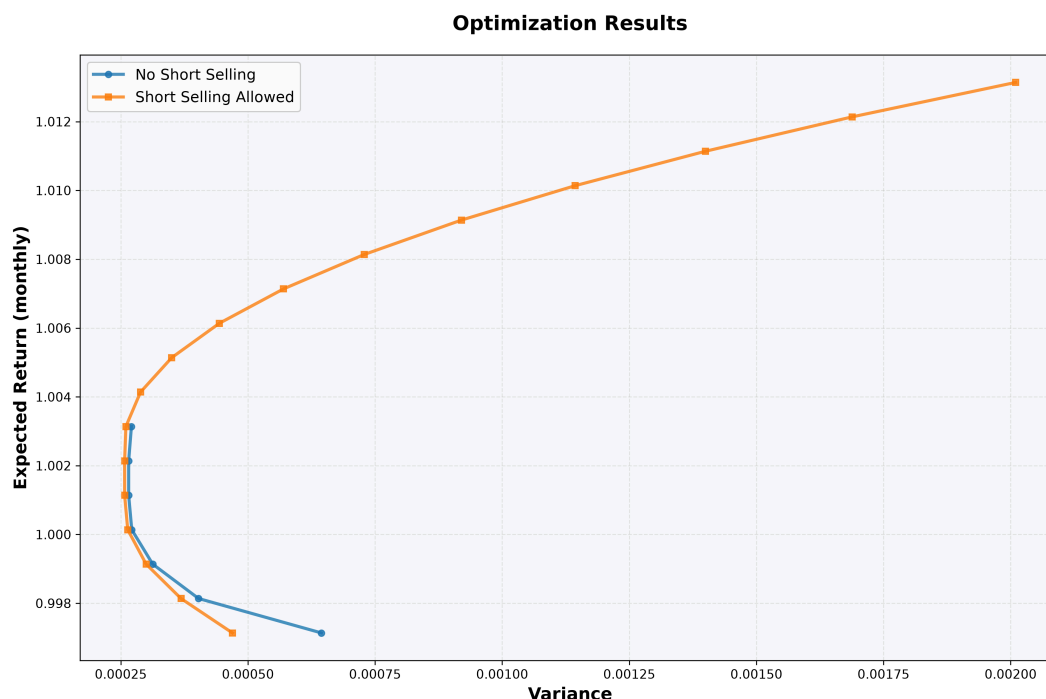

Above are the results of the solver. The efficient frontier for no short selling is quite small, with only 2-3 data points, this is because there stock with the highest expected return "only" has a return of 1.034. While for the short selling allowed the frontier is similar (although slightly better) for expected returns of 1-1.034, but the possibility of shorting stocks allows for

shorting low/negative expected returns stocks in order to buying expected return stocks. This comes at the cost of higher variance.

For both the short and no short cases, we see that the points on the graph below an expected return of 1.001 (approximate) are not efficient.

Our core analysis assumes no risk free return is available. See the appendix for a quick exploration of the tangent portfolio is risk free return is available.

Appendix

File locations

The core files for running the analysis can be found in the following locations:

```
or-central-repo/  
├── prelim-assign/  
│   ├── bel20_2026.csv  
│   ├── codebase/src/codebase/  
│   ├── datacleaning.py  
│   ├── solver.py  
│   ├── data_cleaned.json  
│   └── solver.output.json
```

Bonus, max 3 stocks

We use the big M method. Adding the following constrains to the no short selling model


$$\begin{aligned}x_i &\in \{0, 1\} \quad \forall i \\ \sum_{i=1}^n x_i &\leq 3 \\ w_i &\leq M \cdot x_i \quad \forall i\end{aligned}$$

Since no short selling is allowed, it is sufficient to set $M = 1$

However this makes the problem into a MIPQ problem, which HIGHS struggles to solve. For future tasks we will explore other solvers to give us the flexibility needed to solve this.

Bonus, tangent portfolio

Tangent Portfolio

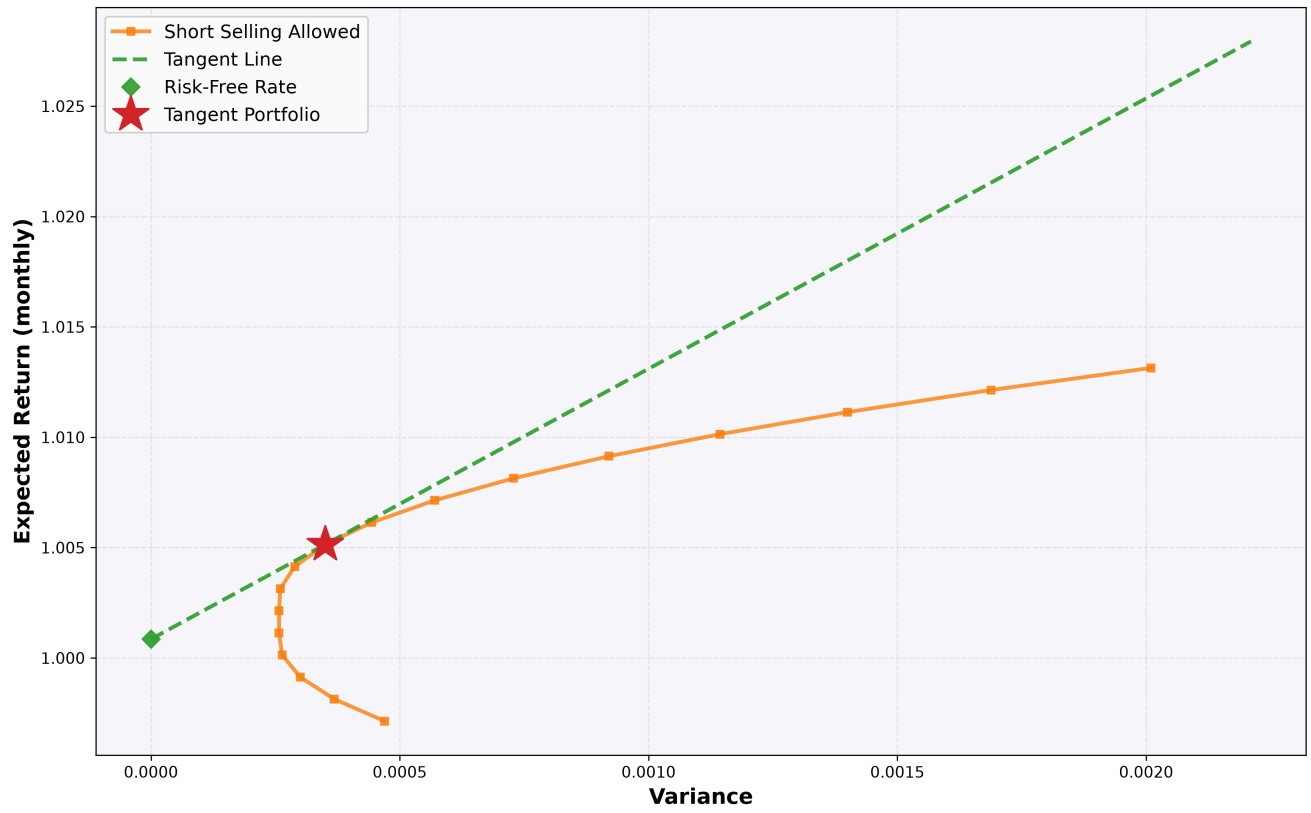

You write here Breuc