



AI with Rav

Learn AI the way you actually think.



DAY 3 of 30

OPEN SOURCE

I opened 35 PRs. Two merged.

WHAT YOU'LL LEARN TODAY

- > Why volume is the wrong strategy
- > The question maintainers ask
- > What the two winners had
- > How to pick your first PR



I opened 35 PRs. Two merged.


In One Line: I sent 35 documentation pull requests. Two merged. The other 33 all failed the same test.

The strategy that felt smart

Find functions with no docstring. Write one. Open a PR. Repeat 35 times across several libraries.

Pure volume. Surely some would land?

Two did.

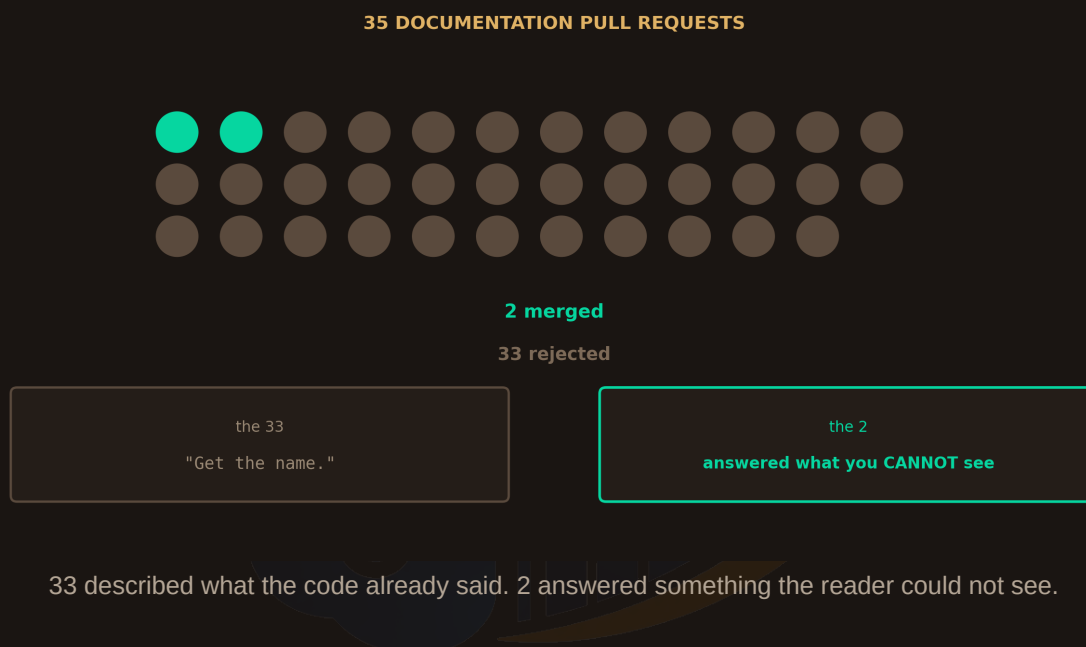

What the 33 had in common

They described what the code **already said**:

```
def get_name(self):  
    """Get the name."""
```

A reviewer reads that and thinks: *the function is called get_name. You have added nothing and given me something to maintain.*

What the two that merged did

They answered a question the reader could **not** see from the signature — the



units, the edge case, the thing that surprises you at 2am.

joblib #1811 documented what `format_time` actually returns and when the short form kicks in. You cannot get that from the name.

The test before you open a PR

Read your own description and ask:

"Could a reader work this out from the function name alone?"

If yes, do not send it. If no — you have something worth a maintainer's time.

One PR that answers a real question beats thirty that restate the obvious.

