MELLOX AI

02

Architecture & Engineering

Runtime boundaries, frontend and backend design, integration contracts, and the API map.

REBUILD BLUEPRINT SERIES / VOLUME 02 OF 06

Source snapshot: 21 October 2026 | Branch: master

Commit: 055c90977c2c | Internal working reference

Code-derived implementation. Production activation requires separate evidence.

01 How to use this volume

This is volume 02 of six documents describing Mellox AI as represented in the local source snapshot on 21 October 2026. The owner confirmed that this repository is current, Railway is the hosting platform, codebase pricing should be used, and mellox.ai is the public website.

Evidence labels: Implemented means source exists and is mapped here; it does not prove that a production migration, credential, permission or feature switch is enabled. Owner-confirmed identifies facts supplied by the owner. External-verified identifies official web information checked on the snapshot date. Recommended identifies a rebuild or operating procedure. Unverified identifies missing deployment or commercial evidence.

Runtime code, migrations and current configuration outrank older guides. Model and price tables describe defaults unless explicitly stated otherwise. They are a dated reference, not a promise that vendors will retain them. No credentials or customer records are included.

Volume	Read it for
01 Product & workflows	Feature behavior, journeys, approvals and module ownership
02 Architecture & engineering	Frontend, backend, integrations, APIs and implementation patterns
03 AI models & generation	Every task-model route, images, video, context and evaluations
04 Pricing & billing	Plans, feature gates, all action prices, wallets and economics
05 Railway & operations	Deployment, configuration, jobs, security, recovery and diagnostics
06 Rebuild & data reference	Build order, acceptance criteria, full typed schema and migration index

Contents

01 How to use this volume 2

02 System topology and source ownership 4

03 Frontend composition and navigation 5

04 Authenticated route kernel and RPC 5

05 Persistence, ownership and transactions 6

06 Long-running jobs and reconciliation 6

07 Media data flow and storage contracts 7

08 Integration boundary map 8

09 OAuth, callbacks and connector state 8

10 AI Visibility engineering 9

11 Separate Python intelligence and SDR runtimes 9

12 Dependencies and resolved versions 11

13 HTTP API route index 14

14 Server function registry index 23

15 Page and route surface index 27


16 Source ledger and verification limits 31

02 System topology and source ownership

The confirmed hosting platform is Railway. The main deployable is a Next.js App Router application with browser components, route handlers and server-domain modules. Supabase supplies identity and PostgreSQL persistence; private Cloudflare R2 is the production media path. External providers supply AI, web research, social delivery, website integrations and payment processing.

The repository also contains Python intelligence packages and a separate FastAPI/Celery Social Distribution Engine. Their presence does not prove they run in the current Railway environment. The active TypeScript GEO scanner can run through the web runtime and database-driven hooks. Build the separate services only for selected execution paths. Older Amplify, Oracle tunnel, Lightsail or research deployment notes are not the owner's confirmed current hosting topology.

Implementation sources: Dockerfile; next.config.ts; src/app; src/server; backend; Social-Distribtion-Engine-MelloxAI-SDE; docs/repository-layout.md

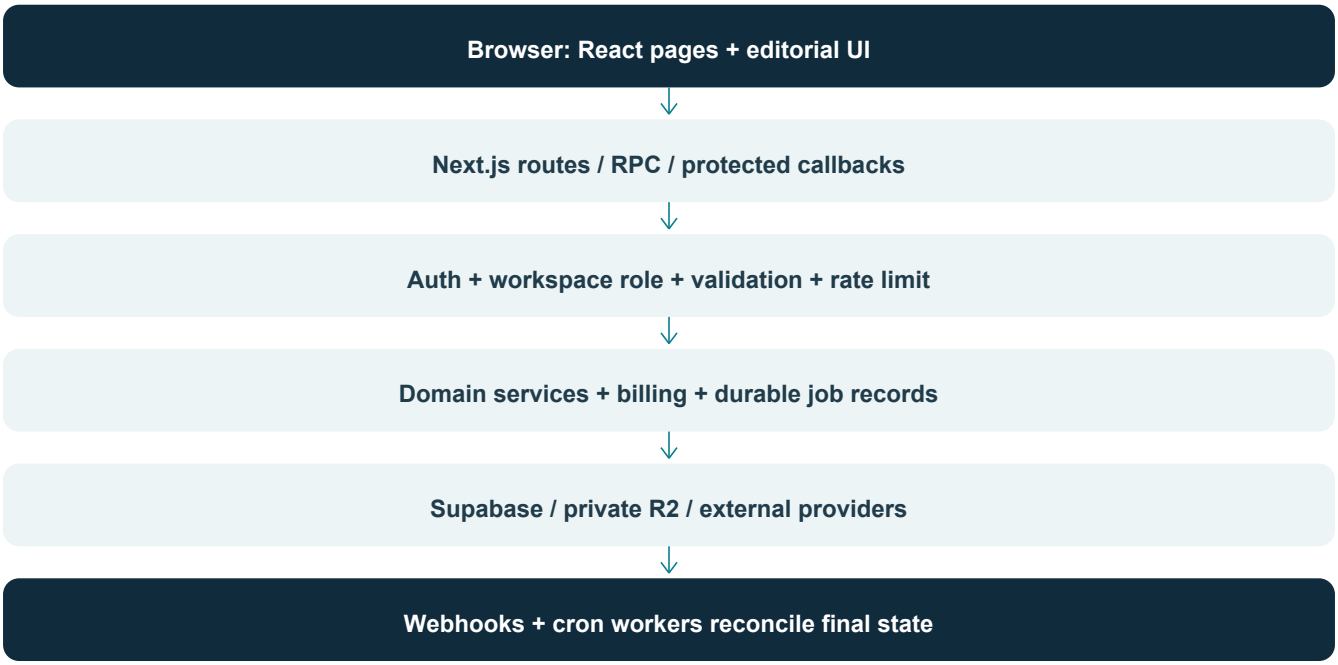

Layer	Owns	Must not own
src/app + components	Navigation, forms, loading and review UI	Service credentials or authoritative delivery state
src/lib	Shared contracts, pure rules, helpers; explicitly named server modules also exist here	Assume every lib file is browser-safe
src/server + route handlers	Trust checks, external operations, job execution, metering	Trust client role/workspace/price assertions
Supabase	Identity, state, RLS, atomic claims, ledger durability	Infer business completion from a browser view
R2	Private generated and uploaded media	Public uncontrolled access to all client assets
Python / SDR	Separate optional runtime boundaries	Assume main Next gateway rules apply automatically

03 Frontend composition and navigation

Route entry points live in src/app. Product surfaces live mainly in src/components/app, with shared UI, workspace and brand components. Workspace paths are generated through src/lib/workspace rather than assembled ad hoc. Public pages can avoid loading the full authenticated provider tree; providers.tsx distinguishes public paths and dynamically loads AppProviders.

TanStack Query handles server data and cache invalidation. Query keys include workspace identity, and workspace switching clears the affected cache. Local component state owns transient editing, not canonical publication status. Mutation completion invalidates the matching scoped reads. Async work retains the ID captured when the request started.

The UI stack is React 19, Tailwind 4, Radix primitives, Framer Motion, Lucide, Recharts and Sonner. Existing EmptyState, ErrorState, Skeleton and AppModalShell patterns should be reused. Every async feature needs loading, empty, failed, unavailable/disabled and successful states. A pending edit must not be lost when an older fetch resolves.

Next.js behavior must be read from the installed node_modules/next/dist/docs version. The current config enables standalone output and names external server packages for parsing and rendering. New features should preserve the server/client import boundary and current routing conventions rather than importing a server module into a client component.

Implementation sources: src/app/providers.tsx; src/app/AppProviders.tsx; src/lib/workspace; src/components/app; next.config.ts; node_modules/next/dist/docs/01-app/01-getting-started/05-server-and-client-components.md

04 Authenticated route kernel and RPC

defineRoute centralizes authenticated HTTP handling. Its order is authentication, schema parsing, workspace membership/minimum role, rate limiting and handler. User-authenticated routes can attribute a workspace header only after membership checks; workspace routes resolve an explicit ID from validated input. The handler receives the caller's RLS-bound Supabase client, request context and abort signal.

The RPC route /api/rpc/[...fn] dispatches through src/server/fns/index.ts. Client stubs call registered server functions rather than importing server implementation. A server function combines authentication middleware, Zod input validation, role checks and a domain service. The route name, not a client-selected implementation name, decides what executes.

The main kernel maps BillingError to HTTP 402, budget exhaustion to 429, malformed input or blocked URLs to 400, oversized bodies to 413, auth failures to 401, role denials to the owning 403 path, and stale editorial conflicts to 409. Provider errors are normalized; internal stack traces, balances, keys and raw provider messages are not the response contract. Streaming endpoints also need correct cancellation and settlement behavior.

Implementation sources: src/server/route.ts; src/server/server-fn.ts; src/server/fns/index.ts; src/app/api/rpc; src/server/request-context.ts

Recommended contract for a new workspace mutation

• Accept a workspace UUID and only feature-owned input fields; validate lengths, formats and allowed enum values.

• Authenticate and require the operation-specific role before any paid provider call or privileged read.

• Load each referenced row inside that workspace, even when the supplied item ID is a valid UUID.

• Check feature availability, quota, balance, safety and idempotency before producing a side effect.

• Write using the read revision or an atomic state transition, and return a stable domain result.

• Map failure without leaking raw upstream bodies; preserve retryable and ambiguous outcomes in durable state.

05 Persistence, ownership and transactions

Supabase PostgreSQL is the durable source of truth for workspace, brand, content, approval, job, usage, account and connector state. Generated TypeScript Row/Insert/Update types help clients use that schema; they are not a replacement for migrations, SQL constraints, grants or RLS.

Most customer records carry workspace_id, and their policies check membership or role helpers. The user client carries the caller's JWT and uses RLS. Service-role clients bypass RLS, so every privileged service path must validate the workspace and row relationship explicitly. Ownership columns are protected in important domains to stop records being moved across tenants.

Concurrent workflows use atomic claims, database functions, leases and revision checks. Lease duration is not proof the worker is alive; another worker may reclaim expired work. Idempotency must surround the external operation and its stored provider ID, not just the first HTTP request. Financial holds, capture, release and grants require transaction-safe functions and stable replay keys.

Volume 06 contains the full checked-in table/column dictionary, foreign-key relationships, database function names and migration chronology. It intentionally avoids pretending generated types encode every runtime policy. Start a clean database from the canonical migration sequence and verify it, rather than create approximate tables by hand from this PDF.

Implementation sources: supabase/migrations; src/integrations/supabase/types.ts; src/integrations/supabase/client.user.server.ts; src/integrations/supabase/client.server.ts

06 Long-running jobs and reconciliation

Generation, scans, analytics synchronization, competitor research, audience runs, Autopilot steps and media completion outlive an ordinary click. The request stores a job and may start a bounded after() continuation. Cron hooks reclaim or advance work that timed out or survived a process restart.

The run-schedules hook is a shared coordinator: scheduled jobs and due Market Brain collections each have bounded batch reads, while Autopilot and Audience have bounded execution budgets. It also schedules refresh of social trends, audience outcome collection, visual capture and expired-memory cleanup. Dedicated hooks advance GEO, UGC, distribution reconciliation, experiments, billing and operational checks.

Separate concerns: generation produces a reviewed artifact, publishing sends approved content, and reconciliation determines delivery truth. A timeout after submitting to a provider is an ambiguous side effect. Record and investigate the task rather than charging or posting again blindly. Terminal states must win over stale callbacks, and retries must not invalidate a newer user's edit.

Implementation sources: src/app/api/public/hooks/run-schedules/route.ts; src/server/cron.ts; src/server/studio/runner.server.ts; src/server/ugc/providers/routed.server.ts; src/lib/postforme

07 Media data flow and storage contracts

The canonical storage adapter writes new production assets to R2 when configured. Keys include workspace/<workspaceId>/assets/r2/<assetId>/...; older keys without the r2 marker can remain in Supabase Storage. Reader and deletion logic chooses the correct backend from canonical identity, with server-only aliases for migrations.

Media persistence validates supported formats, size, ownership and idempotency. A persistence lease prevents concurrent overwrites; an expired process's lease can be reclaimed atomically. Replaying an old persistence request must not restore an intentionally deleted asset. User uploads and report logos also use the canonical storage layer.

The browser asks authenticated routes for short-lived access. The download route obtains a fresh five-minute attachment URL after membership and workspace-path checks, letting the browser navigate directly without buffering a large video. Private buckets stay private. Canvas or fetch use of signed URLs still requires approved GET/HEAD CORS origins. A signed URL is a temporary access artifact, never the permanent database identity of media.

Implementation sources: src/server/assets/storage.server.ts; src/server/assets; src/app/api/assets/download/route.ts; docs/storage.md; docs/storage-migration.md

08 Integration boundary map

Integration	Current code responsibility	Readiness / restriction
OpenRouter	Text, vision, tools, images; selected video paths	Key, model availability, budget and route configuration
KIE	Selected UGC video model paths and fallback interplay	Key and per-option provider capabilities; do not assume retired
Post for Me	Account connection, publish/schedule, feed/metrics, callbacks	Preferred when configured; seven Mellox networks
Self-hosted SDR	Optional separate distribution runtime	Explicit provider selection and workspace enablement
SocialAPI	Compatibility code and old records	Retired as active distribution provider
Tavily / Firecrawl	Search, extract, crawl and evidence gathering	Optional configured capabilities; distinct charges
Google	Sign-in separately from GA4/GSC OAuth and data sync	Exact callback, selected property/site, encrypted grants
GitHub	Repository ownership, source reads, reviewable PR writes	App installation, host ownership and reviewed revisions
WordPress / Webflow	Site integration, articles and supported fixes	Check connected provider capability for each operation
Canva	Design creation, editing round trip and versioned export	OAuth scopes; preview conversion flag; safe export download
Notion	Manual calendar exchange with preview/conflicts	No automatic delivery authority
Slack	Opt-in workspace connector and inbound processing	Disabled unless enabled; signed and bound input
Stripe	Owner-account plans/packs and separate link purchasing	Signed webhooks; price mapping; idempotent grants
Resend	Approval, billing and summary emails	Configured sender; skipped notices do not imply approval
Helicone / Trigger.dev / Mastra / Promptfoo	Optional telemetry/orchestration/evaluation paths	Installed library or config does not prove live service activation
Pexels / Unsplash	Stock media paths	Provider configuration, rights and attribution still matter

Implementation sources: src/server/env.ts; src/lib/feature-flags.ts; src/server/connectors; src/server/analytics; src/server/billing; docs/self-hosted-integrations.md

09 OAuth, callbacks and connector state

Connector installation starts in an authenticated workspace context and binds provider authorization to the initiating user and workspace. One-use state, expiration, safe internal return paths and membership rechecks protect callbacks. Provider tokens stay in encrypted server-only credential storage; browser responses contain status and validated destinations rather than raw credentials.

Canva uses PKCE and serialized installation/refresh/withdrawal. Notion adds callback browser binding and an atomic operation lease around imports/exports. Keep the service-role-derived encryption root stable across deploys, or preserve a configured legacy dedicated key until grants are replaced. Rotating a key without a migration can make existing grants unreadable.

Readiness is capability-specific. A valid OAuth grant does not prove sufficient scopes, selected data source, provider app verification or usable write permissions. Disconnection removes local grants and attempts provider invalidation where supported; a provider without revocation may require user action in that provider. Imported content has its own retained lifecycle.

Implementation sources: src/server/connectors/canva; src/server/connectors/notion; src/server/analytics/google; docs/canva-integration.md; docs/notion-integration.md

10 AI Visibility engineering

The main app's pure GEO engine separates fetching from deterministic evaluation. analyze-page builds structured evidence; rules consume page/site context; score calculates points; fix recipes and proposal services translate findings into actions. Stable rule IDs and fingerprints preserve finding state across scans.

Current scoring gives pass 1, warning 0.5, failure 0, and excludes not-applicable rules. Category scores are weighted means of applicable rule credit, then the six category shares create the overall score. Shares are AI access 20%, technical 20%, structured data 15%, content 20%, authority 20% and rendering/performance 5%. SCORE_VERSION is 2; different versions must not be presented as ordinary score movement.

Priority combines impact, confidence and effort: 0.5 x impact + 0.25 x confidence + 0.25 x (1 - effortValue). Effort values are low .25, medium .5 and high .75. Thresholds are .8 critical, .6 high, .4 medium. Rule confidence and an emerging convention do not become proof of causal search ranking influence.

Full scans persist a frontier and checkpoint under leases; browser rendering is a separately controlled fallback for empty client shells. All page requests and redirects go through safe fetching. A fix applies only within the connected source's verified ownership boundary and requires post-change verification.

Implementation sources: src/lib/geo/analyze-page.ts; src/lib/geo/rules.ts; src/lib/geo/score.ts; src/lib/geo/types.ts; src/server/geo; src/server/safe-fetch.ts

11 Separate Python intelligence and SDR runtimes

The backend package is a Python/FastAPI analysis and persistence runtime with crawler, connector, content/entity/fix/opportunity/validation packages. It has its own adapter and configuration surface. Its provider adapters must not be described as active main-app model routes. Some Python model defaults and historical documents reference older generations; their production use and provider availability were not confirmed, so they are excluded from the current main-app model recommendation.

The Social Distribution Engine has its own Docker/Compose and Railway API, worker and beat configuration files. It is an independently tested service with provider OAuth, delivery and multi-tenant concerns. The main app's default Post for Me path does not require deploying this service solely because its files are present.

For a rebuild, retain a separate service only if the selected feature path needs it. Otherwise duplicate queues, provider credentials and databases create extra operational state without improving the editorial product. Any consolidation requires a migration plan for existing records and callbacks; file location alone is not permission to remove a runtime.

Implementation sources: backend; crawler; connectors; Social-Distribtion-Engine-MelloxAI-SDE/README.md; Social-Distribtion-Engine-MelloxAI-SDE/railway.toml

12 Dependencies and resolved versions

The requested ranges come from package.json; resolved versions come from package-lock.json, not a claim that the local install was built or that these are the latest upstream releases. A rebuild should reproduce the lockfile first. Dependencies below are the complete main application dependency list; development tooling is in package.json.

Dependency	Requested	Lockfile
@aws-sdk/client-s3	^3.1149.0	3.1149.0
@aws-sdk/s3-request-presigner	^3.1149.0	3.1149.0
@hookform/resolvers	^5.2.2	5.9.1
@mastra/core	^1.67.0	1.75.0
@mdx-js/loader	^3.1.1	3.1.1
@mdx-js/react	^3.1.1	3.1.1
@mendable/firecrawl-js	^4.40.0	4.45.0
@modelcontextprotocol/sdk	^1.31.0	1.32.1
@next/mdx	^16.4.0	16.4.0
@radix-ui/react-alert-dialog	^1.1.15	1.1.23
@radix-ui/react-avatar	^1.1.11	1.2.6
@radix-ui/react-dialog	^1.1.15	1.1.23
@radix-ui/react-dropdown-menu	^2.1.16	2.1.24
@radix-ui/react-label	^2.1.8	2.1.15
@radix-ui/react-popover	^1.1.15	1.1.23
@radix-ui/react-progress	^1.1.8	1.1.16
@radix-ui/react-select	^2.2.6	2.3.7
@radix-ui/react-slot	^1.2.4	1.3.3
@radix-ui/react-switch	^1.2.6	1.3.7
@radix-ui/react-tabs	^1.1.13	1.1.21
@radix-ui/react-tooltip	^1.2.8	1.2.16
@radix-ui/react-visually-hidden	^1.2.6	1.2.11
@supabase/ssr	^0.12.7	0.12.7
@supabase/supabase-js	^2.110.0	2.114.0
@tailwindcss/postcss	^4.2.1	4.3.3

Dependency	Requested	Lockfile
@tanstack/react-query	^5.83.0	5.102.8
@trigger.dev/sdk	^4.6.2	4.7.3
@types/mdx	^2.0.14	2.0.14
@vercel/analytics	^2.0.1	2.0.1
@vercel/speed-insights	^2.0.0	2.0.0
class-variance-authority	^0.7.1	0.7.1
clsx	^2.1.1	2.1.1
cmdk	^1.1.1	1.1.1
date-fns	^4.1.0	4.4.0
diff	^8.0.4	8.0.4
eventsource-parser	^3.1.0	3.1.1
framer-motion	^12.38.0	12.43.0
jspdf	^4.2.1	4.2.1
lenis	^1.3.26	1.3.26
lucide-react	^0.575.0	0.575.0
mammoth	^1.12.0	1.13.0
next	^16.3.8	16.4.0
pdfjs-dist	^6.1.200	6.3.289
playwright-core	^1.56.0	1.56.0
post-for-me	^2.9.1	2.9.1
postcss	^8.5.6	8.5.27
pptxgenjs	^3.12.0	3.12.0
react	^19.2.0	19.2.8
react-dom	^19.2.0	19.2.8
react-hook-form	^7.71.2	7.87.0
react-markdown	^10.1.0	10.1.0
recharts	^2.15.4	2.15.4
redis	^5.12.1	5.12.1
rehype-sanitize	^6.0.0	6.0.0
rehype-stringify	^10.0.1	10.0.1

Dependency	Requested	Lockfile
remark-gfm	^4.0.1	4.0.1
sharp	^0.35.5	0.35.5
sonner	^2.0.7	2.0.8
stripe	^22.6.2	22.6.2
tailwind-merge	^3.5.0	3.6.0
tailwindcss	^4.2.1	4.3.3
tw-animate-css	^1.3.4	1.4.0
typescript	^5.9.3	5.9.3
undici	^8.10.2	8.11.2
ws	^8.21.0	8.21.3
xlsx	https://cdn.sheetjs.com/xlsx-0.20.3/xlsx-0.20.3.tgz	0.20.3
zod	^3.25.76	3.25.76

Implementation sources: package.json; package-lock.json

13 HTTP API route index

All 159 current API route files are listed. Methods and minimum roles are statically extracted from direct export/option syntax; a blank or "see source" is not permission to call anonymously. Re-exports, custom authentication, RPC middleware and public signed hooks require reading the named route. Input schema names are an index, not a JSON Schema specification.

Route	Methods	Role / source
/api/admin/abuse	GET	see source src/app/api/admin/abuse/route.ts
/api/admin/ai/caps	POST	see source src/app/api/admin/ai/caps/route.ts
/api/admin/ai	GET	see source src/app/api/admin/ai/route.ts
/api/admin/ai/routing	POST	see source src/app/api/admin/ai/routing/route.ts
/api/admin/analytics	GET	see source src/app/api/admin/analytics/route.ts
/api/admin/announcements	GET, POST	see source src/app/api/admin/announcements/route.ts
/api/admin/audit/export	POST	see source src/app/api/admin/audit/export/route.ts
/api/admin/audit	GET	see source src/app/api/admin/audit/route.ts
/api/admin/billing/accounts	GET	see source src/app/api/admin/billing/accounts/route.ts
/api/admin/billing/enforcement	POST	see source src/app/api/admin/billing/enforcement/route.ts
/api/admin/billing/manage	POST	see source src/app/api/admin/billing/manage/route.ts
/api/admin/billing/requests	GET	see source src/app/api/admin/billing/requests/route.ts
/api/admin/billing	GET, POST	see source src/app/api/admin/billing/route.ts
/api/admin/credits	POST	see source src/app/api/admin/credits/route.ts
/api/admin/entitlements/overrides/revoke	POST	see source src/app/api/admin/entitlements/overrides/revoke/route.ts
/api/admin/entitlements/overrides	POST	see source src/app/api/admin/entitlements/overrides/route.ts
/api/admin/entitlements	GET	see source src/app/api/admin/entitlements/route.ts

Route	Methods	Role / source
/api/admin/flags	GET, POST	see source src/app/api/admin/flags/route.ts
/api/admin/health	GET	see source src/app/api/admin/health/route.ts
/api/admin/integrations	GET	see source src/app/api/admin/integrations/route.ts
/api/admin/jobs/cancel	POST	see source src/app/api/admin/jobs/cancel/route.ts
/api/admin/jobs/nudge	POST	see source src/app/api/admin/jobs/nudge/route.ts
/api/admin/jobs	GET	see source src/app/api/admin/jobs/route.ts
/api/admin/lookup	GET	see source src/app/api/admin/lookup/route.ts
/api/admin/me	GET	see source src/app/api/admin/me/route.ts
/api/admin/overview	GET	see source src/app/api/admin/overview/route.ts
/api/admin/security	GET	see source src/app/api/admin/security/route.ts
/api/admin/switches	GET, POST	see source src/app/api/admin/switches/route.ts
/api/admin/team	GET, POST	see source src/app/api/admin/team/route.ts
/api/admin/usage	GET	see source src/app/api/admin/usage/route.ts
/api/admin/users/detail	GET	see source src/app/api/admin/users/detail/route.ts
/api/admin/users/notes	POST	see source src/app/api/admin/users/notes/route.ts
/api/admin/users	GET	see source src/app/api/admin/users/route.ts
/api/admin/users/sessions	POST	see source src/app/api/admin/users/sessions/route.ts
/api/admin/users/suspend	POST	see source src/app/api/admin/users/suspend/route.ts
/api/admin/view/end	POST	see source src/app/api/admin/view/end/route.ts
/api/admin/view	GET	see source src/app/api/admin/view/route.ts

Route	Methods	Role / source
/api/admin/view/start	POST	see source src/app/api/admin/view/start/route.ts
/api/admin/workspaces/access	POST	see source src/app/api/admin/workspaces/access/route.ts
/api/admin/workspaces/detail	GET	see source src/app/api/admin/workspaces/detail/route.ts
/api/admin/workspaces	GET	see source src/app/api/admin/workspaces/route.ts
/api/agent-tasks	POST	see source src/app/api/agent-tasks/route.ts
/api/agents/actions	GET, POST	editor src/app/api/agents/actions/route.ts
/api/agents/findings	GET, POST	editor src/app/api/agents/findings/route.ts
/api/agents/run	POST, GET	editor src/app/api/agents/run/route.ts
/api/agents/runs	GET	see source src/app/api/agents/runs/route.ts
/api/agents/settings	GET, POST	admin src/app/api/agents/settings/route.ts
/api/ai-generate	POST	system, user src/app/api/ai-generate/route.ts
/api/assets/download	POST	see source src/app/api/assets/download/route.ts
/api/assets/library	GET	see source src/app/api/assets/library/route.ts
/api/assets/persist	POST	editor src/app/api/assets/persist/route.ts
/api/assets/sign	POST	see source src/app/api/assets/sign/route.ts
/api/assets/upload	POST	editor src/app/api/assets/upload/route.ts
/api/auth/google/config	GET	see source src/app/api/auth/google/config/route.ts
/api/billing/addons/change	POST	see source src/app/api/billing/addons/change/route.ts
/api/billing/addons/preview	POST	see source src/app/api/billing/addons/preview/route.ts
/api/billing/brands	GET, POST	see source src/app/api/billing/brands/route.ts

Route	Methods	Role / source
/api/billing/checkout	POST	see source src/app/api/billing/checkout/route.ts
/api/billing/entitlements	GET	owner src/app/api/billing/entitlements/route.ts
/api/billing/history	GET	see source src/app/api/billing/history/route.ts
/api/billing/portal	POST	see source src/app/api/billing/portal/route.ts
/api/billing/requests	GET, POST, DELETE	see source src/app/api/billing/requests/route.ts
/api/billing/subscription/cancel	POST	see source src/app/api/billing/subscription/cancel/route.ts
/api/billing/subscription/change	POST	see source src/app/api/billing/subscription/change/route.ts
/api/billing/subscription/pause	POST	see source src/app/api/billing/subscription/pause/route.ts
/api/billing/subscription/preview	POST	see source src/app/api/billing/subscription/preview/route.ts
/api/billing/subscription/resume	POST	see source src/app/api/billing/subscription/resume/route.ts
/api/billing/upgrade-requests	POST, GET, PATCH	see source src/app/api/billing/upgrade-requests/route.ts
/api/billing/wallet	GET	owner src/app/api/billing/wallet/route.ts
/api/brand-extract	POST	see source src/app/api/brand-extract/route.ts
/api/brand-visuals/upload	POST	editor src/app/api/brand-visuals/upload/route.ts
/api/chat	POST	system src/app/api/chat/route.ts
/api/clarify	POST	see source src/app/api/clarify/route.ts
/api/client-errors	POST	see source src/app/api/client-errors/route.ts
/api/file-extract	POST	see source src/app/api/file-extract/route.ts
/api/generate-image	POST	see source src/app/api/generate-image/route.ts
/api/generate-video	POST	see source src/app/api/generate-video/route.ts

Route	Methods	Role / source
/api/geo/scans	POST	editor src/app/api/geo/scans/route.ts
/api/geo/scans/[id]/cancel	POST	editor src/app/api/geo/scans/[id]/cancel/route.ts
/api/geo/scans/[id]	GET	see source src/app/api/geo/scans/[id]/route.ts
/api/health/ready	GET	see source src/app/api/health/ready/route.ts
/api/health	GET	see source src/app/api/health/route.ts
/api/integrations/canva/callback	GET	see source src/app/api/integrations/canva/callback/route.ts
/api/integrations/canva/connect	GET	editor src/app/api/integrations/canva/connect/route.ts
/api/integrations/github/callback	GET	see source src/app/api/integrations/github/callback/route.ts
/api/integrations/github/webhook	POST, GET	see source src/app/api/integrations/github/webhook/route.ts
/api/integrations/google/callback	GET	see source src/app/api/integrations/google/callback/route.ts
/api/integrations/notion/callback	GET	see source src/app/api/integrations/notion/callback/route.ts
/api/integrations/notion/connect	GET	editor src/app/api/integrations/notion/connect/route.ts
/api/integrations/slack/events	POST	see source src/app/api/integrations/slack/events/route.ts
/api/integrations/slack/interactivity	POST	see source src/app/api/integrations/slack/interactivity/route.ts
/api/integrations/slack/oauth/callback	GET	see source src/app/api/integrations/slack/oauth/callback/route.ts
/api/integrations/webflow/callback	GET	see source src/app/api/integrations/webflow/callback/route.ts
/api/integrations/wordpress/callback	GET	see source src/app/api/integrations/wordpress/callback/route.ts
/api/market/intelligence	POST	see source src/app/api/market/intelligence/route.ts
/api/market/latest	GET	see source src/app/api/market/latest/route.ts
/api/market/trends	POST, GET	see source src/app/api/market/trends/route.ts

Route	Methods	Role / source
/api/mcp	OPTIONS, POST, GET, DELETE	see source src/app/api/mcp/route.ts
/api/memory-extract	POST	system, user src/app/api/memory-extract/route.ts
/api/pexels/video	GET	see source src/app/api/pexels/video/route.ts
/api/public/hooks/agents-tick	POST	see source src/app/api/public/hooks/agents-tick/route.ts
/api/public/hooks/analytics-sync	POST, GET	see source src/app/api/public/hooks/analytics-sync/route.ts
/api/public/hooks/billing	POST	see source src/app/api/public/hooks/billing/route.ts
/api/public/hooks/competitor-watch	POST, GET	see source src/app/api/public/hooks/competitor-watch/route.ts
/api/public/hooks/experiments	POST, GET	see source src/app/api/public/hooks/experiments/route.ts
/api/public/hooks/geo-agents	POST, GET	see source src/app/api/public/hooks/geo-agents/route.ts
/api/public/hooks/geo-scans	POST, GET	see source src/app/api/public/hooks/geo-scans/route.ts
/api/public/hooks/kie	POST	see source src/app/api/public/hooks/kie/route.ts
/api/public/hooks/link-catalog	POST, GET	see source src/app/api/public/hooks/link-catalog/route.ts
/api/public/hooks/link-orders	POST, GET	see source src/app/api/public/hooks/link-orders/route.ts
/api/public/hooks/openrouter-video	POST	see source src/app/api/public/hooks/openrouter-video/route.ts
/api/public/hooks/ops-watch	POST	see source src/app/api/public/hooks/ops-watch/route.ts
/api/public/hooks/postforme	POST	see source src/app/api/public/hooks/postforme/route.ts
/api/public/hooks/run-schedules	POST, GET	see source src/app/api/public/hooks/run-schedules/route.ts
/api/public/hooks/sdr	POST	see source src/app/api/public/hooks/sdr/route.ts
/api/public/hooks/sdr-reconcile	POST	see source src/app/api/public/hooks/sdr-reconcile/route.ts
/api/public/hooks/slack	POST	see source src/app/api/public/hooks/slack/route.ts

Route	Methods	Role / source
/api/public/hooks/socialapi	POST	see source src/app/api/public/hooks/socialapi/route.ts
/api/public/hooks/stripe	POST, GET	see source src/app/api/public/hooks/stripe/route.ts
/api/public/hooks/ugc-renders	POST, GET	see source src/app/api/public/hooks/ugc-renders/route.ts
/api/public/share/[slug]	GET, POST	see source src/app/api/public/share/[slug]/route.ts
/api/rpc/[...fn]	POST	see source src/app/api/rpc/[...fn]/route.ts
/api/sdr/accounts	GET	see source src/app/api/sdr/accounts/route.ts
/api/sdr/cancel	POST	editor src/app/api/sdr/cancel/route.ts
/api/sdr/disconnect	POST	editor src/app/api/sdr/disconnect/route.ts
/api/sdr/oauth/start	POST	editor src/app/api/sdr/oauth/start/route.ts
/api/sdr/publications	GET	see source src/app/api/sdr/publications/route.ts
/api/sdr/publish	POST	editor src/app/api/sdr/publish/route.ts
/api/sdr/schedule	POST	editor src/app/api/sdr/schedule/route.ts
/api/sdr/status	GET	see source src/app/api/sdr/status/route.ts
/api/shares	POST	editor src/app/api/shares/route.ts
/api/social/analytics	GET	see source src/app/api/social/analytics/route.ts
/api/social/connect/complete	POST	editor src/app/api/social/connect/complete/route.ts
/api/social/connect/postforme/complete	POST	editor src/app/api/social/connect/postforme/complete/route.ts
/api/social/connect/select	GET, POST	editor src/app/api/social/connect/select/route.ts
/api/social/creator-info	GET	editor src/app/api/social/creator-info/route.ts
/api/social/metrics/sync	POST	editor src/app/api/social/metrics/sync/route.ts

Route	Methods	Role / source
/api/social/retry	POST	editor src/app/api/social/retry/route.ts
/api/social-multi	POST	see source src/app/api/social-multi/route.ts
/api/studio/ideas	POST	editor src/app/api/studio/ideas/route.ts
/api/studio/jobs	POST, GET	editor src/app/api/studio/jobs/route.ts
/api/studio/jobs/[id]/cancel	POST	editor src/app/api/studio/jobs/[id]/cancel/route.ts
/api/studio/jobs/[id]	GET	see source src/app/api/studio/jobs/[id]/route.ts
/api/studio/prompt	POST	editor src/app/api/studio/prompt/route.ts
/api/studio/upload-captions	POST	editor src/app/api/studio/upload-captions/route.ts
/api/ugc/models	GET	see source src/app/api/ugc/models/route.ts
/api/ugc/products/extract	POST	editor src/app/api/ugc/products/extract/route.ts
/api/ugc/projects	GET, POST	editor src/app/api/ugc/projects/route.ts
/api/ugc/projects/[id]/concepts	POST	editor src/app/api/ugc/projects/[id]/concepts/route.ts
/api/ugc/projects/[id]/notes	POST	editor src/app/api/ugc/projects/[id]/notes/route.ts
/api/ugc/projects/[id]	GET, PATCH, DELETE	editor src/app/api/ugc/projects/[id]/route.ts
/api/ugc/references/import	POST	editor src/app/api/ugc/references/import/route.ts
/api/ugc/references/upload	POST	editor src/app/api/ugc/references/upload/route.ts
/api/ugc/renders	POST	editor src/app/api/ugc/renders/route.ts
/api/ugc/renders/[id]/cancel	POST	editor src/app/api/ugc/renders/[id]/cancel/route.ts
/api/ugc/renders/[id]/download	GET	see source src/app/api/ugc/renders/[id]/download/route.ts
/api/ugc/renders/[id]/post-draft	POST	editor src/app/api/ugc/renders/[id]/post-draft/route.ts

Route	Methods	Role / source
/api/ugc/renders/[id]	GET	see source src/app/api/ugc/renders/[id]/route.ts
/api/unsplash/random	GET	see source src/app/api/unsplash/random/route.ts

Implementation sources: src/app/api

14 Server function registry index

The transport is /api/rpc/<module>/<export>. Only modules in fns/index.ts are reachable through the generic resolver, and only exports marked as actual server functions resolve. The list below statically finds createServerFn exports in source files; inspect index.ts before treating any file as registered. Schemas and role checks are in the cited source.

src/server/fns/analytics.ts

getAnalyticsSummary, getAnalyticsDrilldown, getAnalyticsReport, getAnalyticsInsights, refreshAnalyticsInsights, getAnalyticsChatContext

src/server/fns/audience.ts

getAudienceStatus, getAudience, buildAudience, saveAudienceGroup, removeAudienceGroup, getAudienceScores, getContentAudience, predictContent, startAudienceCheck, startAudienceComparison, startAudienceRanking, getAudienceRun, cancelAudienceRun, listAudiencePredictions

src/server/fns/autopilot.ts

getAutopilotStatus, getAutopilot, suggestAutopilotStrategy, startAutopilot, updateAutopilot, setAutopilotPaused, stopAutopilot, approveAutopilotPlan, decideAutopilotAction, retryAutopilotAction, decideOpportunity, getAgencyAutopilot

src/server/fns/brain.ts

getBrainOverview

src/server/fns/brand-dna.ts

getBrandDna, saveBrandDna

src/server/fns/brand-visuals.ts

restoreManualVisualLook, editVisualArtwork, learnVisualReferences, getVisualTaste, scanVisualWebsite, addVisualReference, updateVisualReference, saveVisualDirection, giveVisualFeedback, cancelVisualScan

src/server/fns/campaign-generation.ts

generateCampaignBrief

src/server/fns/canva.ts

getCanvaConnection, startCanvaConnect, completeCanvaConnect, removeCanvaConnection, createCanvaEdit, getCanvaEditState, importCanvaVersion, selectCanvaVersionAction, restoreCanvaOriginalAction

src/server/fns/chat-actions.ts

getChatActions, runChatAction

src/server/fns/coach.ts

getCoachBriefing

src/server/fns/competitor-intel.ts

startCompetitorIntel, getCompetitorIntelRun, listCompetitorIntelRuns

src/server/fns/competitor-watch.ts

listCompetitorWatches, addCompetitorWatch, removeCompetitorWatch, toggleCompetitorWatch, runCompetitorWatchNow, listCompetitorAlerts, markCompetitorAlertsRead

src/server/fns/competitors.ts

getCompetitorOverview, discoverCompetitors, bootstrapCompetitors, addCompetitor, setCompetitorStatus, trackCompetitors, refreshCompetitor, markCompetitorUpdatesRead, removeCompetitor

src/server/fns/connectors.ts

getConnectors, startGithubInstall, completeGithubInstall, verifyConnection, disconnectConnection, listGithubRepositories, selectGithubRepository, updateSource, removeSource, inspectSource, verifySourceOwnership, attestSourceOwnership, setAgentConsent, getSiteSource

src/server/fns/content.ts

listContentItems, createContentItem, updateContentItem, deleteContentItem, rescheduleContentItem, regenerateContentItem, generateContentBatch, planContentCalendar, setContentPlanDate, setContentItemStatus, listAgencyFeed, suggestNextSteps, generateNextPost

src/server/fns/experiments.ts

getProofEngineStatus, getExperimentsOverview, getExperiment, getDelivery, detectPageGroups, checkGroupEligibility, prepareGroupSetup, approveGroupSetup, discardDelivery, suggestHypotheses, createExperiment, retryPrepare, editExperimentValue, refreshShip, approveExperiment, discardExperiment, cancelExperiment, stopExperiment, prepareDecision, approveDecision, keepExperiment, closeExperiment, setReportBranding, getExperimentReport

src/server/fns/geo-aeo-audit.ts

runGeoAeoAudit

src/server/fns/geo-agent.ts

startAgentRun, getAgentRun, getAgentRunForFinding, listAgentRuns, approveAgentPlan, reviseAgentPlan, submitAgentInputs, cancelAgentRun, retryAgentRun

src/server/fns/geo-fixes.ts

getFixAvailability, listFixBranches, previewFix, createFixProposal, getFixProposal, approveFixProposal, undoCmsFix, getSiteConnections, getCmsFixAll, startCmsFixAll, applyCmsFixAll, discardFixProposal, requestVerification, getVerification, getFixAllPreflight, createFixBatch, getFixBatch, approveFixBatch, mergeFixBatch, mergeFixProposal, discardFixBatch, getFixImpact, listFixActivity

src/server/fns/geo.ts

listScans, getScanFindings, getScanPages, getScanPage, compareScans, setFindingState, bulkSetFindingStates, markFindingsReviewed, listMonitors, saveMonitor, deleteMonitor, getGeoSettings

src/server/fns/google-analytics.ts

getGoogleConnection, startGoogleConnect, completeGoogleConnect, listGa4Properties, listGscSites, selectGa4Property, selectGscSite, removeAnalyticsSource, disconnectGoogle, syncAnalyticsNow, getSyncStatus

src/server/fns/insights.ts

getGeoTrend, refreshSuggestions, upsertMemoryInsights, listMemoryInsights

src/server/fns/links.ts

getOverview, findPlacements, suggestLinkText, writeBrief, saveSelection, getOrder, confirmOrder, discardDraft, recheckPlacement, getCreditHistory

src/server/fns/mcp.ts

getMcpSettings, updateMcpSettings, listMcpActivity

src/server/fns/memory.ts

getMemoryStatus, getMemory, addMemory, editMemory, removeMemory, restoreMemory, clearMemory, setMemoryEnabled, proposeMemories

src/server/fns/notion.ts

getNotionConnection, startNotionConnect, disconnectNotion, listNotionDestinations, selectNotionDestination, createNotionDestination, exportToNotion, previewNotionImport, importFromNotion, syncNotionNow, listNotionConflicts, resolveNotionConflict

src/server/fns/publish.ts

getPublishQueue

src/server/fns/schedules.ts

listScheduledJobs, createScheduledJob, updateScheduledJob, deleteScheduledJob, runScheduledJobNow

src/server/fns/site-publishing.ts

previewArticlePublish, publishArticle, getArticlePublication, cancelArticlePublication, recheckArticlePublication, setupSiteBlog

src/server/fns/slack.ts

getSlackConnection, startSlackConnect, listSlackChannels, setSlackChannel, setSlackPreferences, createSlackLinkCode, sendSlackTest, disconnectSlack

src/server/fns/stories.ts

getStoriesStatus, shareVideoAsStory, shareStoryAsReel, getStoryAnalytics

src/server/fns/strategy.ts

getStrategy, generateStrategy, saveStrategy

src/server/fns/tracked-prompts.ts

getTrackedPrompts, suggestTrackedPrompts, addTrackedPrompt, setTrackedPromptPaused, deleteTrackedPrompt, checkTrackedPromptNow

src/server/fns/webflow.ts

getWebflowConnection, startWebflowConnect, completeWebflowConnect, refreshWebflowSites, selectWebflowSite, disconnectWebflow, getWebflowData

src/server/fns/wordpress.ts

getWordPressConnection, connectWordPress, startWordPressOAuth, completeWordPressOAuth, refreshWordPress, selectWordPressSite, disconnectWordPress, getWordPressData, publishWordPress

src/server/fns/workspaces.ts

renameWorkspace, getWorkspaceDetails, listApprovals, decideApproval, createWorkspace, listWorkspaces, deleteWorkspace, ensureAuthWorkspace, acceptWorkspaceInvite, getWorkspaceMemberProfiles, createWorkspaceInvite, revokeWorkspaceInvite, updateWorkspaceMemberRole, removeWorkspaceMember

Implementation sources: src/server/fns/index.ts; src/server/fns

15 Page and route surface index

These are file-system page entry points, including public/auth, workspace, staff and development labs. Route groups in parentheses are source structure and do not appear in the public URL. Dynamic parameters need real IDs. A lab page is not a commercial feature merely because it exists.

Route expression	Owning source
/(marketing)/about	src/app/(marketing)/about/page.tsx
/(marketing)/about/[slug]	src/app/(marketing)/about/[slug]/page.tsx
/(marketing)/blog	src/app/(marketing)/blog/page.tsx
/(marketing)/blog/[slug]	src/app/(marketing)/blog/[slug]/page.tsx
/(marketing)/changelog	src/app/(marketing)/changelog/page.tsx
/(marketing)/compare	src/app/(marketing)/compare/page.tsx
/(marketing)/contact	src/app/(marketing)/contact/page.tsx
/(marketing)/contact/partner	src/app/(marketing)/contact/partner/page.tsx
/(marketing)/contact/press	src/app/(marketing)/contact/press/page.tsx
/(marketing)/cookies	src/app/(marketing)/cookies/page.tsx
/(marketing)/demo	src/app/(marketing)/demo/page.tsx
/(marketing)/docs	src/app/(marketing)/docs/page.tsx
/(marketing)/faq	src/app/(marketing)/faq/page.tsx
/(marketing)/features/[slug]	src/app/(marketing)/features/[slug]/page.tsx
/(marketing)/integrations	src/app/(marketing)/integrations/page.tsx
/(marketing)	src/app/(marketing)/page.tsx
/(marketing)/pricing	src/app/(marketing)/pricing/page.tsx
/(marketing)/privacy	src/app/(marketing)/privacy/page.tsx
/(marketing)/safety	src/app/(marketing)/safety/page.tsx
/(marketing)/security	src/app/(marketing)/security/page.tsx
/(marketing)/terms	src/app/(marketing)/terms/page.tsx
/(marketing)/use-cases/[slug]	src/app/(marketing)/use-cases/[slug]/page.tsx
/admin/(console)/abuse	src/app/admin/(console)/abuse/page.tsx
/admin/(console)/ai	src/app/admin/(console)/ai/page.tsx
/admin/(console)/analytics	src/app/admin/(console)/analytics/page.tsx
/admin/(console)/announcements	src/app/admin/(console)/announcements/page.tsx

Route expression	Owning source
/admin/(console)/audit	src/app/admin/(console)/audit/page.tsx
/admin/(console)/emergency	src/app/admin/(console)/emergency/page.tsx
/admin/(console)/flags	src/app/admin/(console)/flags/page.tsx
/admin/(console)/health	src/app/admin/(console)/health/page.tsx
/admin/(console)/integrations	src/app/admin/(console)/integrations/page.tsx
/admin/(console)/jobs	src/app/admin/(console)/jobs/page.tsx
/admin/(console)	src/app/admin/(console)/page.tsx
/admin/(console)/plans	src/app/admin/(console)/plans/page.tsx
/admin/(console)/security	src/app/admin/(console)/security/page.tsx
/admin/(console)/support	src/app/admin/(console)/support/page.tsx
/admin/(console)/team	src/app/admin/(console)/team/page.tsx
/admin/(console)/usage	src/app/admin/(console)/usage/page.tsx
/admin/(console)/users	src/app/admin/(console)/users/page.tsx
/admin/(console)/users/[id]	src/app/admin/(console)/users/[id]/page.tsx
/admin/(console)/view/[id]	src/app/admin/(console)/view/[id]/page.tsx
/admin/(console)/workspaces	src/app/admin/(console)/workspaces/page.tsx
/admin/(console)/workspaces/[id]	src/app/admin/(console)/workspaces/[id]/page.tsx
/admin/billing	src/app/admin/billing/page.tsx
/admin-lab	src/app/admin-lab/page.tsx
/agency	src/app/agency/page.tsx
/analytics	src/app/analytics/page.tsx
/analytics-lab	src/app/analytics-lab/page.tsx
/app/analytics	src/app/app/analytics/page.tsx
/app/chat/[conversationId]	src/app/app/chat/[conversationId]/page.tsx
/app/content	src/app/app/content/page.tsx
/app/library	src/app/app/library/page.tsx
/app	src/app/app/page.tsx
/app/seo	src/app/app/seo/page.tsx
/app/social/connected	src/app/app/social/connected/page.tsx
/app/social	src/app/app/social/page.tsx

Route expression	Owning source
/audience-lab	src/app/audience-lab/page.tsx
/auth/callback	src/app/auth/callback/page.tsx
/auth/confirm	src/app/auth/confirm/page.tsx
/autopilot-lab	src/app/autopilot-lab/page.tsx
/brain-lab	src/app/brain-lab/page.tsx
/calendar	src/app/calendar/page.tsx
/calendar-lab	src/app/calendar-lab/page.tsx
/canva-lab	src/app/canva-lab/page.tsx
/chat-lab	src/app/chat-lab/page.tsx
/command-center-lab	src/app/command-center-lab/page.tsx
/connections-lab	src/app/connections-lab/page.tsx
/content	src/app/content/page.tsx
/integrations/canva/callback	src/app/integrations/canva/callback/page.tsx
/integrations/github/callback	src/app/integrations/github/callback/page.tsx
/integrations/google/callback	src/app/integrations/google/callback/page.tsx
/integrations/notion/result	src/app/integrations/notion/result/page.tsx
/integrations/webflow/callback	src/app/integrations/webflow/callback/page.tsx
/integrations/wordpress/callback	src/app/integrations/wordpress/callback/page.tsx
/layout-lab	src/app/layout-lab/page.tsx
/library	src/app/library/page.tsx
/links-lab	src/app/links-lab/page.tsx
/login	src/app/login/page.tsx
/memory-lab	src/app/memory-lab/page.tsx
/oauth/consent	src/app/oauth/consent/page.tsx
/onboarding	src/app/onboarding/page.tsx
/projects	src/app/projects/page.tsx
/projects-lab	src/app/projects-lab/page.tsx
/promo-lab	src/app/promo-lab/page.tsx
/reset-password	src/app/reset-password/page.tsx
/share/[slug]	src/app/share/[slug]/page.tsx

Route expression	Owning source
/signup	src/app/signup/page.tsx
/start	src/app/start/page.tsx
/studio	src/app/studio/page.tsx
/studio-lab	src/app/studio-lab/page.tsx
/tour-lab	src/app/tour-lab/page.tsx
/upgrade-lab	src/app/upgrade-lab/page.tsx
/visual-taste-lab	src/app/visual-taste-lab/page.tsx
/w/[workspaceId]/app/audience	src/app/w/[workspaceId]/app/audience/page.tsx
/w/[workspaceId]/app/autopilot	src/app/w/[workspaceId]/app/autopilot/page.tsx
/w/[workspaceId]/app/backlinks	src/app/w/[workspaceId]/app/backlinks/page.tsx
/w/[workspaceId]/app/brain	src/app/w/[workspaceId]/app/brain/page.tsx
/w/[workspaceId]/app/brand-kit	src/app/w/[workspaceId]/app/brand-kit/page.tsx
/w/[workspaceId]/app/chat/[conversationId]	src/app/w/[workspaceId]/app/chat/[conversationId]/page.tsx
/w/[workspaceId]/app/competitors	src/app/w/[workspaceId]/app/competitors/page.tsx
/w/[workspaceId]/app/experiments	src/app/w/[workspaceId]/app/experiments/page.tsx
/w/[workspaceId]/app	src/app/w/[workspaceId]/app/page.tsx
/w/[workspaceId]/onboarding	src/app/w/[workspaceId]/onboarding/page.tsx
/w/[workspaceId]	src/app/w/[workspaceId]/page.tsx
/workspace	src/app/workspace/page.tsx
/workspace-lab	src/app/workspace-lab/page.tsx
/workspaces	src/app/workspaces/page.tsx

Implementation sources: src/app

16 Source ledger and verification limits

Repository-relative paths below identify the owning implementation. The companion source folder includes an extracted inventory and SHA-256 hashes for source files and migrations. The inventory is a static extraction, not a database dump or a successful production test. Generated database types describe their checked-in state; migrations define actual SQL constraints, defaults and policies.

The Mellox connector failed with an internal error. The public site could not be fetched by the web tool or local network, and browser initialization was unavailable. Consequently public-site rendering, deployed commit, enabled credentials, vendor approvals, production schema, invoices, real usage and exact Railway service topology were not independently inspected. The local marketing implementation was used as a secondary source. No live provider generation or publication was triggered.

Source	SHA-256 prefix
Dockerfile	430225c9b5bc79c7
next.config.ts	bc5ebc3b26f710f9
src/app	directory reference
src/server	directory reference
backend	directory reference
Social-Distribtion-Engine-MelloxAI-SDE	directory reference
docs/repository-layout.md	6ed2189f680847bc
src/app/providers.tsx	d39037cc3b594d83
src/app/AppProviders.tsx	7ad97f4926e8adaa
src/lib/workspace	directory reference
src/components/app	directory reference
node_modules/next/dist/docs/01-app/01-getting-started/05-server-and-client-components.md	c08524a1483abbda
src/server/route.ts	391e0eb6fa6c43a7
src/server/server-fn.ts	8547a5c5ce5d83b9
src/server/fns/index.ts	84639cd2980d7fce
src/app/api/rpc	directory reference
src/server/request-context.ts	3926d1867f4e6ee4
supabase/migrations	directory reference
src/integrations/supabase/types.ts	2c6c5e758669115b
src/integrations/supabase/client.user.server.ts	6eeedbfe236a5e14
src/integrations/supabase/client.server.ts	367dae237158b834
src/app/api/public/hooks/run-schedules/route.ts	8f479418bbf8ff6e

Source	SHA-256 prefix
src/server/cron.ts	a6ba76d8d76537e4
src/server/studio/runner.server.ts	cbee09d7f87b6aa2
src/server/ugc/providers/routed.server.ts	042c0785447c2538
src/lib/postforme	directory reference
src/server/assets/storage.server.ts	5f20083ebbddc447
src/server/assets	directory reference
src/app/api/assets/download/route.ts	3faa81c7157ca0f9
docs/storage.md	a019ec513b248c76
docs/storage-migration.md	890c6f55243cb487
src/server/env.ts	a814c54a60a11cb0
src/lib/feature-flags.ts	e56ac35e17629593
src/server/connectors	directory reference
src/server/analytics	directory reference
src/server/billing	directory reference
docs/self-hosted-integrations.md	20fc25ab6c39c75d
src/server/connectors/canva	directory reference
src/server/connectors/notion	directory reference
src/server/analytics/google	directory reference
docs/canva-integration.md	3a4e314a5a82741a
docs/notion-integration.md	d34c7c9352c3f010
src/lib/geo/analyze-page.ts	c67fb52a512c5a79
src/lib/geo/rules.ts	7b3c2594c6f5bf4a
src/lib/geo/score.ts	fb15eea103344041
src/lib/geo/types.ts	d6d7268da86425d6
src/server/geo	directory reference
src/server/safe-fetch.ts	9f217ee77851db86
crawler	directory reference
connectors	directory reference
Social-Distribtion-Engine-MelloxAI-SDE/README.md	2ac5e3a6d2740330
Social-Distribtion-Engine-MelloxAI-SDE/railway.toml	025c5c2363a1b635

Source	SHA-256 prefix
package.json	c6995b00a40c90b8
package-lock.json	3128315607b265d7
src/app/api	directory reference
src/server/fns	directory reference