

MINI ASSESSMENT

API ERROR HANDLING AND SAFE JSON ACCESS

Name	DODDI SRICHARAN RAO
Reg. No.	99230040099
Department	CSE – AIML

1. If an API returns 429, what should your program do?

Answer: A 429 means too many requests. The program should wait and retry later. It should use the Retry-After value when available and use backoff if it is not available.


2. If `response.json()` fails, what should your program do?

Answer: The program should catch the JSON parsing error instead of crashing. It should handle the invalid response safely and continue or stop in a controlled way.

3. If a JSON key is missing, why might `.get()` be safer than `[]`?

Answer: `data.get("key")` is safer because it returns `None` or a default value when the key is missing. `data["key"]` raises a `KeyError`.

FLOWCHART — SAFE API RESPONSE HANDLING

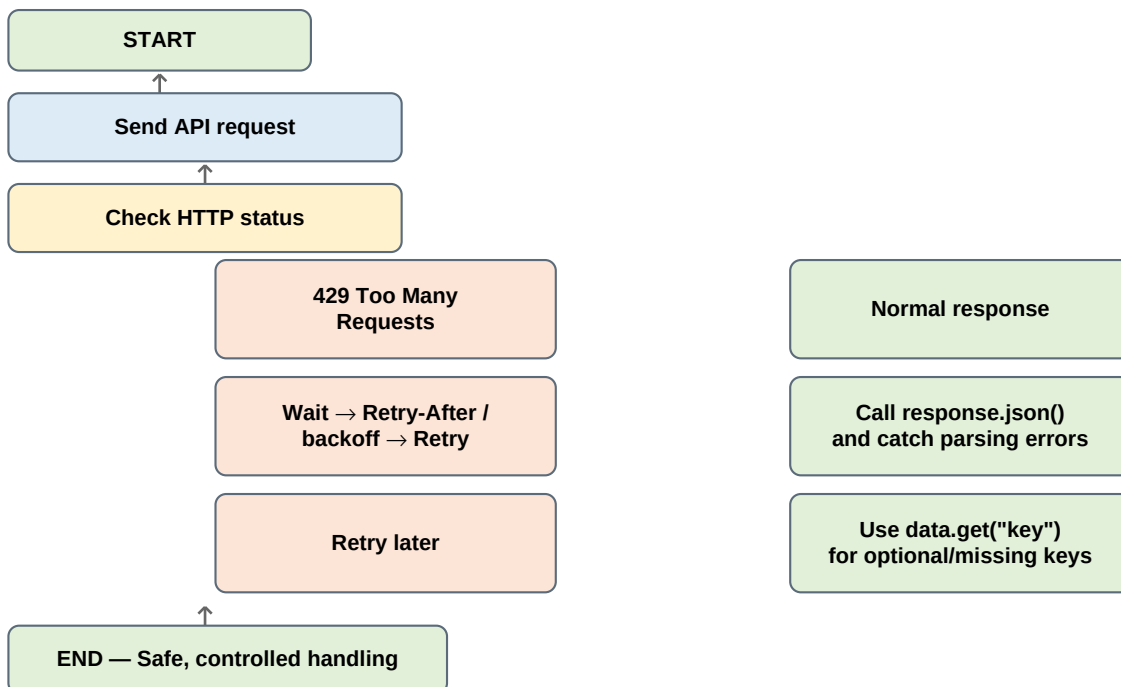

KEY TAKEAWAY

Good API programs should safely handle rate limits, invalid responses, and missing JSON fields.