

## Import Libraries

```
In [2]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
```

## Import Data

```
In [4]: data=pd.read_csv(r'C:\Users\HP\Downloads\Inc_Exp_Data.csv')
data
```

Out[4]:

	Mthly_HH_Income	Mthly_HH_Expense	No_of_Fly_Members	Emi_or_Rent_Amt	Annu
0	5000	8000	3	2000	
1	6000	7000	2	3000	
2	10000	4500	2	0	
3	10000	2000	1	0	
4	12500	12000	2	3000	
5	14000	8000	2	0	
6	15000	16000	3	35000	
7	18000	20000	5	8000	
8	19000	9000	2	0	
9	20000	9000	4	0	
10	20000	18000	4	8000	
11	22000	25000	6	12000	
12	23400	5000	3	0	
13	24000	10500	6	0	
14	24000	10000	4	0	
15	25000	12300	3	0	
16	25000	20000	3	3500	
17	25000	10000	6	0	
18	29000	6600	2	2000	
19	30000	13000	4	0	
20	30500	25000	5	5000	
21	32000	15000	4	0	
22	34000	19000	6	0	
23	34000	25000	3	4000	
24	35000	12000	3	0	
25	35000	25000	4	0	
26	39000	8000	4	0	
27	40000	10000	4	0	
28	42000	15000	4	0	
29	43000	12000	4	0	
30	45000	25000	6	0	
31	45000	40000	6	3500	
32	45000	10000	2	1000	

	Mthly_HH_Income	Mthly_HH_Expense	No_of_Fly_Members	Emi_or_Rent_Amt	Annu
33	45000	22000	4	2500	
34	46000	25000	5	3500	
35	47000	15000	7	0	
36	50000	20000	4	0	
37	50500	20000	3	0	
38	55000	45000	6	12000	
39	60000	10000	3	0	
40	60000	50000	6	10000	
41	65000	20000	4	5000	
42	70000	9000	2	0	
43	80000	20000	4	0	
44	85000	25000	5	0	
45	90000	48000	7	0	
46	98000	25000	5	0	
47	100000	30000	6	0	
48	100000	50000	4	20000	
49	100000	40000	6	10000	

## Analyzing the Data

In [6]: `data.info()`

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 50 entries, 0 to 49
Data columns (total 7 columns):
#   Column                                Non-Null Count  Dtype
---  -
0   Mthly_HH_Income                      50 non-null    int64
1   Mthly_HH_Expense                     50 non-null    int64
2   No_of_Fly_Members                    50 non-null    int64
3   Emi_or_Rent_Amt                      50 non-null    int64
4   Annual_HH_Income                     50 non-null    int64
5   Highest_Qualified_Member             50 non-null    object
6   No_of_Earning_Members                50 non-null    int64
dtypes: int64(6), object(1)
memory usage: 2.9+ KB
```

In [7]: `data.head()`

Out[7]:

	Mthly_HH_Income	Mthly_HH_Expense	No_of_Fly_Members	Emi_or_Rent_Amt	Annua
0	5000	8000	3	2000	
1	6000	7000	2	3000	
2	10000	4500	2	0	
3	10000	2000	1	0	
4	12500	12000	2	3000	

In [8]: `data.shape`

Out[8]: (50, 7)

In [9]: `data.describe()`

Out[9]:

	Mthly_HH_Income	Mthly_HH_Expense	No_of_Fly_Members	Emi_or_Rent_Amt	Ar
<b>count</b>	50.000000	50.000000	50.000000	50.000000	
<b>mean</b>	41558.000000	18818.000000	4.060000	3060.000000	
<b>std</b>	26097.908979	12090.216824	1.517382	6241.434948	
<b>min</b>	5000.000000	2000.000000	1.000000	0.000000	
<b>25%</b>	23550.000000	10000.000000	3.000000	0.000000	
<b>50%</b>	35000.000000	15500.000000	4.000000	0.000000	
<b>75%</b>	50375.000000	25000.000000	5.000000	3500.000000	
<b>max</b>	100000.000000	50000.000000	7.000000	35000.000000	

In [10]: `data.describe().T`

Out[10]:

	count	mean	std	min	25%	50%
<b>Mthly_HH_Income</b>	50.0	41558.00	26097.908979	5000.0	23550.0	35000.0
<b>Mthly_HH_Expense</b>	50.0	18818.00	12090.216824	2000.0	10000.0	15500.0
<b>No_of_Fly_Members</b>	50.0	4.06	1.517382	1.0	3.0	4.0
<b>Emi_or_Rent_Amt</b>	50.0	3060.00	6241.434948	0.0	0.0	0.0
<b>Annual_HH_Income</b>	50.0	490019.04	320135.792123	64200.0	258750.0	447420.0
<b>No_of_Earning_Members</b>	50.0	1.46	0.734291	1.0	1.0	1.0

In [11]: `data.isna().any().any()`

Out[11]: False

```
In [12]: data.isna().any()
```

```
Out[12]: Mthly_HH_Income      False
Mthly_HH_Expense      False
No_of_Fly_Members      False
Emi_or_Rent_Amt      False
Annual_HH_Income      False
Highest_Qualified_Member  False
No_of_Earning_Members  False
dtype: bool
```

## Mean

```
In [14]: data["Mthly_HH_Expense"].mean()
```

```
Out[14]: 18818.0
```

## Median

```
In [16]: data["Mthly_HH_Expense"].median()
```


```
Out[16]: 15500.0
```

```
In [17]: mth_exp_temp=pd.crosstab(index=data["Mthly_HH_Expense"],columns="count")
mth_exp_temp.reset_index(inplace=True)
mth_exp_temp[mth_exp_temp['count'] == data.Mthly_HH_Expense.value_counts().max()]
```

```
Out[17]:
```

col_0	Mthly_HH_Expense	count
18	25000	8

```
In [18]: data["Highest_Qualified_Member"].value_counts().plot(kind="bar")
plt.show()
```

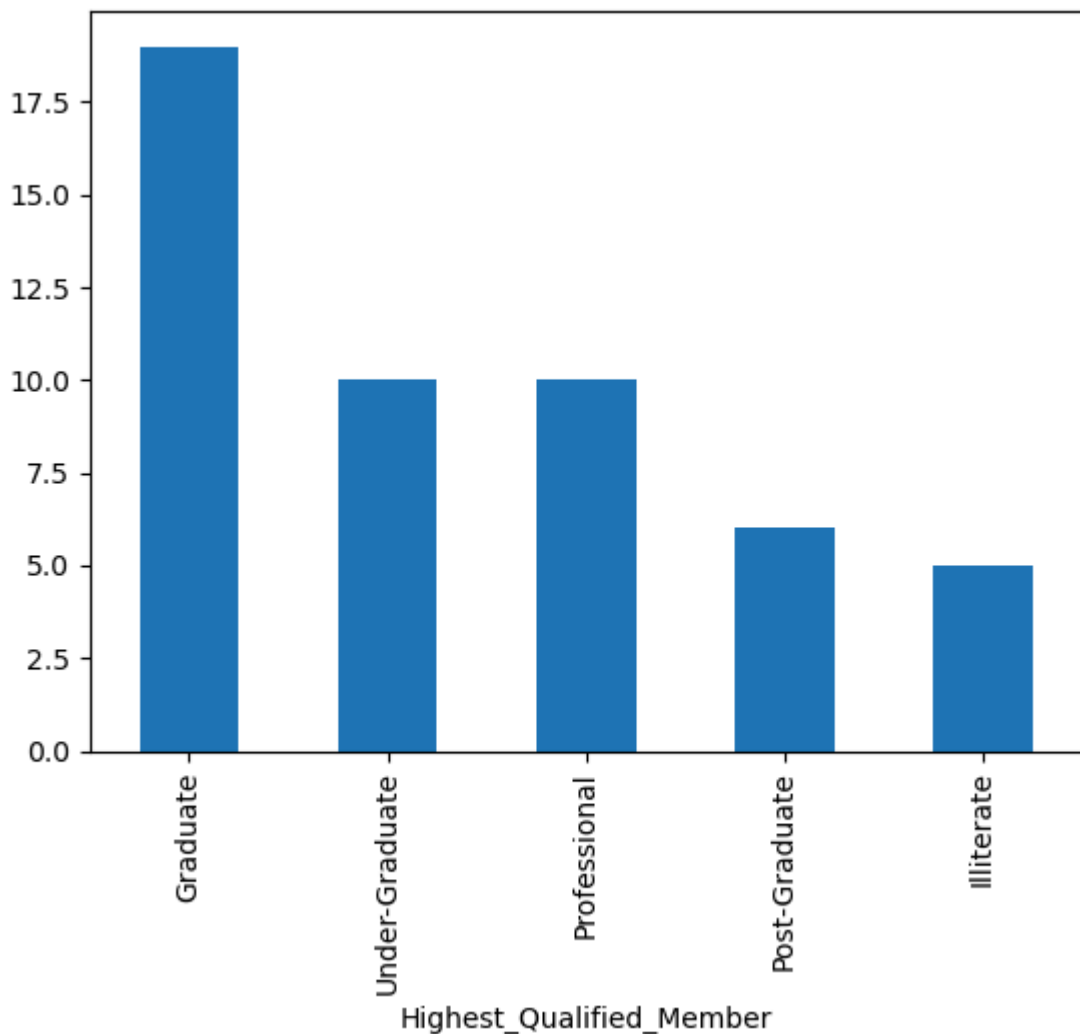

```
In [26]: mth_exp_temp=pd.crosstab(index=data["Mthly_HH_Expense"],columns="count")
mth_exp_temp.reset_index(inplace=True)
mth_exp_temp[mth_exp_temp['count'] == data.Mthly_HH_Expense.value_counts().max()]
```


```
Out[26]:
```

col_0	Mthly_HH_Expense	count
18	25000	8

## IQR [InterQuartile Range]

```
In [20]: data.plot(x="Mthly_HH_Income", y="Mthly_HH_Expense")
IQR=data["Mthly_HH_Expense"].quantile(0.75)-data["Mthly_HH_Expense"].quantile(0.25)
IQR
```

```
Out[20]: 15000.0
```

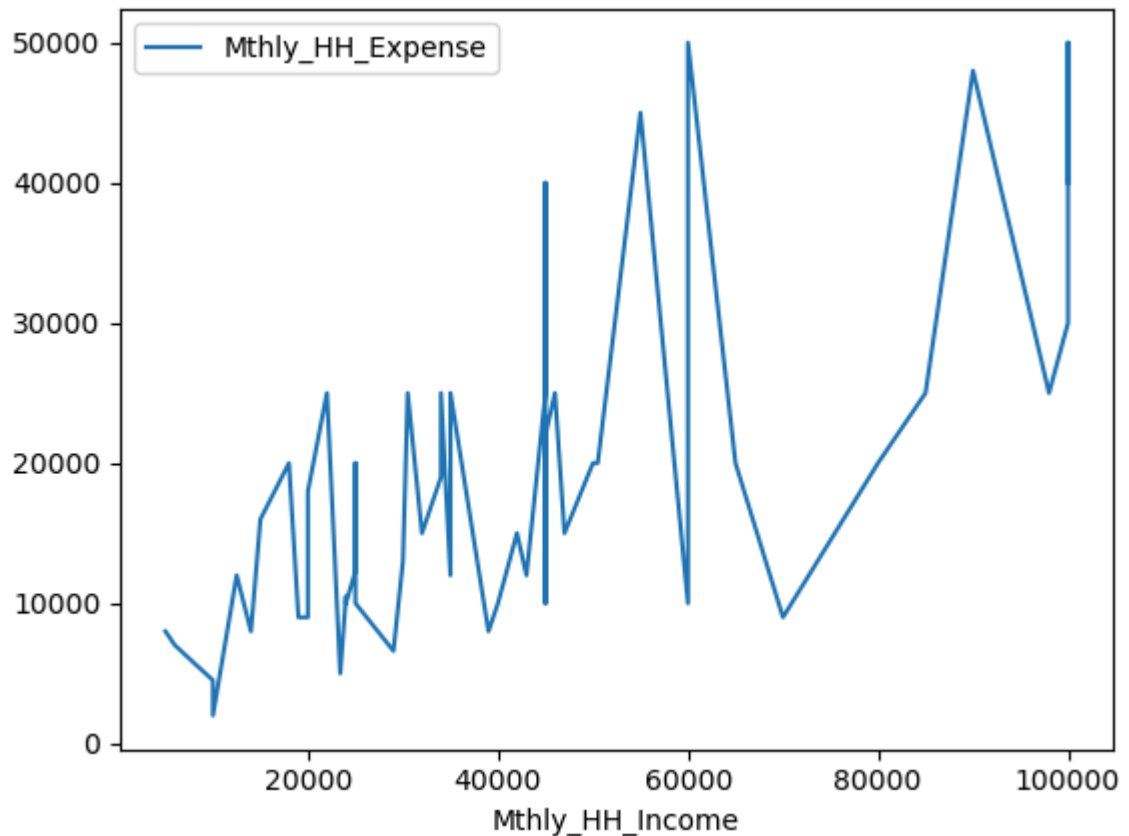

## Standard Deviation

```
In [24]: pd.DataFrame(data.iloc[:,0:5].std().to_frame()).T
```

```
Out[24]:
```

	Mthly_HH_Income	Mthly_HH_Expense	No_of_Fly_Members	Emi_or_Rent_Amt	Annua
0	26097.908979	12090.216824	1.517382	6241.434948	3

## Variance

```
In [29]: pd.DataFrame(data.iloc[:,0:4].var().to_frame()).T
```

```
Out[29]:
```

	Mthly_HH_Income	Mthly_HH_Expense	No_of_Fly_Members	Emi_or_Rent_Amt
0	6.811009e+08	1.461733e+08	2.302449	3.895551e+07


```
In [31]: data["Highest_Qualified_Member"].value_counts().to_frame().T
```

```
Out[31]:
```

Highest_Qualified_Member	Graduate	Under-Graduate	Professional	Post-Graduate	Illiterate
count	19	10	10	6	5

```
In [33]: data["No_of_Earning_Members"].value_counts().plot(kind="bar")
```

```
Out[33]: <Axes: xlabel='No_of_Earning_Members'>
```

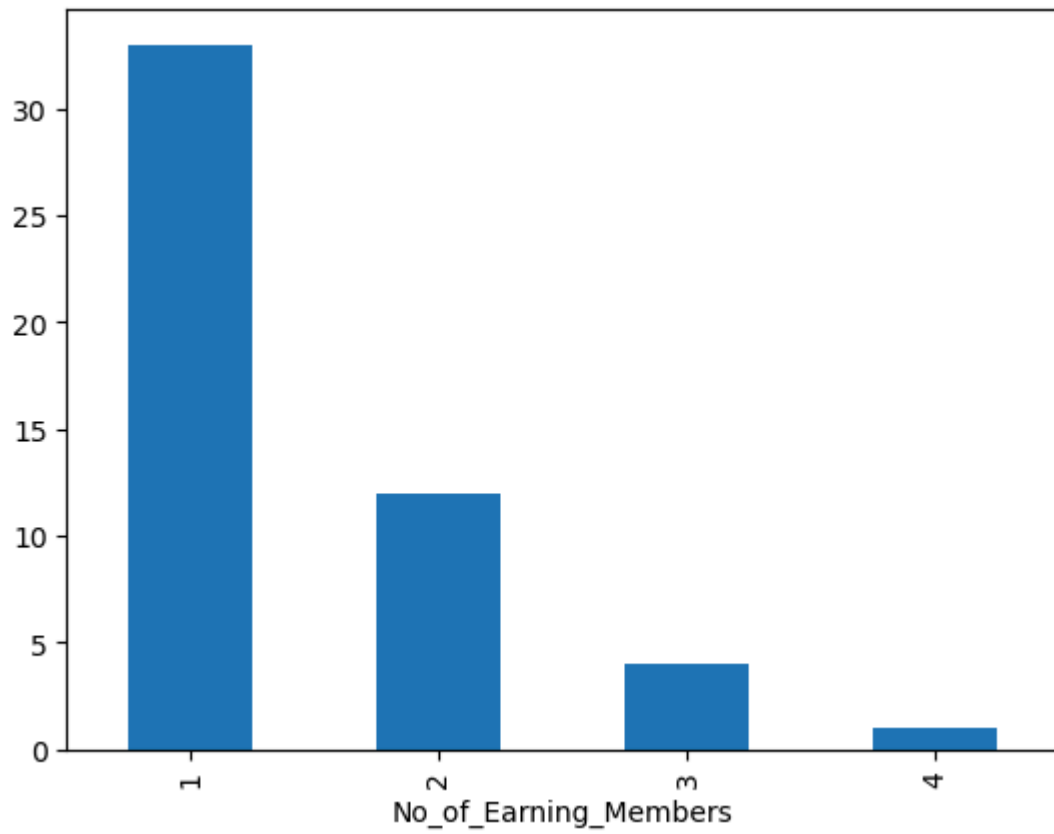

```
In [35]: Coeff_of_var_StockA=10/15  
print(Coeff_of_var_StockA)  
Coeff_of_var_StockB=5/10  
print(Coeff_of_var_StockB)
```

```
0.6666666666666666
```

```
0.5
```

```
In [ ]:
```