



i is read to determine the element
in which the value will be stored, 0 in this case



The value is stored in data[0],
skipping 0 elements and placing the
data there...

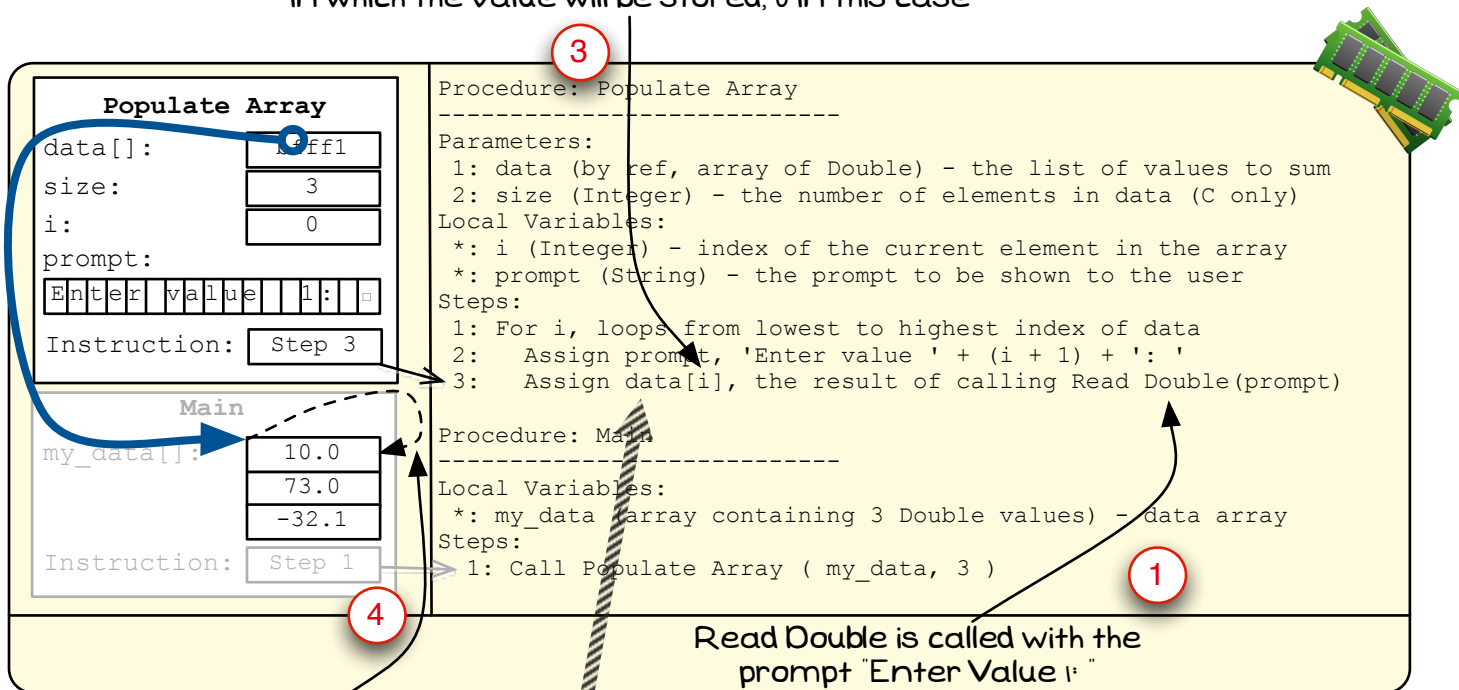

Read Double is called with the
prompt "Enter Value 1: "

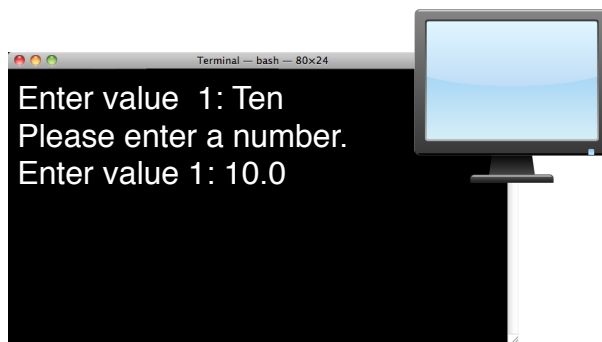

Read Double reads a number
from the user, and performs
basic validation

2