Main is loaded onto
the Stack

(1)

```
Main
```
val: `207`

range: `167.0192371`

Current Instruction:
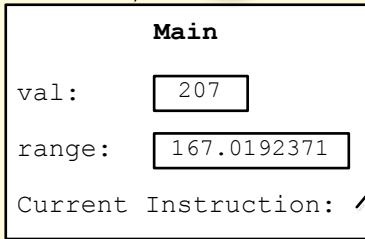
```
-----------------------------
Procedure: Write Procedure
-----------------------------
...

Program: Test Assignment
-----------------------------
Variables:
 * val (Integer)
 * range (Double)
Steps:
 1: Assign to val, 23
 2: Assign to range, 1 + val / 100
 3: Output val and range to the Terminal
```

Variables are allocated
space on the Stack
within Main

(2)

Terminal — bash — 80×24