

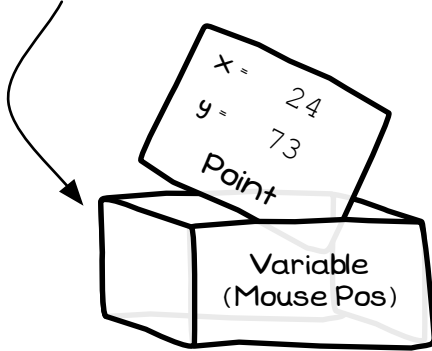


Values can be records like a Point record with X and Y coordinates

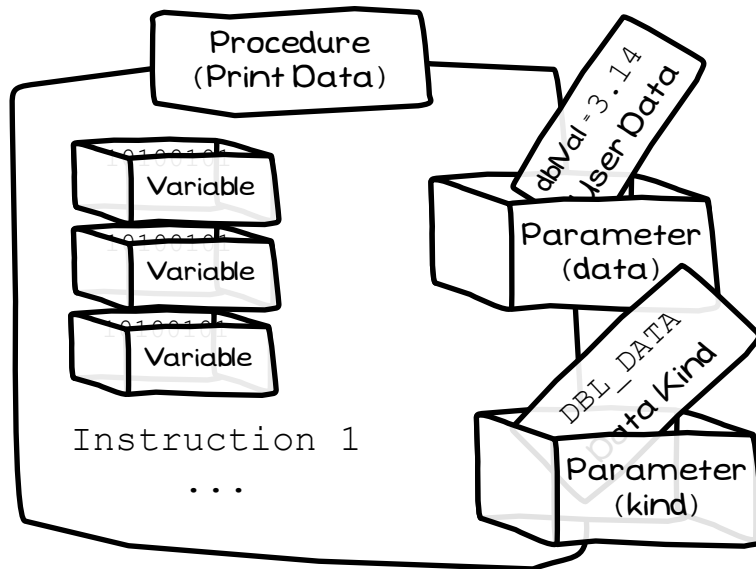

Elements of an array can be values of a union, allowing the one array to store integer, double, and text data in different elements

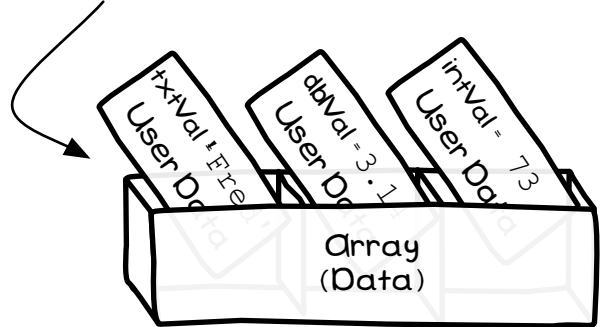

Parameters can accept enumerated values, in this case a value telling the Procedure the kind of data stored in the data parameter (which is a union)