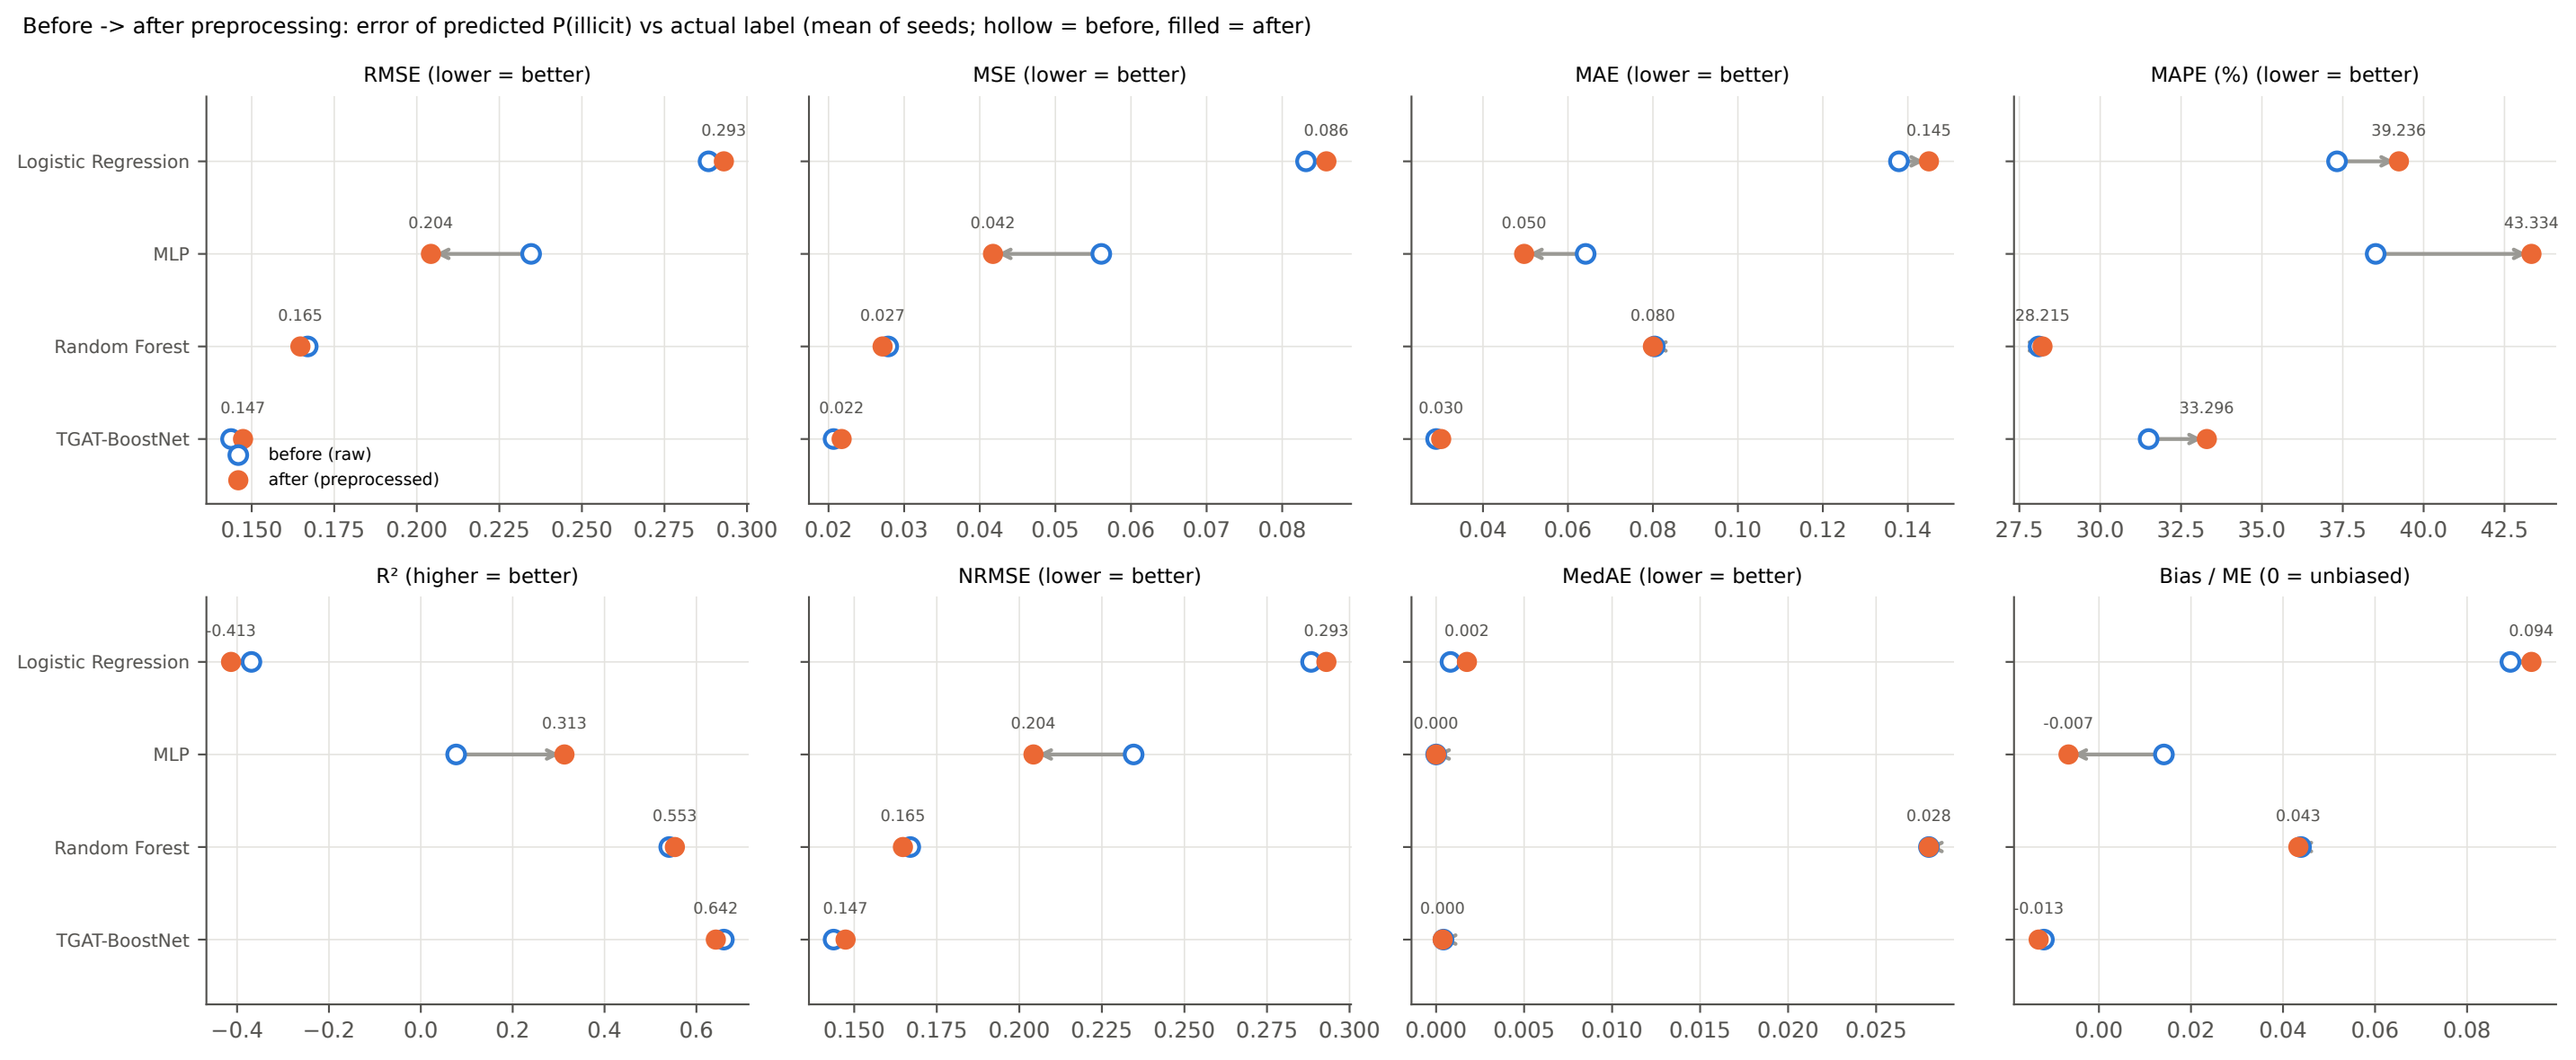
Before -> after preprocessing: error of predicted P(illicit) vs actual label (mean of seeds; hollow = before, filled = after)
RMSE (lower = better)
MSE (lower = better)
MAE (lower = better)
MAPE (%) (lower = better)
R² (higher = better)
NRMSE (lower = better)
MedAE (lower = better)
Bias / ME (0 = unbiased)
Logistic Regression
MLP
Random Forest
TGAT-BoostNet
before (raw)
after (preprocessed)
0.293
0.204
0.165
0.147
0.086
0.042
0.027
0.022
0.145
0.050
0.080
0.030
39.236
43.334
28.215
33.296
-0.413
0.313
0.553
0.642
0.293
0.204
0.165
0.147
0.002
0.000
0.028
0.000
0.094
-0.007
0.043
-0.013