
Paid Ads Analyst Agent — architecture

Two Railway services from one repo. The model can read and propose; only a registered human in Telegram can approve a change.

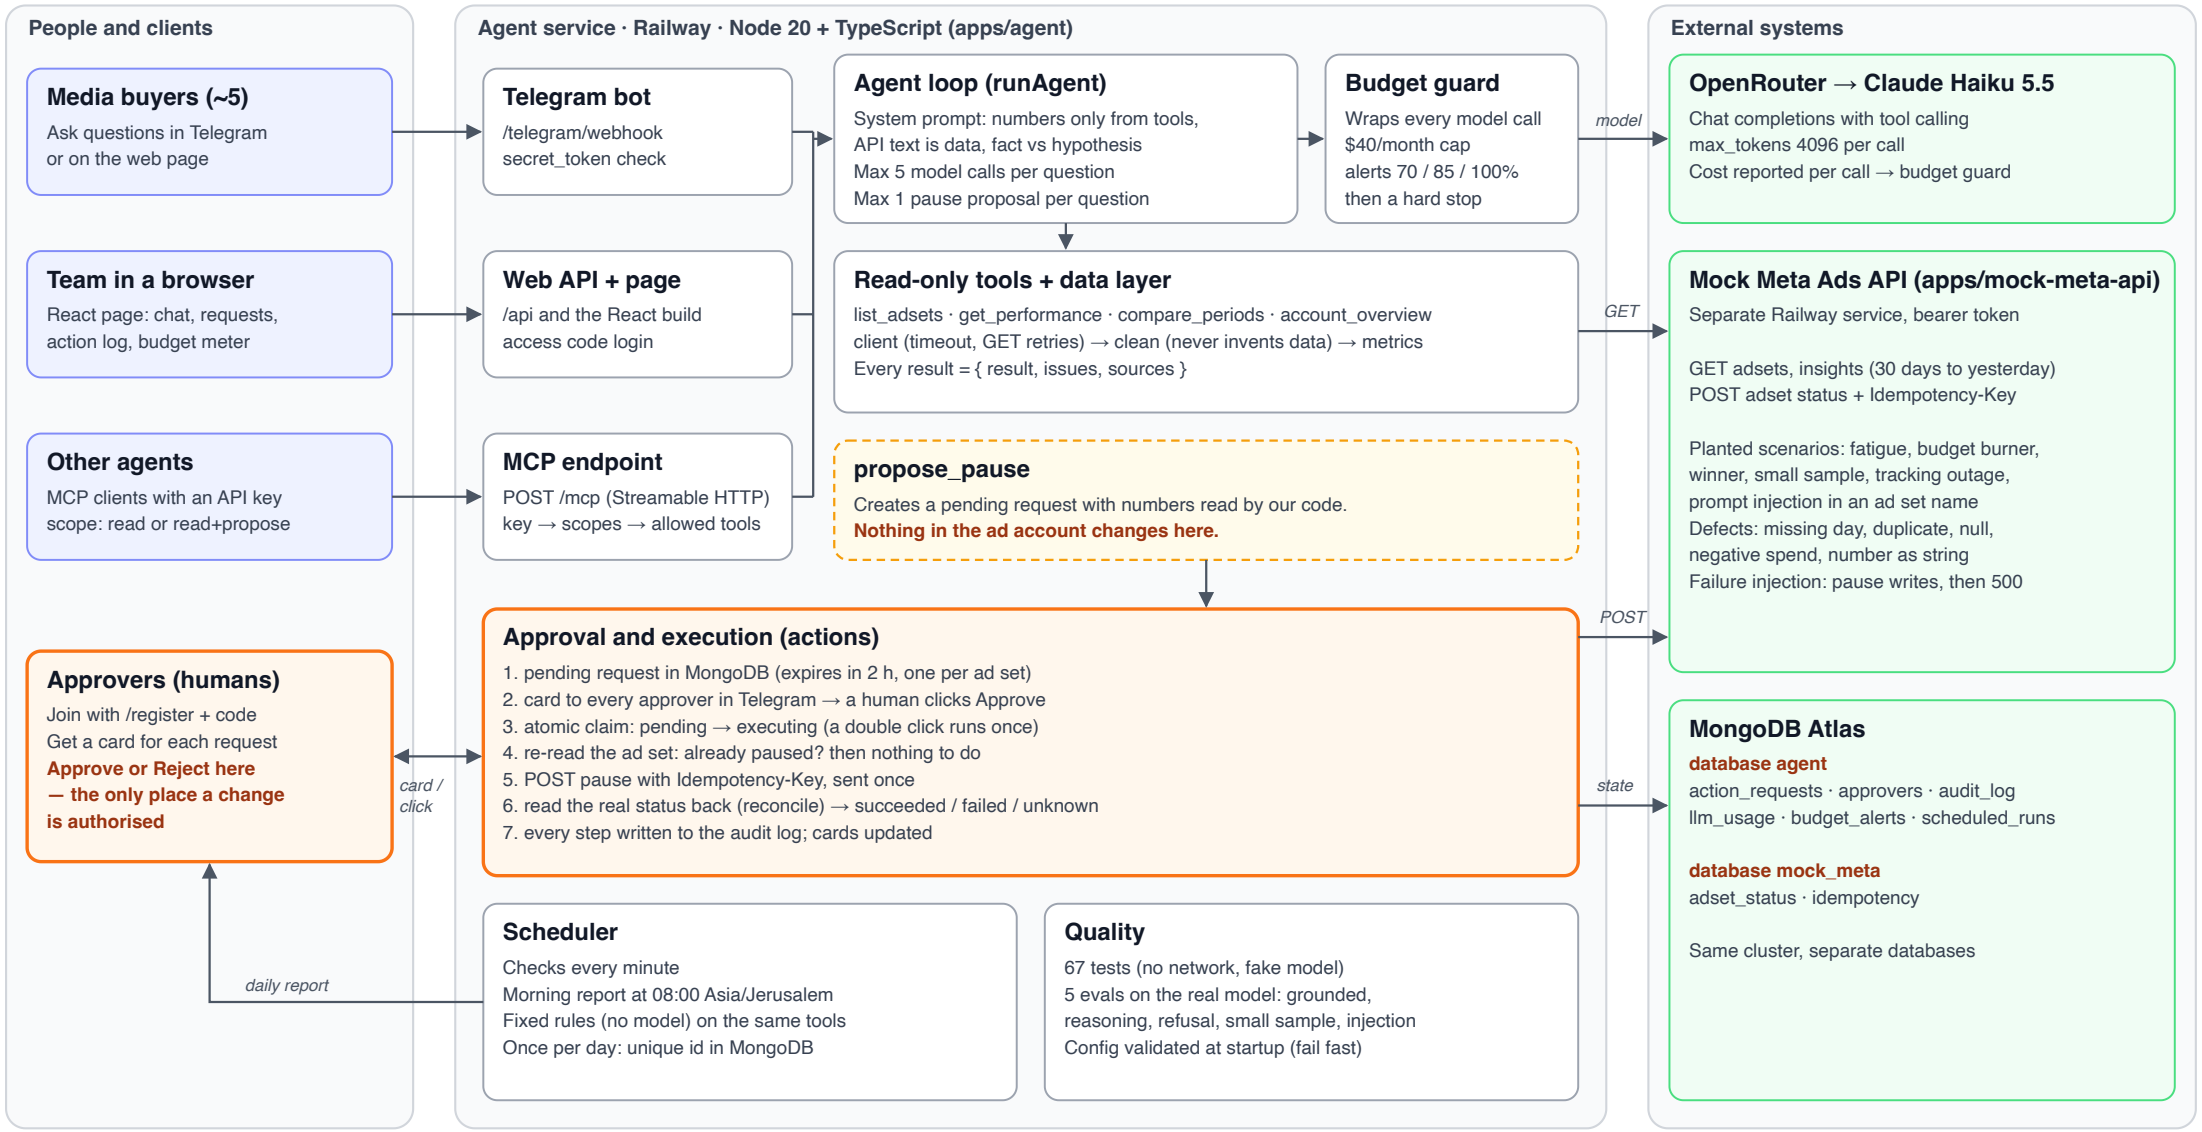

Where secrets live

Production: Railway variables, per service. Local development: .env files (gitignored). Never in the repository.
Agent: TELEGRAM_BOT_TOKEN · TELEGRAM_WEBHOOK_SECRET · OPENROUTER_API_KEY · MONGODB_URI · MOCK_API_TOKEN · APPROVER_CODE · MCP_API_KEYS
Mock API: MOCK_API_TOKEN · MONGODB_URI
MCP keys are held in memory only as SHA-256 hashes and compared in constant time; the approver code is compared the same way.
The access code and an MCP key are given to testers by email, not in the README. Config is validated at startup: a missing or malformed secret stops the service.
Telegram can only reach the webhook with the secret token; the mock API rejects calls without the bearer token.