


Lab program-1:

1. Create a new process by invoking the appropriate system call. Get the process identifier of the currently running process and its respective parent using system calls and display the same using a C program.

```
C lab_1.c > main()
1  #include <stdio.h>
2  #include <unistd.h>
3
4  int main(){
5      printf("Process ID: %d\n", getpid() );
6      printf("Parent Process ID: %d\n", getppid() );
7      getchar();
8      return 0;
9  }
```

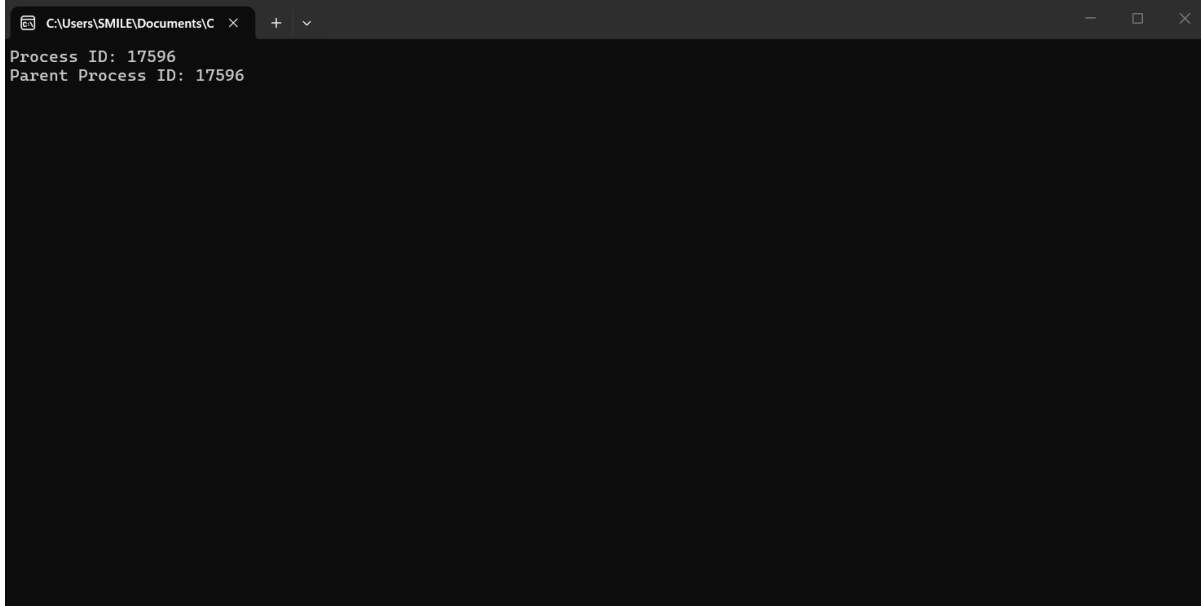

The screenshot shows a terminal window with the following output:

```
C:\Users\SMILE\Documents\C > + v
Process ID: 17596
Parent Process ID: 17596
```