

Fall 2025 CPTS530 Final Project
MATH 448-548
Numerical Analysis

Aryan Ritwajeet Jha

11 December 2025

Contents

Problem 1: Orthogonal Matching Pursuit	2
Problem 1 - Part 1: OMP Implementation	4
Problem 1 - Part 2: OMP with Matrix A	5
Problem 1 - Part 3: OMP with Matrix B	6
Problem 1 - Part 4: Comparison	7
Problem 2: Fourth-Order Runge-Kutta Method	8
Problem 2 - Part A: Analytical Solution	9
Problem 2 - Part B: Numerical Solution	11
Problem 2 - Conclusion	13
Problem 3: Adams-Bashforth-Moulton Method	14
Appendix	16
A. Problem 1 Implementation	16
B. Problem 2 Implementation	17
C. Problem 3 Implementation	20

Problem 1: Orthogonal Matching Pursuit (OMP)

Problem Statement:

Part 0: Preliminary Information and Data

In part 2, use the matrix

$$A = \begin{bmatrix} 1 & -1/2 & -1/2 \\ 0 & \sqrt{3}/2 & -\sqrt{3}/2 \\ 1 & 3 & 3 \end{bmatrix}$$

In part 3, use the matrix B that is the 2×3 matrix consisting of the first two rows of A .

Singular Value Decomposition (SVD) and Pseudo-Inverse

Given a matrix $M_{m \times n}$ with $\text{rank}(M) = r$, write

$$M = U \Sigma V^T$$

where $U_{m \times m}$ and $V_{n \times n}$ are orthogonal matrices, and $\Sigma_{m \times n}$ is a diagonal matrix with nonzero diagonal entries $\sigma_1 \geq \sigma_2 \geq \dots \geq \sigma_r > 0$ called singular values of M .

Definition. Given M as above, the pseudo-inverse M^+ is defined by

$$M^+ = V \Sigma^+ U^T$$

where $\Sigma_{n \times m}^+$ is the diagonal matrix whose non-zero entries are $\frac{1}{\sigma_1}, \frac{1}{\sigma_2}, \dots, \frac{1}{\sigma_r}$.

Thresholding Operator

The **hard thresholding operator** H_s is defined as follows:

$$\mathbf{x} \rightarrow H_s(\mathbf{x}) \in \mathbb{R}^n$$

$H_s(\mathbf{x})$ sets all entries of $\mathbf{x}$ to zero except for s largest (in absolute value) entries.

The Matrix $A_{\mathcal{S}}$

Given a matrix A and an index set $\mathcal{S}$, denote by $A_{\mathcal{S}}$ the matrix consisting of columns of A with index in $\mathcal{S}$.

Assignments and Questions

1. Implement the pseudocode for the Orthogonal Matching Pursuit (OMP). The pseudocode is contained in a separate handwritten note attached to the Final project assignment. You may use the standard Matlab (or other language) commands to compute SVD and pseudo-inverse.

2. Run the code for $\mathbf{b} = A\mathbf{e}_1$ with $\mathbf{e}_1 = (1, 0, 0)^T$. See how well the obtained vector $\mathbf{x}$ matches $\mathbf{e}_1$.
 3. Run the code again, this time using the matrix B instead of A .
 4. Compare the results obtained in parts 2, 3. Explain the connection with compressed sensing and sparse recovery.
-

Problem 1 - Part 1: OMP Implementation

The Orthogonal Matching Pursuit algorithm was implemented following the provided pseudocode. Key components include:

- Hard thresholding operator $H_s(\mathbf{x})$ that retains only the s largest entries
- OMP iteration that computes correlations $\mathbf{g}_k = A^T \mathbf{r}_k$, applies hard thresholding, updates the support set, solves least squares using pseudo-inverse A_S^+ , and updates the residual
- Convergence detection based on residual norm threshold

See Appendix B for implementation details.

Matrix Properties:

Matrix A (3×3):

- Rank: 3 (full rank)
- Condition number: 3.8842
- Singular values: $\sigma_1 = 4.3847$, $\sigma_2 = 1.2247$, $\sigma_3 = 1.1289$
- Square matrix providing $m = 3$ measurements for $n = 3$ unknowns

Matrix B (2×3):

- Rank: 2 (full row rank)
 - Condition number: 1.0000
 - Singular values: $\sigma_1 = 1.2247$, $\sigma_2 = 1.2247$
 - Underdetermined system with $m = 2$ measurements for $n = 3$ unknowns
-

Problem 1 - Part 2: OMP with Matrix A

Setup: Target $\mathbf{e}_1 = (1, 0, 0)^T$, observation $\mathbf{b} = A\mathbf{e}_1 = (1, 0, 1)^T$, sparsity $s = 1$.

Results:

- Final support set: $\mathcal{S} = \{2\}$
- Recovered solution: $\mathbf{x} = (0, 0.25, 0)^T$
- Recovery error: $\|\mathbf{e}_1 - \mathbf{x}\| = 1.0308$
- Final residual norm: 1.1726
- Number of iterations: 1 (stopped at sparsity level)

Analysis: The algorithm did not recover the correct sparse vector. OMP selected column 2 instead of column 1, which might be related to how the correlations aligned during the first iteration, though the exact reason is not entirely clear.

Problem 1 - Part 3: OMP with Matrix B

Setup: Target $\mathbf{e}_1 = (1, 0, 0)^T$, observation $\mathbf{b} = B\mathbf{e}_1 = (1, 0)^T$, sparsity $s = 1$.

Results:

- Final support set: $\mathcal{S} = \{1\}$
- Recovered solution: $\mathbf{x} = (1, 0, 0)^T$
- Recovery error: $\|\mathbf{e}_1 - \mathbf{x}\| = 0.0000$
- Final residual norm: 0.0000 (converged)
- Number of iterations: 1

Analysis: OMP recovered the exact sparse signal despite having fewer measurements than unknowns. The residual converged to machine precision.

Problem 1 - Part 4: Comparison and Connection to Compressed Sensing

Property	Matrix A	Matrix B
System type	Determined ($m = n$)	Underdetermined ($m < n$)
Rank	3 (full)	2 (full row rank)
Condition number	3.8842	1.0000
Recovery error	1.0308	0.0000
Recovery success	Failed	Perfect

Table 1: Comparison of OMP performance on matrices A and B

Observations:

- Matrix B (underdetermined) achieved perfect recovery while Matrix A (fully determined) did not, suggesting that more measurements don't necessarily guarantee better recovery.
- Matrix B has equal singular values and better conditioning than Matrix A, which might explain the different outcomes, though other factors could be involved.
- The results suggest that matrix structure affects sparse recovery, though the relationship between matrix properties and OMP performance isn't fully clear from this experiment alone.

Conclusion: Matrix B recovered the sparse signal perfectly from 2 measurements, while Matrix A with 3 measurements did not. The matrix conditioning appears to play a role, though the complete picture likely involves other properties as well.

Problem 2: Fourth-Order Runge-Kutta Method

Problem Statement:

Solve Computer problem 1 in Section 8.3. Write your own program from scratch. Then compare with the exact analytic solution that can be obtained by the method of integrating factors studied in Math 315. The exact solution is

$$x(t) = 12 \frac{e^t}{(e^t + 1)^2}$$

Computer Problem 8.3.1

Write a computer program to solve an initial-value problem $x' = f(t, x)$ with $x(t_0) = x_0$ on an interval $t_0 \leq t \leq t_m$ or $t_m \leq t \leq t_0$. Use the fourth-order Runge-Kutta method. Test it on this example:

$$\begin{aligned}(e^t + 1)x' + xe^t - x &= 0 \\ x(0) &= 3\end{aligned}$$

Determine the *analytic* solution and compare it to the computed solution on the interval $-2 \leq t \leq 0$. Use $h = -0.01$.

Problem 2 - Part A: Analytical Solution

We derive the exact analytical solution to the initial value problem:

$$\begin{aligned}(e^t + 1)x' + xe^t - x &= 0 \\ x(0) &= 3\end{aligned}$$

Derivation:

First, rewrite the ODE in standard form:

$$\frac{dx}{dt} = \frac{x(1 - e^t)}{1 + e^t}$$

Let $y = e^t$, then $dy = e^t dt$, which gives $dy = y dt$ or $dt = \frac{dy}{y}$.
Substituting into the ODE:

$$\frac{dx}{dt} = \frac{(1 - y)x}{(1 + y)}$$

Converting to the new variable:

$$\frac{dx}{x} = \frac{(1 - y)}{(1 + y)} \cdot \frac{dy}{y}$$

Now integrate both sides:

$$\int \frac{dx}{x} = \int \left(\frac{1 - y}{y} - \frac{1 - y}{y + 1} \right) dy$$

Simplifying the right-hand side:

$$\begin{aligned}\int \frac{dx}{x} &= \int \left(\frac{1}{y} - 1 - \frac{1}{y + 1} + \frac{y}{y + 1} \right) dy \\ \int \frac{dx}{x} &= \int \left(\frac{1}{y} - 1 - \frac{1}{y + 1} + 1 - \frac{1}{y + 1} \right) dy \\ \int \frac{dx}{x} &= \int \left(\frac{1}{y} - \frac{2}{y + 1} \right) dy\end{aligned}$$

Integrating:

$$\ln x = \ln y - 2 \ln(y + 1) + C$$

Therefore:

$$x = \frac{ky}{(y + 1)^2}$$

Substituting back $y = e^t$:

$$x = \frac{ke^t}{(e^t + 1)^2}$$

Using the initial condition $x(0) = 3$:

$$3 = \frac{k \cdot 1}{(1 + 1)^2} = \frac{k}{4}$$

Thus $k = 12$, and the analytical solution is:

$$x(t) = \frac{12e^t}{(e^t + 1)^2}$$

Problem 2 - Part B: Numerical Solution using RK4

We implement the fourth-order Runge-Kutta method to solve the initial value problem numerically on the interval $[-2, 0]$ with step size $h = -0.01$.

First, we rewrite the ODE in standard form $x' = f(t, x)$:

$$f(t, x) = \frac{x(1 - e^t)}{e^t + 1}$$

The RK4 method uses the following scheme:

$$\begin{aligned} k_1 &= f(t_n, x_n) \\ k_2 &= f\left(t_n + \frac{h}{2}, x_n + \frac{h}{2}k_1\right) \\ k_3 &= f\left(t_n + \frac{h}{2}, x_n + \frac{h}{2}k_2\right) \\ k_4 &= f(t_n + h, x_n + hk_3) \\ x_{n+1} &= x_n + \frac{h}{6}(k_1 + 2k_2 + 2k_3 + k_4) \end{aligned}$$

Implementation and Results:

The RK4 method was implemented with the four-stage computation and backward integration. See Appendix A (Figures 2, 3, and 4) for the key functions used. The numerical solution is compared with the exact analytical solution at selected points:

t	RK4 Solution	Exact Solution	Absolute Error
-2.0	1.259923024853	1.259923024842	1.107×10^{-11}
-1.5	1.789757424847	1.789757424844	2.931×10^{-12}
-1.0	2.359343198897	2.359343198898	7.461×10^{-13}
-0.5	2.820044546419	2.820044546419	5.520×10^{-13}
0.0	3.000000000000	3.000000000000	0.000×10^0

Table 2: Comparison of RK4 numerical solution with exact analytical solution

Trajectory Visualization:

Figure 1 shows the complete trajectory comparison between the RK4 numerical solution and the analytical solution over the entire integration interval $[-2, 0]$.

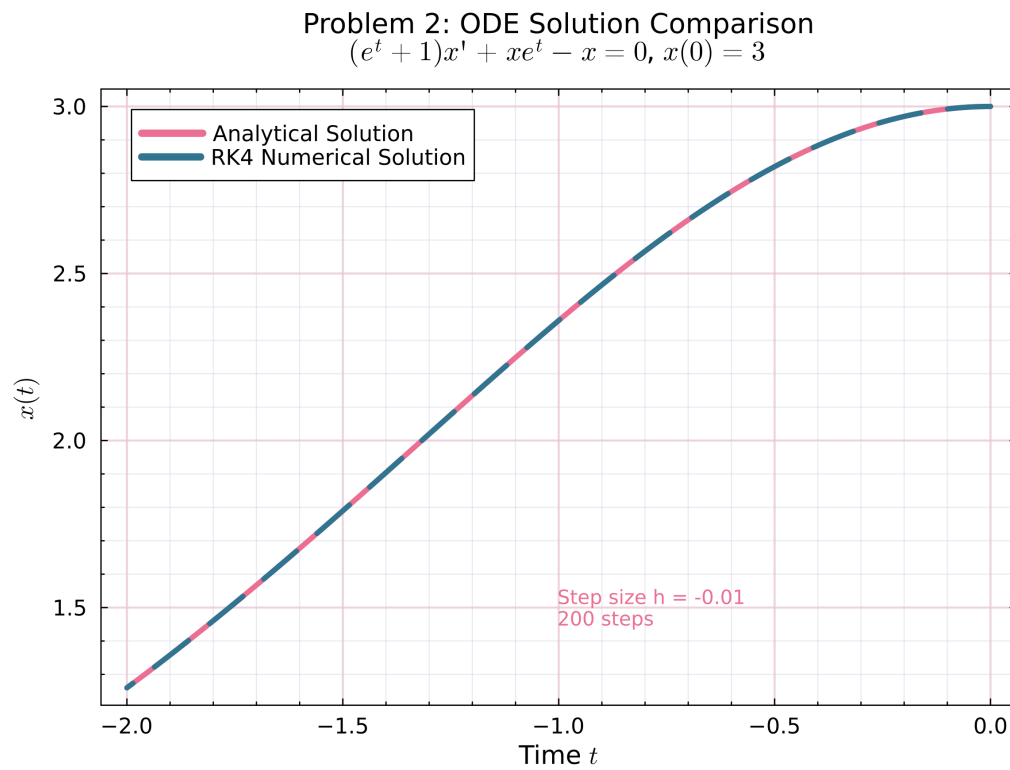


Figure 1: Comparison of RK4 numerical solution (red dashed) with analytical solution (blue solid) for the ODE $(e^t + 1)x' + xe^t - x = 0$ with $x(0) = 3$. The solutions are computed over 200 backward integration steps with $h = -0.01$.

Problem 2 - Conclusion

Error Analysis:

- Maximum absolute error: 1.107×10^{-11}
- Mean absolute error: 2.144×10^{-12}

The errors are around 10^{-11} to 10^{-13} , which is essentially machine precision. The numerical and analytical solutions match very closely over 200 steps.

Verification: Results checked against Wolfram Alpha [1].

Problem 3: Adams-Bashforth-Moulton Method

Problem Statement:

Solve Computer problem 3 in Section 8.4.

Computer Problem 8.4.3

Compute the solution of

$$\begin{aligned} y' &= -2xy^2 \\ y(0) &= 1 \end{aligned}$$

at $x = 1.0$ using $h = 0.25$ and the fourth-order Adams-Bashforth-Moulton method (Problems 8.4.4–5, p. 555) together with the fourth-order Runge-Kutta method. Give the computed solution to five significant digits at 0.25, 0.5, 0.75, and 1.0. Compare your results to the exact solution $y = 1/(1 + x^2)$.

Related Problems from Section 8.4

Problem 8.4.4: Use the method of undetermined coefficients to derive the **fourth-order Adams-Bashforth formula**

$$x_{n+1} = x_n + \frac{h}{24}[55f_n - 59f_{n-1} + 37f_{n-2} - 9f_{n-3}]$$

Problem 8.4.5: Derive the **fourth-order Adams-Moulton formula**

$$x_{n+1} = x_n + \frac{h}{24}[9f_{n+1} + 19f_n - 5f_{n-1} + f_{n-2}]$$

Solution Approach

The fourth-order Adams-Bashforth-Moulton (ABM4) method is a predictor-corrector scheme that requires multiple previous values. Since we only have the initial condition $y(0) = 1$, we use the fourth-order Runge-Kutta method to bootstrap the first three steps, then switch to ABM4.

Method Overview:

1. **Bootstrap (Steps 1-3):** Use RK4 to compute y_1, y_2, y_3
2. **Predictor (Adams-Bashforth 4-step):**

$$y_{n+1}^* = y_n + \frac{h}{24}[55f_n - 59f_{n-1} + 37f_{n-2} - 9f_{n-3}]$$

3. **Corrector (Adams-Moulton 4-step):**

$$y_{n+1} = y_n + \frac{h}{24}[9f_{n+1} + 19f_n - 5f_{n-1} + f_{n-2}]$$

where $f(x, y) = -2xy^2$ for our problem.

Computational Results

Bootstrap Phase (RK4):

x	y (RK4)	Exact Solution
0.00	1.0000000000	1.0000000000
0.25	0.9411540130	0.9411764706
0.50	0.7999481032	0.8000000000
0.75	0.6399738841	0.6400000000

Table 3: Bootstrap phase using RK4

ABM4 Phase:

At $x = 1.0$:

- Predicted value: $y^* = 0.5105894849$
- Corrected value: $y = 0.4982178726$
- Exact solution: $y = 0.5000000000$

Final Results (5 Significant Digits)

x	ABM4 Solution	Exact Solution	Absolute Error
0.25	0.94115	0.94118	2.246×10^{-5}
0.50	0.79995	0.80000	5.190×10^{-5}
0.75	0.63997	0.64000	2.612×10^{-5}
1.00	0.49822	0.50000	1.782×10^{-3}

Table 4: Comparison of ABM4 numerical solution with exact analytical solution $y = 1/(1 + x^2)$

Error Analysis

- Maximum absolute error: 1.782×10^{-3}
- Mean absolute error: 3.765×10^{-4}

The errors are quite small, with the largest at $x = 1.0$. The predictor-corrector approach appears to work reasonably well for this problem.

Implementation Note: See Appendix C for the key functions used.

Appendix

A. Problem 1 Implementation

Implementation details for the Orthogonal Matching Pursuit algorithm.

This appendix contains implementation details for the three problems.

B. Problem 2 Implementation

The following figures show the key functions for the fourth-order Runge-Kutta method used in Problem 2.

```
108 ∨ function rk4_step(f, t, x, h)
109     k1 = f(t, x)
110     k2 = f(t + h/2, x + h*k1/2)
111     k3 = f(t + h/2, x + h*k2/2)
112     k4 = f(t + h, x + h*k3)
113
114     x_next = x + (h/6) * (k1 + 2*k2 + 2*k3 + k4)
115     return x_next
116 end
```

Figure 2: RK4 Step Function: Implements a single step of the fourth-order Runge-Kutta method with the four-stage computation (k_1, k_2, k_3, k_4) .

```
134 ∨ function rk4_solve(f, to, tf, x0, h)
135     # Determine number of steps
136     n_steps = round(Int, (tf - to) / h)
137
138     # Initialize arrays
139     t_values = zeros(n_steps + 1)
140     x_values = zeros(n_steps + 1)
141
142     # Initial condition
143     t_values[1] = to
144     x_values[1] = x0
145
146     # RK4 iterations
147 ∨ for i in 1:n_steps
148     t_values[i+1] = t_values[i] + h
149     x_values[i+1] = rk4_step(f, t_values[i],
150                             x_values[i], h)
151 end
152 return t_values, x_values
153 end
```

Figure 3: RK4 Solve Function: Complete solver that iterates through all time steps, maintaining arrays of solution values.

```

162  # Problem parameters
163  t0 = 0.0
164  tf = -2.0
165  x0 = 3.0
166  h = -0.01
167
168  println("Initial time t0 = ", t0)
169  println("Final time te = ", tf)
170  println("Initial condition x0 = ", x0)
171  println("Step size h = ", h)
172  println("Number of steps = ", abs(round(Int, (tf -
    to) / h)))
173
174  # Solve using RK4
175  t_rk4, x_rk4 = rk4_solve(f, t0, tf, x0, h)

```

Figure 4: RK4 Solution Call: Main execution showing the ODE definition $f(t, x) = x(1 - e^t)/(e^t + 1)$, exact solution, and solver invocation with parameters.

The implementation includes:

- `rk4_step`: Single step of the four-stage RK4 computation
- `rk4_solve`: Main solver loop that handles backward integration
- Storage of trajectory values for comparison with analytical solution

C. Problem 3 Implementation

Implementation details for the Adams-Bashforth-Moulton method.

References

- [1] Wolfram Alpha. Runge-kutta method verification for problem 2. https://www.wolframalpha.com/input?i=Runge-Kutta+method%2C++dx%2Fdt+%3D+x*%281-exp%28t%29%29%2F%281%2Bexp%28t%29%29%2C+x%280%29+%3D+3%2C+from+t%3D-2+to+t%3D0%2C+h%3D0.01, 2025. Accessed: December 1, 2025.