

# A Systematic Literature Review on Extensions to Role Based Access Control

Eric D. Helms, JeeHyun Hwang, Tao Xie, Laurie Williams

*North Carolina State University*

*Department of Computer Science*

*890 Oval Drive, Box 8206*

*Raleigh, NC 27695-2858*

---

## Abstract

**Context:** Since the introduction of the role based access control (RBAC) standard in the late 1990's by the National Institute of Standards and Technology (NIST), RBAC has become an increasingly popular access control mechanism for applications such as web applications, mobile computing and databases. RBAC restricts access to resources based on the identity of subjects connected to logical groupings of permissions. The introduction of computing into new domains has led to proposals for extensions to the standard RBAC model; for example, defining additional constraints among roles, adding context or defining new heirarchy relationships.

**Aim:** The goal of our work is to aid practioners and researchers in choosing an exentsion to the RBAC standard model, and in understanding how extensions to RBAC are evaluated by providing an assessment of the state of extensions to the RBAC standard model through: establishment of a set of extension categories, an examination of the state of the art in evaluations of extension models and a breakdown of the reasoning and motivations that have led to extension of the RBAC standard.

**Method:** We conducted a systematic literature review by collecting and synthesizing relevant research papers in the area of RBAC extensions. The review we performed yielded 1716 papers, of which 29 were deemed primary sources for inclusion as model extensions to the RBAC standard model. The papers we collected were from electronic digital libraries IEEE, Google Scholar, CiteSeerX and ACM based on a set of exclusion and inclusion criteria. We performed a comparative analysis of the primary sources to find relationships among extended models and to analyze the state of RBAC extension evaluations.

**Results:** Our results showed that extensions to RBAC can be classified under seven categories: Constraint, Context, Organization, Privacy, Resource, Task, Spatio-Temporal, Spatial and Temporal. We found a range of motivations behind RBAC extensions from lack of fine-grained controls to a need for context placed on permissions, roles and assignment.

We found that 12 models presented no evidence of an evaluation, 8 models used example scenarios and 6 others provided some complexity and time analysis. Of the 29 papers, we identified only 8 that provided in an implementation of their model in the form of an enterprise application or prototype. We found that the primary domains that inspired were the model domain with 9 of the 29 models, enterprise workflows with 5 of 29, and mobile computing with 5 of 29.

**Conclusions:** The extensions to RBAC found by our systematic literature review fall into seven categories that upon closer inspection can be aligned under the single category of context. Two domains, healthcare and mobile computing, were identified as predominant motivations behind the development of extensions to the RBAC model. Our literature review showed that the state of evaluation of RBAC model evaluation is limited with 1 paper doing an evaluation comparing itself to the core RBAC model, 12 of the 29 models lacking any identifiable evaluation and 8 presenting example scenarios of their model in action, the predominant evaluation method.

*Keywords:* RBAC, access control, systematic literature review

---

## 1. Introduction

Innovation and the use of role based access control (RBAC) in new domains has led to scenarios that, by some accounts, the standard RBAC model cannot handle [1]. For example, Ni, Q. et al [2] state that RBAC is “not designed to enforce privacy policies and barely meet privacy protection requirements“ with the introduction of privacy concerns in domains such as healthcare. Since the introduction of the NIST RBAC standard in 2000, extension models to the RBAC standard have appeared in the literature, each adding one or more features on top of the core RBAC model. A cursory examination of the extension model papers does not provide good comparisons for developers and researchers to build upon. Further, these extension models are each building upon and adding features to a standard that was designed to reduce the economic impact experienced by enterprises and increase interoperability [3].

The RBAC standard was first introduced in the 1990s when the National Institute for Standards and Technology (NIST) requested that a unified standard be created by combining the Ferraiolo and Kuhn model [4] with the framework proposed by Sandhu, et al [5]. In 2004, this standard was adopted as ANSI/INCITS 359-2004 approved by American National Standards Institute (ANSI) and the InterNational Committee for Information Technology Standards (INCITS). The development of a standard was inspired by an economic impact study done during the 1990s and later confirmed in 2011 <sup>1</sup> that showed the cost savings of RBAC implementation and maintenance. NIST found that IT developers and users in government and industry need consistent and uniform definition of RBAC features. Prior to the development of RBAC standard, vendors proposed and implemented their own defined

---

<sup>1</sup>[http://csrc.nist.gov/groups/SNS/rbac/documents/20101219\\_RBAC2\\_Final\\_Report.pdf](http://csrc.nist.gov/groups/SNS/rbac/documents/20101219_RBAC2_Final_Report.pdf)

RBAC features without general agreement on the unified definition of RBAC features. As a result, IT developers and users have uncertainty, confusion and a lack of interoperability of RBAC features. Due to this uncertainty and confusion, not only do the development and maintenance cost of RBAC increase but also frequencies of security violations. RBAC standard address this issue by describing definition and functional specification of RBAC features using a reference model.

RBAC is a generalized access control approach used for various applications including web services, database applications, and healthcare applications. RBAC has advantages in maintaining and managing an organization's security policies. For example, if a user requires access to resources associated with the manager role within a given organization, security policy administrators need only associate the user with the manager role. In the standard RBAC model, roles represent a set of permissions needed to perform a particular job function within an organization. Any number of users who are involved in that specific job function within the organization can then be assigned to the role to inherit the required access instead of assigning individual permissions to individual users. As the number of permissions and users scales upward, the ability to logically group both users and permissions into smaller numbers of entities becomes paramount for managing access control as an organization grows and evolves.

*The goal of our work is to aid practioners and researchers in choosing an exentsion to the RBAC standard model, and in understanding how extensions to RBAC are evaluated by providing an assessment of the state of extensions to the RBAC standard model through: establishment of a set of extension categories, an examination of the state of the art in evaluations of extension models and a breakdown of the reasoning and motivations that have led to extension of the RBAC standard.* With respect to our goal, the authors addressed the following research questions:

- What categorizations exist within extensions to RBAC?
- What are the motivations behind extensions to RBAC?
- Do the extensions to RBAC have corresponding implementations?
- How are extensions to RBAC evaluated theoritically and in practice?
- What domains have extensions to RBAC been created for?
- What commonalities or generalizations exist across all categorizations?

The authors performed a systematic literature review designed to explore the current body of research in the area of extensions to the core RBAC model. The review we performed yielded 1716, of which 29 were deemed primary sources for inclusion as model extensions to the RBAC standard model. This review is intended to serve as a starting place for researcher's looking to tackle new problems in the realm of authorization and prevent re-invention of the wheel. For developer's looking to find a model to fit their seemingly unique access control needs, this review will provide a basis for comparison and easy look-up for what extension based model to use. Further, the review provides insight into the state of evaluation, or lack thereof, within the RBAC extension model community.

Our research provides contributions to the community in the following ways:

- Summarizes current extended RBAC research work and its contributions.
- Guides a direction for a standard of extended RBAC. Understanding the categorization and the motivation of the existing research results helps decide a standard of extended RBAC.
- Identifies the research challenges in the areas of security policies and suggest a future extension of RBAC.
- Identifies the deficiencies in RBAC extension evaluation.

The rest of the paper is organized as follows. Section 2 covers background and the core RBAC model. Section 3 lays out the process used in conducting the review. Sections 4-9 present the analysis and discussion of the research questions. Section 10 contains the final conclusions.

## 2. Role Based Access Control Standard

INCITS is an international organization, which approves and maintains information technology standards. INCITS operates under rules approved by American National Standards Institute (ANSI). Since the basis for our review is extensions to the core model, we will describe the core model, associated entities and other terminology encountered across the space of our review. The NIST RBAC model proposed by Ferraiolo et al. [4] and later adopted as the official standard for RBAC by the International Committee for Information Technology Standards (INCITS) consists of four basic entities:

- a set of *Users*: A user can be a person or an agent.
- a set of *Roles*: A role is a collection of permissions to perform a specific job function in an organization.
- a set of *Permissions*: A permission refers to an access mode that can be exercised on an object in the system and a session relates a user to possibly many roles.
- a set of *Sessions*: In each session, a user can be assigned to some of the roles, only when the corresponding role is enabled for activation for that time.

In RBAC, a user can exercise a permission only if the user is assigned to a role. In addition to the four basic components, two functions are defined: the user role assignment (UA) and the role permission assignment (PA) functions. UA models assignment of users to roles. PA models assignment of permissions to roles.

Figure 1 presents an overview of core RBAC model diagram where elements and their relations are described. Let "USERS", "ROLES", "OBS", "OPS", "PRM", and "SESSIONS" denote users, roles, objects, operations, permissions, and sessions, respectively. Permissions are associated with possible users' pre-defined operation on an object (e.g., execute a file). Note that, at user or role activation, a session associated with user or role is established.

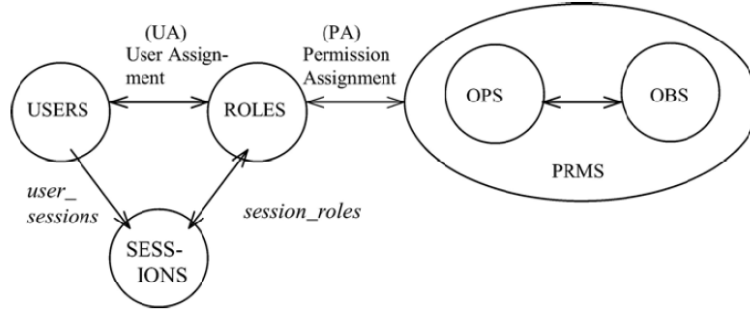


Figure 1: RBAC Core Diagram in NIST RBAC model [4].

### 3. Process

The authors adopted and applied a systematic literature review following recommendations from Kitchenham’s suggested processes [6]. The systematic literature review process was broken down in to four stages and the rest of this section is broken down by each stage. The stages were:

- Step 1: Development of a search strategy
- Step 2: Elimination of papers based on title criteria
- Step 3: Elimination of papers based on abstract criteria
- Step 4: Elimination of papers based on content and matching to elimination criteria

#### 3.1. Step 1: Search Strategy

For the first phase of our systematic literature review, the authors developed a search strategy for finding papers. The search strategy was executed by an automated comprehensive search taking as input a set of academic search engines and a list of search terms. The search was performed by applying each search term to each engine incrementally until a stopping criteria was met. Table 2 lists the four search engines along the left most column with the three search term across the top row along with the papers for each criteria and engine combination. The search algorithm was performed as follows:

1. Call to search engine with current search position and current search term.
2. Parse results and extract paper title, authors and year of publication.
3. Compare results against stopping criteria:
  - If the size of the result set is greater than or equal to 1000 then stop.
  - If the last ten results did not contain the search term phrase within the tite then stop.
4. If stopping criteria not met, increment search position and go back to step one.

	<b>RBAC</b>	<b>role based access control</b>	<b>role-based access control</b>	<b>Total</b>
Google Scholar	651	213	435	1299
ACM Portal	500	20	720	1240
IEEEExplore	200	40	230	470
CiteSeerX	100	100	150	350
Totals	1451	373	1535	3359
Combined				<b>1716</b>

Table 1: Paper counts after applying search strategy

The result set size stopping criteria was chosen due to a technical limitation of some search engines. The stopping criteria related to the last ten titles is meant to stop after relevant results are no longer being returned by the search engine. After gathering all 12 data sets, the authors combined the papers into a master list by systematically comparing the bibliographic information for each. The master list of 1716 papers was used to perform a series of elimination rounds to narrow the list of papers and identify primary sources. Table ?? shows the total number of papers selected by each author for each round and how many papers from the disjoint set for each round survived to the next round.

### 3.2. Steps 2-4: Elimination Rounds

The elimination rounds were performed based on reading of the title, abstract and finally the paper itself. While each elimination stage had a unique set of criteria for elimination the general procedure for elimination for the researchers was as follows.

- The two first authors independently classified papers as relevant, irrelevant or uncertain based off elimination criteria
- Those papers marked as relevant by both reviewers were kept and those marked irrelevant by both were thrown out.
- Papers marked as relevant, or irrelevant by a single reviewer were combined with all papers marked as uncertain and discussed by both reviewers. From this discussion, papers were either thrown out or kept until the next round of the review.

#### 3.2.1. Step 2: Title Elimination

The first round of elimination was performed by strict examination based on the title. Each author was tasked with deciding on elimination by answering the following questions:

- Did the title contain a reference to 'role based access control' or 'RBAC'?
- Did the title contain a reference to 'model'?

		<b>Title</b>	<b>Abstract</b>	<b>Content</b>
Eric		305	86	46
Hwang		176	102	42
	Overlap	249	51	24
	Disjoint	232	137	64
	Rejected	208	116	59
	Retained	41	21	5
	<b>Total</b>	290	72	29

Table 2: Elimination Rounds

### 3.2.2. Step 3: Abstract Elimination

The second round of elimination was based on strict reading of the abstracts of papers that survived title elimination. Researchers read each abstract and evaluated relevancy based off:

- Does the abstract mention a proposed model?
- Does the abstract mention extension of role-based access control?
- Does the abstract mention either an implementation, evaluation or domain for their model?

### 3.2.3. Step 4: Content Elimination

The final elimination round involved taking the entire paper into consideration and answering five questions that would serve as the basis for elimination. The data collected by answering these questions served as the basis towards answering the research questions. The questions each reviewer attempted to answer based on the content of the paper was:

1. Does this model extend the core model? (Exclusion)
2. Do the researchers give evidence that RBAC needs extension? (Inclusion)
3. Was the paper and subsequent model inspired by a real world example? (Conditional Inclusion)
4. Did the researchers offer any evaluation of the proposed model? If yes, how did they do one? If no, why? (Conditional Inclusion)
5. Did the authors implement their model? (Inclusion)

Question 1 was a definitive exclusion criteria as any paper that failed in the affirmative was rejected. Questions 3 and 4 were marked as conditional includes given that they were connected in making a decision. A paper that met Question 3 but not 4, or met 4 but not 3 would be included since in some cases the real world examples served as research evaluations and without this conditional include the paper list size would be too small to be significant.

### 3.3. Extraction

After selection of primary sources, the next step was to extract data from each paper that pertained to our research questions in order to look for trends. The first step was to take the individual data generated from the final elimination round and organize this information around the research questions. During the paper reading round, and resulting data, the fact that the papers were logically falling into a number of categorizations became evident. Thus, the first step undertaken was to answer the question of what categories exist for the RBAC model extensions and what papers fall into what categories.

## 4. Categorization

RQ1: What categories exist within RBAC extensions?

During the paper reading phase, the authors noted that a variety of themes were present amongst the extensions. For example, the paper “Privacy-aware role-based access control” [2] brings in the notion of privacy directly in the title of the paper and the name of their model. Some papers presented this direct pronouncement of their theme, while others were less obvious. Thus, the authors developed a set of guidelines to aid in determining a set of extension categories based upon observations during the paper reading phase. The guidelines were:

- Self Declaration - Does the title or name of the model classify itself?
- Repetition of Phrase - Does the body of the paper present the same phrase repeatedly when discussing their model?
- Self Assessment - Do the authors of the paper directly identify a quantifier for their paper within the body of the paper?
- Simple - Can the category be represented by a single quantifier?

If we take the previous example above, the paper “Privacy-aware role-based access control” [2] contained “privacy” in the title and in the name of the model leading to the creation of the Privacy categorization and the subsequent placement of the paper under that category. By comparison, the paper “An extended RBAC model based on granular logic” [7] does not contain a direct categorization in the title or model name, but in reading the body of the paper the authors assessed that this paper was context based.

The authors offer definitions for each category based on the data extracted from the primary sources and the English definitions for each word.

### 4.1. Definitions

- Context: Access control model integrates context information. In access control, context often refers to user’s current state and environment information (e.g., location, time, system resources, network state, network security configuration, etc) which may affect user’s access privileges.



- **Constraint (Const):** Access control model in this category extends constraints, which are conditional restrictions on permissions of given roles. This constraint is either static and dynamic. For example, a doctor can modify any medical record for which the doctor is assigned as the designated primary care physician. This example describes doctor's permission with conditional restriction, "only when the doctor is assigned as the designated primary care physician".
- **Organizational (Org):** Organizational access control is concerned with access control associated with multiple organizations. Typically, users may have the same role name in different organizations, but may have different access privileges due to different local variations.
- **Privacy (Priv):** Access control model can be extended to describe privacy policies, which are legal statements or documents about disclose and management of personally identifiable information such as name, address, data of birth, etc.
- **Resource (Res):** Access control model can be extended to handle any system resources (e.g., a file, printer, terminal, database record, etc) in a flexible way.
- **Task:** A task is a fundamental unit of a business activity. Different from core RBAC, in task-role-based access control model, roles are not directly associated with permissions. Roles are first associated with tasks, which are associated permissions. For example, the employee role is associated with a task, which is to write a report. Then, this task is associated with a permission.
- **Spatio-Temporal:** Spatio-temporal constraints are combination of spatial (location-based) and temporal (time-based) constraints in specifying access control policies. For example, specific locations are enforced while a role is permitted to conduct an action from 8 am to 5 pm.
- **Spatial:** Spatial constraints are location-based constraints in specifying access control policies. For example, in organizations, locations are enforced while a specific role is permitted to conduct an action. Consider that part-time employee works only in specific location. In such cases, the part-time employee role should access required resources only when the user is in the location. Spatial constraints can incorporate either on roles, user-role assignments, or role-permission assignments.
- **Temporal (Temp):** Temporal constraints are time-based constraints in specifying access control policies. For example, in organizations, periodic temporal durations are enforced while a specific role is permitted to conduct an action. Consider that part-time employee works only from 9:00 a.m. to 3:00 p.m. In such cases, the part-time employee role should access required resources during the interval. Temporal constraints can incorporate either on roles, user-role assignments, or role-permission assignments.

## 4.2. Analysis and Discussion

The 29 primary sources produced a set of 8 hierarchical categories. Table 3 summarizes each primary source under their assumed category and further, displays the perceived hierarchy of the categories. The Spatial and Temporal categories were treated as subsets of the broader category of Spatio-Temporal since this category encompasses them individually and the Spatio-Temporal category contained more primary sources than the Spatial or Temporal categories alone.

When looking across all categories, the authors noted that each category added some new features on top of the standard RBAC model that were domain specific. These domain specific features were under the surface adding contextual relationships between the core user, permission and role entities. Thus, the authors concluded that all categories stemmed from the context category, of which some primary sources were already deemed direct members.

For example, in the case of Privacy the models added entities such as purpose binding to represent within the model data collected for one purpose should not be used for another purpose without user consent [2]. While the new entity provided by the Privacy based models is inspired by domains such as healthcare where privacy is of legal concern, the underlying mechanism that drives purpose binding is providing context around making an access control decision. The system must take into account not just a static set of permissions a user has through their roles, but also the context of the data being accessed as that data relates to privacy policy. In the spatio-temporal models, a user's location and the time of day are two factors that can be taken into account when activating a role or verifying a permission. The concepts of location and time are properties of the user and place specific contexts around the role and permission entities.

## 5. Motivations

### 5.1. Research Question 2

What are the motivations behind RBAC extensions?

Core RBAC model provides an abstraction of authorization model based on user role assignment (UA) and the role permission assignment (PA). Since this simple model may not provide a fine-grained access control for sophisticated security mechanism, a variety of extended RBAC models have been proposed over the years to meet security requirements. When administrators design a model, it is important to capture an important abstraction to help the model to be enforced in a system.

- Core RBAC model needs additional contextual information and constraints to develop fine-grained policies in practice.
- Core RBAC does not incorporate context. Therefore, RBAC belongs to static access control model, which may not capture changes in environments.
- Core RBAC does not support for various constraints such as temporal and spatial constraints to design sophisticated policies on demand.

- Core RBAC does not provide an abstraction to additional user-defined attributes (e.g., task and team) and their association with existing attributes.
- Core RBAC has limitation on delegation and role hierarchy. For example, partial inheritance in role hierarchy needs to be developed.
- Model needs to incorporate additional contextual information and constraints to develop fine-grained policies in practice.
- Model needs to incorporate additional attributes such as task, team, purpose, organizational roles and collaborative activities over existing attributes. Moreover, new association between attributes are introduced.
- Model needs to improve existing features such delegation and role hierarchy to meet fine-grained access control.

## 6. Implementations

### 6.1. Research Question 3

Do the extension models have corresponding implementations?

When designing and proposing a model targeted at a feature that is rooted in practical usage by real software systems, bringing the model to life is strong evidence that the proposed model can work in practice. The concept of authorization, and access control is rooted in a business need. Thus, any access control model needs to be feasible in the real world not just on paper. We analyzed the primary sources to see how many proposed models actually had implementations associated with them. And quantified the type of implementation. Whether the implementation was for a real system, for a prototype and/or used in a production environment.

Of the 29 papers surveyed, there was a lack of implementation with 21 of the paper providing no mention of a implementation or prototype. Of the remaining 8 papers that did mention an implementation, half were simply prototypes developed by the authors while the other half were claimed to be implemented within a real system.

## 7. Evaluations

### 7.1. Research Question 4

How are extension to RBAC evaluated theoretically and in practice?

Providing evaluation of a proposed model is a key component in establishing the models validity. The papers were examined for evidence of evaluations ranging from performance to mathematical accuracy to application to real world scenarios. Further, for each proposed model, the reviewers looked for evidence that the authors made comparisons between their own model and the base model as they pertained to claims made by the authors of why their model is needed. The quantifiable evaluations looked for were:

- Time-based Performance [2], [8]
- Complexity analysis [9], [10], [11], [8]
- Comparison to standard RBAC [9], [12], [10], [13], [14]
- Mathematical modeling [? ], [15], [16], [11], [17]
- Example scenarios of the model in action [18], [19], [20], [21], [9], [7], [? ], [12], [14], [22], [14], [17], [23], [24], [25]
- Experimental analysis of the model
- Case study of the model in practice [26]

Based on the diverse evaluation criteria, 12 models presented no evidence of an evaluation. 8 models presented example scenarios and how application of their model would apply and resolve the situation. 6 of the models provided some form of performance or complexity analysis of their model. This included graphs of the model's time to determine authorization as the number of entities grew, and the size of the role space for the extension model compared to standard RBAC. 4 models provided mathematical descriptions and analysis as a way to provide evaluation in the form of completeness.

The most widely used evaluation method was providing sample scenarios with accompanying workflows of how the extension model would tackle those scenarios. Much is left to the reader to assume of these types of evaluations, as the authors do not explicitly state or show how the standard model is deficient in tackling said scenarios.

## 8. Domains

### 8.1. Research Question 5

What domains have RBAC extensions been created for?

Business needs have historically driven RBAC research and development. The primary mode of evaluation for model extensions has been the presentation of business scenarios in various domains and how the model uniquely handles those particular scenarios. Thus, looking for trends in the domains used in the example scenarios might serve to illuminate a trend worth further examination into the reason for the explosion of RBAC extensions.

Upon examination of the primary sources, the most prevalent domains were:

- What domains or scenarios serve as inspiration for these extensions?
- Medical domain [18], [19], [26], [2], [27], [15], [22], [8], [24]
- Pervasive computing environments [21], [11], [14]
- Web applications [28]
- Mobile computing [29], [12], [30], [14], [8]
- Large-scale organizations with many sub-departments [31], [32], [23]
- Enterprise, organization workflows [20], [9], [10], [25], [17]

## 9. Generaliations

### 9.1. Research Question 6

What commonalities or generalizations exist across all categorizations?

Core or any extended role-based access control is used in various aspects of computer systems. In order to reduce efforts for modeling access control used in various applications, researchers often focus on developing generalized core concepts of access control. We found that propositional logic is used to describe access control model across all categorizations. Propositional logic is concerned with propositions and their logical relationships. In propositional logic, simple (i.e., atomic) or compound condition at given context is evaluated to true or false based on specified rules and access control logic. Researchers are concerned to extend limited set of propositions specific to core RBAC to meet real-world scenarios such as dynamic constraints, temporal, or spatial constraints. However, semantic meanings of such propositions are various based on researchers' intention.

## 10. Conclusion

The extensions to RBAC were revealed to fall into a number of categorizations with Organization, Privacy, Resource, Task, Spatio-Temporal, Spatial and Temporal falling under the general category of context. The categories each had properties specific to their implementation, but were seen to generalize to being specialized instances of context tailored to the entities or actions the categories covered. A number of domains were identified as being the motivations behind needing extensions to the core RBAC model. The domains, such as healthcare, presenting new challenges the previous models were not required to design for. Our literature review showed that the state of RBAC model evaluation needs focused from the research community given most model evaluations seen within the papers were based on hypothetical situations with little to no case studies or implementations in practice.

## References

- [1] D. Kuhn, E. J. Coyne, T. R. Weil, Adding attributes to role-based access control, *Computer* 43 (6) (2010) 79–81.
- [2] Q. Ni, E. Bertino, J. Lobo, C. Brodie, C. Karat, J. Karat, A. Trombetta, Privacy-aware role-based access control, *ACM Transactions on Information and System Security (TISSEC)* 13 (3) (2010) 24.
- [3] A. C. OConnor, R. J. Loomis, 2010 economic analysis of role-based access control, RTI International report for NIST.
- [4] D. Ferraiolo, D. Kuhn, Role based access control, in: 15th National Computer Security Conference, Oct 13-16, 1992, pp. 554–563.
- [5] R. Sandhu, E. Coyne, H. Feinstein, C. Youman, Role-based access control models, *Computer* 29 (2) (1996) 38–47.
- [6] B. Kitchenham, S. Charters, Guidelines for performing systematic literature reviews in software engineering.
- [7] H. Jian-min, L. Xi-yu, Y. Hui-qun, T. Jun, An extended rbac model based on granular logic, in: *Granular Computing, 2008. GrC 2008. IEEE International Conference on*, IEEE, 2008, pp. 261–264.

- [8] S. Aich, S. Mondal, S. Sural, A. K. Majumdar, Transactions on computational science iv, 2009, Ch. Role Based Access Control with Spatiotemporal Context for Mobile Applications, pp. 177–199.
- [9] Y. Bao, J. Song, D. Wang, D. Shen, G. Yu, A role and context based access control model with uml, in: Young Computer Scientists, 2008. ICYCS 2008. The 9th International Conference for, 2008, pp. 1175–1180.
- [10] Z. Zhang, X. Zhang, R. Sandhu, Robac: Scalable role and organization based access control models, in: Collaborative Computing: Networking, Applications and Worksharing, 2006. CollaborateCom 2006. International Conference on, 2006, pp. 1–9.
- [11] L. Chen, J. Crampton, On spatio-temporal constraints and inheritance in role-based access control, in: ASIACCS: ACM Symposium on InformAtion, Computer and Communications Security, 2008, pp. 205–216.
- [12] D. Zou, L. He, H. Jin, X. Chen, Crbac: Imposing multi-grained constraints on the rbac model in the multi-application environment, Journal of Network and Computer Applications 32 (2) (2009) 402–411.
- [13] Y. Zhao, Y. Zhao, H. Lu, A flexible role-and resource-based access control model, in: Computing, Communication, Control, and Management, 2008. CCCM’08. ISECS International Colloquium on, Vol. 2, IEEE, 2008, pp. 75–79.
- [14] I. Ray, M. Toahchoodee, A spatio-temporal role-based access control model, in: Proceedings of the 21st annual IFIP WG 11.3 working conference on Data and applications security, 2007, pp. 211–226.
- [15] F. Hansen, V. Oleshchuk, Spatial role-based access control model for wireless networks, in: Vehicular Technology Conference, 2003. VTC 2003-Fall. 2003 IEEE 58th, Vol. 3, IEEE, 2003, pp. 2093–2097.
- [16] S. Aich, S. Sural, A. K. Majumdar, Starbac: spatiotemporal role based access control, in: Proceedings of the 2007 OTM confederated international conference on On the move to meaningful internet systems: CoopIS, DOA, ODBASE, GADA, and IS - Volume Part II, OTM’07, 2007, pp. 1567–1582.
- [17] J. Joshi, E. Bertino, U. Latif, A. Ghafoor, A generalized temporal role-based access control model, Knowledge and Data Engineering, IEEE Transactions on 17 (1) (2005) 4–23.
- [18] M. Alam, M. Hafner, R. Breu, A constraint based role based access control in the sectet a model-driven approach, in: Proceedings of the 2006 International Conference on Privacy, Security and Trust: Bridge the Gap Between PST Technologies and Business Services, PST ’06, 2006, pp. 13:1–13:13.
- [19] S. K. Tzelepi, D. K. Koukopoulos, G. Pangalos, A flexible content and context-based access control model for multimedia medical image database systems, in: Proceedings of the 2001 workshop on Multimedia and security: new challenges, Sec ’01, 2001, pp. 52–55.
- [20] D. G. Cholewka, R. A. Botha, J. H. P. Eloff, A context-sensitive access control model and prototype implementation, in: In: Information Security for Global Information Infrastructures: IFIP TC 11 Sixteenth Annual Working Conference on Information Security, Kluwer Academic Publishers, 2000, pp. 341–350.
- [21] X. Huang, H. Wang, Z. Chen, J. Lin, A context, rule and role-based access control model in enterprise pervasive computing environment, in: Pervasive Computing and Applications, 2006 1st International Symposium on, 2006, pp. 497–502.
- [22] E. B. Arjmand Samuel, Arif Ghafoor, A framework for specification and verification of generalized spatio-temporal role based access control model, Tech. Rep. CERIAS Tech Report 2007-08.
- [23] L. Yao, X. Kong, Z. Xu, A task-role based access control model with multi-constraints, in: Networked Computing and Advanced Information Management, 2008. NCM’08. Fourth International Conference on, Vol. 1, IEEE, 2008, pp. 137–143.
- [24] W. Zhou, C. Meinel, Team and task based rbac access control model, in: Network Operations and Management Symposium, 2007. LANOMS 2007. Latin American, IEEE, 2007, pp. 84–94.
- [25] S. Oh, S. Park, Task–role-based access control model, Information Systems 28 (6) (2003) 533–562.
- [26] G. Motta, S. Furuie, A contextual role-based access control authorization model for electronic patient record, Information Technology in Biomedicine, IEEE Transactions on 7 (3) (2003) 202–207.
- [27] M. Damiani, E. Bertino, B. Catania, P. Perlasca, Geo-rbac: A spatially aware rbac, ACM Transactions on Information and System Security (TISSEC) 10 (1) (2007) 2.
- [28] A. Masoumzadeh, J. Joshi, Purbac: Purpose-aware role-based access control, On the Move to Mean-

- ingful Internet Systems: OTM 2008 (2008) 1104–1121.
- [29] N. Thein, et al., Leveraging access control mechanism of android smartphone using context-related role-based access control model, in: Networked Computing and Advanced Information Management (NCM), 2011 7th International Conference on, IEEE, 2011, pp. 54–61.
  - [30] S. M. Chandran, J. B. D. Joshi, Lot-rbac: a location and time-based RBAC model, in: Proceedings of the 6th international conference on Web Information Systems Engineering, WISE'05, 2005, pp. 361–375.
  - [31] W. Yamazaki, H. Hiraishi, F. Mizoguchi, Designing an Agent-Based RBAC system for dynamic security policy, in: Proceedings of the 13th IEEE International Workshops on Enabling Technologies: Infrastructure for Collaborative Enterprises, WETICE '04, 2004, pp. 199–204.
  - [32] H. Jian-min, L. Xi-yu, Y. Hui-qun, T. Jun, An extended RBAC model based on granular logic, in: Granular Computing, 2008. GrC 2008. IEEE International Conference on, 2008, pp. 261–264.
  - [33] S. Haibo, H. Fan, A context-aware role-based access control model for web services, in: e-Business Engineering, 2005. ICEBE 2005. IEEE International Conference on, IEEE, 2005, pp. 220–223.

## 11. Appendix

Context	
	A flexible content and context-based access control model for multimedia medical image database systems, 2001 [19]
	A Context-Aware Role-Based Access Control Model for Web Services, 2005 [33]
	A context-sensitive access control model and prototype implementation, 2000 [20]
	A Context, Rule and Role-Based Access Control Model In Enterprise Pervasive Computing Environment, 2006 [21]
	A contextual role-based access control authorization model for electronic patient record Motta, 2003 [26]
	A Role and Context Based Access Control Model with UML, 2008 [9]
	An extended RBAC model based on granular logic, 2008 [7]
	Designing an agent-based RBAC system for dynamic security policy, 2004 [31]
	An extended RBAC model based on granular logic, 2008 [32]
	Leveraging Access Control Mechanism of Android Smartphone Using Context-Related Role-Based Access Control Model, 2011 [29]
	CRBAC: Imposing multi-grained constraints on the RBAC model in the multi-application environment, 2009 [12]
Const.	A constraint based role based access control in the SECTET a model-driven approach, 2006 [18]
Org	ROBAC: Scalable Role and Organization Based Access Control Models, 2006 [10]
Priv.	Privacy-aware role-based access control, 2007 [2]
	PuRBAC: Purpose-Aware Role-Based Access Control, 2008 [28]
Res.	A Flexible Role- and Resource-Based Access Control Model, 2008 [13]
Task	A Task-Role Based Access Control Model with Multi-Constraints, 2008 [23]
	Team and Task Based RBAC Access Control Model, 2009 [24]
	Task-role-based access control model, 2003 [25]
	STARRBAC: Spatiotemporal role based access control, 2007 [16]
Spatio-Temporal	On spatio-temporal constraints and inheritance in role-based access control, 2008 [11]
	A framework for specification and verification of generalized spatio-temporal role based access control model, 2007 [22]
	LoT-RBAC: A Location and Time-Based RBAC Model, 2005 [30]
	A Spatio-temporal Role-Based Access Control Model, 2007 [14]
	Role Based Access Control with Spatiotemporal Context for Mobile Applications, 2009 [8]
	GEO-RBAC: a spatially aware RBAC, 2005 [27]
	LRBAC: A location-aware role-based access control model, 2006 [14]
Spatial	Spatial role-based access control model for wireless networks, 2003 [15]
Temp.	A generalized temporal role-based access control model, 2005 [17]

Table 3: Primary sources grouped by categorization