



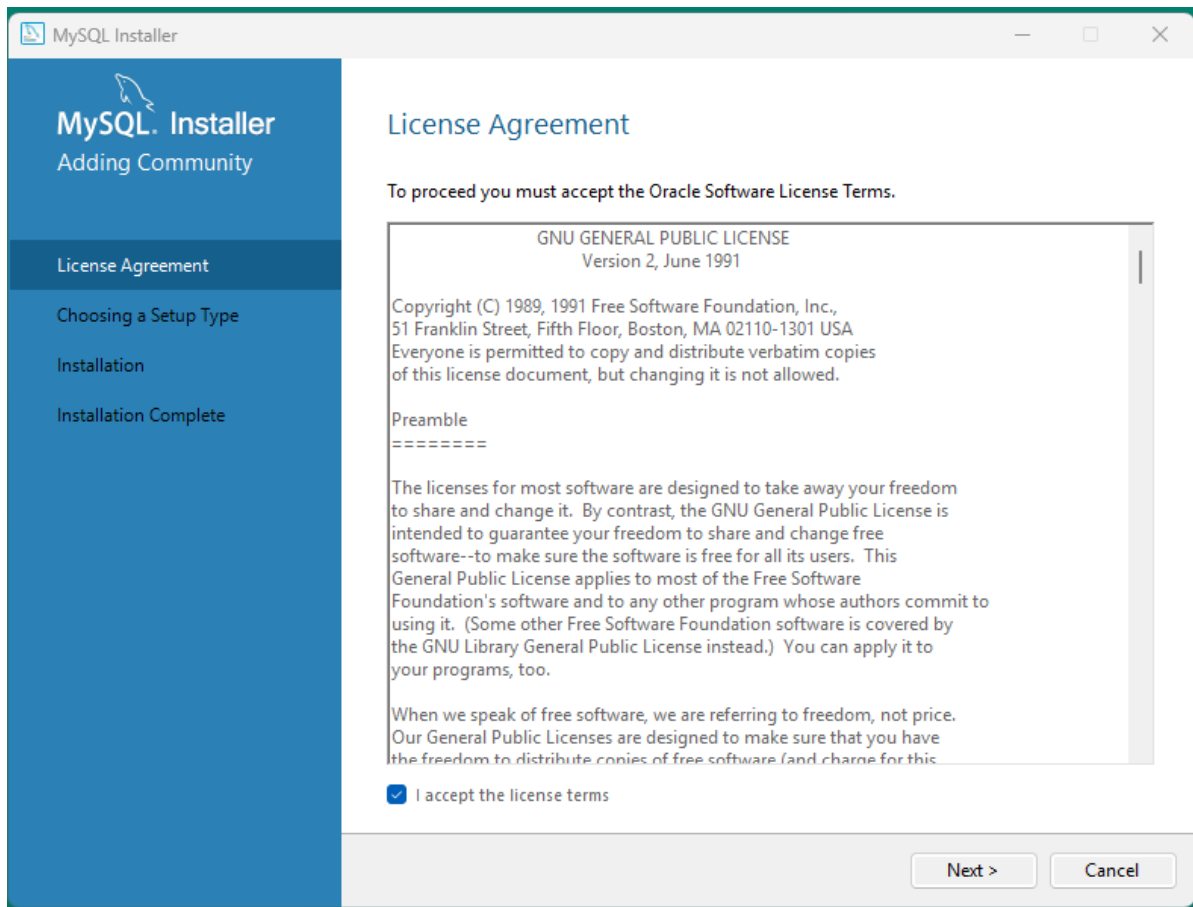
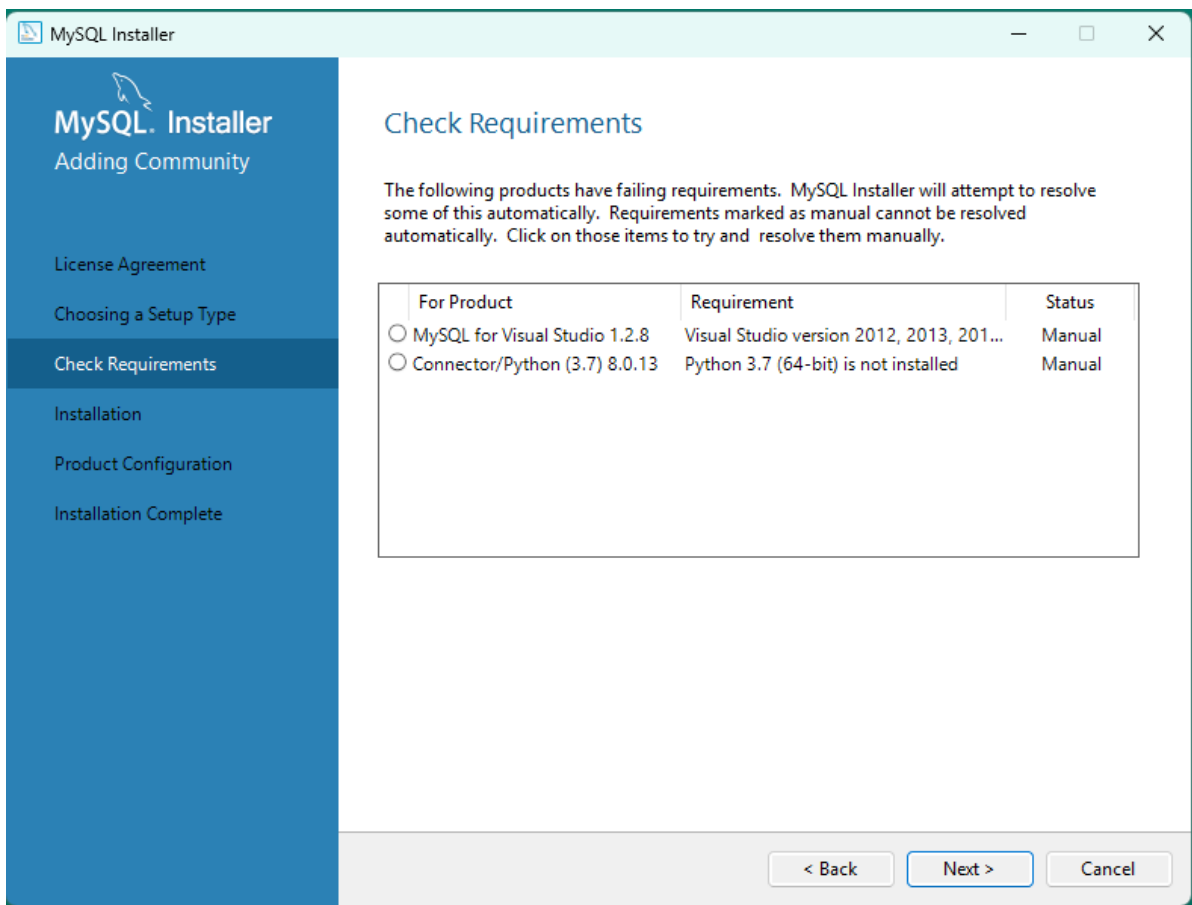
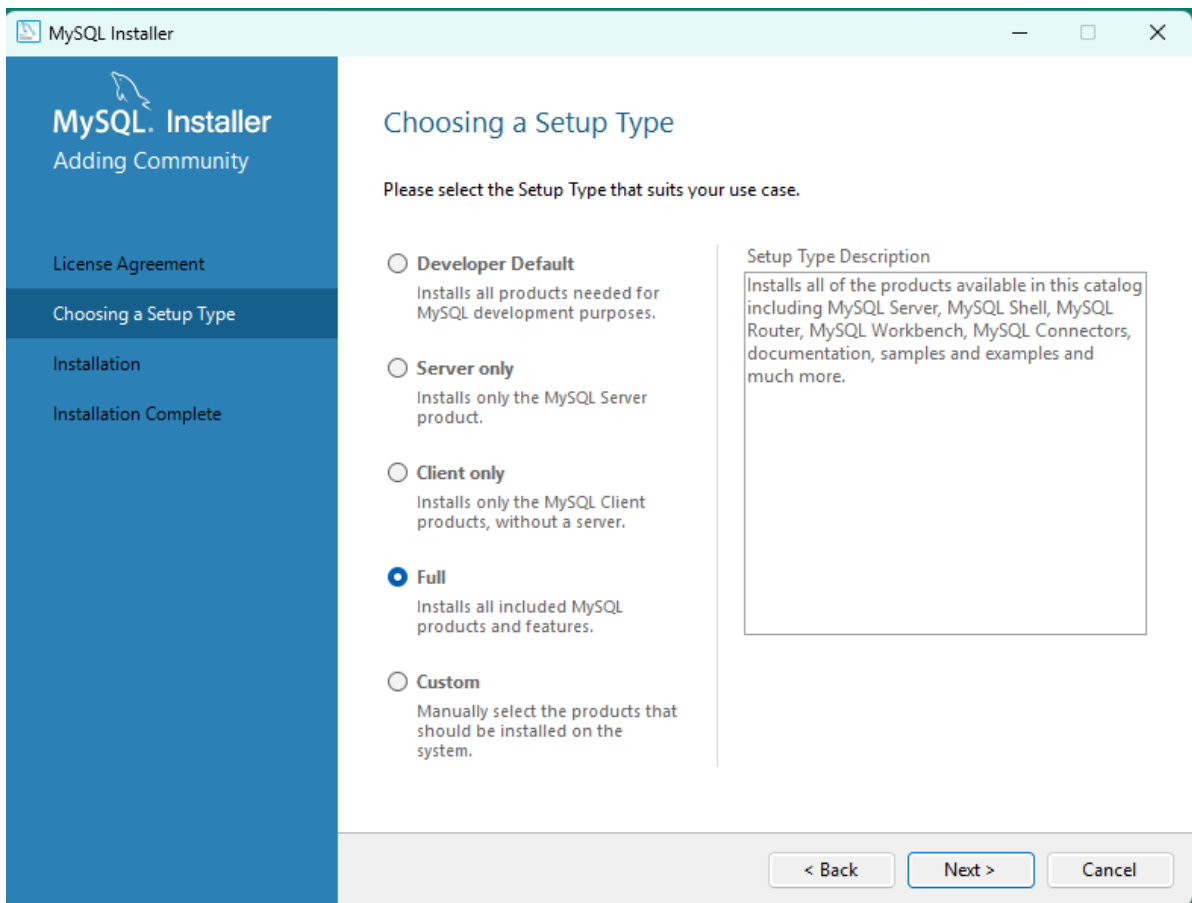


—MYSQL安装

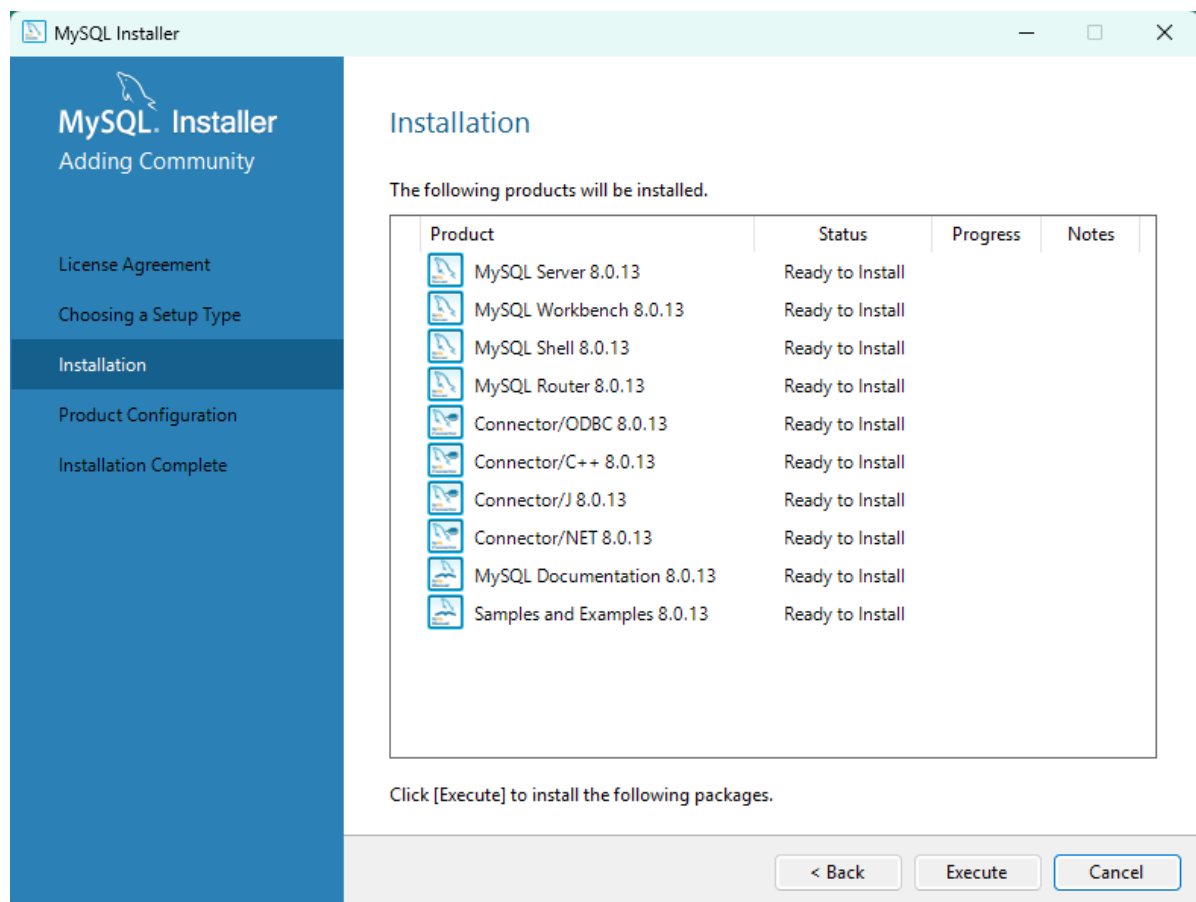

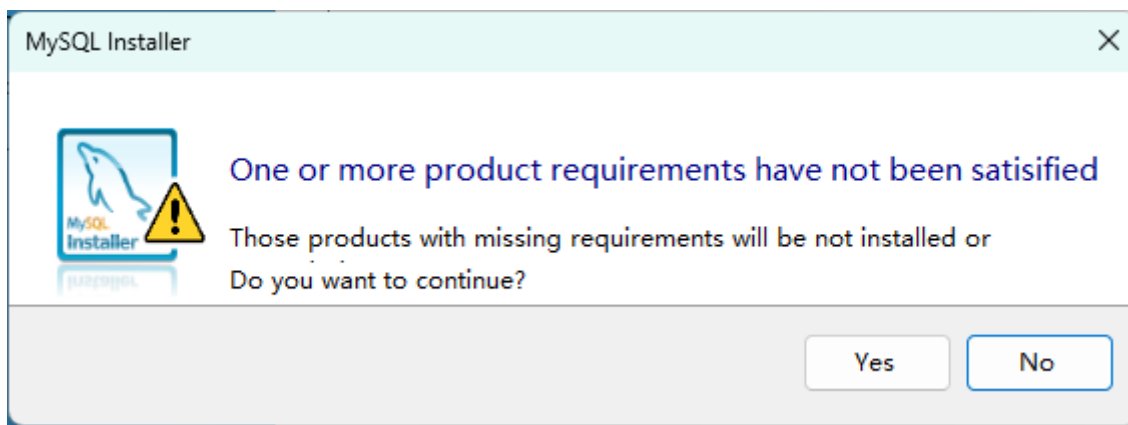

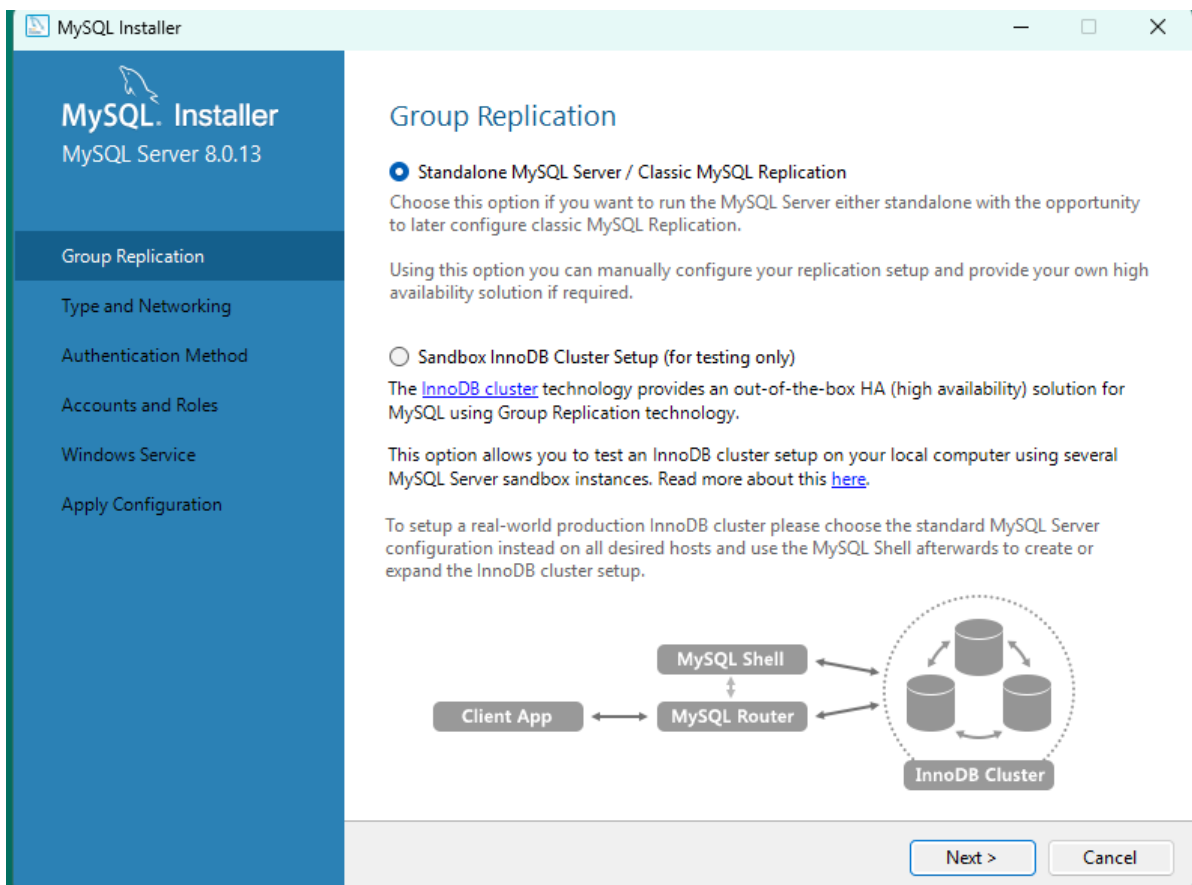

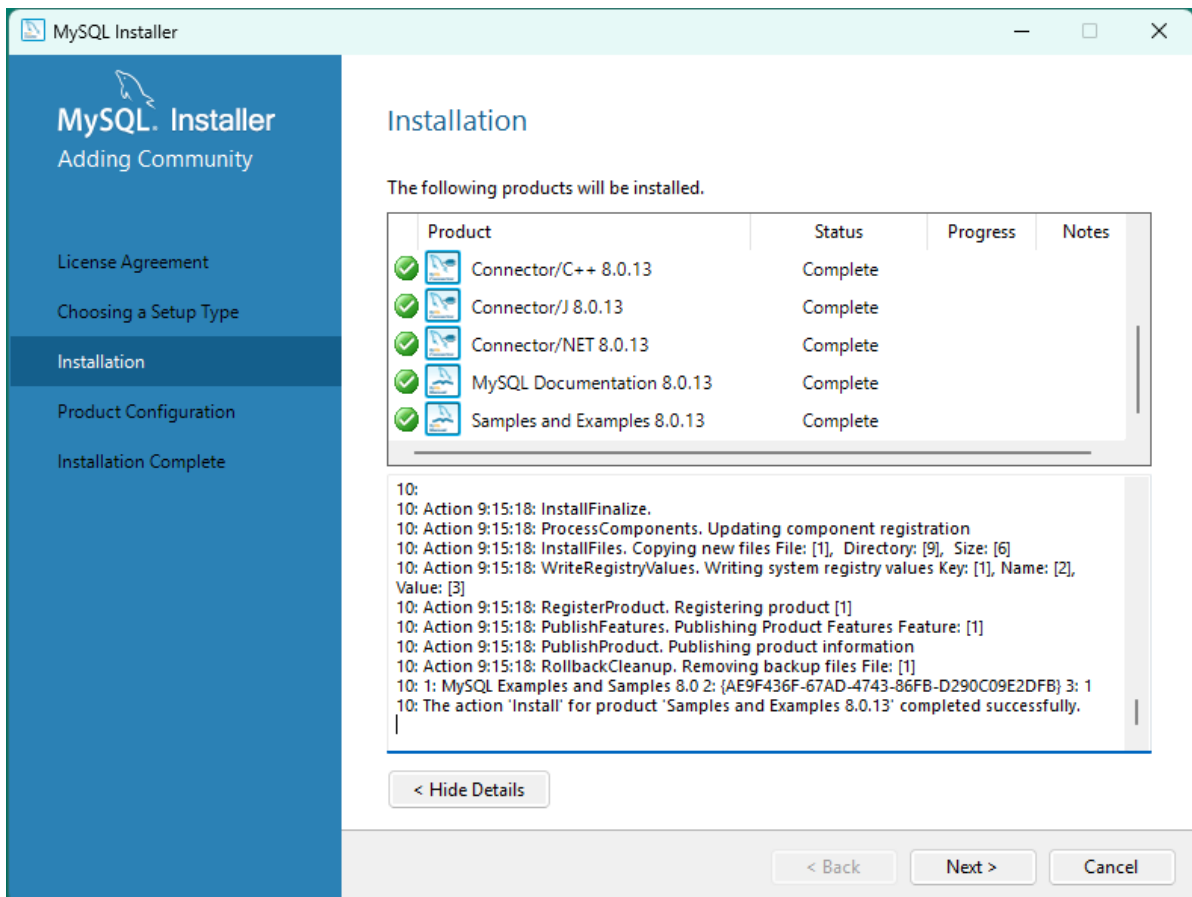

MySQL Installer

MySQL Server 8.0.13

Group Replication

Type and Networking

Authentication Method

Accounts and Roles

Windows Service

Apply Configuration

Type and Networking

Server Configuration Type

Choose the correct server configuration type for this MySQL Server installation. This setting will define how much system resources are assigned to the MySQL Server instance.

Config Type: Development Computer

Connectivity

Use the following controls to select how you would like to connect to this server.

☒ TCP/IP Port: 3306 X Protocol Port: 33060

☒ Open Windows Firewall ports for network access

☐ Named Pipe Pipe Name: MYSQL

☐ Shared Memory Memory Name: MYSQL

Advanced Configuration

Select the check box below to get additional configuration pages where you can set advanced and logging options for this server instance.

☐ Show Advanced and Logging Options

< Back

Next >

Cancel

MySQL Installer

MySQL Server 8.0.13

Group Replication

Type and Networking

Authentication Method

Accounts and Roles

Windows Service

Apply Configuration

Authentication Method

☐ Use Strong Password Encryption for Authentication (RECOMMENDED)

MySQL 8 supports a new authentication based on improved stronger SHA256-based password methods. It is recommended that all new MySQL Server installations use this method going forward.

 Attention: This new authentication plugin on the server side requires new versions of connectors and clients which add support for this new 8.0 default authentication (caching_sha2_password authentication).

Currently MySQL 8.0 Connectors and community drivers which use libmysqlclient 8.0 support this new method. If clients and applications cannot be updated to support this new authentication method, the MySQL 8.0 Server can be configured to use the legacy MySQL Authentication Method below.

☒ Use Legacy Authentication Method (Retain MySQL 5.x Compatibility)

Using the old MySQL 5.x legacy authentication method should only be considered in the following cases:



- If applications cannot be updated to use MySQL 8 enabled Connectors and drivers.
- For cases where re-compilation of an existing application is not feasible.
- An updated, language specific connector or driver is not yet available.



Security Guidance: When possible, we highly recommend taking needed steps towards upgrading your applications, libraries, and database servers to the new stronger authentication. This new method will significantly improve your security.



< Back

Next >

Cancel

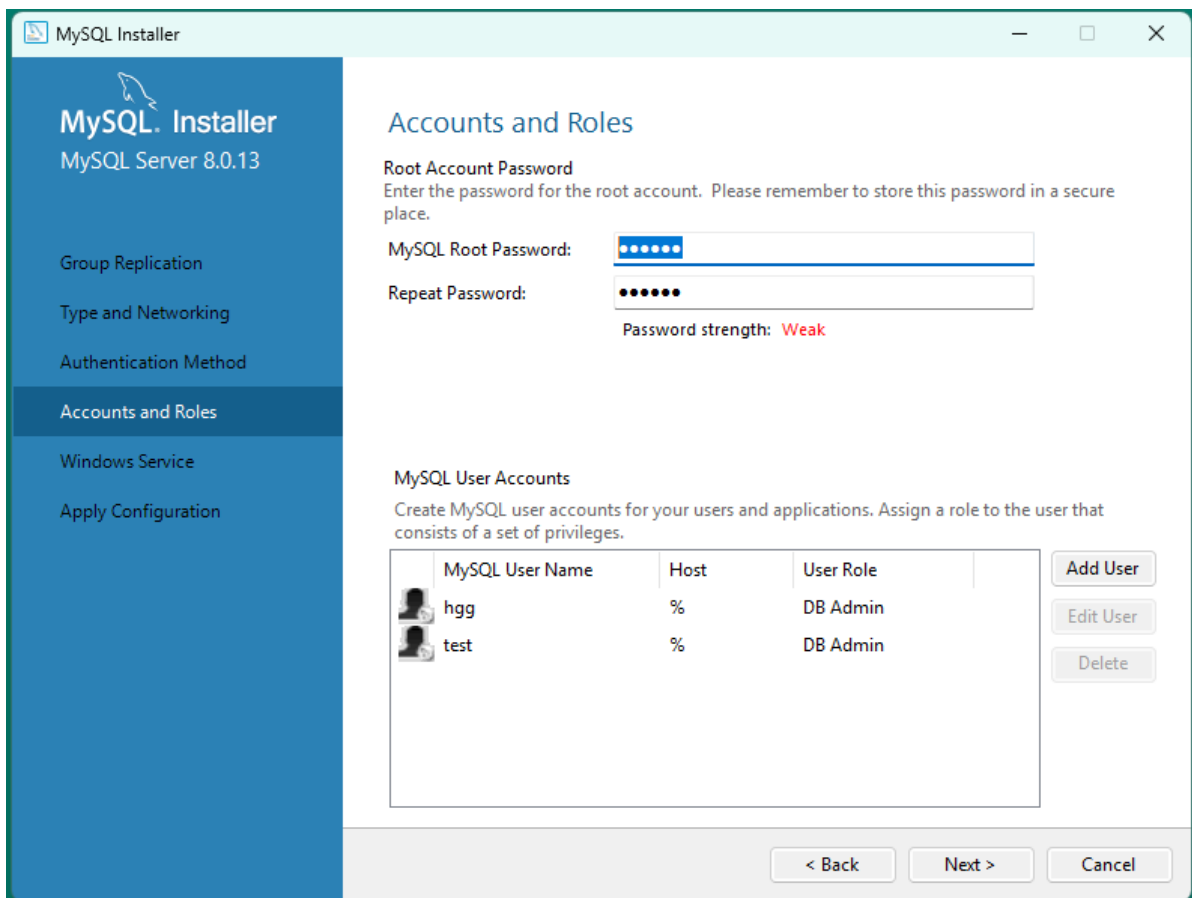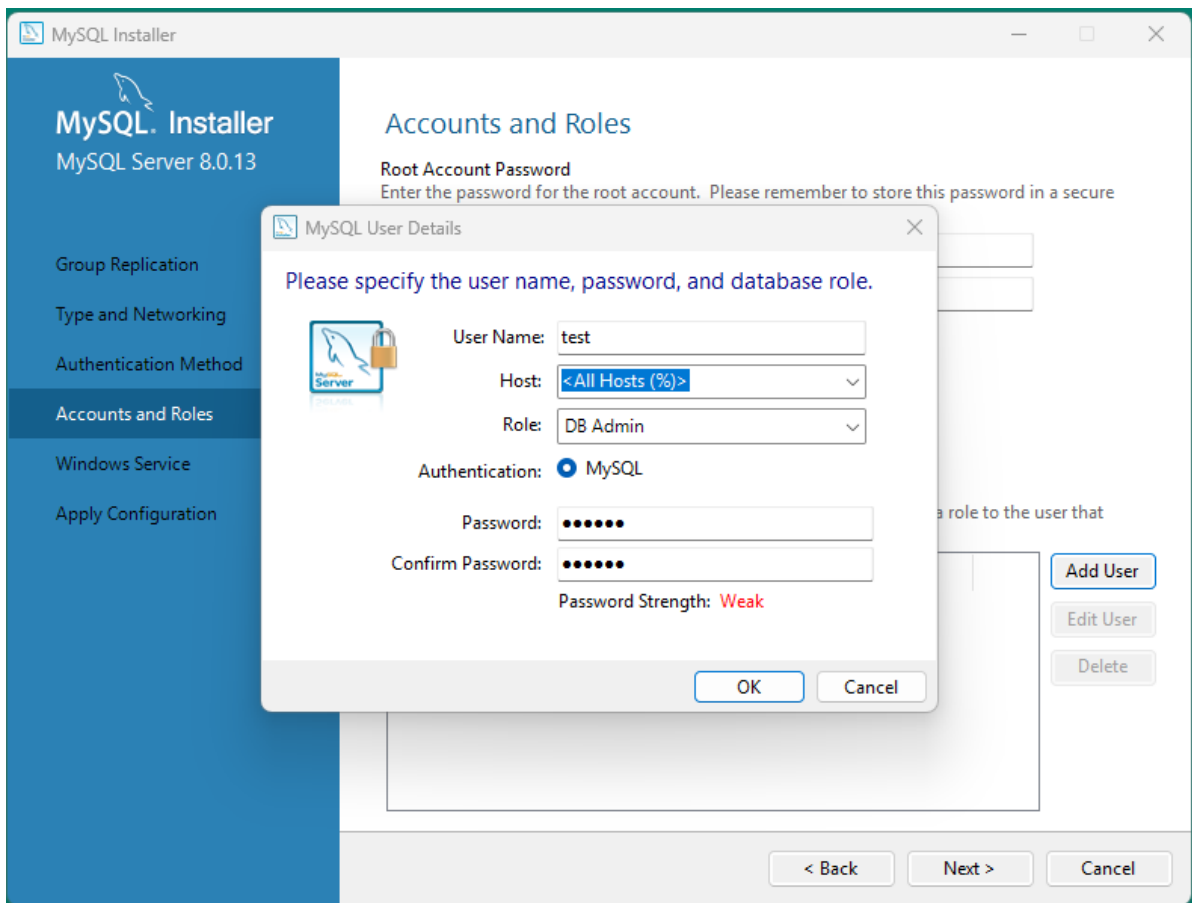

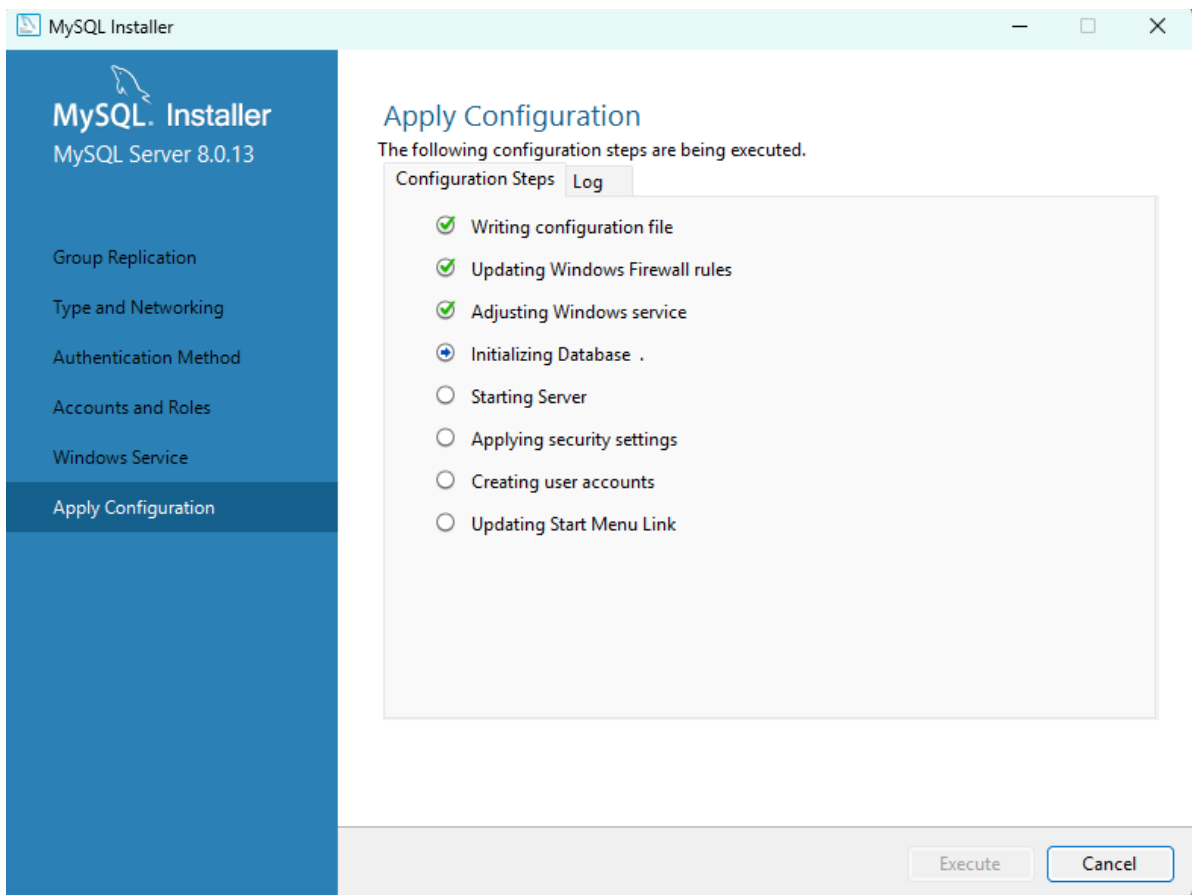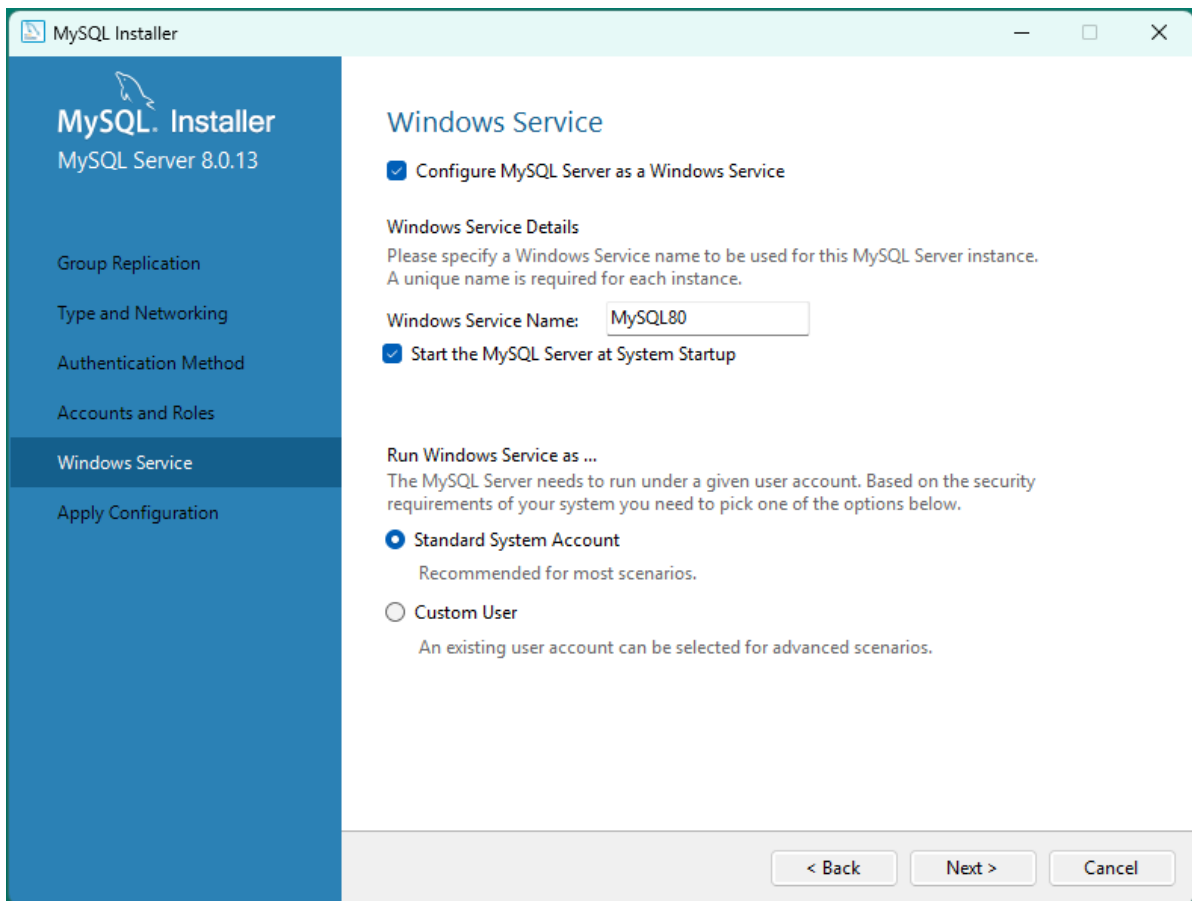

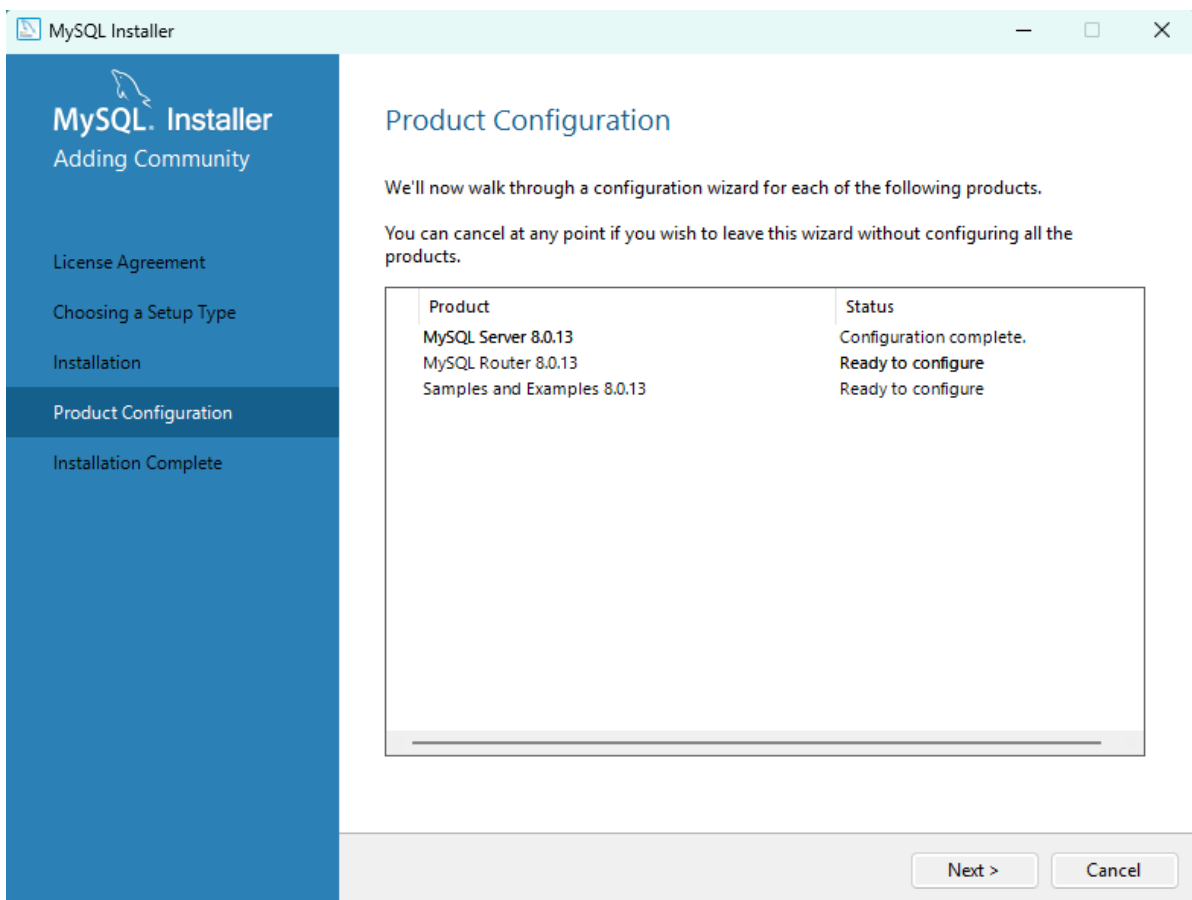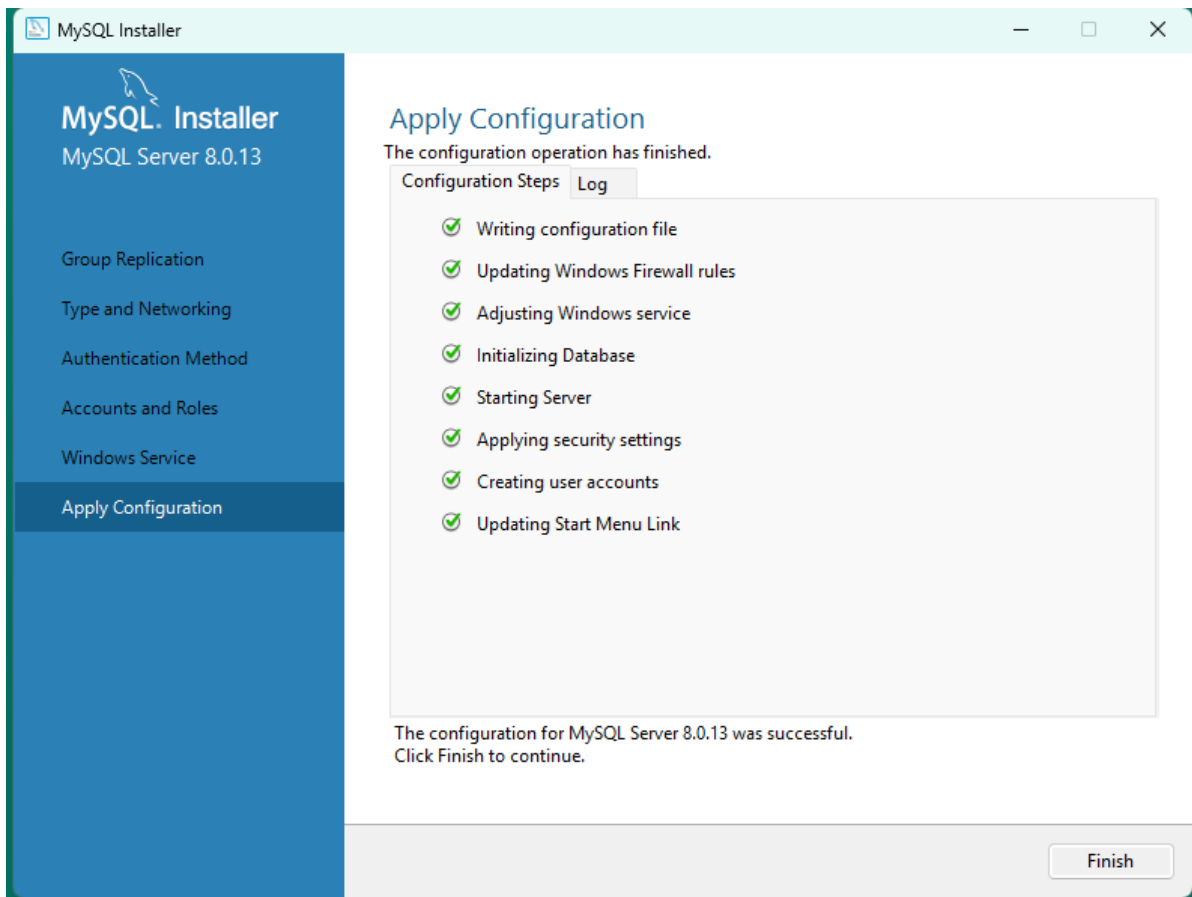

MySQL Installer

MySQL Router 8.0.13

MySQL Router Configuration

MySQL Router Configuration

☐ Bootstrap MySQL Router for use with InnoDB cluster

This wizard can bootstrap MySQL Router to direct traffic between MySQL applications and a MySQL InnoDB cluster. Applications that connect to the router will be automatically directed to an available read/write or read-only member of the cluster.

The bootstrapping process requires a connection to the InnoDB cluster. In order to register the MySQL Router for monitoring, use the current Read/Write instance of the cluster.

Hostname:

Port:

Management User:

Password: Test Connection

MySQL Router requires specification of a base port (between 80 and 65532). The first port is used for classic read/write connections. The other ports are computed sequentially after the first port. If any port is indicated to be in use, please change the base port.

Classic MySQL protocol connections to InnoDB cluster:

Read/Write:

Read Only:

MySQL X protocol connections to InnoDB cluster:

Read/Write:

Read Only:

FinishCancel

MySQL Installer

Adding Community

License Agreement

Choosing a Setup Type

Installation

Product Configuration

Installation Complete



Product Configuration



We'll now walk through a configuration wizard for each of the following products.


You can cancel at any point if you wish to leave this wizard without configuring all the products.

Product	Status
MySQL Server 8.0.13	Configuration complete.
MySQL Router 8.0.13	Configuration not needed.
Samples and Examples 8.0.13	Ready to configure

Next >Cancel

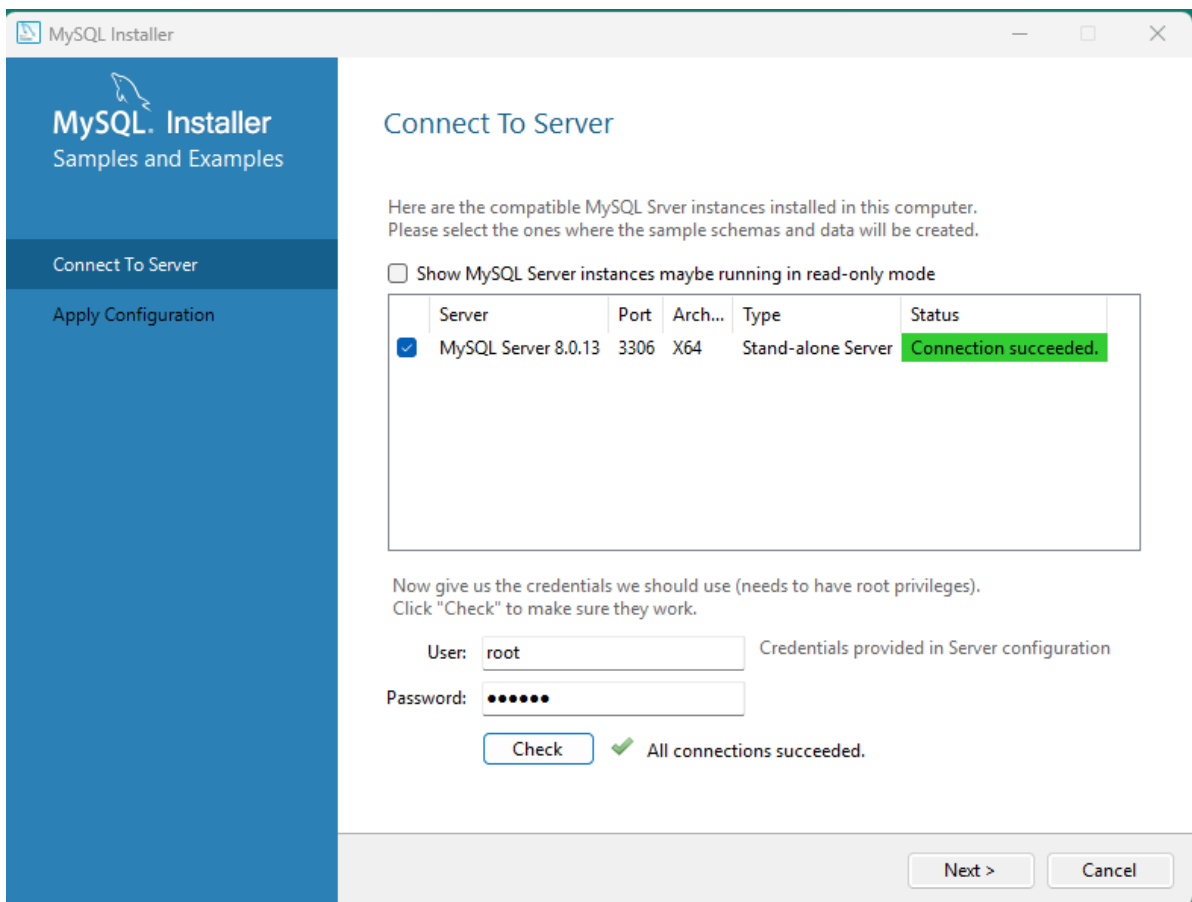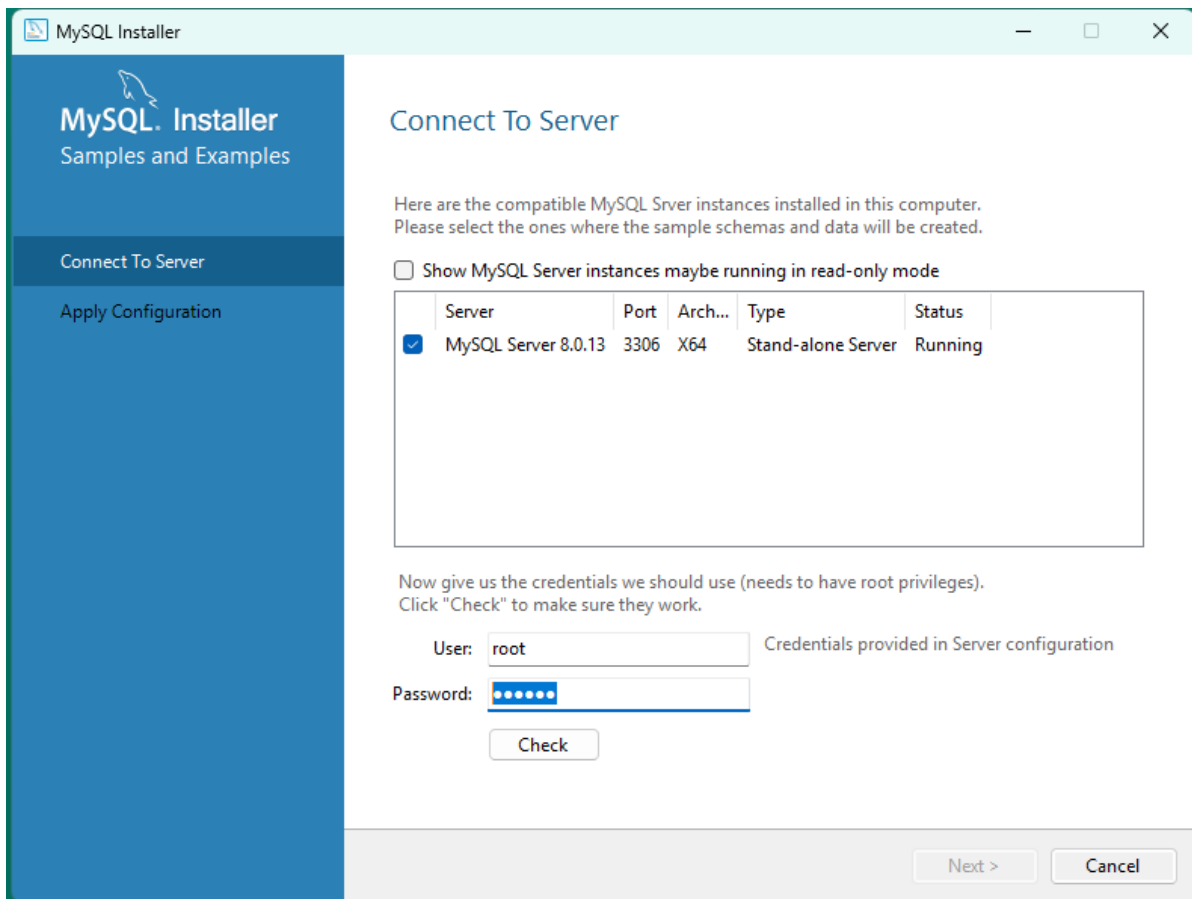

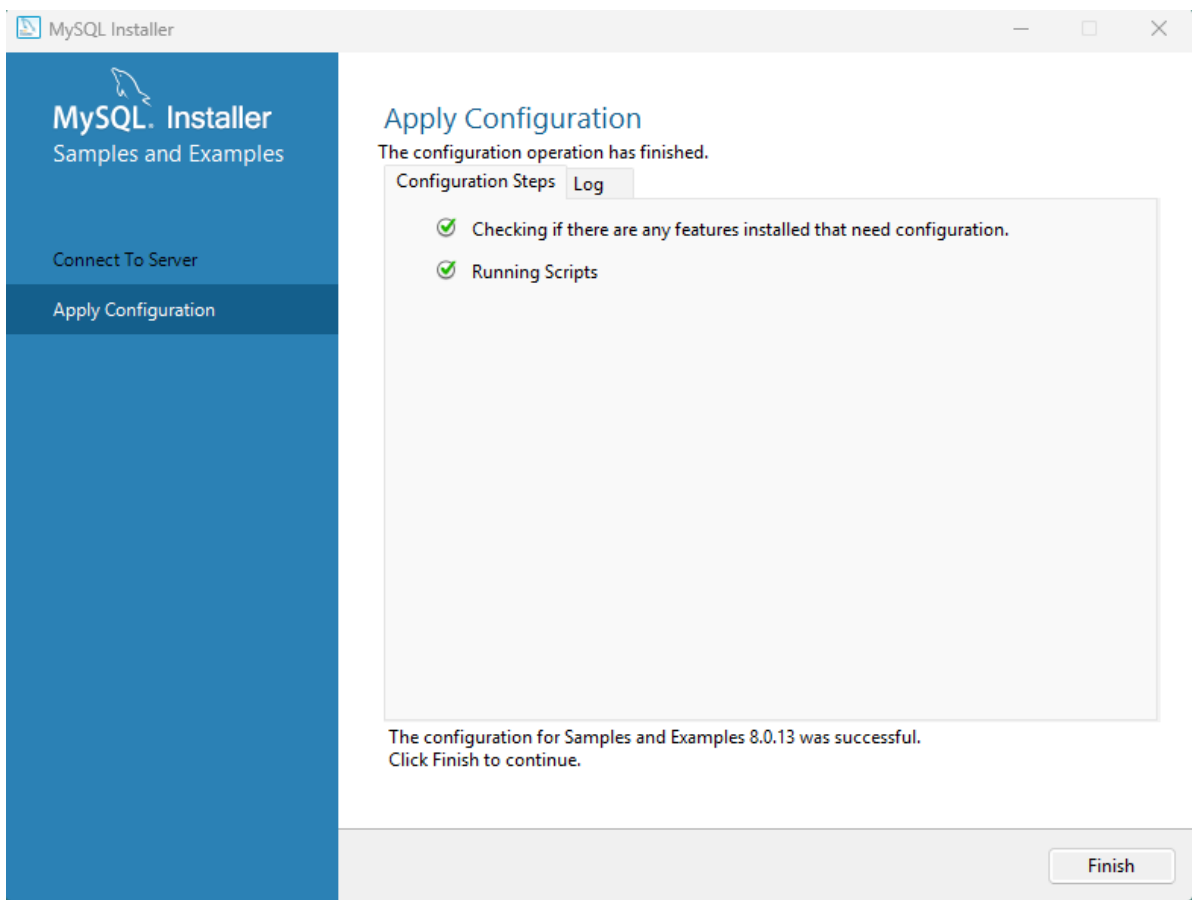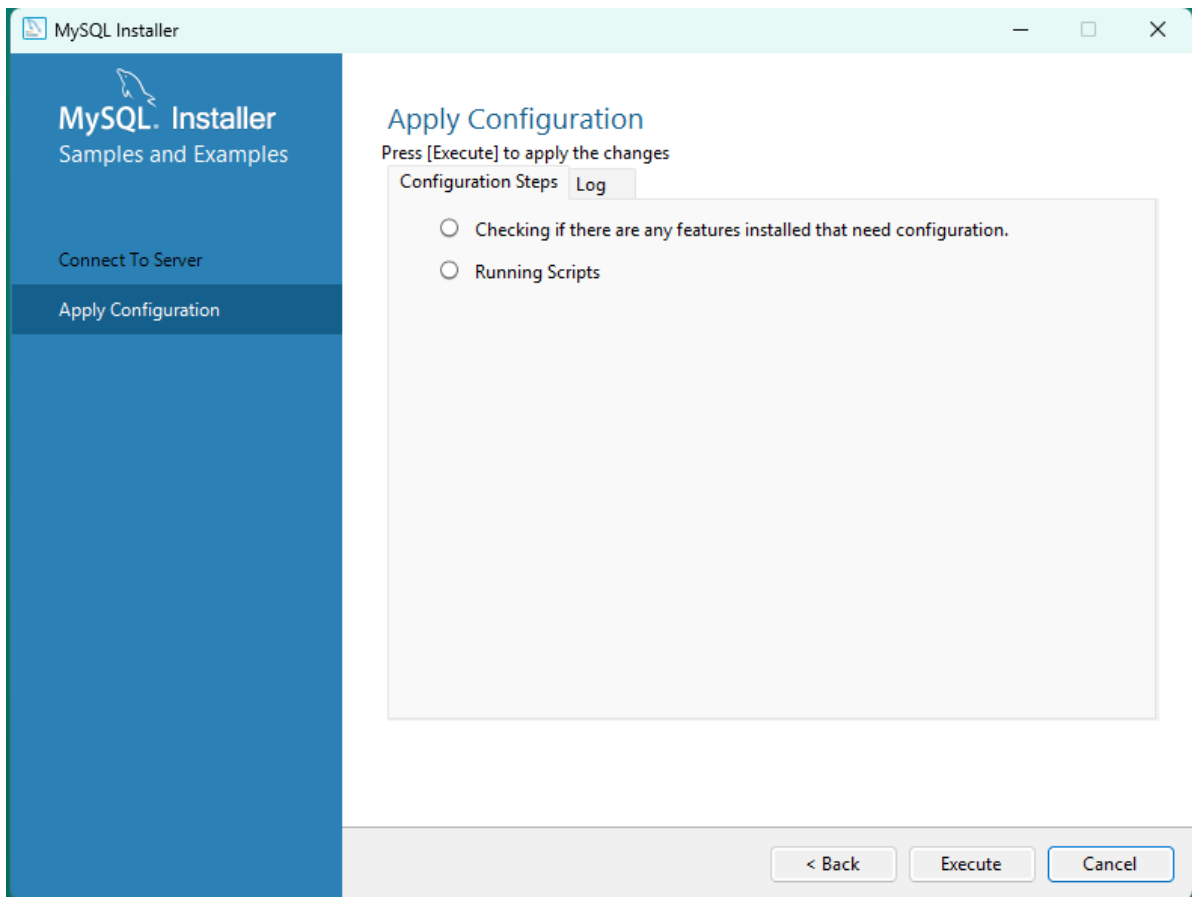

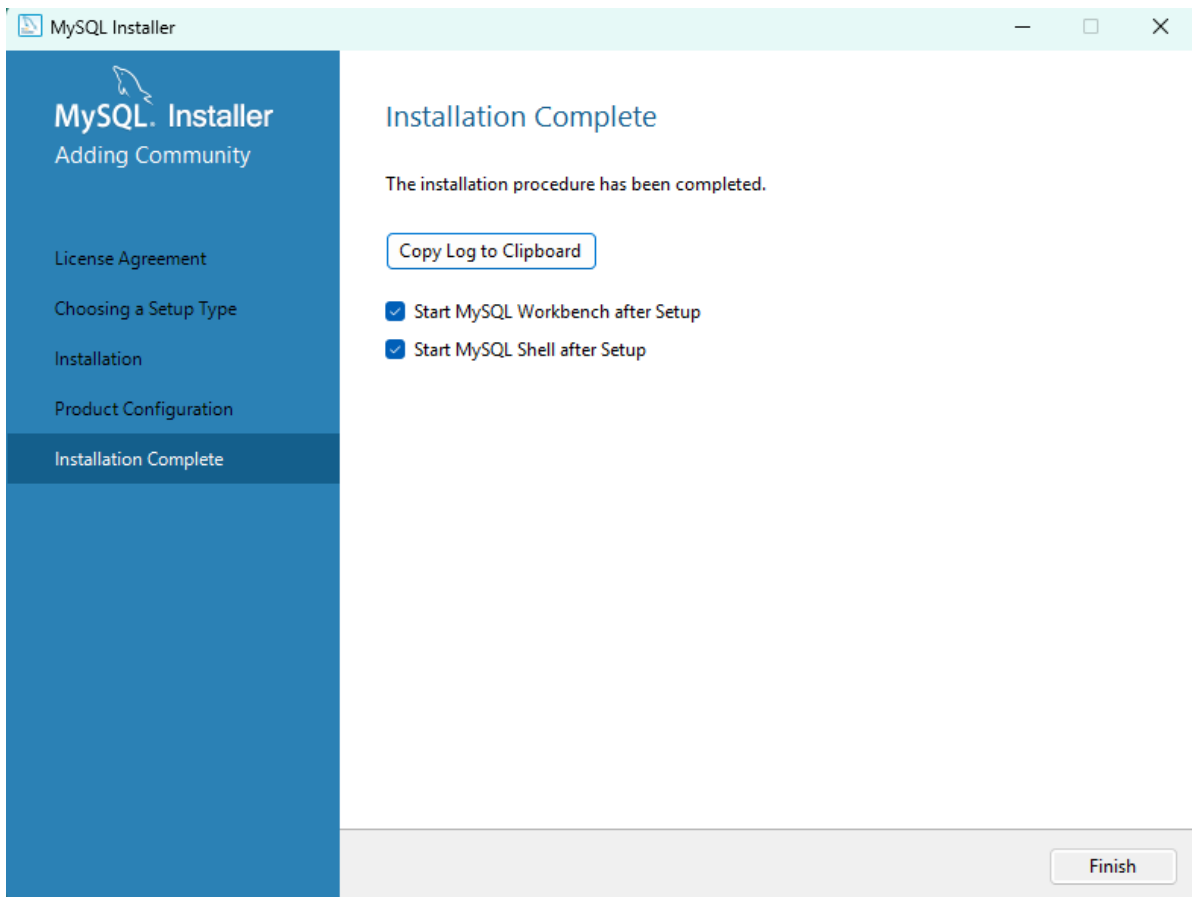

```
C:\Program Files\MySQL\MySQL JS > Displays usage details for the dba.checkInstanceConfiguration function.
\? sql syntax
Displays the main SQL help categories.

MySQL JS > \? AdminAPI
MySQL InnoDB cluster provides a complete high availability solution for MySQL.

The AdminAPI is an interactive API that enables configuring and administering
InnoDB clusters.

Use the dba global object to:



- Verify if a MySQL server is suitable for InnoDB cluster.
- Configure a MySQL server to be used as an InnoDB cluster instance.
- Create an InnoDB cluster.
- Get a handle for performing operations on an InnoDB cluster.
- Other InnoDB cluster maintenance tasks.



In the AdminAPI, an InnoDB cluster is represented as an instance of the Cluster
class.



For more information about the dba object use: \? dba
For more information about the Cluster class use: \? Cluster

MySQL JS >
MySQL JS >
MySQL JS >
MySQL JS >
```

二.mysql工具

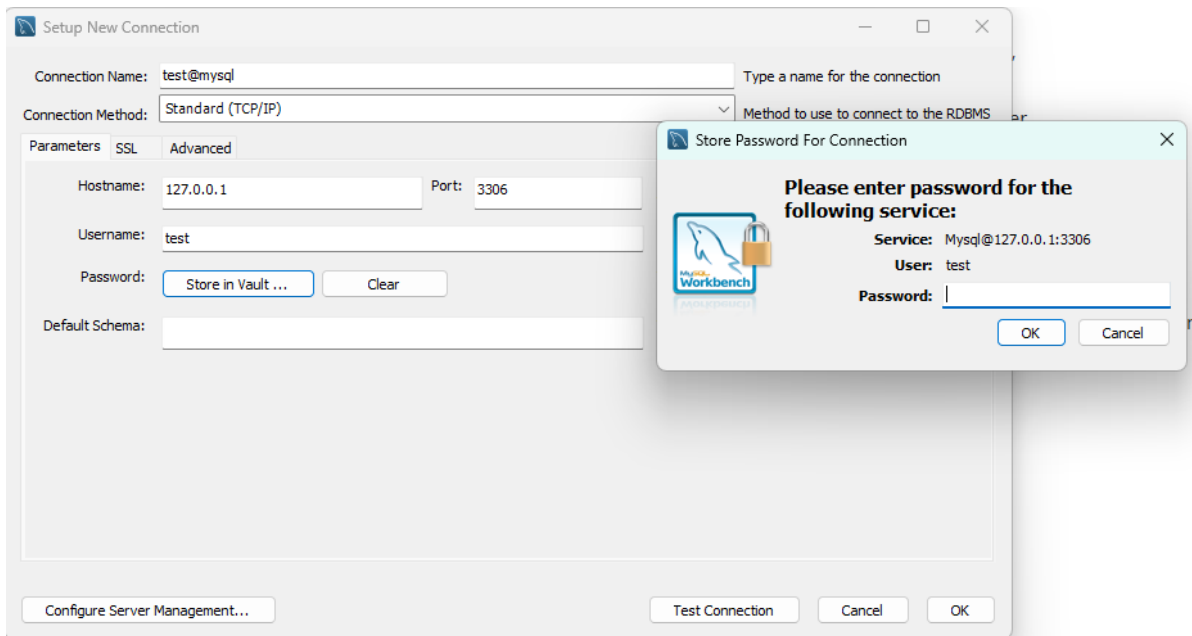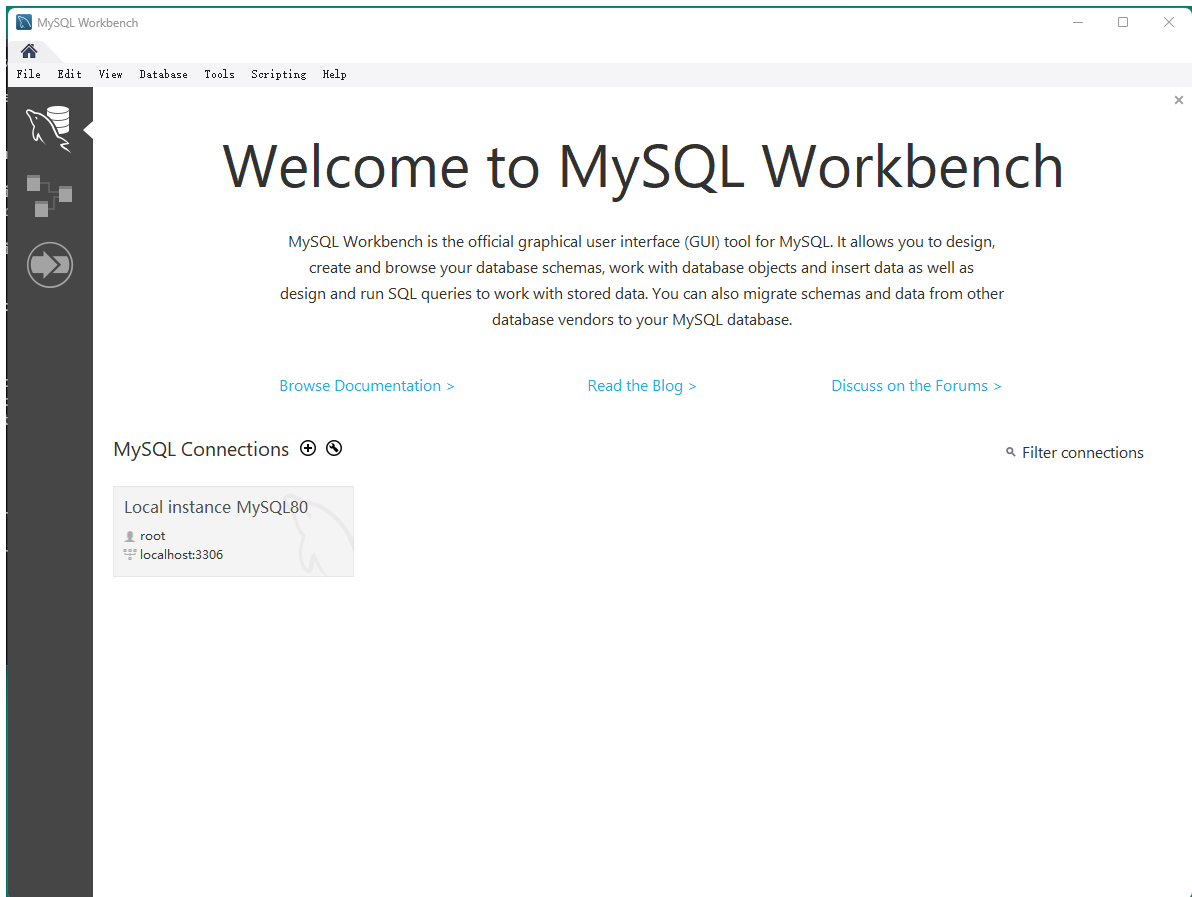

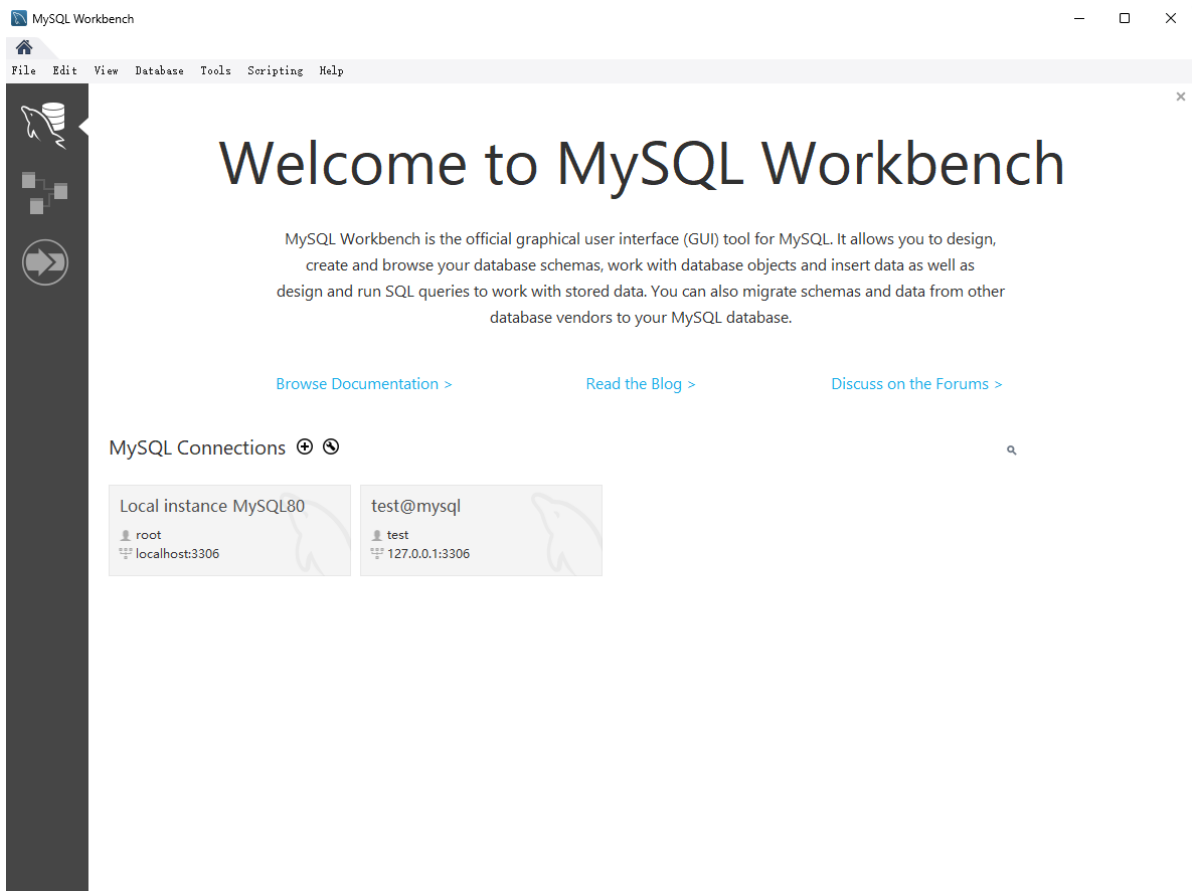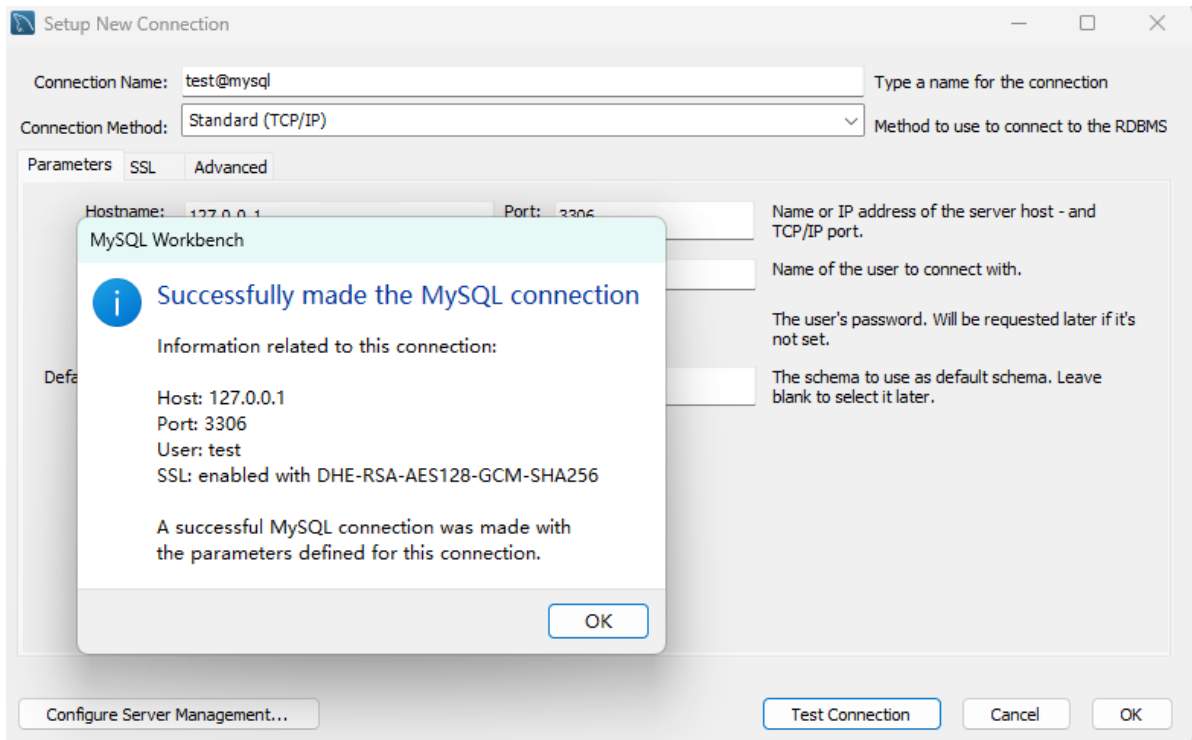

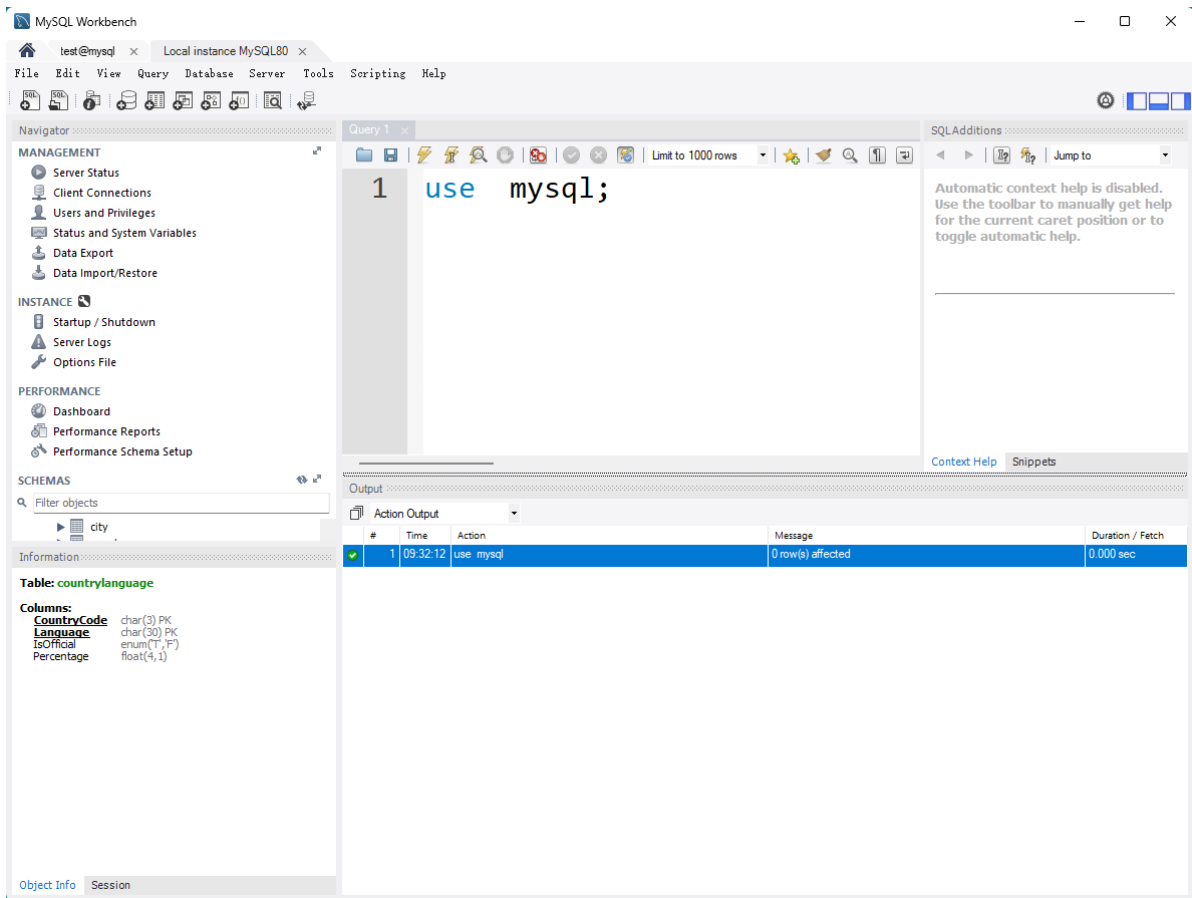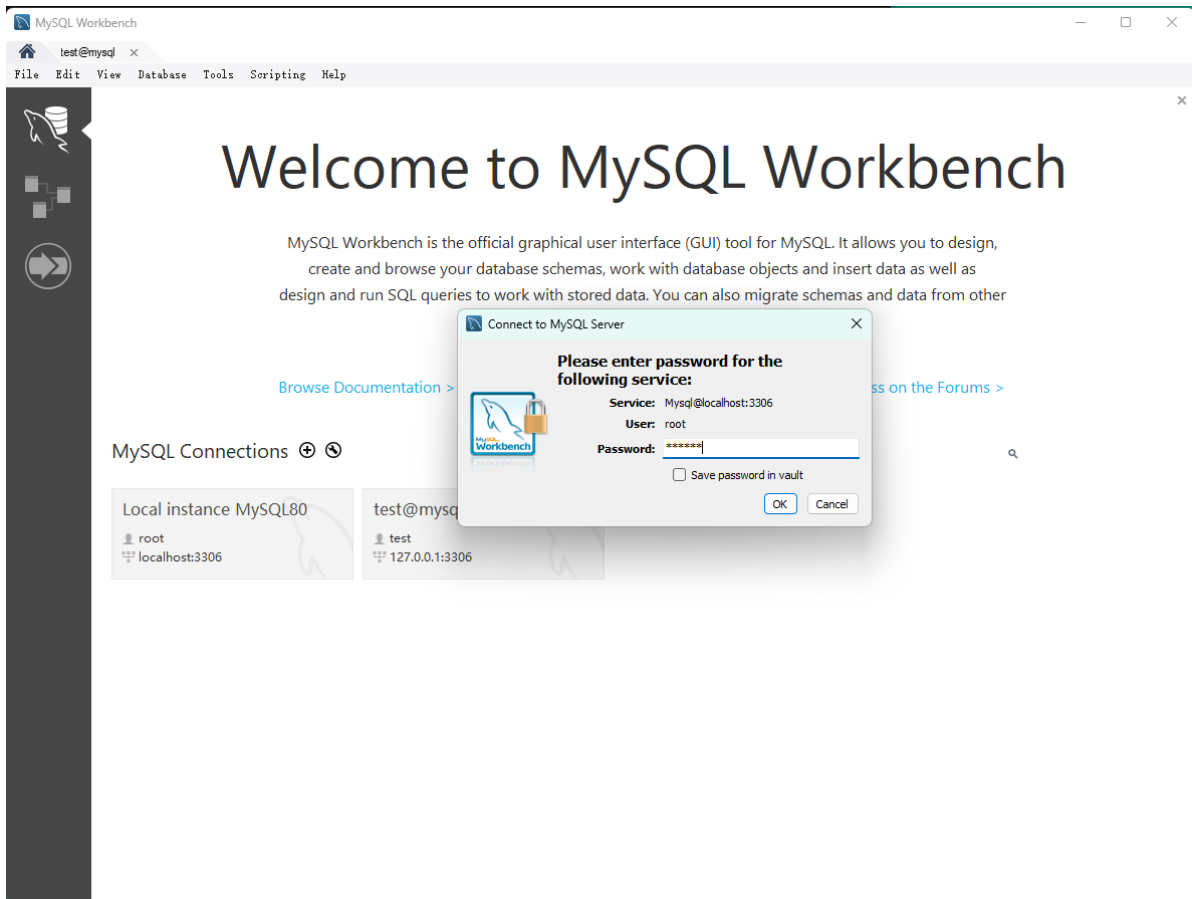

MySQL Workbench

test@mysql x Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

SCHEMAS

Filter objects

city

Information

Table: **countrylanguage**

Columns:

- CountryCode char(3) PK
- Language char(30) PK
- isOfficial enum('Y','N')
- Percentage float(4,1)

Query 1

```
1 use mysql;
2 show tables;
```

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

Tables_in_mysql

- role_edges
- server_cost
- servers
- slave_master_j...
- slave_relay_log...
- slave_worker_j...
- slow_log
- tables_priv
- time_zone
- time_zone_leap...
- time_zone_name
- time_zone_tran...
- time_zone_tran...
- user

Result 1

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	09:32:12	use mysql	0 row(s) affected	0.000 sec
2	09:33:02	use mysql	0 row(s) affected	0.000 sec
3	09:33:02	show tables	33 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

PS C:\Users\Administrator\Desktop> netstat -abn

活动连接

协议	本地地址	外部地址	状态
TCP	0.0.0.0:21	0.0.0.0:0	LISTENING
[FileZilla Server.exe]			
TCP	0.0.0.0:135	0.0.0.0:0	LISTENING
RpcEptMapper			
[svchost.exe]			
TCP	0.0.0.0:445	0.0.0.0:0	LISTENING
无法获取所有权信息			
TCP	0.0.0.0:808	0.0.0.0:0	LISTENING
[OneApp.IGCC.WinService.exe]			
TCP	0.0.0.0:3306	0.0.0.0:0	LISTENING
[mysqld.exe]			

搜索应用、设置和文档

全部

< 返回



ChangeLog



Documentation



MySQL 8.0 Command Line Client

新



MySQL 8.0 Command Line Client - Unicode

新



MySQL Installer - Community

新



MySQL Shell

新



MySQL Workbench 8.0 CE

新



Release Notes



媒体播放器

N



NVIDIA Control Panel

P



phpstudy_pro

新



Administrator



```
MySQL 8.0 Command Line Clir x + v
Enter password: *****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 21
Server version: 8.0.13 MySQL Community Server - GPL

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.


mysql> show tables;
ERROR 1046 (3D000): No database selected
mysql> use mysql
Database changed
mysql> show tables;
+-----+
| Tables_in_mysql |
+-----+
| columns_priv    |
| component       |
| db              |
| default_roles   |
| engine_cost     |
| func            |
| general_log     |
| global_grants   |
| gtid_executed   |
| help_category   |
| help_keyword    |
| help_relation   |
| help_topic      |
| innodb_index_stats |
| innodb_table_stats |
| password_history |
| plugin          |
+-----+
```

```
管理员: Windows PowerShell x + v
Windows PowerShell
版权所有 (C) Microsoft Corporation。保留所有权利。

安装最新的 PowerShell，了解新功能和改进！ https://aka.ms/PSWindows

PS C:\Users\Administrator\Desktop> mysql
mysql : 无法将“mysql”项识别为 cmdlet、函数、脚本文件或可运行程序的
名称。请检查名称的拼写，如果包括路径，请确保路径
正确，然后再试一次。
所在位置 行:1 字符: 1
+ mysql
+ ~~~~~
+ CategoryInfo          : ObjectNotFound: (mysql:String) [], Co
mmmandNotFoundException
+ FullyQualifiedErrorId : CommandNotFoundException

PS C:\Users\Administrator\Desktop> |
```

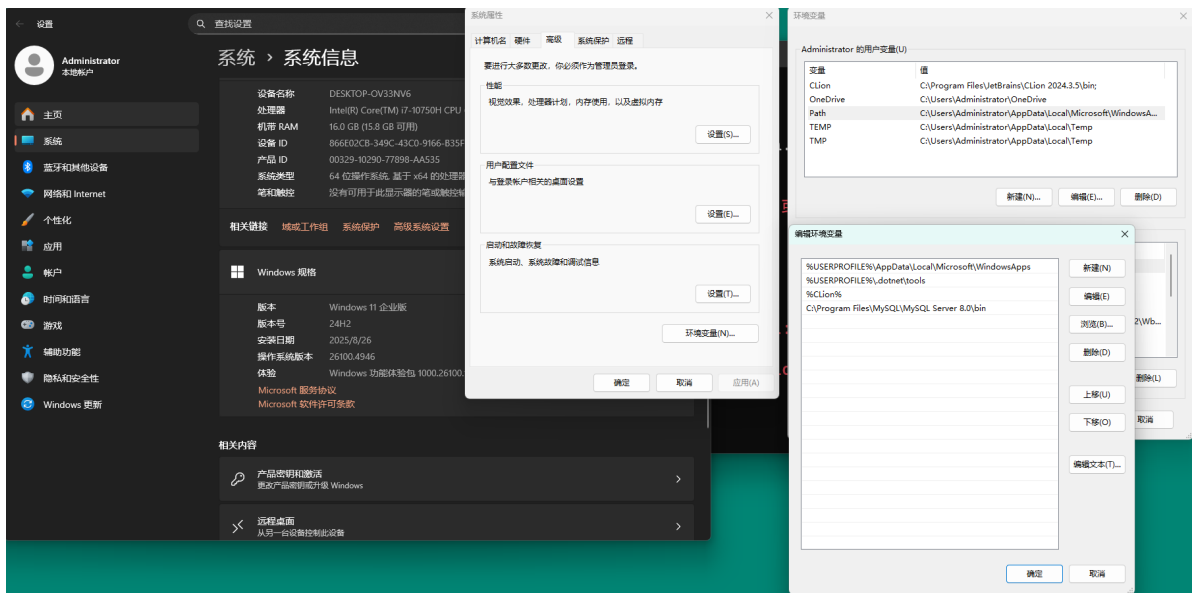

如果还是有提示无法识别的内部命令，这输入 set-executionpolicy remotesigned，选择"全是"

```
PS C:\Users\Administrator\Desktop> mysql -u root -h localhost -p -P 3306 mysql
Enter password: *****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 23
Server version: 8.0.13 MySQL Community Server - GPL

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show tables;
+-----+
| Tables_in_mysql |
+-----+
| columns_priv    |
| component       |
| db              |
| default_roles   |
| engine_cost     |
```

```
PS C:\Users\Administrator\Desktop> mysql -u root -h localhost -p -P 3306
Enter password: *****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 24
Server version: 8.0.13 MySQL Community Server - GPL

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> use mysql
Database changed
mysql> show tables;
+-----+
| Tables_in_mysql |
+-----+
| columns_priv    |
| component       |
| db              |
| default_roles   |
| engine_cost     |
+-----+
```

 安装 - Microsoft Visual Studio Code

选择附加任务

您想要安装程序执行哪些附加任务？

选择您想要安装程序在安装 Visual Studio Code 时执行的附加任务，然后单击“下一步”。

附加快捷方式：

- ☒ 创建桌面快捷方式(D)



其他：



- ☒ 将“通过 Code 打开”操作添加到 Windows 资源管理器文件上下文菜单
- ☒ 将“通过 Code 打开”操作添加到 Windows 资源管理器目录上下文菜单
- ☒ 将 Code 注册为受支持的文件类型的编辑器
- ☒ 添加到 PATH (重启后生效)




< 上一步(B)




下一步(N) >

取消

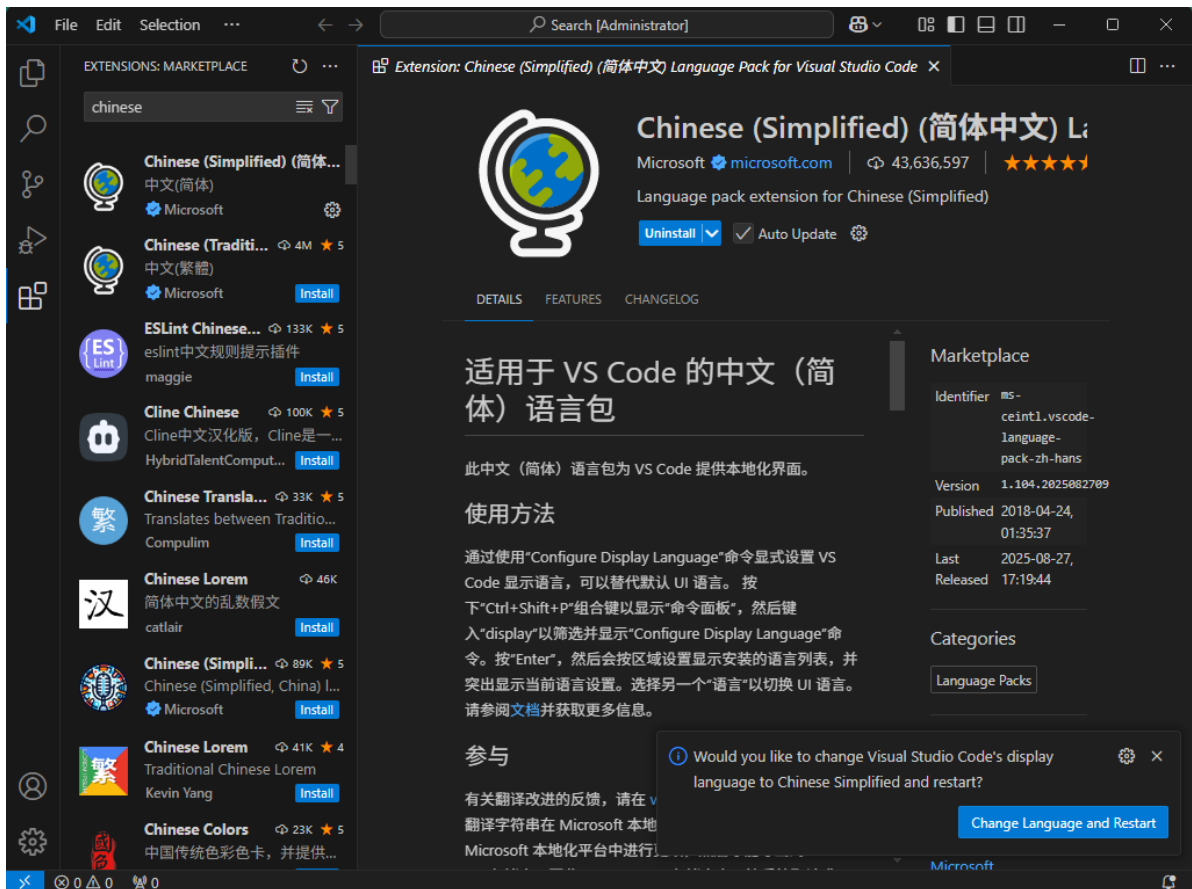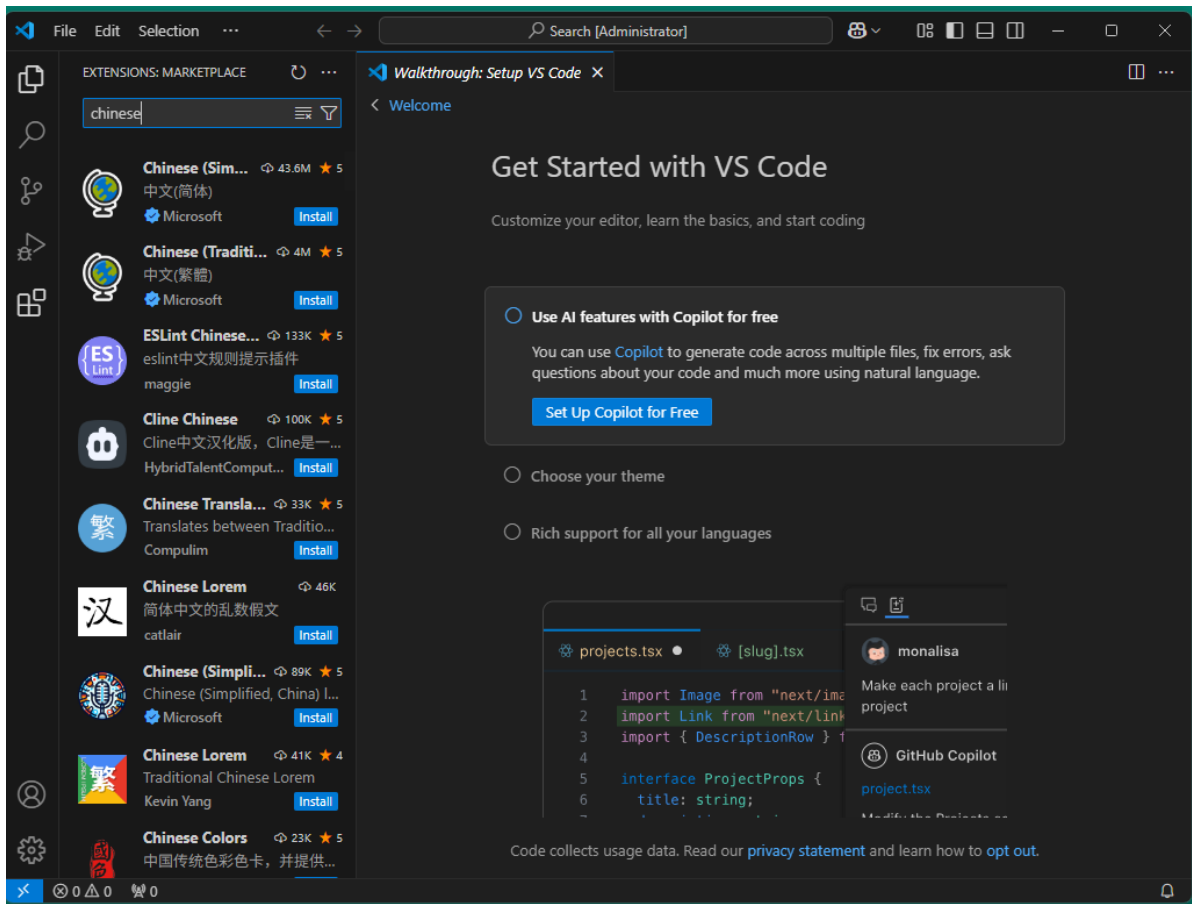

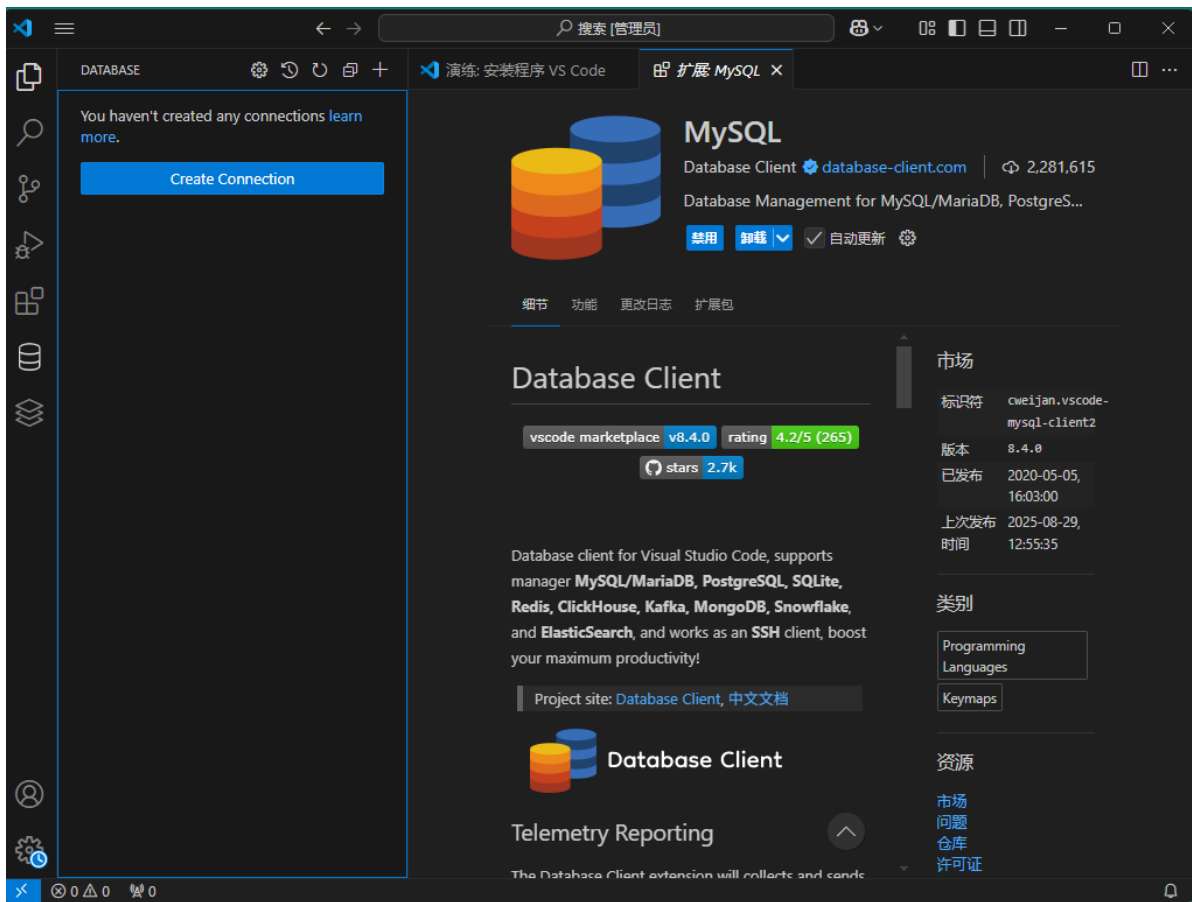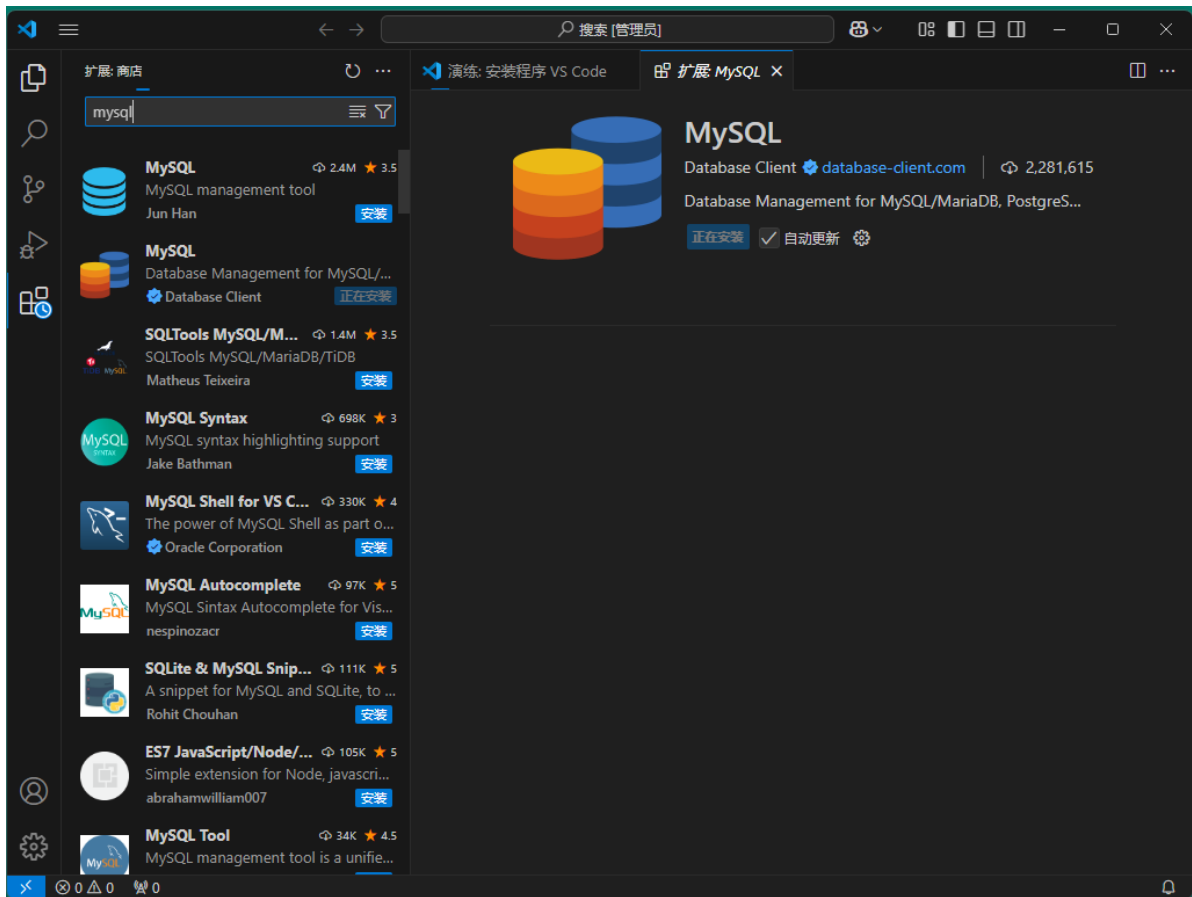

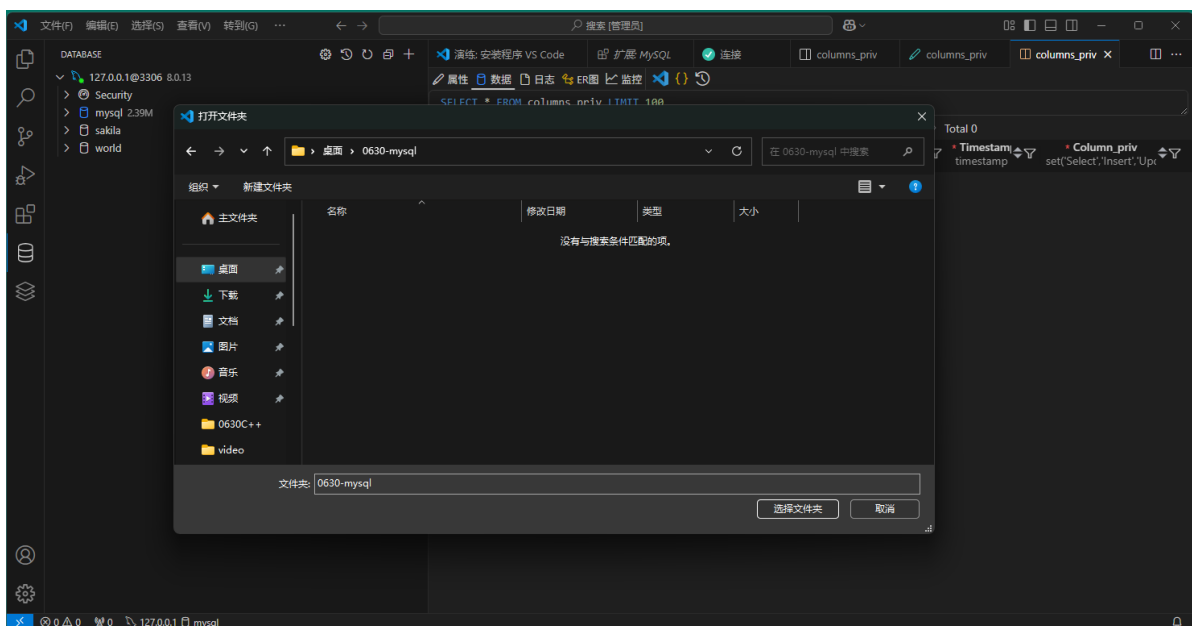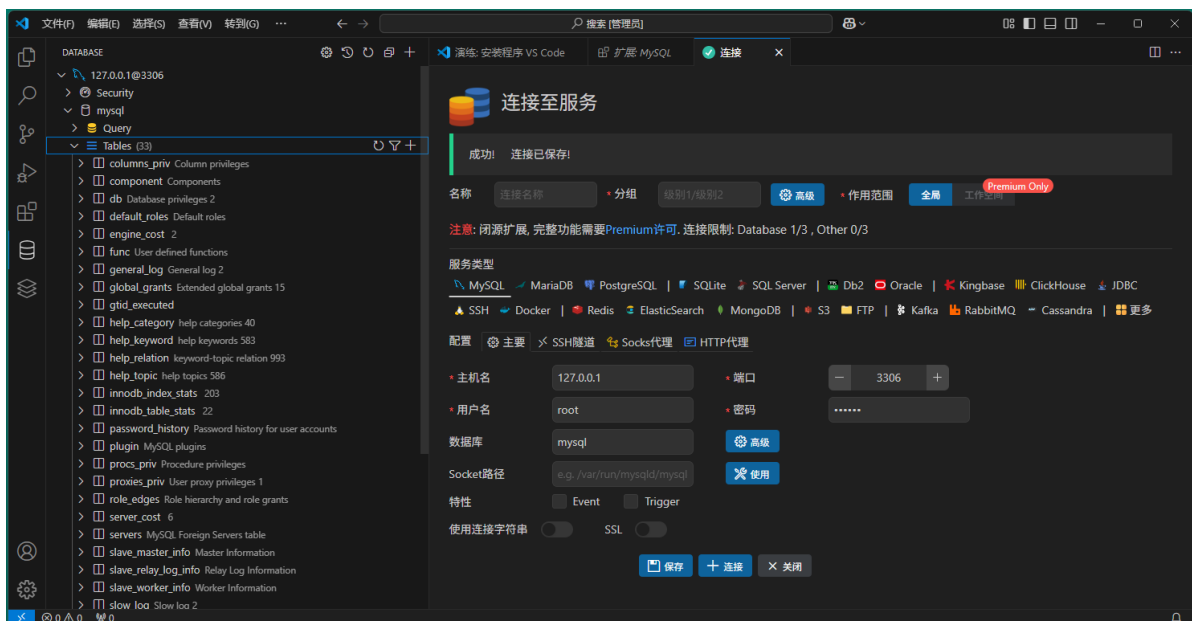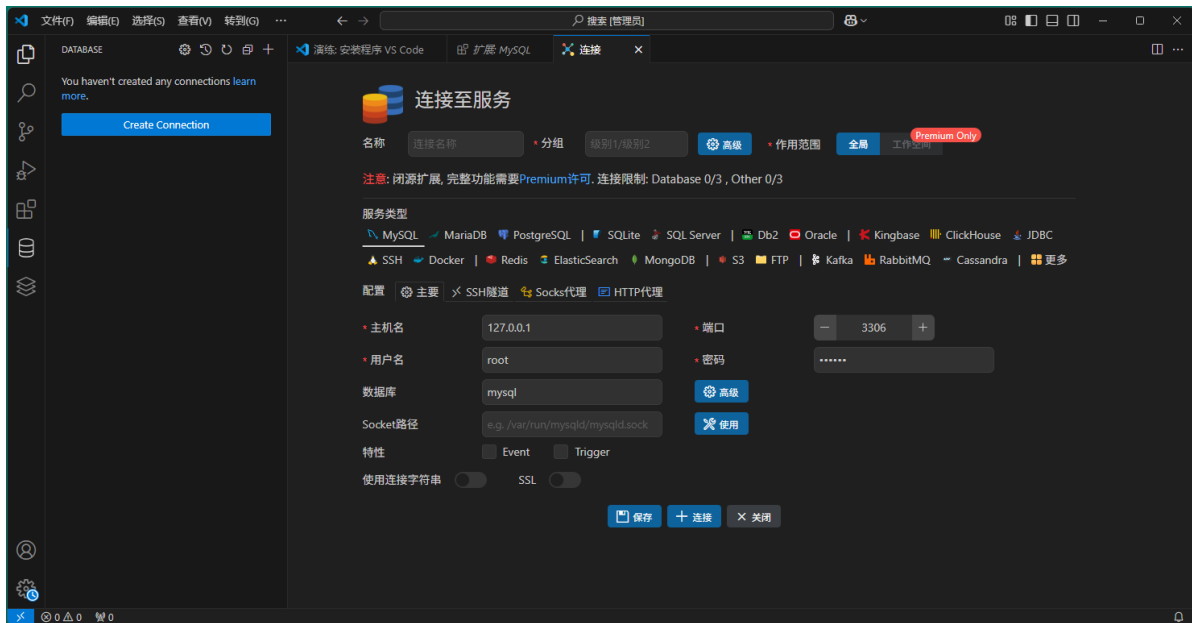

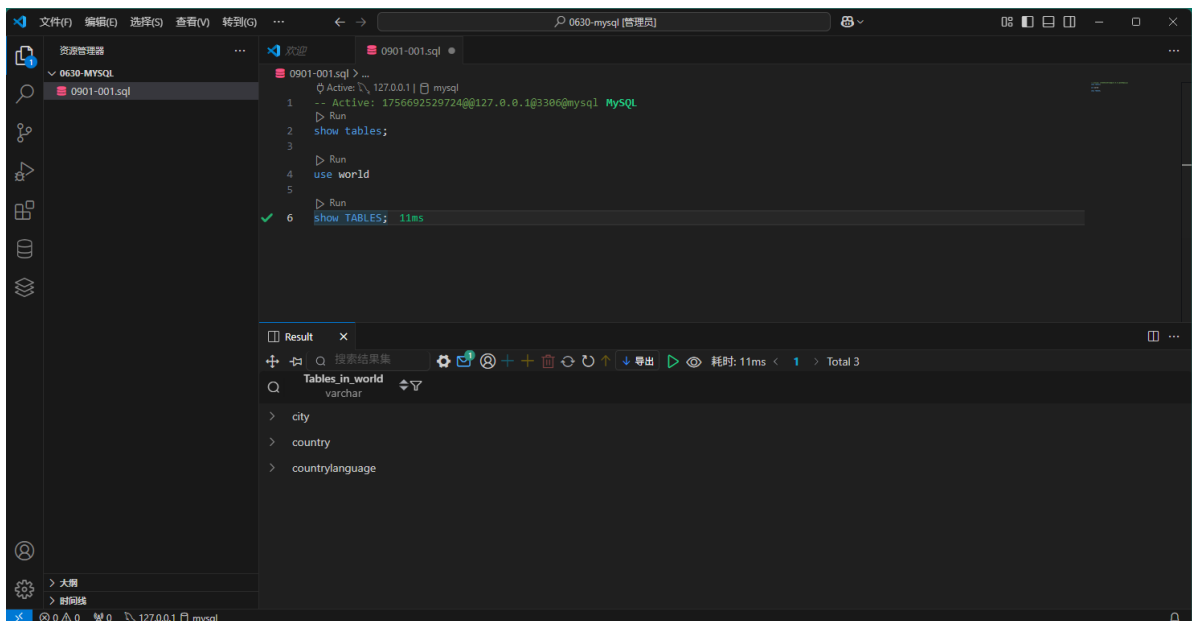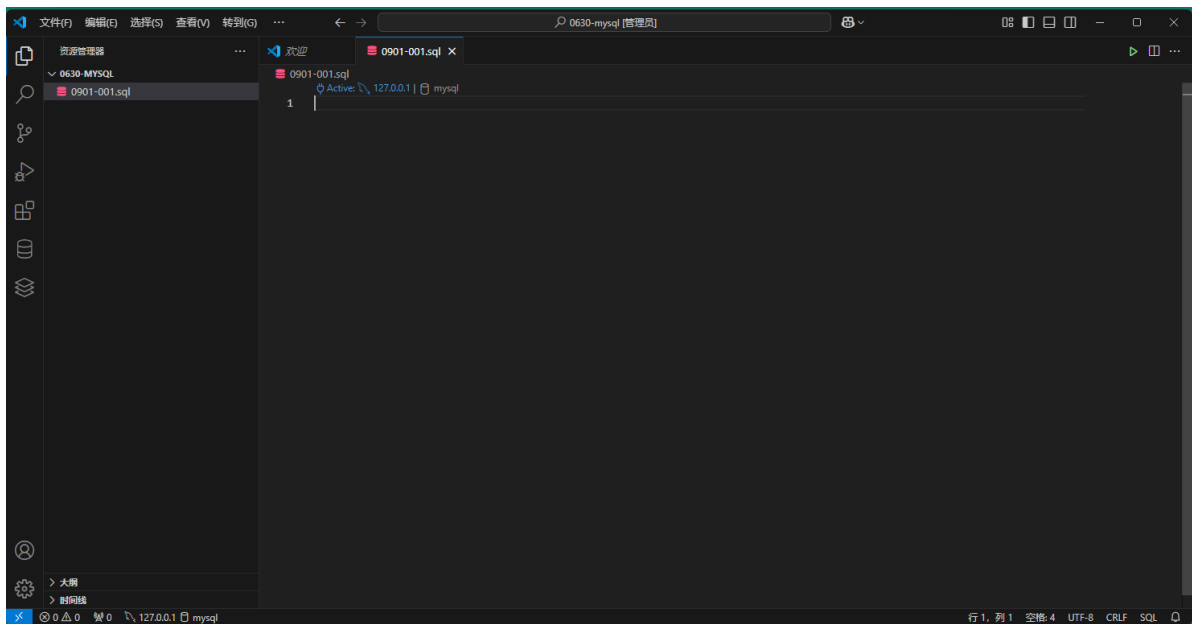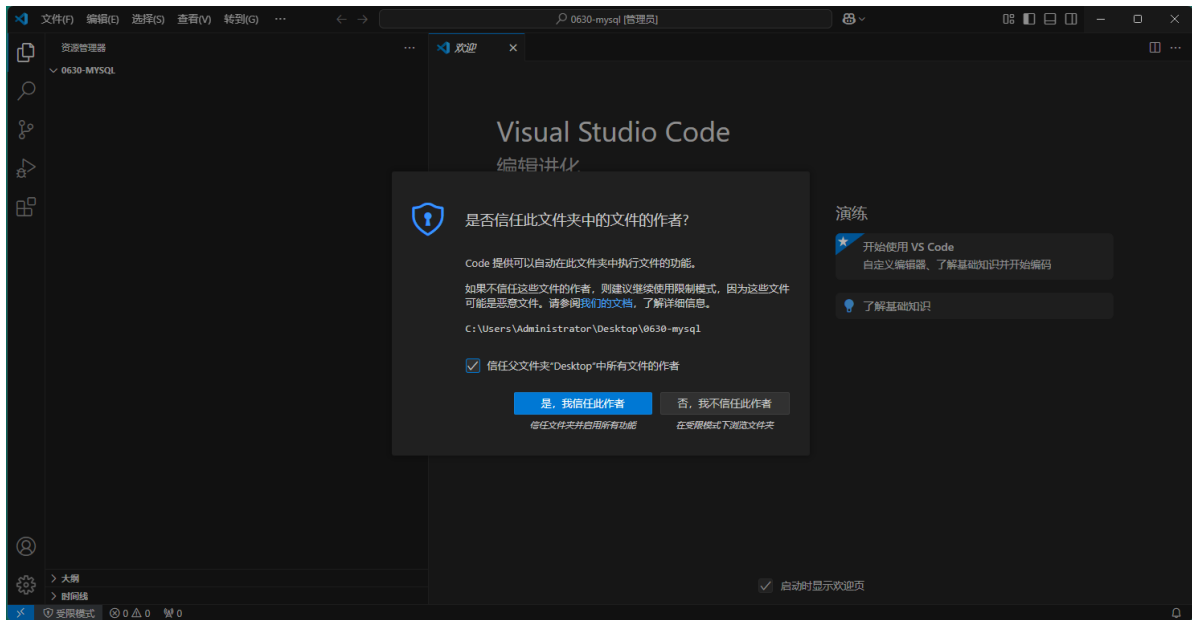

三.SQL命令入门

SQL:结构化查询语言

DDL:数据定义语句,管理和维护数据库对象(表table、数据库database、视图view、索引index、存储过程procedure、函数function、用户\user)

create: 创建对象

drop:删除对象

alter:修改对象

DCL:数据控制语句: 管理和维护数据安全

grant:授权

revoke:收权

DML:数据操作语句,管理和操作数据(表里面的内容)

select:查询数据

insert:新增数据

delete:删除数据

update:更新数据

三.数据库维护

1.创建数据库

```
create database test0630;
```

2.切换数据库

```
use test0630;
```

```
mysql> use test0630;  
Database changed
```

3.查看数据库属性

```
show create database test0630;
```

```
mysql> alter database test0630 DEFAULT CHARACTER SET "utf8" ;  
Query OK, 1 row affected, 1 warning (0.03 sec)  
  
mysql> show create database test0630;  
+-----+  
| Database | Create Database |  
+-----+  
| test0630 | CREATE DATABASE `test0630` /*!40100 DEFAULT CHARACTER SET utf8 */ |  
+-----+  
1 row in set (0.00 sec)
```

```
mysql> show databases;  
+-----+  
| Database |  
+-----+  
| information_schema |  
| mysql |  
| performance_schema |  
| sakila |  
| sys |  
| test0630 |  
| world |  
+-----+  
7 rows in set (0.00 sec)
```

```
mysql> drop database test0630;  
Query OK, 0 rows affected (0.07 sec)
```

四.表维护

```
1 CREATE table student
2 (
3     s_id int PRIMARY key
4     AUTO_INCREMENT COMMENT "学生表_序号",
5     s_name VARCHAR(128) not null ,
6     s_tel char(11) ,
7     s_number char(18) UNIQUE,
8     s_gender ENUM('男','女')
9 );
```

ALTER TABLE student ADD COLUMN s_address
VARCHAR(255) COMMENT '学生表_籍贯' DEFAULT '陕西
西安'

```
mysql> desc student;
```

Field	Type	Null	Key	Default	Extra
s_id	int(11)	NO	PRI	NULL	auto_increment
s_name	varchar(128)	NO		NULL	
s_tel	char(11)	YES		NULL	
s_number	char(18)	YES	UNI	NULL	
s_gender	enum('男','女')	YES		NULL	
s_address	varchar(255)	YES		陕西西安	

```
1 INSERT into student VALUES
2 (
3     -- s_id | s_name | s_tel |
4     s_number | s_gender |
5     s_address
```

```
4      3, '张光
    明', '15666667777', '02311018434654223', '男
    ', '中国太旺'
5  ),
6  (
7      -- s_id | s_name | s_tel      |
    s_number      | s_gender |
    s_address
8      4, '刘光
    阳', '13566667777', '02311018983434223', '男
    ', '中国太旺'
9  ),
10 (
11     -- s_id | s_name | s_tel      |
    s_number      | s_gender |
    s_address
12     5, '谢提
    供', '15566667077', '02311018932354223', '男
    ', '中国太旺'
13 )
14
15
16 INSERT into student(s_name,s_tel) VALUES
17 (
18     '陈琪', '19909098989'
19 ),
20 (
21     '张琪', '19909095989'
22 ),
23 (
```

```
24     '马琪', '19909498989'
25 ),
26 (
27     '政琪', '1939098989'
28 ),
29 (
30     '九琪', '11909098989'
31 ),
32 (
33     '琪琪', '19909098989'
34 )
35 delete from student
36
37 -- 截断表
38 TRUNCATE student
39
40 delete from student where s_id=2;
41
42 update student set s_gender='男' ;
43
44 update student set s_gender='男' where
    s_id=7;
```

五.SQL

1.聚合函数

- count(*) 统计总个数
- sum 统计总和

- avg 统计平均数
- min 最小值
- max 最大值

```
1
2 select count(*) from employee where
  e_salary>=8000;
3 select sum(e_salary) from employee;
4 select e_gender 性别,sum(e_salary) 总和
  from employee where e_gender is not
 null group by e_gender;
5 select e_gender 性别,count(*) 总和 from
  employee where e_gender is not null
  group by e_gender;
6 select avg(e_salary) from employee;
7 select e_gender,avg(e_salary) from
  employee group by e_gender;
8 select max(e_salary) from employee;
9 select min(e_salary) from employee;
10 select e_gender,min(e_salary) from
  employee group by e_gender;
11 select e_gender,max(e_salary) from
  employee group by e_gender;
12
13 ALTER TABLE `employee` ADD COLUMN
  `e_dept` VARCHAR(255) COMMENT '员工表_部
  门'
14
15 select e_dept 部门,sum(e_salary) 总和 from
  employee group by e_dept;
```

2.having关键字

对分组聚合的结果再次筛选查询使用having

```
1  -- 对分组聚合的结果筛选用having
2  select e_dept 部门,sum(e_salary) 总和
   from employee group by e_dept having 总
   和>30000;
3  select * from
4  (
5      select e_dept as 部门,sum(e_salary)
   as 总和 from employee group by e_dept
6  ) res;
7
8  -- having场景的另一种解决方案:(实际应用中,可以将1个查询结果当做表再次参与查询)
9  select * from
10 (
11     select e_dept as 部门,sum(e_salary)
   as 总和 from employee group by e_dept
12 ) as res
13 where res.总和>30000 ;
```

3.关系运算和逻辑运算等

```
1  -- 关系运算/逻辑运算/模糊查询
2  -- && and
```

```
3  -- || or
4  -- ! not
5
6  select * from employee where e_dept='销售部' or e_dept='市场部';
7
8  select * from employee where not
   (e_dept='销售部' || e_dept='市场部');
9  select * from employee where !
   (e_dept='销售部' || e_dept='市场部');
10
11 select * from employee where (e_dept='销售部' || e_dept='市场部') &&
   e_salary>=7000;
12
13 select * from employee where (e_dept='销售部' || e_dept='市场部') AND
   e_salary>=7000;
14
15
16 select * from employee where
   e_salary>8000
17
18 select * from employee where
   e_salary=8000;
19
20 select * from employee where
   e_salary<>8000;
21 select * from employee where
   e_salary!=8000;
```

```
22
23
24 select * from employee where e_dept in
    ('销售部','市场部')
25
26 -- in
27 -- like => % _
28 -- BETWEEN
29
30 select count(*) from employee where
    e_salary is null ;
31
32 select * from employee where e_salary
    is not null ;
33
34 -- 模糊查询
35 select * from employee where e_name
    like '张__';
36
37
38 select * from employee where e_name
    like '张__';
39
40 select * from employee where e_name
    like '张__';
41
42
43 select * from employee where
    e_salary>=8000 and e_salary<=9000;
44
```

```
45 select * from employee where e_salary  
    BETWEEN 8000 and 9000;
```

4.外键约束

```
1  -- 外键约束  foreign key  
2  -- 主表  
3  
4  create table dept  
5  (  
6      d_id int PRIMARY key not null  
7      COMMENT '部门表_序号',  
8      d_name VARCHAR(64) not NULL UNIQUE  
9      COMMENT '部门表_部门名称',  
10     e_comment varchar(1280) COMMENT '部  
11     门表_部门简介'  
12 )  
13  
14 alter Table employee add constraint  
15 e_fk FOREIGN KEY (e_dept) REFERENCES  
16 dept(d_id)  
17  
18 -- 测试外键  
19 update employee set e_dept=40 where  
20 e_id=1002;  
21  
22 -- 违背外键约束，添加数据失败
```

```
17 -- ERROR 1452 (23000): Cannot add or
    update a child row: a foreign key
    constraint fails (`test0901`.`employee`,
    CONSTRAINT `e_fk` FOREIGN KEY (`E_DEPT`)
    REFERENCES `dept` (`d_id`))
```

5.多表联合查询

```
1
2 -- 笛卡尔积：多表联合时数据相乘
3 select * from employee,dept;
4 -- 内连接：多表联合时按条件完全匹配
5 select * from employee e,dept d where
   e.`E_DEPT`=d.d_id;
6
7 -- 笛卡尔积：
8 select * from employee cross JOIN
   dept;
9
10 -- 内连接::多表联合时按条件完全匹配
11 select * from employee JOIN dept on
   e.`E_DEPT`=d.d_id;
12
13 -- 左外链接：多表联合时获得按条件完全匹配以及左
   表中未匹配的数据
14 select * from employee left JOIN dept
   on employee.`E_DEPT`=dept.d_id;
15
```

```
16  -- 右外连接：多表联合时获得按条件完全匹配以及右
    表中未匹配的数据
17  select * from employee right JOIN    dept
    on  employee.`E_DEPT`=dept.d_id;
```

6.子查询

```
1  -- 子查询：一个查询语句中嵌套了另一个查询语句
2  select * from employee where e_address=
    (select e_address from employee where
    e_id='1001');
3
4  -- in
5
6  select info.`E_DEPT` from (
7  select  e_dept,avg(e_salary)  from
    employee group by e_dept having
    avg(e_salary)>7500
8  )  info;
9
10 -- in  any  all
11
12 -- 获得平均工资大于7500的部门员工
13 -- 当子查询的结果放回的是多行时用in去匹配数据(或
    者的关系)
14 select * from employee where e_dept in (
15     select info.`E_DEPT` from (
```

```
16      select  e_dept,avg(e_salary)  from
employee group by e_dept having
avg(e_salary)>7500
17      )  info
18 );
19
20
21 -- 当子查询返回多行数据时,
22 -- 获得大于子查询中所有数据的员工信息
23
24 -- ALL
25 select * from employee where e_salary >
all (
26      select e_avg from (
27      select  e_dept,avg(e_salary)
e_avg  from employee group by e_dept
having e_avg>7500
28      )  info
29      );
30
31      select * from employee where
e_salary > (
32      select max(e_avg) from (
33      select  e_dept,avg(e_salary)
e_avg  from employee group by e_dept
having e_avg>7500
34      )  info
35      );
36
37 -- 当子查询返回多行数据时,
```

```
38  -- 获得大于子查询中任意一个数据即可的员工信息
39
40  -- ANY
41  select * from employee where e_salary >
    any (
42      select e_avg from (
43          select e_dept, avg(e_salary)
e_avg  from employee group by e_dept
having e_avg>7500
44      ) info
45  );
46
47
48  select * from employee where
e_salary > (
49      select min(e_avg) from (
50          select e_dept, avg(e_salary)
e_avg  from employee group by e_dept
having e_avg>7500
51      ) info
52  );
53
54
55  -- 相关子查询
56  -- 子查询是否执行依赖于子查询是否有结果返回
57  select * from employee
58  where exists(select * from employee
    where e_address='山西大同') ;
```

7.自连接

```
1  create table yk
2  (
3      y_id int,
4      y_name varchar(128),
5      y_tel char(11),
6      y_mid int
7  );
8
9
10 select
    youke.y_id,youke.y_name,youke.y_tel,daoyou.y_tel from yk
11     youke
12  join yk daoyou
13  where youke.y_mid=daoyou.y_id;
```

六.视图

```

1  -- 视图 :
2  -- 记录了一个查询语句的虚拟表
3  -- 不占物理空间，可以当表使用
4  create view vi_emp
5  AS
6  select e_id 工号,e_name 姓名,d.d_name 部
   门,e_address 籍贯,e_tel 电话,e_salary 薪资
   from employee e,dept d where
   e.`E_DEPT`=d.d_id;

```

七:索引

```

1  -- 索引:
2  -- 唯一索引
3  -- 主键索引
4
5  -- 单列索引
6  -- 多列索引
7  -- 全文索引
8  -- 普通索引
9  create FULLTEXT index idx_emp_e_address
10 on employee(e_address) ;
11
12 explain select * from employee where
   e_name like '张%' \G
13 ***** 1. row
   *****
14           id: 1
15   select_type: SIMPLE

```

```
16         table: employee
17     partitions: NULL
18         type: range
19 possible_keys: idx_emp_e_name
20         key: idx_emp_e_name
21     key_len: 514
22         ref: NULL
23         rows: 4
24     filtered: 100.00
25         Extra: Using index condition
26 -- 1 row in set, 1 warning (0.00 sec)
```

八.用户和权限管理

```
1  -- 用户和权限
2  CREATE user 'admin'@'192.168.120.%'
   IDENTIFIED by 'aaa123' ;
3
4  GRANT select on test0901.* to
   'admin'@'192.168.120.%' ;
5  GRANT update,delete,insert on
   test0901.emp to 'admin'@'192.168.120.%'
   ;
6
7  revoke select on test0901.* from
   'admin'@'192.168.120.%' ;
8  revoke update,delete,insert on
   test0901.emp from
   'admin'@'192.168.120.%' ;
```

```
9
10 GRANT all on test0901.employee to
    'admin'@'192.168.120.%' ;
11
12 GRANT all on test0901.* to
    'admin'@'192.168.120.%' ;
13
14 GRANT all on *.* to
    'admin'@'192.168.120.%' ;
15
16 flush PRIVILEGES;
17
18 REVOKE all on test0901.employee from
    'admin'@'192.168.120.%' ;
19
20 REVOKE all on *.* from
    'admin'@'192.168.120.%' ;
21
22 REVOKE all on *.* from
    'admin'@'192.%.%.%' ;
23
24 REVOKE all on *.* from
    'admin'@'192.%.%.%' ;
25
26 GRANT all on *.* to 'admin'@'%' ;
```

九.存储过程

1.存储过程基本语法

```
1  -- 存储过程
2  /*
3  CREATE Procedure 名称(参数类型 变量 类型)
4  begin
5      .....
6  end
7
8
9  参数类型:in(输入参数)  out(输出参数)
    inout(输入输出参数)
10
11 call 名称(实参列表)
12 */
13
14 drop Procedure if EXISTS pro_001;
15
16 CREATE Procedure pro_001()
17 begin
18     select * from vi_emp ORDER BY 姓名;
19 end
20
21
22 DELIMITER $$
23
24 -- in输入参数
25 CREATE Procedure pro_002(in id int)
26 begin
27     select * from vi_emp where 工号
    =id;
28 end
```

```
29
30
31 call pro_002(1002)
32
33 set @eid=1003;
34 call pro_002(@eid)
35
36 -- out输出参数
37 CREATE Procedure pro_003(in id int,out
tel varchar(128))
38 begin
39     select 电话 into tel    from vi_emp
    where 工号=id;
40 end
41
42 call pro_003(@eid,@tel)
43 select @tel;
44
45
46 -- inout输入输出参数
47 CREATE Procedure pro_004(inout info
varchar(128))
48 begin
49     select 电话 into info    from vi_emp
    where 姓名=info;
50 end
```

2.选择结构

```
1  /*  选择结构
2  -----
3  if()  then
4      .....
5  end if;
6
7  -----
8  if()  then
9      .....
10 else
11     .....
12 end if;
13
14 -----
15 if()  then
16     .....
17 elseif()  then
18     .....
19 elseif()  then
20     .....
21     .....
22 else
23     .....
24 end if;
25
26 -----
27 case 表达式
28 when 值1  then .....;
29 when 值2  then .....;
30 when 值3  then .....
```

```
31 else
32     .....
33 end case;
34 */
35
36 drop Procedure pro_005;
37
38
39 CREATE Procedure pro_005(in id int)
40 begin
41     DECLARE cnt int DEFAULT 0;
42     select count(*) into cnt from
employee where e_id=id;
43     if(cnt=0) THEN
44         SELECT '查无此人' 提示;
45     END if;
46
47     if(cnt=1) THEN
48         select *      from employee where
e_id=id;
49     END if;
50 end
51
52
53 CREATE Procedure pro_006(in id int)
54 begin
55     DECLARE cnt int DEFAULT 0;
56     select count(*) into cnt from
employee where e_id=id;
57     if(cnt=0) THEN
```

```
58         SELECT    '查无此人'    提示;
59     ELSE
60         select *    from employee where
e_id=id;
61     END if;
62 end
63
64
65 CREATE Procedure pro_007()
66 begin
67     DECLARE    sum_sal DECIMAL(10,2)
DEFAULT    0.0;
68     select sum(e_salary) into sum_sal
from employee;
69     if(sum_sal>=100000) THEN
70         -- 加薪20%
71         select e_id 序号,e_name 姓
名,e_salary 应发,e_salary*1.2 实发_X_P2
from employee;
72     ELSEIF(sum_sal>=80000) THEN
73         -- 加薪10%
74         select e_id 序号,e_name 姓
名,e_salary 应发,e_salary*1.1 实发_X_P1
from employee;
75     ELSEIF(sum_sal>=50000) THEN
76         -- 加薪5%
77         select e_id 序号,e_name 姓
名,e_salary 应发,e_salary*1.05 实发_X_P05
from employee;
78     ELSEIF(sum_sal>=30000) THEN
```

```
79      -- 加薪100
80      select e_id 序号,e_name 姓
      名,e_salary 应发,e_salary+100 实发_x_A100
      from employee;
81      ELSE
82      -- 正常发放
83      select e_id 序号,e_name 姓
      名,e_salary 应发,e_salary 实发_x_1 from
      employee;
84      end if;
85  end
```