

TABLES IN HTML

<table>

<caption> Food menu </caption>

<tr>

<th> Item </th>

<th> Price </th>

</tr>

<tr>

<td> A </td>

<td> 10 </td>

</tr>

</table>

Food menu - caption

Item	Price
A	10
B	20
C	30

header (th)
data (td)

— <tr> used to display table row

<td> used to display table data

<th> used to display table header

SEMANTICS IN TABLE

— `<thead>` to wrap table header

`<tbody>` " body

`<tfoot>` " footer

Item	Price	→ header
A	10	→ body
B	20	
C	30	
Sum	60	→ footer

```
6 | <title>Tables</title>
7 | </head>
8 | <body>
9 |   <table border="1">
10 |     <caption> Food Menu </caption>
11 |
12 |     <!-- Header -->
13 |     <thead>
14 |       <tr>
15 |         <th>Item</th>
16 |         <th>Price</th>
17 |       </tr>
18 |     </thead>
19 |
20 |     <!-- Body -->
21 |     <tbody>
22 |       <tr>
23 |         <td>Pizza</td>
24 |         <td>10</td>
25 |       </tr>
26 |       <tr>
27 |         <td>Burger</td>
28 |         <td>20</td>
29 |       </tr>
30 |       <tr>
31 |         <td>Fries</td>
32 |         <td>30</td>
33 |       </tr>
34 |     </tbody>
35 |
36 |     <!-- Footer -->
37 |     <tfoot>
38 |       <tr>
39 |         <td>Total</td>
40 |         <td>60</td>
41 |       </tr>
42 |     </tfoot>
43 |   </table>
44 | </body>
45 | </html>
```

COLSPAN AND ROWSPAN ATTRIBUTES

- Used to create cells which spans over multiple rows or columns.

Food	Price
A	10
B	20

Span → 1 row
(area) 1 col

Item	Price	
	Inr	USD
A	10	0.14
B	20	0.17
C	30	0.28

2 row 1 col (green arrow pointing to Item column)

1 row 2 col (red arrow pointing to Price header row)

rowspan = " " } default 1
colspan = " "

<th colspan = "2"> Price </th>

<th rowspan = "2"> Item </th>

(Q) Write HTML code for table

Food Menu

Item	Price	
	Inr	USD
A	10	0.14
B	20	0.17
C	30	0.28

```
7  </head>
8  <body>
9      <table border="1" style="border-collapse: collapse; width: 50%;">
10         <caption> Food Menu </caption>
11
12         <!-- Header -->
13         <thead>
14             <tr>
15                 <th rowspan="2"> Item </th>
16                 <th colspan="2"> Price </th>
17             </tr>
18             <tr>
19                 <th> INR </th>
20                 <th> USD </th>
21             </tr>
22         </thead>
23
24         <!-- Body -->
25         <tbody>
26             <tr>
27                 <td> A </td>
28                 <td> 10 </td>
29                 <td> 0.14 </td>
30             </tr>
31             <tr>
32                 <td> B </td>
33                 <td> 20 </td>
34                 <td> 0.17 </td>
35             </tr>
36             <tr>
37                 <td> C </td>
38                 <td> 30 </td>
39                 <td> 0.28 </td>
40             </tr>
41         </tbody>
42     </table>
43 </body>
```

(practice Q7)

A test table with merged cells

	Average		Red eyes
	Height	Weight	
Males	1.9	0.003	40%
Females	1.7	0.002	43%

```
8 <body>
9   <table border="1">
10     <caption> A test table with merged cells </caption>
11
12     <!-- Header -->
13     <thead>
14       <tr>
15         <th rowspan="2"> </th>
16         <th colspan="2"> Average </th>
17         <th rowspan="2"> Red eyes </th>
18       </tr>
19
20       <tr>
21         <th> Height </th>
22         <th> Weight </th>
23       </tr>
24     </thead>
25
26     <!-- Body -->
27     <tbody>
28       <tr>
29         <td> Males </td>
30         <td> 1.9 </td>
31         <td> 0.003 </td>
32         <td> 40% </td>
33       </tr>
34       <tr>
35         <td> Females </td>
36         <td> 1.7 </td>
37         <td> 0.002 </td>
38         <td> 43% </td>
39       </tr>
40     </tbody>
41   </table>
42 </body>
```

FORMS IN HTML

- Used to collect data from the user.

ACTION ATTRIBUTE

- Used to define what action needs to be performed when a form is submitted or where the form data should be sent.

```
< form action = " /action " >  
< /form >
```

FORM ELEMENTS

INPUT

- Used to create multiple form controls
- there are multiple types of inputs that can be created using type attribute

```
< input type = " " >
```

Type attribute

<code><input type = "text" ></code>	→ Any text
<code><input type = "password" ></code>	→ hidden
<code><input type = "number" ></code>	→ only numbers
<code><input type = "time" ></code>	→ 10 : 28 PM
<code><input type = "color" ></code>	→ colour picker

Placeholder attribute

`<input type = "text" placeholder = "Enter Name" >`

username

enter username here

→ this text vanishes as soon as we type sm.

LABEL

- label element represents a caption for an item in a user interface.

`< label >`

Enter your username :

`<input type = "text" placeholder = "Enter Name" >`

`< / label >`

- This links the username text with the input box.
- clicking anywhere (ie ; box or username) we can start typing in the box.

Classical Approach to Label

<label for = "123" >
Enter username :

</label >

<input type = "text" id = "123" placeholder = "username" >

→ each attribute given
an unique id which is
passed on to label.

BUTTON ELEMENT

<button> Submit </button>

Note : Button only works when it is inside form and action attribute is there.

type
attribute

<button type = "submit" > Submit </button> → default
<button type = "button" > do something </button> → simple button
<button type = "reset" > do something </button>
↳ resets all info

Input element



Button using input

`<input type = "button" >` → adds a button but doesn't perform anything.

`<input type = "submit" value = "click me" >`

↳ creates a submit button that redirects to action attribute.

click me

----->

/action?

↳ url (action)

Name Attribute

— Name of form control. Submitted with the form as part of a name/value pair.

```
<input type = "text"
      placeholder = "Enter name"
      id = "Username"
      name = "user" / >
```

value

Username

Enter name



Username  /server?user=abcd

Note : This is not a safe way as sensitive info is passed through url.

*

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Youtube Search</title>
7 </head>
8 <body>
9   <form action="https://www.youtube.com/results">
10     <input type="text" name="search_query" placeholder="Search Youtube" >
11     <button>Search</button>
12   </form>
13
14 </body>
15 </html>
```



Opens youtube and searches whatever is written inside box.


Input element



```
<input type="checkbox"
       name="age"
       id="age" checked />
```

by default checked ☒

```
<label for="age">
  I am 18+
</label>
```

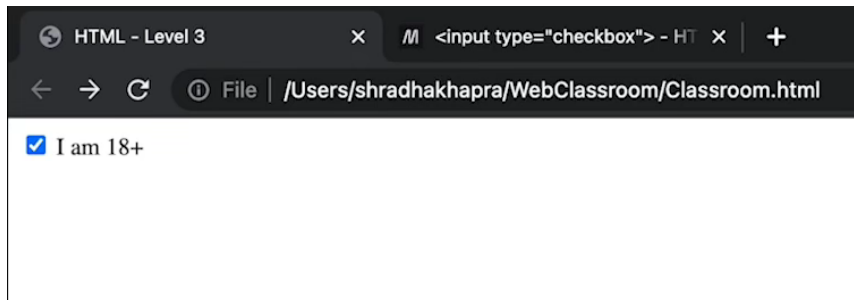

* We can add a submit button

```
<button> submit </button>
```

↓
url = /server? age = on
 /server?

→ when checked

→ when unchecked.

```
<body>
  <form action="/server">
    <input type="checkbox" name="Subjects" id="Science" value="Science">
    <label for="Science">Science</label>

    <input type="checkbox" name="Subjects" id="Math" value="Math">
    <label for="Math">Math</label>

    <input type="checkbox" name="Subjects" id="English" value="English">
    <label for="English">English</label><br><br>

    <button>Enter</button>
  </form>
</body>
```

→ If value not
parsed then

> 127.0.0.1:5500/SIGMA%206.0/Web%20Development/HTML/Level%203/Multiple_Checkbox.html

☒ Science ☒ Math ☐ English

Enter

127.0.0.1:5500/server?Subjects=Science&Subjects=Math

Subjects = on

②

Radio Button

— when multiple check list is there , but we can use only one.

HTML Demo: `<input type="radio">` RESET

HTML CSS OUTPUT

```
1 <fieldset>
2 <legend>Select a maintenance drone:</legend>
3
4 <div>
5 <input type="radio" id="huey"
6   name="drone" value="huey" checked />
7 <label for="huey">Huey</label>
8 </div>
9
10 <div>
11 <input type="radio" id="dewey"
12   name="drone" value="dewey" />
13 <label for="dewey">Dewey</label>
14 </div>
15 <div>
16 <input type="radio" id="louie"
17   name="drone" value="louie" />
18 <label for="louie">Louie</label>
19 </div>
20 </fieldset>
```

Select a maintenance drone:

☒ Huey

☐ Dewey

☐ Louie

`<input` `type = "radio"`
`name = "fruit"`
`id = "apple" />`

`<label for = "apple" > Apple </label>`

`<input` `type = "radio"`
`name = "fruit"`
`id = "orange" />`

`<label for = "orange" > Orange </label>`

☒ Apple ☐ Orange

/server? fruit = on

Note

```
<body>
  <form action="/server">
    <input type="radio" name="Fruit" id="Apple" value="Apple">
    <label for="Apple">Apple</label>

    <input type="radio" name="Fruit" id="Banana" value="Banana">
    <label for="Banana">Banana</label>

    <input type="radio" name="Fruit" id="Mango" value="Mango">
    <label for="Mango">Mango</label><br><br>

    <button>Enter</button>
  </form>
</body>
```

any one
can be
selected
at a tym

☐ Apple ☒ Banana ☐ Mango

Enter



127.0.0.1:5500/server?Fruit=Banana

FORM ELEMENTS

SELECT ELEMENT

① DROPDOWN

— Creates a dropdown menu, from which value can be chosen

```
<body>
  <form action="/server">
    Select your city:
    <select name="city" id="city">
      <option value="" selected>Select your Option </option>
      <option value="Mumbai"> Mumbai</option>
      <option value="Delhi"> Delhi</option>
      <option value="Bangalore"> Bangalore</option>
      <option value="Chennai"> Chennai</option>
      <option value="Kolkata"> Kolkata</option>
      <option value="Hyderabad"> Hyderabad</option>
      <option value="Ahmedabad"> Ahmedabad</option><br>
    </select>
    <button>Enter</button>
  </form>
```

→ Option
Selected
by default

Select your city:

127.0.0.1:5500/server?city=Chennai

②

RANGE

- Allows user to select range element.

`<label for="volume"> Volume </label>`

`<input type="range" min="0" max="100" name="volume" />`

```
<body>
  <form action="/server">
    <label for="vol">Select your volume</label>
    <input
      type="range"
      name="vol"
      min="0"
      max="100"
      value="50" —→ default range
      step="10" —→ Jump by 10 units ie: 10, 20, 30, ... 100
    >
    <button>Submit</button>
  </form>
```

Select your volume 

 127.0.0.1:5500/server?vol=50

TEXT AREA

- Text input as a paragraph or comment.

```
<body>
  <form action="/server">
    <label for="feed">Enter your feedback</label><br>
    <textarea
      name="Feedback"
      id="feed"
      placeholder="Enter your feedback here"
      rows="5"
      cols="15"></textarea>
    <button>Enter</button>
  </form>
```

} user defined
box size

by default :
rows = " 2 "
cols = " 10 "

Enter your feedback

It has been a
great experience.

Enter

i 127.0.0.1:5500/server?Feedback=It+has+been+a+great+experience.

(Practice
Q9)

Registration Form

Please select gender

Do you agree to all terms of service? ☒ Yes, I agree

Recreate this
image

```
<body>
<h1>Registration Form</h1>
<form action="/server">
  <div>
    <label for="fname"></label>
    <input type="text" name="First Name" id="fname" placeholder="Enter your First Name">

    <label for="lname"></label>
    <input type="text" name="Last Name" id="lname" placeholder="Enter your Last Name"><br>
  </div>
  <div>
    <label for="Gender">Please select your gender:</label>
    <select name="Gender" id="Gender">
      <option value="Male">Male</option>
      <option value="Female">Female</option>
      <option value="Others">Others</option>
      <option value="Prefer not to say">Prefer not to say</option>
    </select><br>
  </div>
  <div>
    Do you agree to the terms and conditions?<br>
    <input type="checkbox" name="tc" id="tc" value="Agree">
    <label for="tc">yes, I agree to the terms and conditions</label><br><br>
  </div>
  <button>Register</button>
</form>
```

Registration Form

Please select your gender:

Do you agree to the terms and conditions?
☒ yes, I agree to the terms and conditions

127.0.0.1:5500/server?First+Name=Pragyan&Last+Name=Jena&Gender=Male&tc=Agree