



CSS

- Cascading Style Sheets
- language used to describe style of a document



Basic Format of CSS :

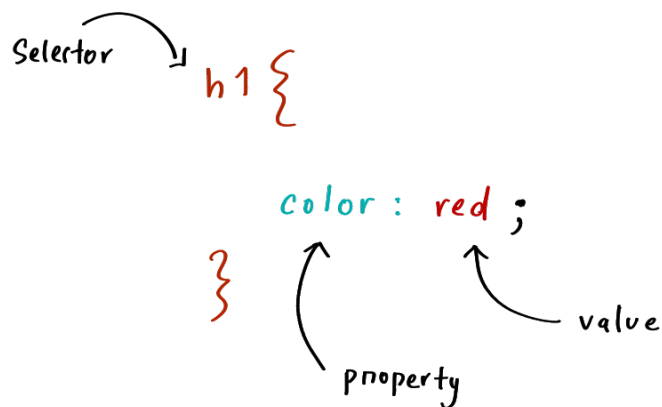

How to Include CSS in HTML ?

① INLINE STYLES

- Writing style directly inline on each element

`<h1 style="color: red"> Apna College </h1>`

- Cons :
- Not scalable
 - Multiple lines of code.

② STYLE TAG

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Example</title>

  <style>
    h2 {
      color: rgb(235, 228, 164);
      background-color: rgba(72, 27, 27, 0.5);
    }
  </style>
</head>
<body>
  <!-- Style tag -->
  <h2>Little elliot</h2>
  <h2>Brown monk</h2>
  <h3>Bush crown</h3>
</body>
</html>
```

Little elliot

Brown monk

Bush crown

* Not used in coz in real life, multiple web pages are developed.

So, we would have to add styling to each web pages.

③ EXTERNAL STYLESHEET (generally used)

- Writing CSS in separate doc. and linking it to HTML file

Linking HTML with CSS file :

```
<head>
  <link rel = "stylesheet" href = "style.css" >
</head>
```

relation

file path

1 Ext_Stylesheet.html

```
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Stytestheet</title>

  <link rel="stylesheet" href="1_Ext_Stylesheet.css">
</head>
<body>
  <h1>I'm good man</h1>
  <h2>I had food</h2>
  <h3>I slept well</h3>
</body>
</html>
```

1_Ext_Stylesheet.css

```
h1{
  color: #9898ec;
}
h2{
  color: #ec7373;
}
h3{
  color: #5d965d;
}
```

Result :

I'm good man

I had food

I slept well

CSS PROPERTIES

① COLOUR

- Used to set colour of foreground

```
color : purple ;
```

```
color : #ffffff ;
```

```
color : rgb ( 214 , 200 , 218 ) ;
```

② BACKGROUND COLOUR

- Used to set color of background.

```
background-color : purple ;
```

```
background-color : #ffffff ;
```

```
background-color : rgb ( 1 , 2 , 3 ) ;
```

Color systems

① named colors

- Each browser recognises around 150 named colors.


② RGB

`color = rgb(0, 0, 0);`

red Green Blue (0 - 255)

③ Hexadecimal or Hex code :

letters : 0, 1, 2, 3, ..., 9, A, B, ..., F
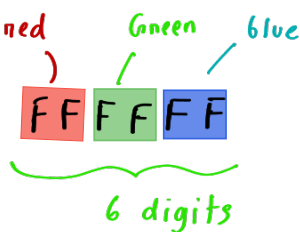
`color = #` 

red : 0 - 255

hexcode : 00 - ff

3

TEXT

(a) text-align

- align left, centre, right
- alignment acc. to parent element

text-align : left / start ;

text-align : right / end ;

text-align : center ;

text-align : justify ;

english

left → right
(start) (end)

arabic

left ← right
(end) (start)

↪ equalises horizontal left and right boundary

Ut enim ad minim
veniam, quis nostrud
exercitation ullamco
laboris nisi ut aliquip
ex ea commodo
consequat. Duis aute
irure dolor in
reprehenderit in
voluptate velit esse
cillum dolore eu
fugiat nulla pariat.

①

h1 {

text-align : right ;

}

output

ABC

②

h1 {

text-align : right ;

width: 50% ;

}

ABC

Note :- Text alignment (left, right, etc) are not absolute.
They are relative to the parent

(b) font-weight

- text bold, light
- 100, 200, ..., 900

font-weight : normal // 400

font-weight : bold // 700

font-weight : 100

font-weight : bolder } In relatⁿ

font-weight : lighter } to parent

(c) text-decoration

- underline, line through, overline

ex: abc ~~abc~~ abc

text-decoration : underline

text-decoration : overline

text-decoration : line-through

decoration types :

text-decoration-color

text-decoration-line

text-decoration-style

text-decoration-thickness

eg : text-decoration : red underline ;

text-decoration : wavy overline ;

text-decoration : dotted overline ;

* When we use anchor tags :

```
<a href = "google.com" > Google me </a>
```

o/p : Google me

to remove underline :

```
a {  
    text-decoration : none ;  
}
```

o/p : Google me
↳ still a link

(d) line-height

— height or space between lines of text

line-height : normal ;

line-height : 2.5 ; } 2.5 → 2.5 × normal

(e) letter-spacing

— controls horizontal spacing behaviour
between text characters

letter-spacing : normal ;

letter-spacing : 10 px ;

px → pixel

(f) Font



(i) Font - size (units in CSS)

Absolute

Relative

mostly
used →

px

pt

pc

cm

mm

in

%

em

rem

ch

vh

vw + many more

* 1in = 96 px

• PIXELS (px)

- most commonly used abs. unit

- 96 px = 1inch

- Not suitable for responsive websites (for laptop, ph, etc)

font-size : 50 px ;

• PERCENTAGES (%)


- Often used to define a size as relative to an element's parent object.

eg: `width: 50%` // 50% relative to parent

```
< div >           // parent
  < div >          // child
  < /div >
< /div >
```

• EM

- Font size of parent in case of topographical properties like font-size.
- Font size of the element itself, in case of other properties like width.

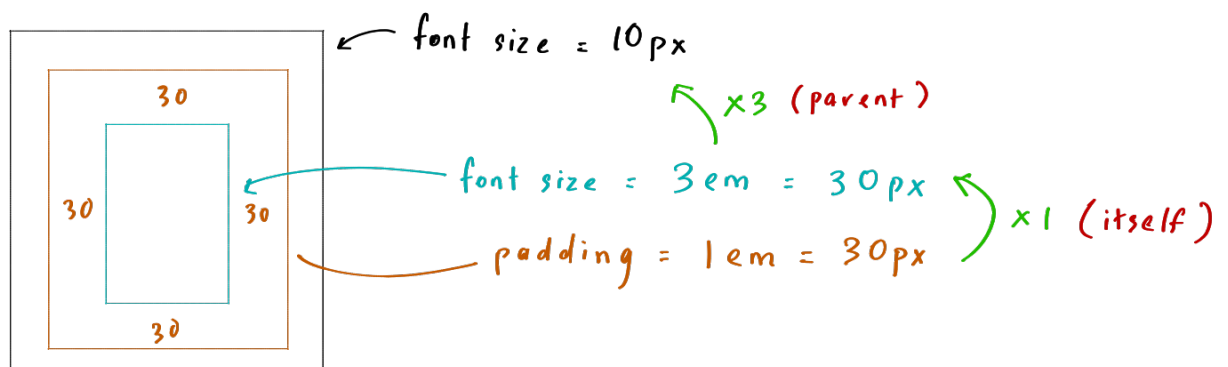

Advantage : We can use em as a relative unit.

- * In a scenario, if we want the padding to be consistent throughout, no matter what the font is

then we can use **em**.

```
button {
```

```
  font-size : 50px ;
```

```
  border : 5px ;
```

```
  padding : 2em ;
```

```
}
```

padding remains x2
times of font size
no matter what

(ie ; 40,50,60,70,...)

Drawback of em :

- **snowball effect** in nested elements

ie: <div>

div 1

<div>

div 2

<div>

div 3

</div>

</div>

</div>

css : **div** {

font-size : 2em ;

}

o/p : div 1

div 2

div 3

snowball
effect



• REM (Root em)

- font size acc. to root element.

```
ie:  <div>
      div 1
      <div>
        div 2
        <div>
          div 3
          </div>
        </div>
      </div>
```

```
css :  div {
        font-size: 2em;    // double of root element
      }
```

o/p: div 1
 div 2
 div 3

(ii) font - family

- determines font type
- specifies a prioritized list of one or more font family names.

font-family : arial ;

font-family : avant garde , didot , sans-serif ;

backup font
family