

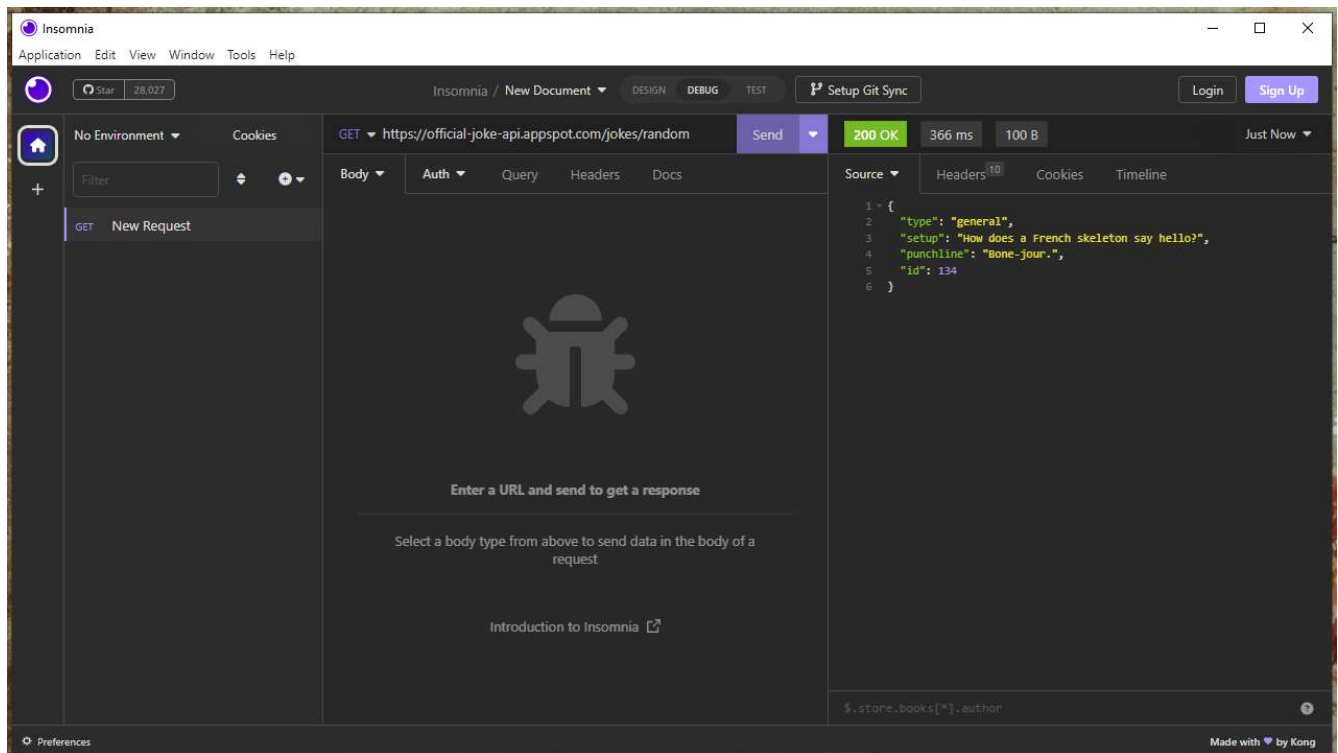
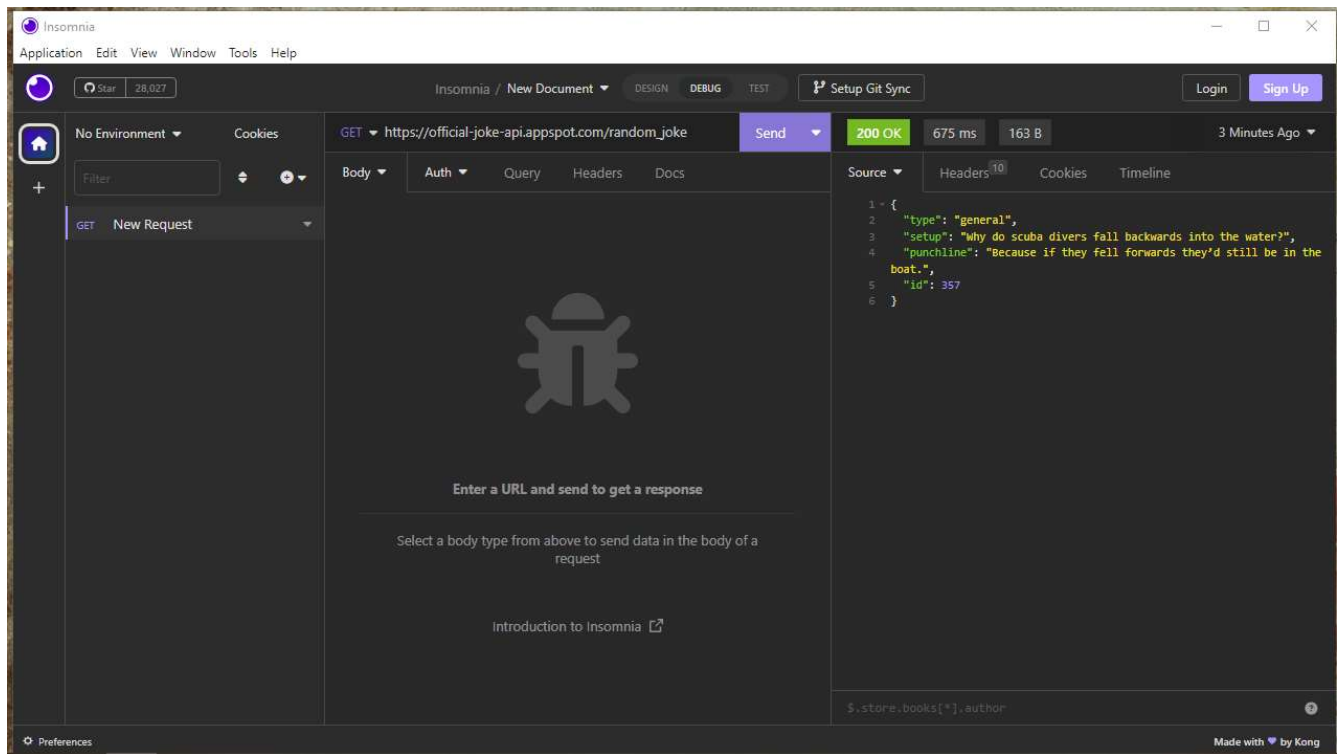


17 - Introduction to APIs

The API I chose from the list is https://github.com/15Dkatz/official_joke_api

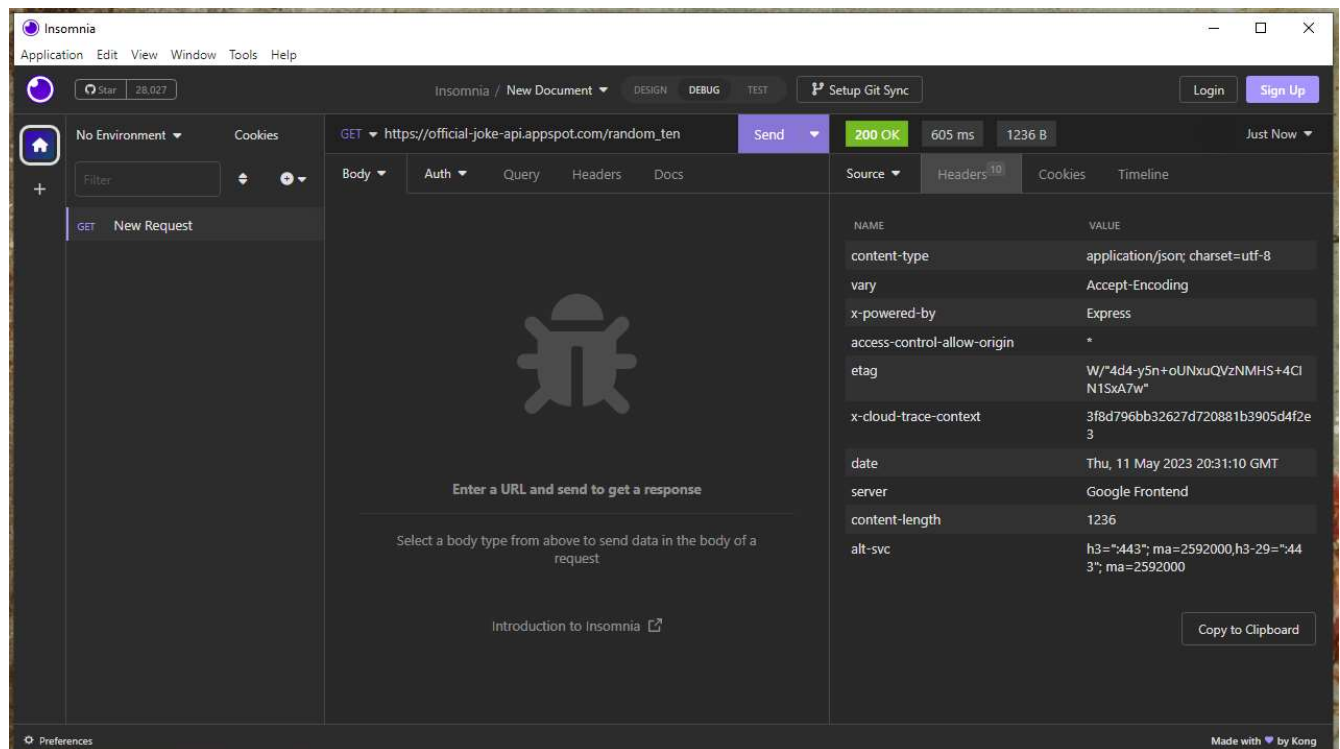

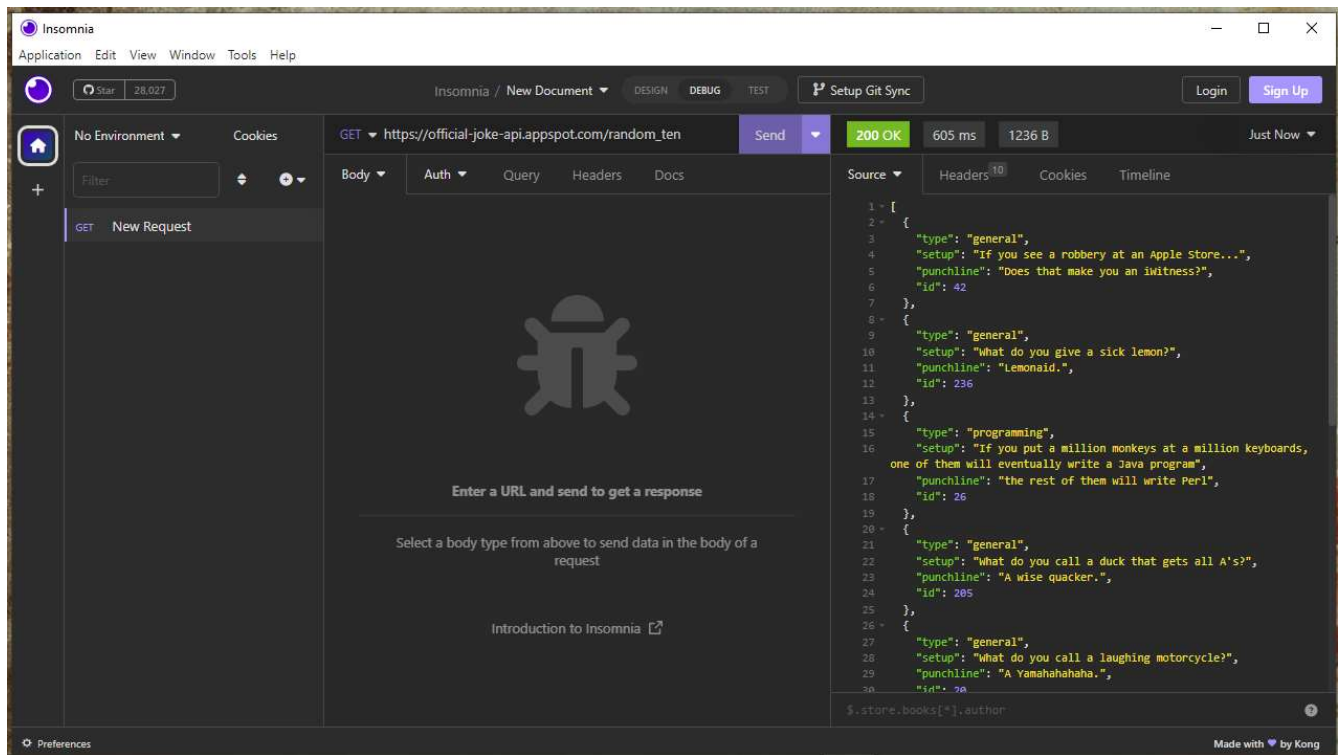

This last screenshot has the headers tab displayed.

Vary – this header describes the request message that does not include the method and the URL. It's commonly used to create a cache key when content negotiation is used. Content negotiation is used when the user can specify which settings are best suited, for example, language and image formatting.

Access-Control-Allow-Origin – this header is one of the headers used when the request comes from another website. It identifies if the response can be shared with the origin.

Etag header – this header is used to determine the best version required so that the response uses the least amount of bandwidth. It prevents loading the same resource again when it's not required so that data isn't overwritten.