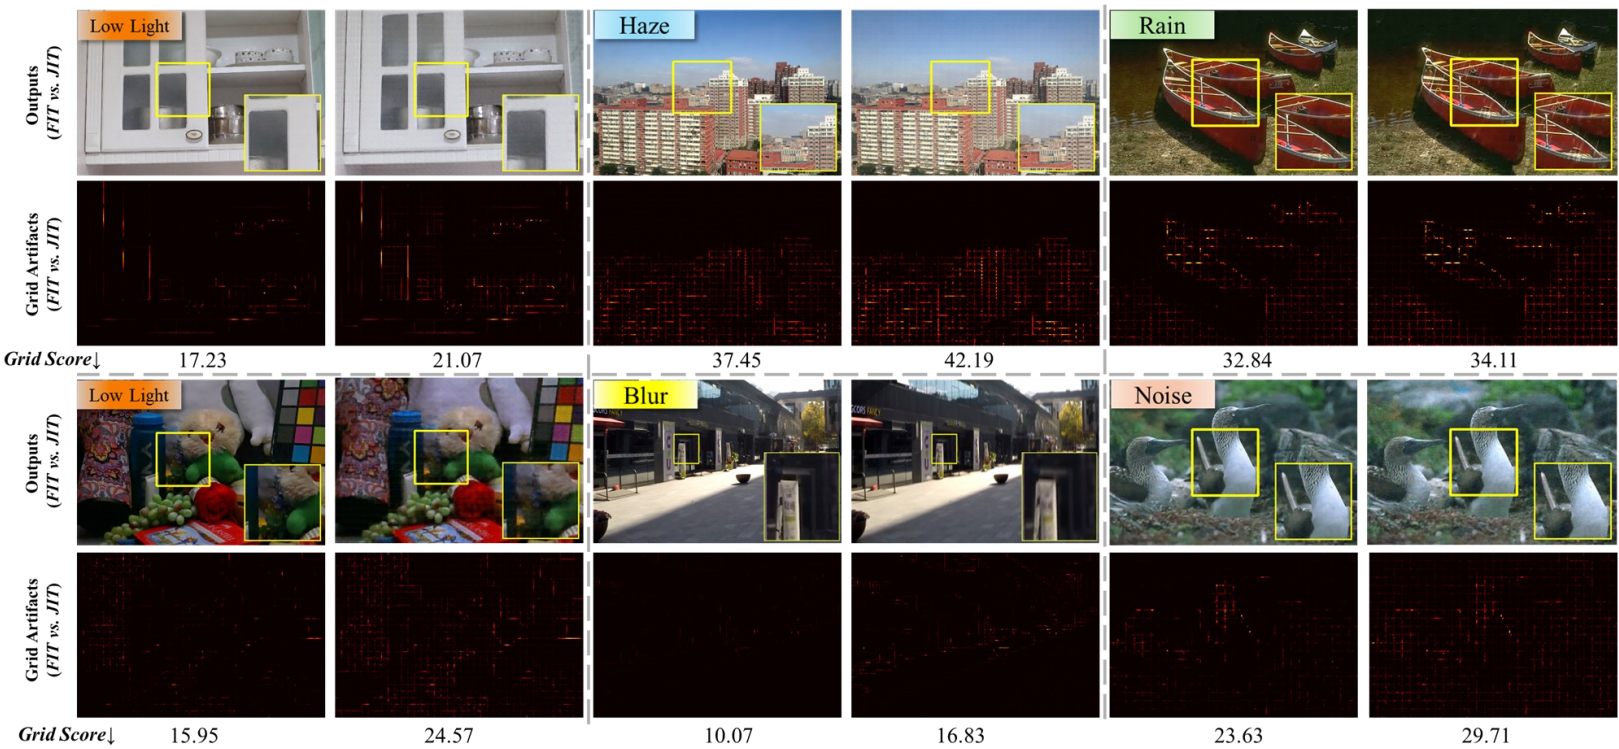

Figure 1: Comparison of grid artifacts between JIT (fixed tokenization) and FIT (deformable tokenization) across different degradation tasks. The second and fourth rows visualize gradient magnitudes at patch boundaries, where brighter regions indicate stronger discontinuities. Grid Score (lower is better) quantifies the average gradient magnitude along patch boundaries. FIT consistently reduces grid artifacts compared to JIT across all tasks.

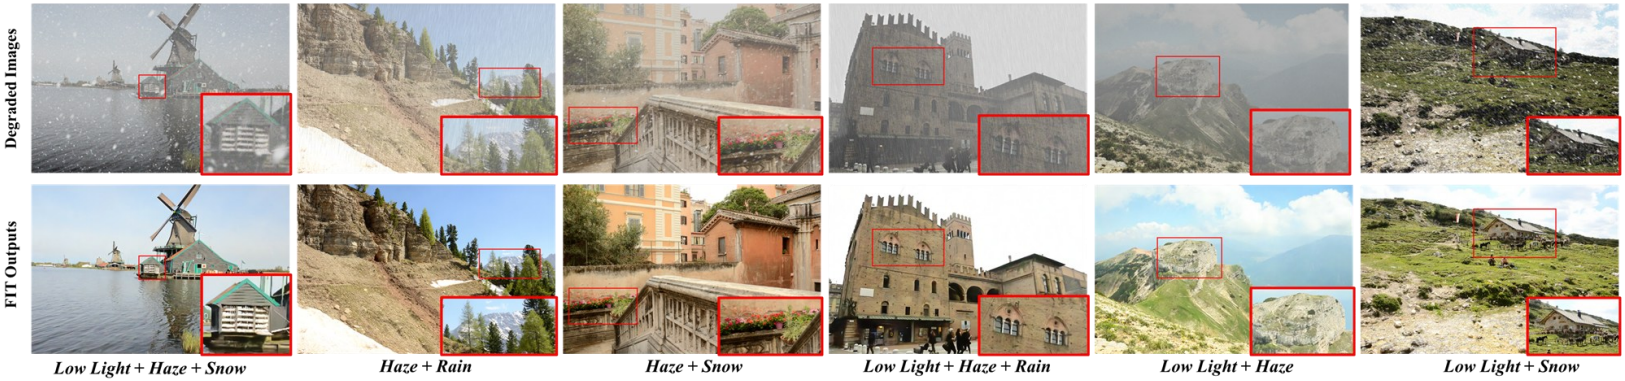

Figure 2: Qualitative results on CDD-11 dataset with composite degradations. FIT effectively handles various combinations of multiple degradation types, including low-light, haze, rain, and snow, providing qualitative evidence that FIT handles composite degradations better than fixed-tokenization baselines.